© Siemens 2025

SIEMENS

SENTRON • SIVACON • ALPHA

Low-Voltage Power Distribution and Electrical Installation Technology

Protection, Switching, Measuring and Monitoring Devices, Switchboards and Distribution Systems

siemens.com/lowvoltage

Catalog
LV 10

Edition
2026

© Siemens 2025

Innovative solutions for industrial controls and power distribution

Reliable components, systems and software solutions are essential in ensuring smooth power distribution in buildings and industrial plants.

With SIRIUS, SENTRON, SIVACON and ALPHA, we offer an innovative portfolio for standard-compliant and demand-oriented applications and enable sustainable energy efficiency.

Efficient engineering tools and innovative cloud-based solutions can be flexibly tailored to individual requirements.

We are there when you need us

Your personal contact can be found at
www.siemens.com/lowvoltage/contact

Catalog LV 10 · 2026

You will find the latest edition and all future editions in SiePortal at **www.siemens.com/lowvoltage/catalogs**

You can find the current prices in SiePortal at
www.siemens.com/lowvoltage/product-catalog

The products and systems described in this catalog are manufactured/distributed under application of a certified quality management system in accordance with EN ISO 9001 (for the Certified Registration Nos., see **www.siemens.com/system-certificates/ep**).
The certificate is recognized by all IQNet countries.

Technical specifications
The technical specifications are for general information purposes only.
Always heed the operating instructions and notices on individual products during assembly, operation and maintenance.

All illustrations are not binding.

© Siemens 2025

© Siemens 2025

Low-Voltage Power Distribution and Electrical Installation Technology

	Introduction	I/2
Protecting	Air Circuit Breakers	1/1
	Molded Case Circuit Breakers	2/1
	Miniature Circuit Breakers	3/1
	Residual Current Protective Devices/Arc Fault Detection Devices (AFDDs)	4/1
	Switching Devices	5/1
	Overvoltage Protection Devices	6/1
	Fuse Systems	7/1
Protecting, Switching and Isolating	Switch Disconnectors	8/1
Switching and Isolating	Transfer Switching Equipment and Load Transfer Switches	9/1
Measuring and Monitoring	Measuring Devices, Power Monitoring and Digitalization Solutions	10/1
	Monitoring Devices	11/1
Distribution	Transformers, Power Supply Units and Socket Outlets	12/1
	Busbar Systems	13/1
	Terminal Blocks	14/1
	Switchboards, Distribution Boards and Small Distribution Boards	15/1
	Busbar Trunking Systems	16/1
	System Cubicles, System Lighting and System Air-Conditioning	17/1
	Appendix	A/1

© Siemens 2025

Sustainability@Siemens

Transforming the everyday to create a better tomorrow.

E

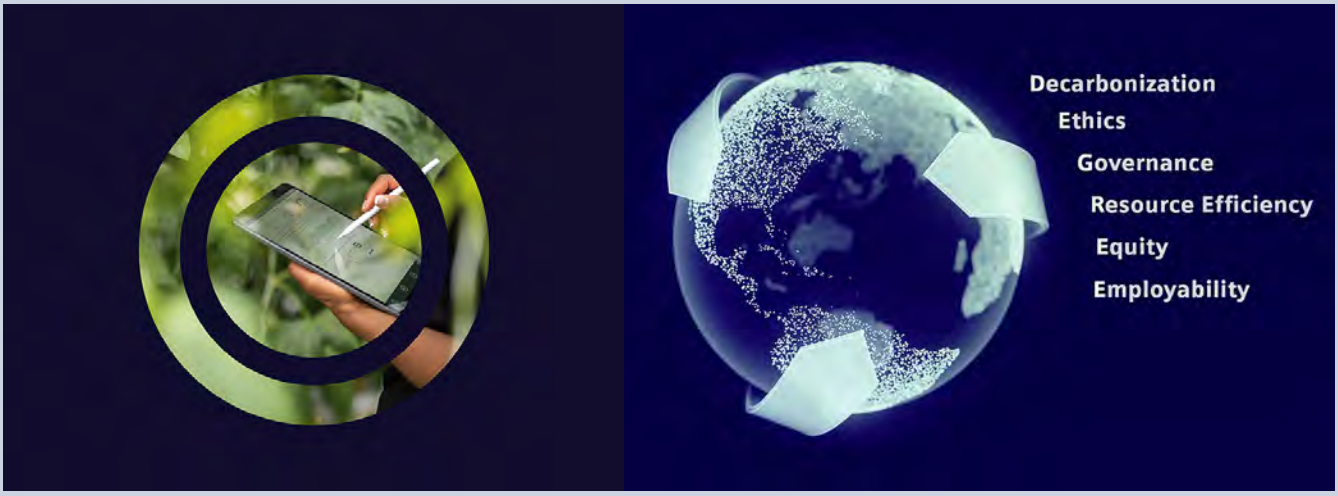

Siemens as a company takes an all-round view of environmental, social and governance criteria (ESG) with its DEGREE rulebook (decarbonization, ethics, governance, resource efficiency, equity and employability). Not only are we committed to reducing the carbon footprint in our own plants to net zero by 2030, but also to helping our customers achieve their decarbonization and sustainability objectives.

Mission & strategy

As a focused technology company, Siemens is committed to tackling the world's most profound challenges by leveraging the synergies of digitalization and sustainability.

Technology with a purpose

We develop technologies that interconnect the real world and the digital world and enable our customers to make positive changes to their industries, which form the backbone of our economy: industry, infrastructure, transportation and healthcare.

Our contribution

Siemens makes a difference every single day by providing innovative solutions for challenges in environmental protection, decarbonization, health and safety. Innovative solutions that have a clear purpose: to make the world more sustainable, more integrative and a better place to live.

Facts about sustainability

For almost 175 years, Siemens has been driven by the desire to improve the lives of people around the world with our technologies.

Siemens EcoTech

Siemens EcoTech is an environment label for products that promotes the sustainable transformation of industry and infrastructure. The label offers transparency about the performance of our certified products in relation to criteria relevant to the environment so that you can make well-founded decisions in order to achieve your sustainability objectives: www.siemens.com/SiemensEcoTech

Further information at:
www.siemens.com/sustainability

© Siemens 2025

New products

SENTRON 5SL58 miniature circuit breakers – 2-pole DC miniature circuit breakers in 1 modular width

- Compact protection against short-circuit and overload according to IEC 60898-3
- Rated voltage 110 V DC (polarity-independent)
- Extended temperature range from –40 °C to +70 °C
- Resistant to vibrations and shock according to EN 61373 and EN 50155
- Fire load calculation according to EN 45545-2

See chapter 3
page 3/24

SENTRON 5TT4 COM digital input/output module

- Switching function also via communications interface to SENTRON Powercenter 1100/2000
- 2 digital inputs
- 2 digital outputs
- Inputs/outputs can be logically operated
- Timing function
- Adjustable functions (monostable, NO/NC outputs)

See chapter 5
page 5/26

SENTRON 3KD switch disconnectors for DC applications up to 1000 V

- Rated uninterrupted current: 80 ... 1600 A
- Rated operational voltage: 400 V/500 V/600 V/750 V/800 V/1000 V DC
- Number of poles: 2/3/4-pole in series
- Utilization category: DC-21B
- Flexible versions of the basic unit with floor mounting and distribution board mounting
- Wide selection of front operating mechanisms
- Rated short-time withstand current: 4 ... 20 kA
- Bridging bars and matching terminal covers optionally available

See chapter 8
page 8/72

© Siemens 2025

New products

E

SENTRON Powercenter 2000

- Hardware with extended function options, analogous to SENTRON Powercenter 1100
- 2 Ethernet ports (switch function)
- Secure communication protocol (https)
- Role-based access via login and password
- New subordinate devices: 5SV8 COM RCM and 5TT4 COM DI/DO
- Special feature: web server and direct cloud connection

See chapter 10
page 10/26

SENTRON Powercenter 3000 – energy data management system according to ISO 50001

- Reporting
- Extended scope of configuration for MQTT communication
- Certified energy data management system
- Eligibility: BAFA module 3: I&C, sensor technology and energy management software

See chapter 10
page 10/22

SENTRON 5SV8 residual current monitoring devices and SENTRON 5SV8 modular residual current devices

- New analog and digital residual current monitoring devices for type A, B with 1 or 4 channels
- Devices can be parameterized on site via rotary switch/display or via COM via SENTRON Powercenter 1100/2000
- Output of the residual current values and switching states of the outputs on the device or via COM
- Residual current analysis using flexible filters via COM

See chapter 11
page 11/8

© Siemens 2025

SENTRON 8US2 CrossBoard busbar system – new busbar system up to 250 A in plug-in design

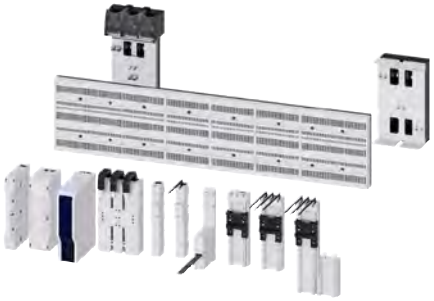

- IP20 all-round touch protection
- Very fast replacement of components reduces downtimes considerably
- IEC and UL approval
- Rear infeed allows more feeders on the busbar system

See chapter 13
page 13/38

SIVACON S4 switchboard – 3D processor and 800 V

- Export of highly detailed 3D models of the individually configured switchboard at the touch of a button
- Open data format (*.step) enables further processing of the data in many 3D environments
- Basis for automation in control panel building
- 3WA incoming feeder panels and 3NJ4 outgoing feeder panels tested up to 800 V

See chapter 15
page 15/70

Compact SIVACON S8 low-voltage switchboard with SIMOCODE M-CP and Rogowski coil measurement technology

- More compact Motor Control Centers by replacing conventional current transformer technology with SIMOCODE M-CP's new Rogowski coil measuring system as an integrated solution in the SIVACON S8 low-voltage switchboard
- Compact and space-saving design for high packing density
- Efficient management of low-voltage motors
- Detailed insights into feeder data that reveal potential for optimization

See chapter 15
page 15/16

© Siemens 2025

New products

E

Sustainable planning of the SIVACON S8 low-voltage switchboard with SIMARIS ecoguide

- Discover the potential of technological options and reduce footprint
- For electrical planners, plant managers and operators to make informed decisions about switchboard configuration – by visualizing sustainability impacts and total costs over the life cycle

See chapter 15
page 15/15

BIM-compliant planning and installation of SIVACON 8PS busbar trunking system routes

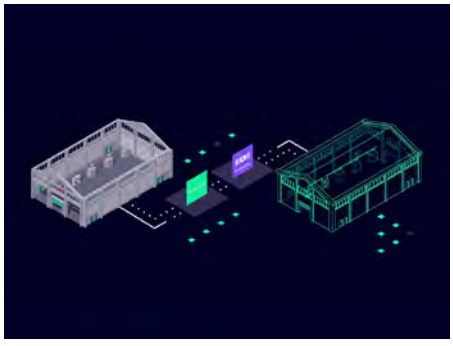

- Planning and creation of the BIM-compliant digital twin of SIVACON 8PS routes with SIMARIS sketch, the standalone solution for 3D planning, and SIMARIS busbarplan, the plug-in for Autodesk Revit® for 3D planning
- Easy adaptation of planning for new loads and changed layout
- Guided installation and simple documentation of the installation progress in the digital twin through the BusbarCheck app

See chapter 16
page 16/6

© Siemens 2025

E

Smart and efficient data transfer via powerline 2.0 technology for SIVACON 8PS busbar trunking systems

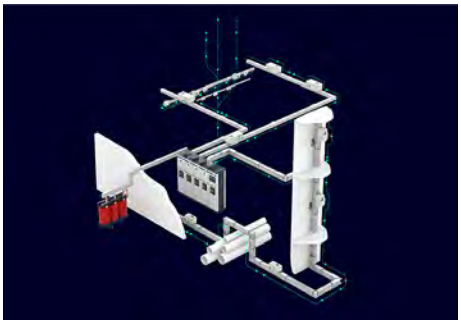

- Fast data transfer directly via the SIVACON 8PS busbar trunking system, highly efficient without additional wiring
- Use of powerline 2.0 technology in industry or infrastructure through to electromobility infrastructure for transparent and efficient operation

See chapter 16
page 16/6

© Siemens 2025

The fast route to the product

Overviews and matrix tables for better orientation within the catalog

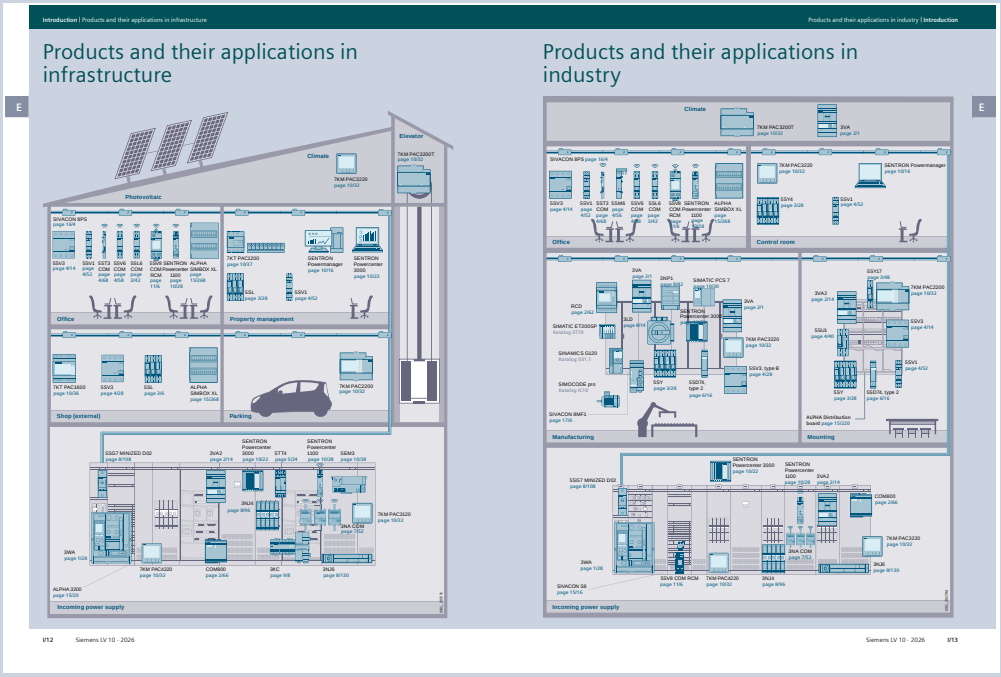

Overview of products and their applications

On pages I/12 to I/13 you can find an overview of the diverse portfolio of catalog LV 10.

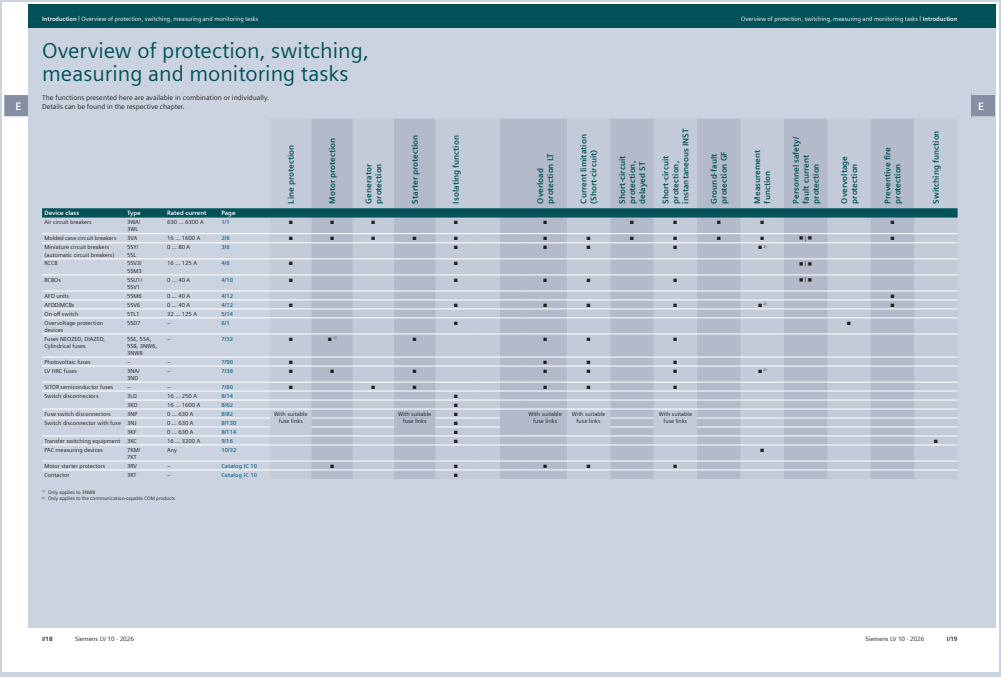

Protection, switching, measuring and monitoring tasks

From page I/18 onwards, the catalog LV 10 portfolio is dedicated to the most important protection, switching, measuring and monitoring tasks.

© Siemens 2025

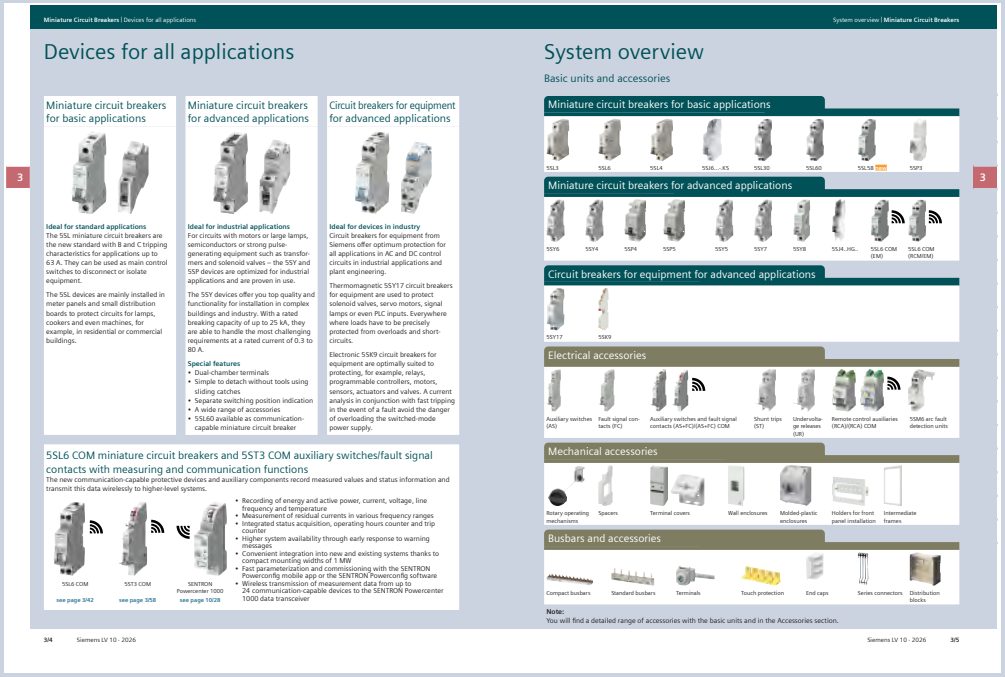

Miniature Circuit Breakers | Devices for all applications

System overview | Miniature Circuit Breakers

Devices for all applications

Miniature circuit breakers for basic applications

Ideal for standard applications
The 5SL miniature circuit breakers are the new standard with B and C tripping characteristics for applications up to 63 A. They can be used as main control switches to disconnect or isolate equipment.

The 5SL devices are mainly installed in meter panels and small distribution boards to protect circuits for lamps, cookers and even machines, for example, in residential or commercial buildings.

Miniature circuit breakers for advanced applications

Ideal for industrial applications
For circuits with motors or large lamps, semiconductors or strong pulse-generating equipment such as transformers and solenoid valves – the 5SY and 5SP devices are optimized for industrial applications and are proven in use.

The 5SY devices offer you top quality and functionality for installation in complex buildings and industry. With a rated breaking capacity of up to 25 kA, they are able to handle the most challenging requirements at a rated current of 0.3 to 80 A.

Special features
- Dual-chamber terminals
- Simple to detach without tools using sliding catches
- Separate switching position indication
- A wide range of accessories
- 5SL60 available as communication-capable miniature circuit breaker

Circuit breakers for equipment for advanced applications

Ideal for devices in industry
Circuit breakers for equipment from Siemens offer optimum protection for all applications in AC and DC control circuits in industrial applications and plant engineering.

Thermomagnetic 5SY17 circuit breakers for equipment are used to protect solenoid valves, servo motors, signal lamps or even PLC inputs. Everywhere where loads have to be precisely protected from overloads and short-circuits.

Electronic 5SK9 circuit breakers for equipment are optimally suited to protecting, for example, relays, programmable controllers, motors, sensors, actuators and valves. A current analysis in conjunction with fast tripping in the event of a fault avoid the danger of overloading the switched-mode power supply.

5SL6 COM miniature circuit breakers and 5ST3 COM auxiliary switches/fault signal contacts with measuring and communication functions

The new communication-capable protective devices and auxiliary components record measured values and status information and transmit this data wirelessly to higher-level systems.

- Recording of energy and active power, current, voltage, line frequency and temperature
- Measurement of residual currents in various frequency ranges
- Integrated status acquisition, operating hours counter and trip counter
- Higher system availability through early response to warning messages
- Convenient integration into new and existing systems thanks to compact mounting widths of 1 MW
- Fast parameterization and commissioning with the SENTRON Powercontig mobile app or the SENTRON Powerconfig software
- Wireless transmission of measurement data from up to 24 communication-capable devices to the SENTRON Powercenter 1000 data transceiver

5SL6 COM see page 3/42

5ST3 COM see page 3/58

SENTRON Powercenter 1000 see page 10/28

System overview

Basic units and accessories

Note:
You will find a detailed range of accessories with the basic units and in the Accessories section.

3/4 Siemens LV 10 · 2026

Siemens LV 10 · 2026 3/5

System overview

An overview of the basic units and accessories can be found in the system overview at the beginning of the chapters or sections. The color helps you recognize the accessory at a glance.

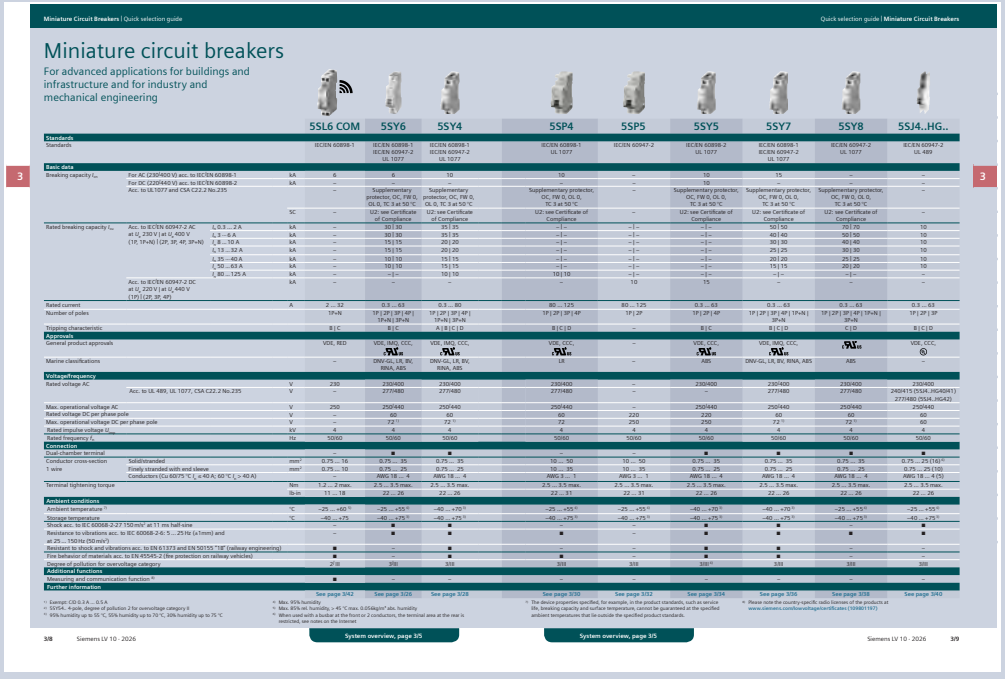

Miniature Circuit Breakers | Quick selection guide

Quick selection guide | Miniature Circuit Breakers

Miniature circuit breakers

For advanced applications for buildings and infrastructure and for industry and mechanical engineering

			5SL6 COM	5SY6	5SY4	5SP4	5SP5	5SY5	5SY7	5SY8	5SJ4..HG..
Standards											
Standards			IEC/EN 60898-1	IEC/EN 60898-1 IEC/EN 60947-2 UL 1077	IEC/EN 60898-1 IEC/EN 60947-2 UL 1077	IEC/EN 60898-1 UL 1077	IEC/EN 60947-2	IEC/EN 60898-2 UL 1077	IEC/EN 60898-1 IEC/EN 60947-2 UL 1077	IEC/EN 60947-2 UL 1077	IEC/EN 60947-2 UL 489
Basic data											
Breaking capacity I_{cn}	For AC (230/400 V) acc. to IEC/EN 60898-1	kA	6	6	10	10	–	10	15	–	–
	For DC (220/440 V) acc. to IEC/EN 60898-2	kA	–	–	–	–	–	10	–	–	–
	Acc. to UL1077 and CSA C22.2 No.235		–	Supplementary protector, OC, FW 0, OL 0, TC 3 at 50 °C	Supplementary protector, OC, FW 0, OL 0, TC 3 at 50 °C	Supplementary protector, OC, FW 0, OL 0, TC 3 at 50 °C	–	Supplementary protector, OC, FW 0, OL 0, TC 3 at 50 °C	Supplementary protector, OC, FW 0, OL 0, TC 3 at 50 °C	Supplementary protector, OC, FW 0, OL 0, TC 3 at 50 °C	–
		SC	–	U2: see Certificate of Compliance	U2: see Certificate of Compliance	U2: see Certificate of Compliance	–	U2: see Certificate of Compliance	U2: see Certificate of Compliance	U2: see Certificate of Compliance	–
Rated breaking capacity I_{cn}	Acc. to IEC/EN 60947-2 AC at U_e 230 V | at U_e 400 V (1P, 1P+N) | (2P, 3P, 4P, 3P+N)	I_n 0.3 ... 2 A	kA	–	30 | 30	35 | 35	– | –	– | –	– | –	50 | 50	70 | 70	–
		I_n 3 ... 6 A	kA	–	30 | 30	35 | 35	– | –	– | –	40 | 40	50 | 50	10
		I_n 8 ... 32 A	kA	–	15 | 15	20 | 20	– | –	– | –	30 | 30	40 | 40	10
		I_n 13 ... 32 A	kA	–	15 | 15	20 | 20	– | –	– | –	25 | 25	30 | 30	10
		I_n 35 ... 40 A	kA	–	10 | 10	15 | 15	– | –	– | –	20 | 20	25 | 25	10
		I_n 50 ... 63 A	kA	–	10 | 10	15 | 15	– | –	– | –	15 | 15	20 | 20	10
		I_n 80 ... 125 A	kA	–	– | –	10 | 10	– | –	– | –	– | –	– | –	–
	Acc. to IEC/EN 60947-2 DC at U_e 220 V | at U_e 440 V (1P) | (2P, 3P, 4P)		kA	–	–	–	10	15	–	–	–	–
Rated current			A	2 ... 32	0.3 ... 63	0.3 ... 80	80 ... 125	80 ... 125	0.3 ... 63	0.3 ... 63	0.3 ... 63	0.3 ... 63
Number of poles				1P+N	1P | 2P | 3P | 4P | 1P+N | 3P+N	1P | 2P | 3P | 4P | 1P+N | 3P+N	1P | 2P | 3P | 4P	1P | 2P	1P | 2P | 3P | 4P	1P | 2P | 3P | 4P | 1P+N | 3P+N	1P | 2P | 3P | 4P | 1P+N | 3P+N	1P | 2P | 3P
Tripping characteristic				B | C	B | C	A | B | C | D	B | C | D	–	B | C	B | C | D	C | D	B | C | D
Approvals											
General product approvals				VDE, RED	VDE, IMQ, CCC, cULus	VDE, IMQ, CCC, cULus	VDE, CCC, cULus	–	VDE, CCC, cULus	VDE, IMQ, CCC, cULus	VDE, CCC, cULus	VDE, CCC,
Marine classifications				–	DNV-GL, LR, BV, RINA, ABS	DNV-GL, LR, BV, RINA, ABS	LR	–	ABS	DNV-GL, LR, BV, RINA, ABS	ABS	–
Voltage/frequency											
Rated voltage AC			V	230	230/400 277/480	230/400 277/480	230/400 277/480	–	230/400 –	230/400 277/480	230/400 277/480	230/400 240/415 (5SJ4..HG40/41) 277/480 (5SJ4..HG42)
	Acc. to UL 489, UL 1077, CSA C22.2 No.235		V	–	–	–	–	–	–	–	–	–
Max. operational voltage AC			V	250	250/440	250/440	250/440	–	250/440	250/440	250/440	250/440
Rated voltage DC per phase pole			V	–	60	60	60	220	220	60	60	60
Max. operational voltage DC per phase pole			V	–	72 [1]	72 [1]	72	250	250	72 [1]	72 [1]	60
Rated impulse voltage U_{imp}			kV	4	4	4	4	4	4	4	4	4
Rated frequency f_n			Hz	50/60	50/60	50/60	50/60	50/60	50/60	50/60	50/60	50/60
Connection												
Dual-chamber terminal				–	■	■	■	■	■	■	■	■
Conductor cross-section	Solid/stranded		mm²	0.75 ... 16	0.75 ... 35	0.75 ... 35	10 ... 50	10 ... 50	0.75 ... 35	0.75 ... 35	0.75 ... 35	0.75 ... 25 (16) [2]
1 wire	Finely stranded with end sleeve		mm²	0.75 ... 10	0.75 ... 25	0.75 ... 25	10 ... 35	10 ... 35	0.75 ... 25	0.75 ... 25	0.75 ... 25	0.75 ... 25 (10)
	Conductors (Cu 60/75 °C) I_n ≤ 40 A)			–	AWG 18 ... 4	AWG 18 ... 4	AWG 3 ... 1	AWG 3 ... 1	AWG 18 ... 4	AWG 18 ... 4	AWG 18 ... 4	AWG 18 ... 4 (1)
Terminal tightening torque			Nm	1.2 ... 2 max.	2.5 ... 3.5 max.	2.5 ... 3.5 max.	2.5 ... 3.5 max.	2.5 ... 3.5 max.	2.5 ... 3.5 max.	2.5 ... 3.5 max.	2.5 ... 3.5 max.	2.5 ... 3.5 max.
			lb-in	11 ... 18	22 ... 26	22 ... 26	22 ... 31	22 ... 31	22 ... 26	22 ... 26	22 ... 26	22 ... 26
Ambient conditions												
Ambient temperature [1]			°C	–25 ... +60 [1]	–25 ... +55 [1]	–40 ... +70 [1]	–25 ... +55 [1]	–25 ... +55 [1]	–40 ... +70 [1]	–40 ... +70 [1]	–25 ... +55 [1]	–25 ... +55 [1]
Storage temperature			°C	–40 ... +75	–40 ... +75 [1]	–40 ... +75 [1]	–40 ... +75 [1]	–40 ... +75 [1]	–40 ... +75 [1]	–40 ... +75 [1]	–40 ... +75 [1]	–40 ... +75 [1]
Shock acc. to IEC 60068-2-27 150 m/s² at 11 ms half-sine				–	■	■	–	–	■	■	■	■
Resistance to vibrations acc. to IEC 60068-2-6: 5 ... 25 Hz (± 1mm) and at 25 ... 150 Hz (50 m/s²)				–	■	■	■	–	■	■	■	■
Resistant to shock and vibrations acc. to EN 61373 and EN 50155 "1B" (railway engineering)				■	–	–	–	–	■	■	–	–
Fire behavior of materials acc. to EN 45545-2 (fire protection on railway vehicles)				■	–	■	■	–	■	■	–	–
Degree of pollution for overvoltage category				2 [3]	3 [5]	3 [5]	3 [5]	3 [5]	3 [5]	3 [5]	3 [5]	3 [5]
Additional functions												
Measuring and communication function [4]				■	–	–	–	–	–	–	–	–
Further information												
				See page 3/42	See page 3/26	See page 3/28	See page 3/30	See page 3/32	See page 3/34	See page 3/36	See page 3/38	See page 3/40

[1] Exempt: CO 0.3 A ... 0.5 A
[2] 5SY54.. 4-pole, degree of pollution 2 for overvoltage category II
[3] 95% humidity up to 55 °C, 95% humidity up to 70 °C, 30% humidity up to 75 °C
[4] Max. 95% humidity
[5] Max. 85% rel. humidity, > 45 °C max. 0.05 kg/m³ abs. humidity
[*] When used with a busbar at the front or 2 conductors, the terminal area at the rear is restricted, see notes on the Internet

[1] The device properties specified, for example, in the product standards, such as service life, breaking capacity and surface temperature, cannot be guaranteed at the specified ambient temperatures that lie outside the specified product standards.

[*] Please note the country-specific radio licenses of the products at www.siemens.com/lowvoltage/cert5Cadm (109801197)

System overview, page 3/5

System overview, page 3/5

3/8 Siemens LV 10 · 2026

Siemens LV 10 · 2026 3/9

Overview of basic units

The overviews at the beginning of the chapters and sections help you make a quick advance selection of the basic units. You can use the important technical specifications to compare the basic units. Page references quickly take you to the suitable devices.

© Siemens 2025

The fast route to the product

Overviews and matrix tables for better orientation within the catalog

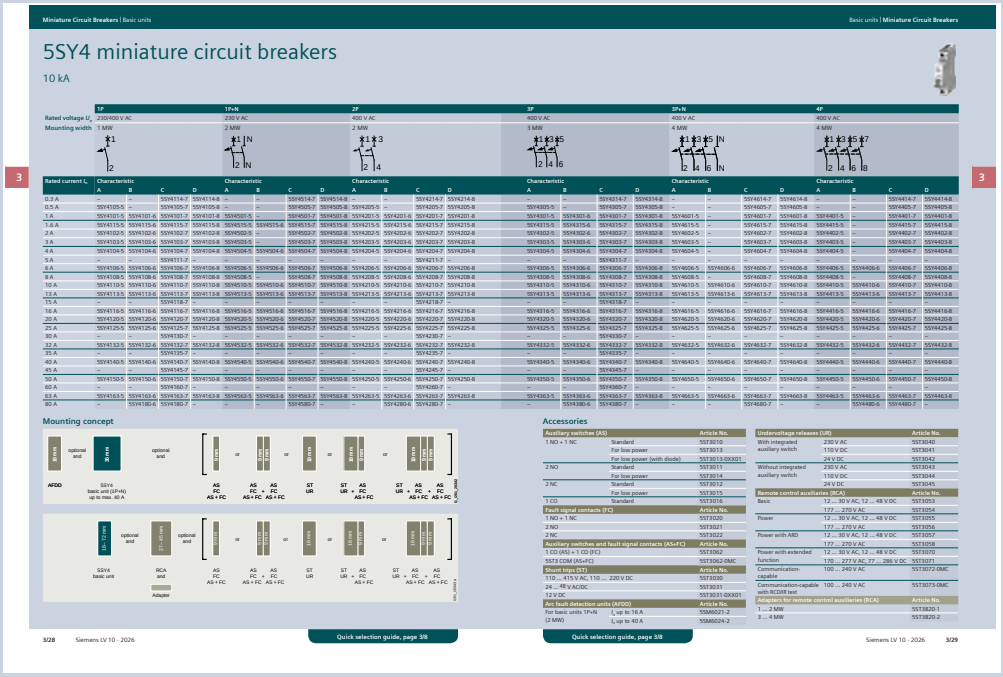

Product page

The article number matrix shows you on the spot which product variants are available. The matching accessories are clearly dedicated to each basic unit – often directly on the same page.

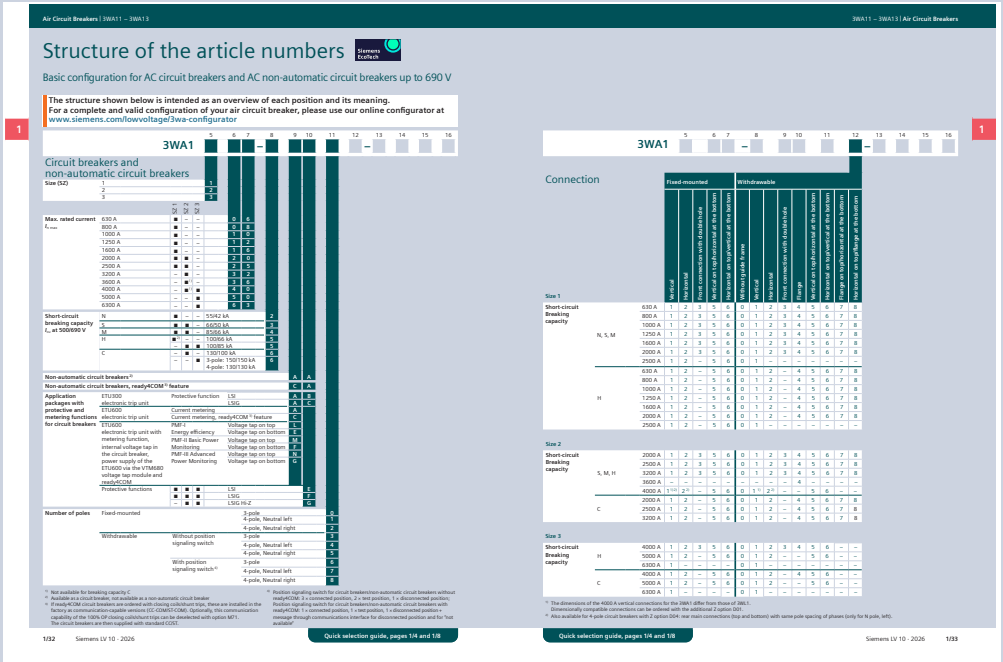

Configurable products

For products which are conveniently configurable online, the structure of the article numbers is clearly displayed. A link takes you directly to the configurator which permits complete and valid configuration.

© Siemens 2025

Clickable article numbers

Direct forwarding to the individual products in SiePortal (Product Catalog) by clicking on the article number in the catalog

or by entering this web address incl. article number
www.siemens.com/product_catalog_SIEP?Article No.

Clickable images

Direct forwarding to the individual motif types in the Industry image database by clicking on the images in the catalog

Industry image database:
www.siemens.com/lowvoltage/picturedb

new Search function

Search for new products by entering "new" in the text field of the search function

Siemens EcoTech

Products bearing our Siemens EcoTech label are identified by this clickable symbol in the catalog

www.siemens.com/lowvoltage/SiemensEcoTech

SiePortal – The integrated platform for product selection, purchasing and support

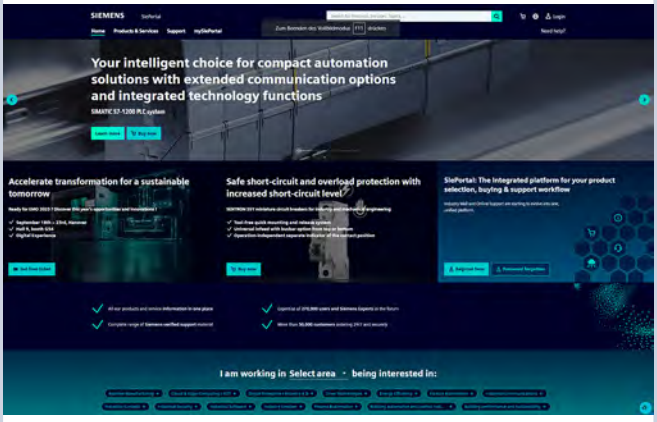

SiePortal:
www.siemens.com/sieportal

SiePortal – Knowledge base for low-voltage products

SiePortal > Support > Knowledge base

- Catalog/Brochure
- Manual
- Characteristic curves
- Certificates
- FAQ etc.

www.siemens.com/lowvoltage/product-support

SiePortal – Product catalog (Internet ordering platform) for low-voltage products

SiePortal > Products & Services

www.siemens.com/lowvoltage/product-catalog

© Siemens 2025

Products and their applications in infrastructure

E

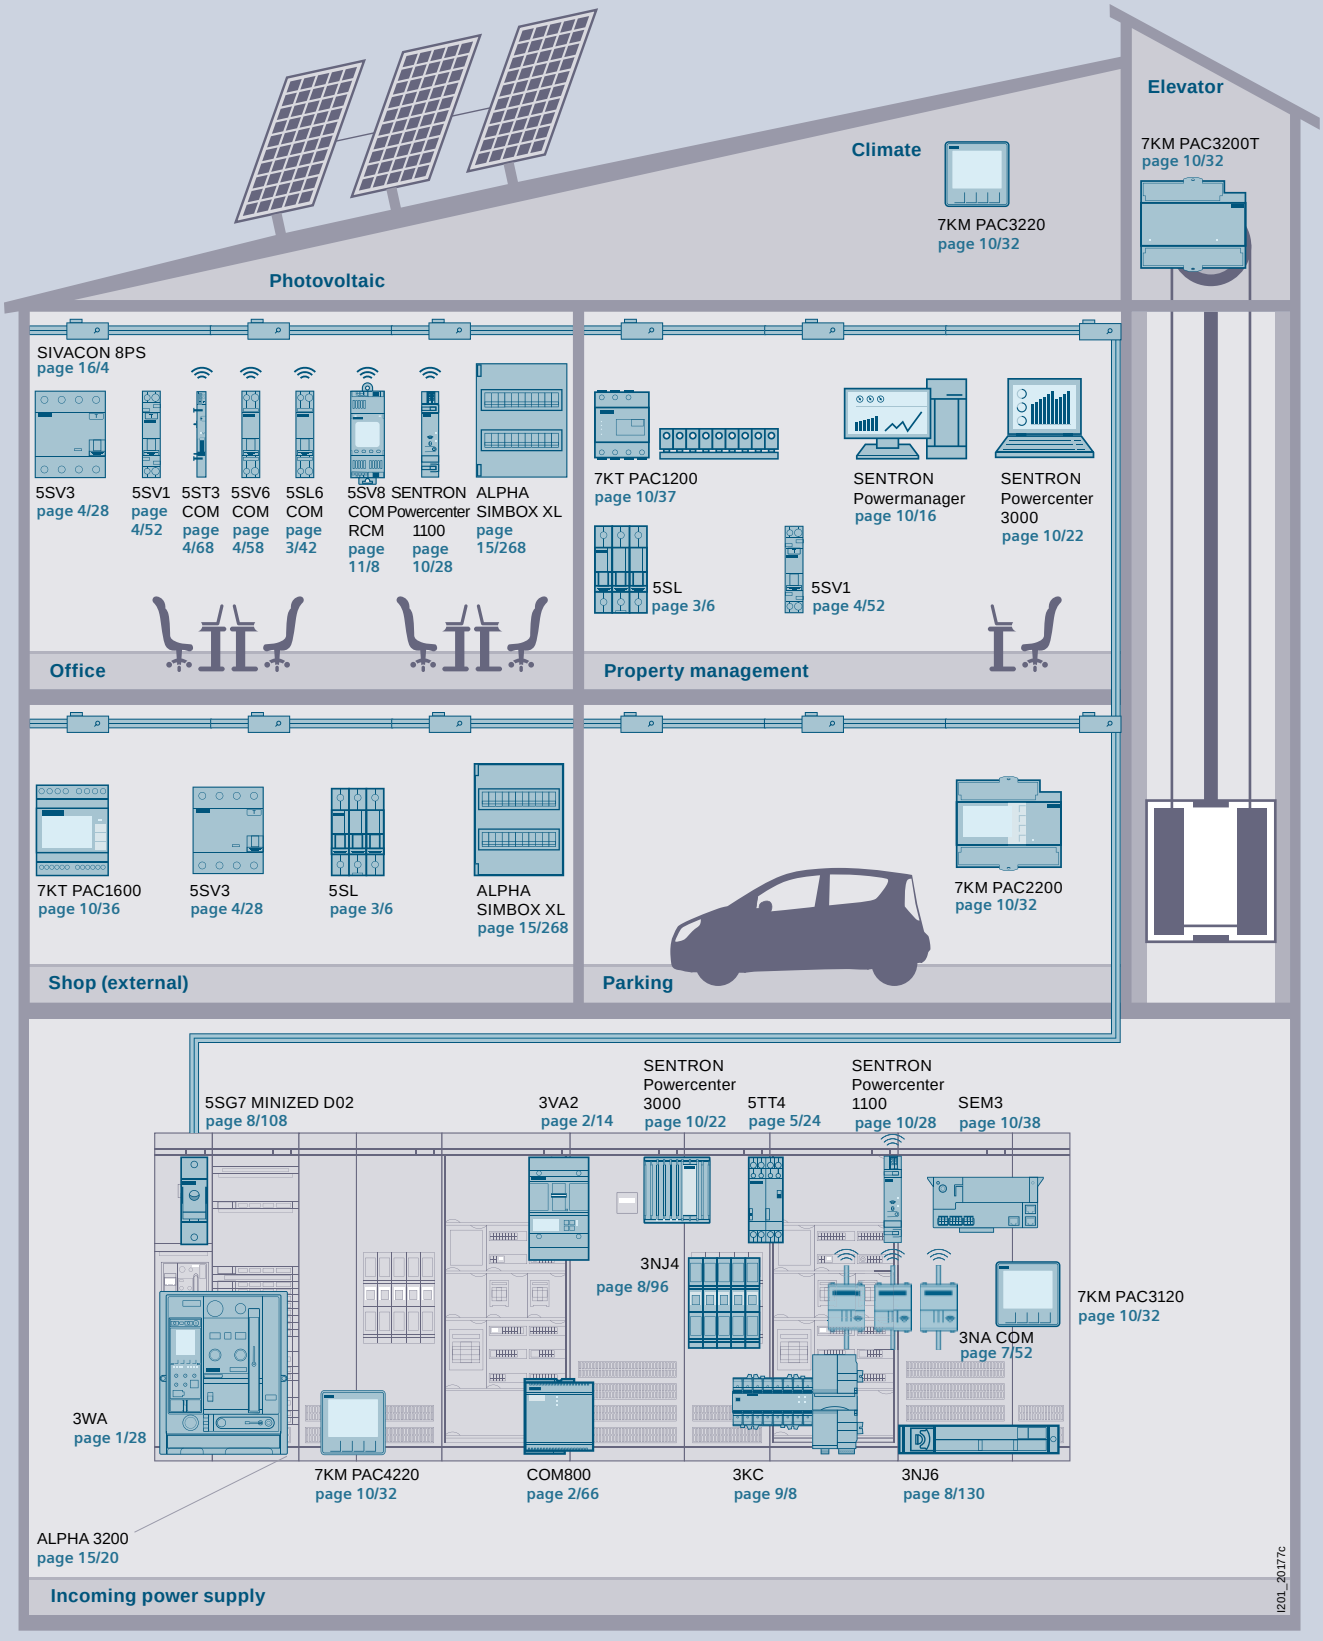

© Siemens 2025

Products and their applications in industry

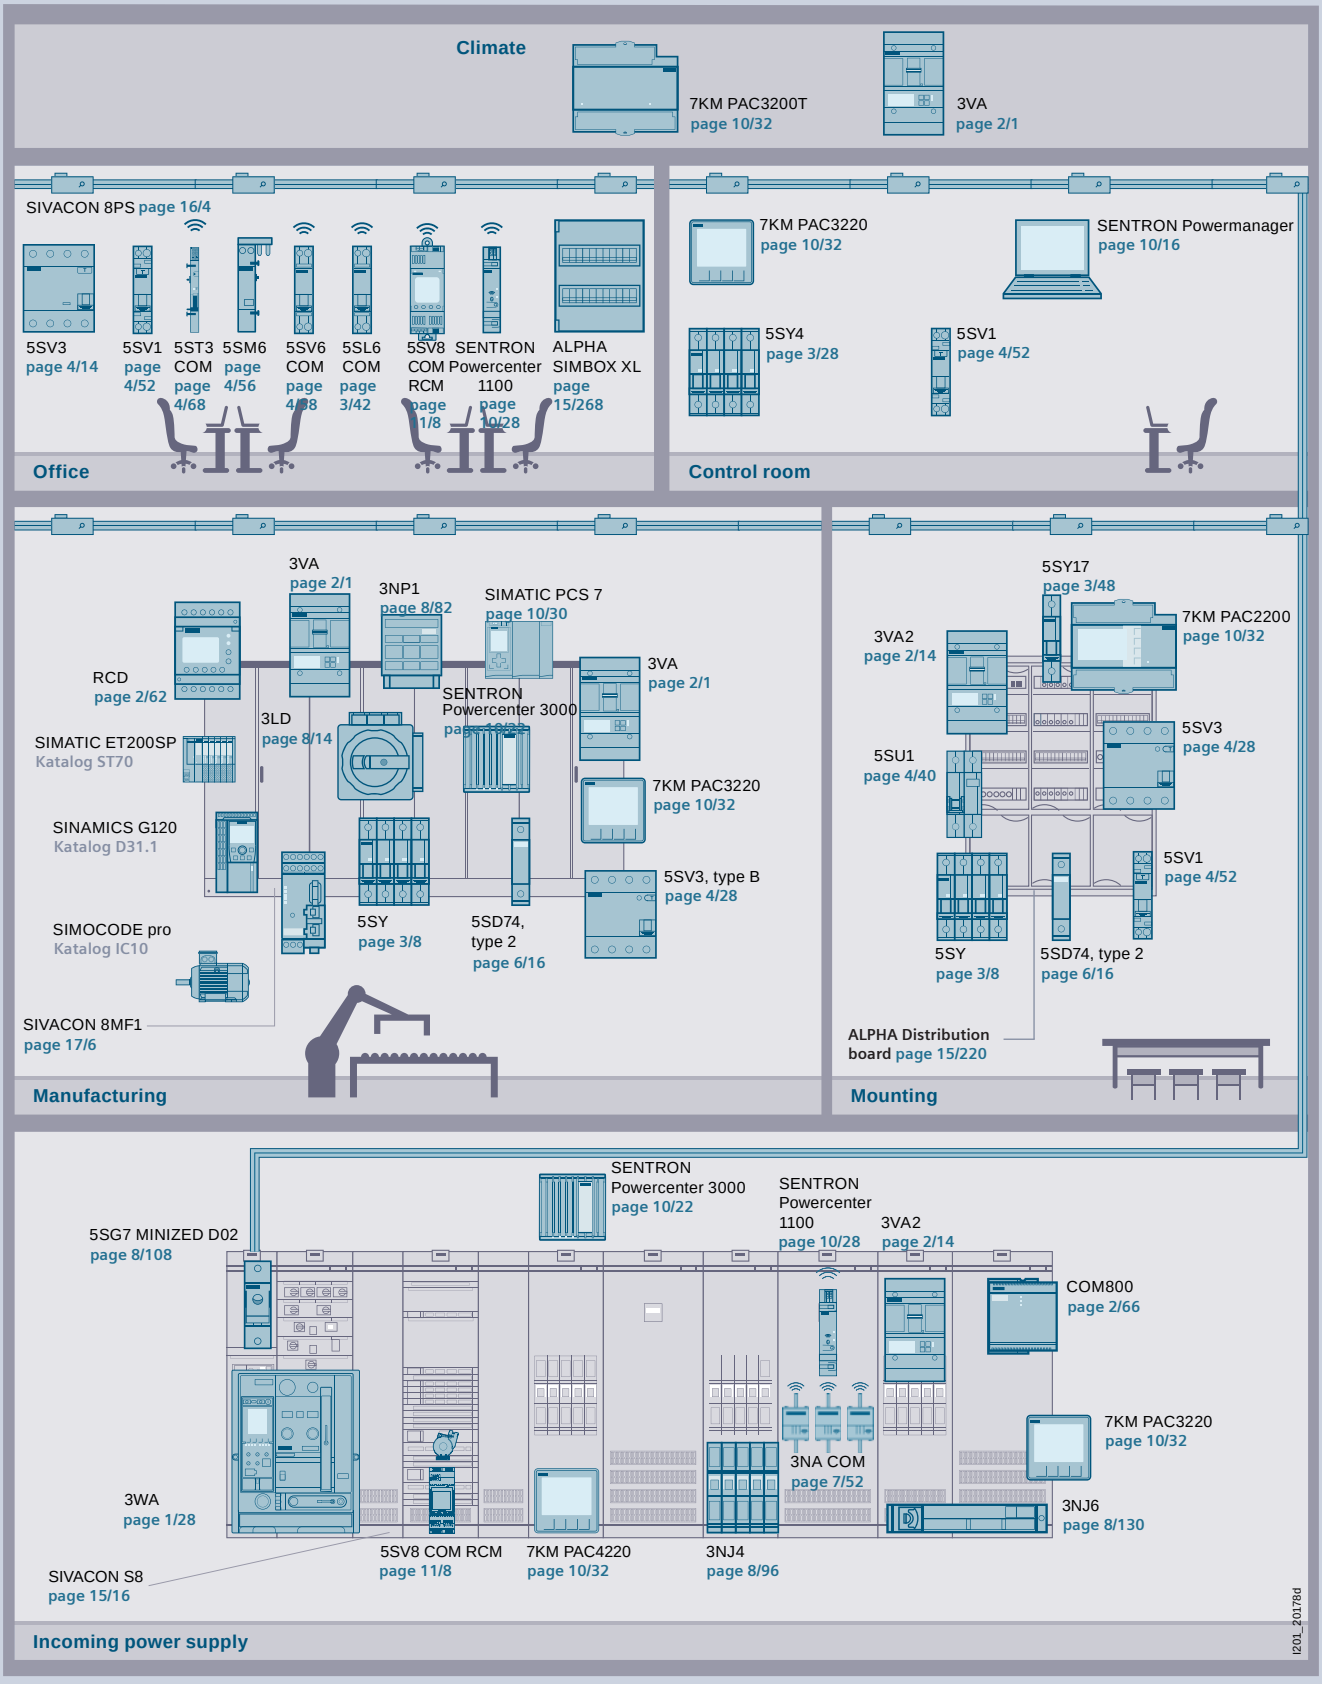

© Siemens 2025

E

Examples of digitalization in infrastructure

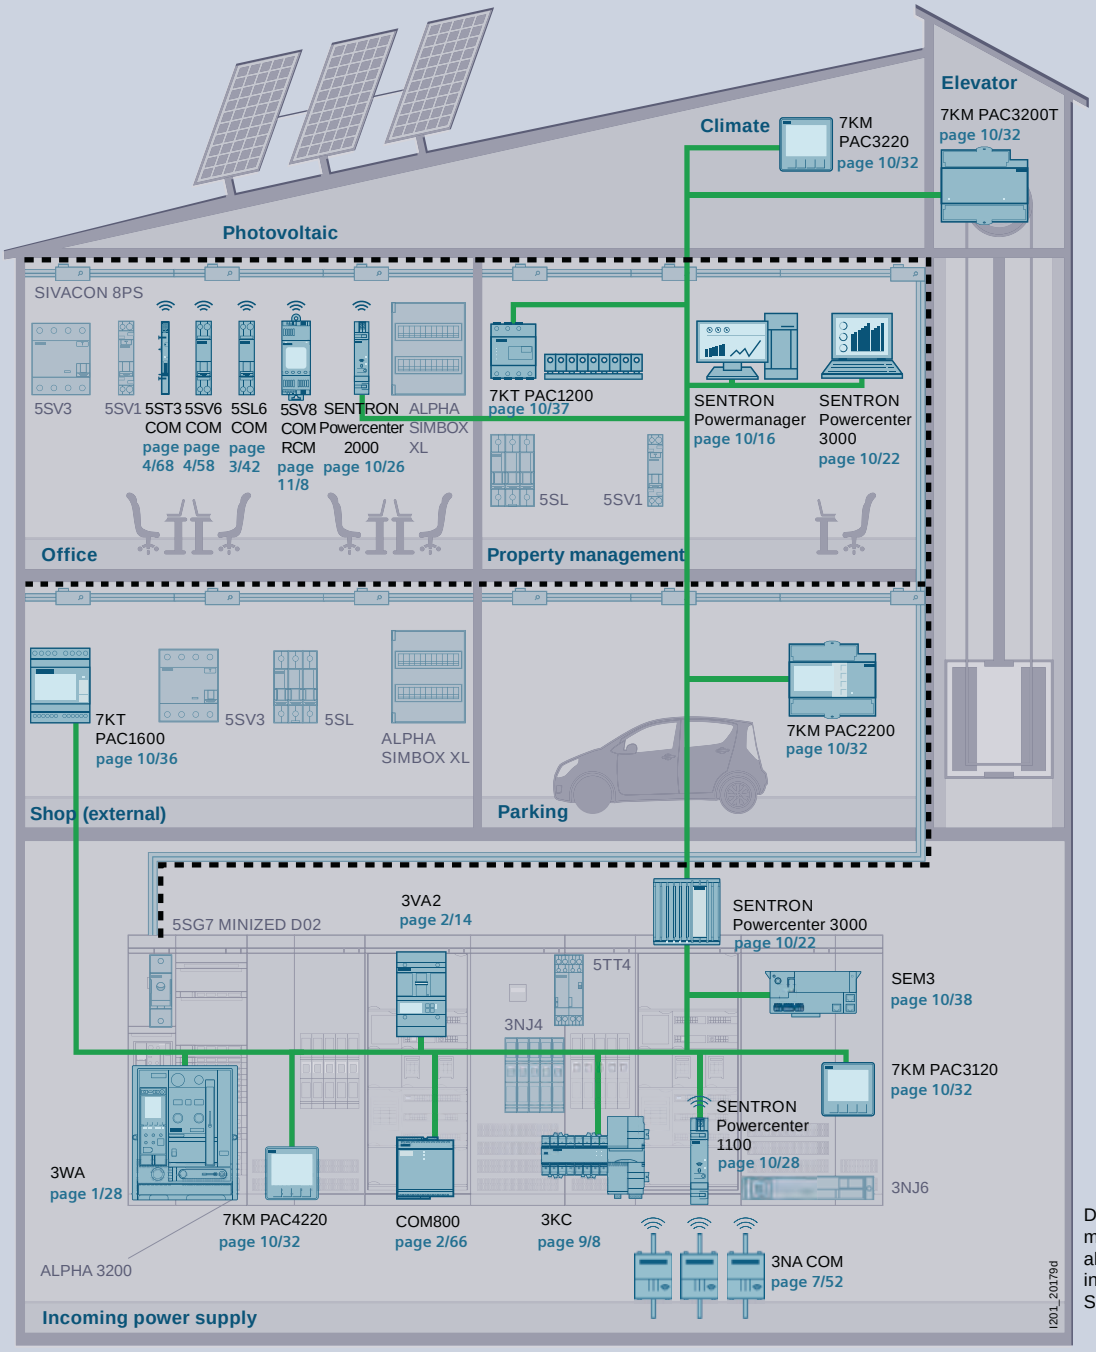

Cloud-based analysis

Condition monitoring

Predictive maintenance

Power monitoring

On premises

Measuring, evaluating and controlling with SENTRON Powermanager / Desigo CC

Stand-alone

Decentralized visualization of measured values, states and alarms via integrated web servers in measuring devices and SENTRON Powercenter 3000

Industrial Ethernet
powerline

© Siemens 2025

Examples of digitalization in industry

Cloud-based analysis

Condition monitoring

Predictive maintenance

Power monitoring

On premises

SENTRON

Measuring, evaluating and controlling with SENTRON Powermanager

Stand-alone

Decentralized visualization of measured values, states and alarms via integrated web servers in measuring devices and SENTRON Powercenter 3000

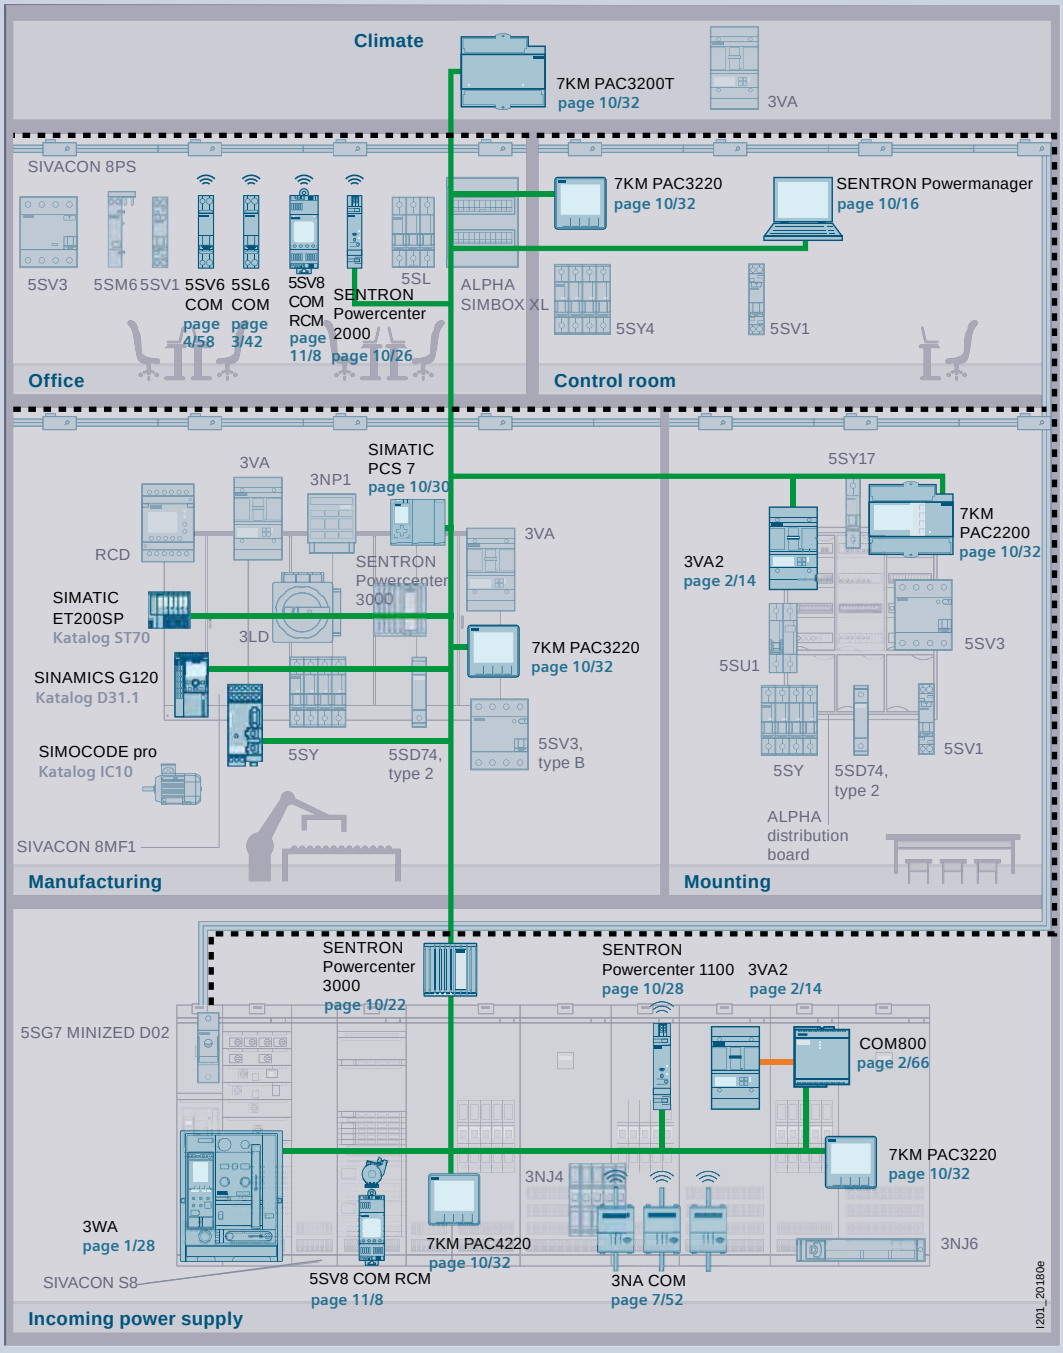

Industrial Ethernet
3VA-line
powerline

© Siemens 2025

Introduction to the topic of digitalization and Industry 4.0

In industrial automation, the demand for communication capability, data transparency and flexibility is growing constantly. To enable industrial switchgear technology to meet this demand, the use of bus systems and intelligent switching devices is unavoidable.

Digitalization

Protection, switching and measuring devices in power distribution systems can display important information on local visualization via integrated communication, e.g. in Powercenter, or transmit it to energy data management systems (EDMS), e.g. SENTRON Powermanager, as well as to cloud systems and applications.

- Diagnostics management
- Fault management – Email alarm
- Maintenance management – predictive maintenance
- Cost center management

1. Visualization and plant transparency

- Greater operational reliability thanks to remote access to the plant.
- Plant visualization for central and simple access to all device information.

2. Digital documentation

- Uniform access to digital data and documentation.
- Provision of extensive CAx data for systems and components during planning and operation.
- Support in planning and process creation using SIMARIS planning tools, product and system configurators.

3. Power monitoring

- Fulfilling the ISO 50001 by detecting and transparently presenting the energy flows within energy distribution.

4. Optimization and retrofit

- Retrofitting solutions such as SEM3 offer a simple option for integrating energy monitoring into existing systems.
- Energy monitoring and plant transparency help you efficiently plan plant expansion.

5. Maintenance management

- Maintenance support, even remotely, by transparently presenting the status of a switchgear and controlgear assembly.

6. Emergency management

- Quick error localization which therefore leads to a minimization of outage times.

7. Cybersecurity

- Protection from unauthorized access and manipulation to switchgear and controlgear assemblies and devices ensures integrity, availability and confidentiality.

© Siemens 2025

E

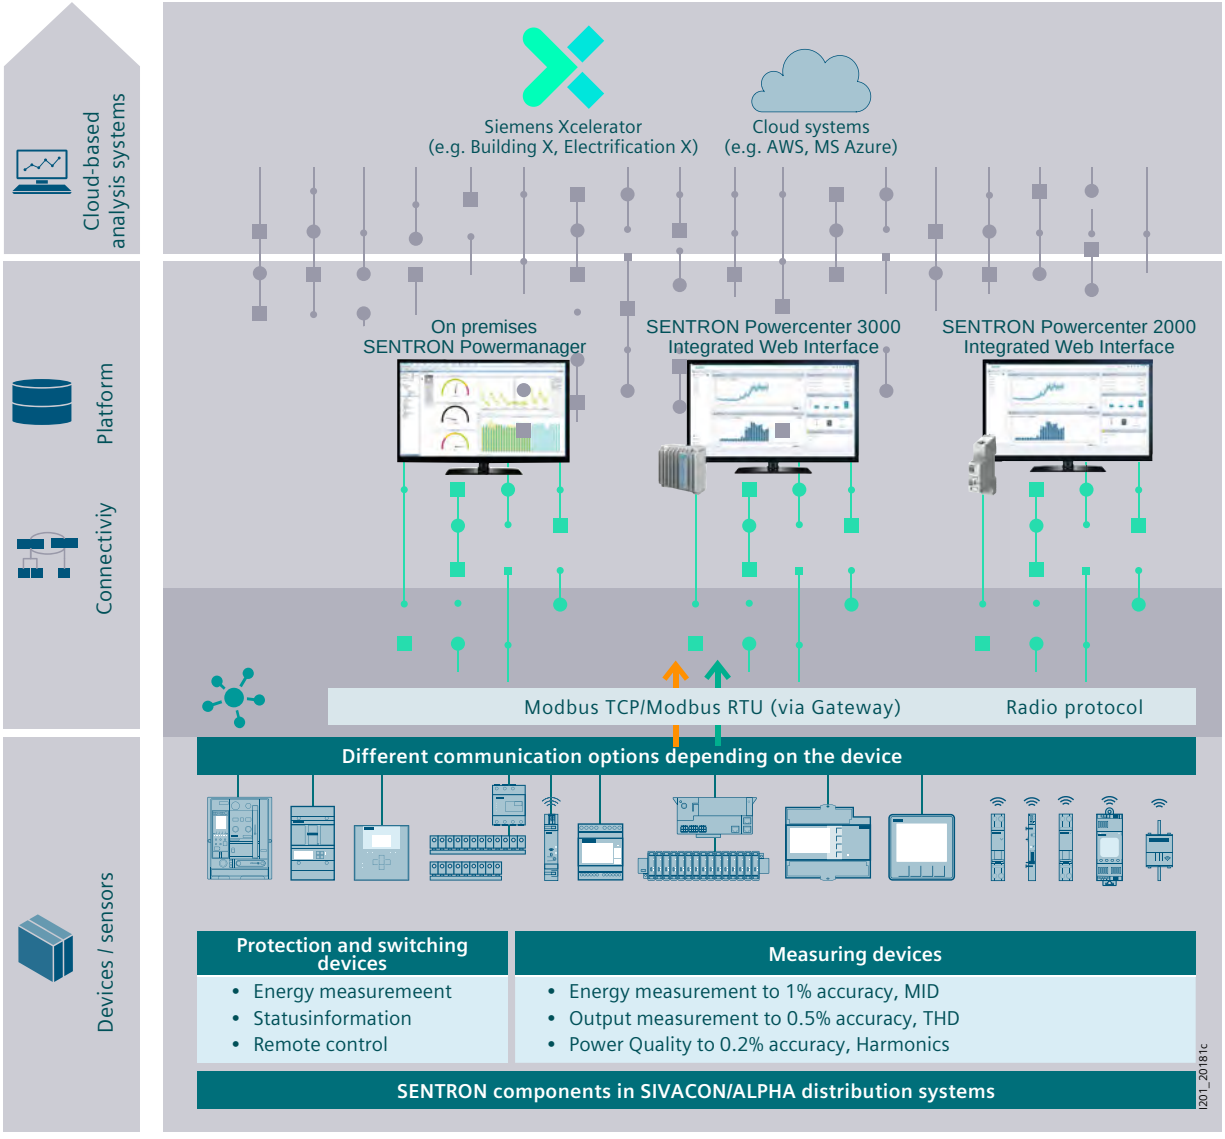

© Siemens 2025

Overview of protection, switching, measuring and monitoring tasks

The functions presented here are available in combination or individually.
Details can be found in the respective chapter.

Device class	Type	Rated current	Page	Line protection	Motor protection	Generator protection	Starter protection	Isolating function
Air circuit breakers	3WA/ 3WL	630 ... 6300 A	1/1	■	■	■		■
Molded case circuit breakers	3VA	16 ... 1600 A	2/6	■	■	■	■	■
Miniature circuit breakers (automatic circuit breakers)	5SY/ 5SL	0 ... 80 A	3/6					■
RCCB	5SV3/ 5SM3	16 ... 125 A	4/6	■				■
RCBOs	5SU1/ 5SV1	0 ... 40 A	4/10	■				■
AFD units	5SM6	0 ... 40 A	4/12					
AFDD/MCBs	5SV6	0 ... 40 A	4/57	■				■
On-off switches	5TL1	32 ... 125 A	5/14					
Overvoltage protection devices	5SD7	–	6/1					■
Fuses NEOZED, DIAZED, Cylindrical fuses	5SE, 5SA, 5SB, 3NW6, 3NW8	–	7/32	■	■ [1]		■	
Photovoltaic fuses	–	–	7/90	■				
LV HRC fuses	3NA/ 3ND	–	7/38	■	■		■	
SITOR semiconductor fuses	–	–	7/60	■		■	■	
Switch disconnectors	3LD	16 ... 250 A	8/14					■
	3KD	16 ... 1600 A	8/62					■
Fuse switch disconnectors	3NP	0 ... 630 A	8/82	With suitable fuse links			With suitable fuse links	■
Switch disconnector with fuse	3NJ	0 ... 630 A	8/130					■
	3KF	0 ... 630 A	8/114					■
Transfer switching equipment	3KC	16 ... 3200 A	9/16					■
PAC measuring devices	7KM/ 7KT	Any	10/32					
Motor starter protectors	3RV	–	Catalog IC 10		■			■
Contactor	3RT	–	Catalog IC 10					■

[1] Only applies to 3NW8
[2] Only applies to the communication-capable COM products

© Siemens 2025

E

Overload protection LT	Current limitation (Short-circuit)	Short-circuit protection, delayed ST	Short-circuit protection, instantaneous INST	Ground-fault protection GF	Measurement function	Personnel safety/ fault current protection	Overvoltage protection	Preventive fire protection	Switching function
■		■	■	■	■			■	
■	■	■	■	■	■	■ | ■		■	
■	■		■		■ [2]				
						■ | ■			
■	■		■			■ | ■			
								■	
■	■		■		■ [2]			■	
							■		
■	■		■						
■	■		■						
■	■		■		■ [2]				
■	■		■						
With suitable fuse links	With suitable fuse links		With suitable fuse links						
									■
					■				
■	■		■						

© Siemens 2025

Overview of protection, switching, measuring and monitoring tasks

Line protection

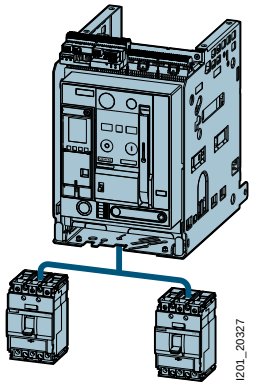

The trip units for line protection are designed to provide overload and short-circuit protection for:

- Cables
- Leads
- Non-motor loads

Generator protection

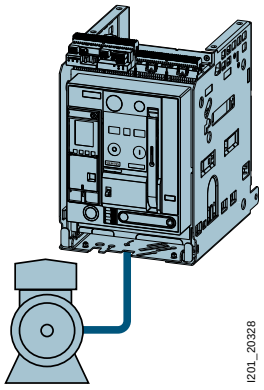

The setting values of the trip units are matched to protecting generators.

Motor protection

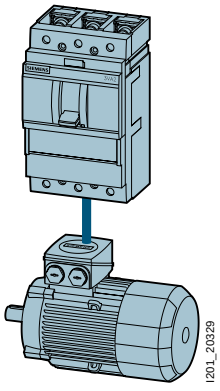

The overload and short-circuit releases are designed for optimal protection and direct starting of three-phase AC squirrel-cage motors.

The molded case circuit breakers for motor protection have phase-failure sensitivity and a thermal image that protects the motor against overheating.

The adjustable time lag class enables users to adjust the overload release to the startup conditions of the motor to be protected.

Starter protection

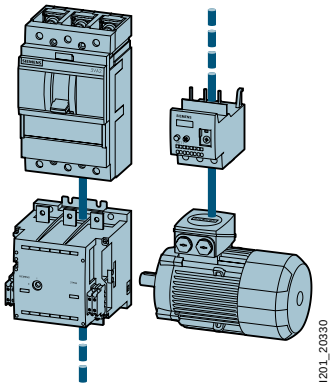

Starter combinations consist of:

Molded case circuit breaker + contactor + overload relay.

The molded case circuit breaker handles short-circuit protection and the isolating function. The task of the contactor is the operational switching of the feeder. The overload relay handles overload protection that can be specially matched to the motor.

The molded case circuit breaker for the starter combination is therefore equipped with an adjustable and instantaneous short-circuit release.

© Siemens 2025

E

Isolating function

Switching devices are described that meet the requirements defined for the isolating function when in the open position.

- Load switches, disconnectors, switch disconnectors according to IEC 60947-3

Switching operational currents up to the maximum rated current of the switching devices is part of the tasks performed by these devices (See chapter 8).

- Non-automatic circuit breakers according to IEC 60947-2 Annex L

Non-automatic circuit breakers can disconnect operational currents up to the maximum rated current, including fault currents up to the specified I_{cc} value.

Measurement function

There are two possibilities for selecting the measurement function in low-voltage power distribution (See chapter 10):

- Protection and switching devices with integrated measurement function (all-in-one), measurement function equivalent to a measuring devicet

- Measuring devices (stand-alone) combined with protection and switching devices



Current limitation (Short-circuit)

Current limitation means that the peak value of the prospective peak short-circuit current is limited to a smaller let-through current.

- Current-limiting devices include molded case circuit breakers (MCCBs), motor starter protectors (MSPs), miniature circuit breakers (MCBs) and fuses

- Air circuit breakers (ACBs) are non-current-limiting devices

Transfer switching function

In the selection of transfer switch equipment, the following functions are distinguished (See chapter 9):

- Transfer control
- Load transfer

The following possibilities for transfer switching are available:

- MTSE = manual transfer switch equipment
- RTSE = remote transfer switch equipment
- ATSE = automatic transfer switch equipment



© Siemens 2025

Tripping characteristics

The protective function of protection and switching devices in low-voltage power distribution systems is determined by the correct selection of the respective tripping characteristic (fuses, miniature circuit breakers) or TMTU/ETU trip units (air circuit breakers, molded case circuit breakers).

All current-limiting protection devices, such as MCCBs, MSPs, MCBs and fuses, can be described in terms of three characteristic curves:

- Tripping curve (time/current)
- Let-through current curve
- Let-through energy curve

In the following, the functions of the tripping curve are presented as an example.

Fuses

The time-current characteristic curve of fuses denotes the melting time as a function of the overload or short-circuit current.

Different characteristics must be considered in dimensioning depending on the protection requirement and operational class (e.g. gG, gR, aR, etc.).

See Configuration Manual – Fuse systems
www.siemens.com/lowvoltage/manuals (45314810)

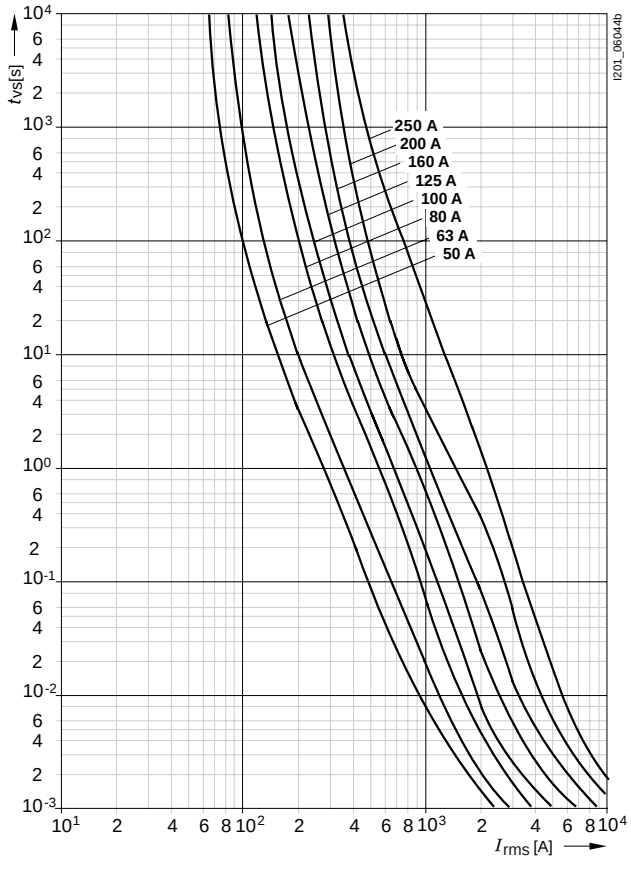

Miniature circuit breakers (MCBs)

The characteristic curve is chosen based on the application and is classified, for example, as tripping characteristic A, B, C or D.

Tripping curve = tripping characteristics according to IEC/EN 60898-1

See Configuration Manual – Miniature circuit breakers
www.siemens.com/lowvoltage/manuals (45302792)

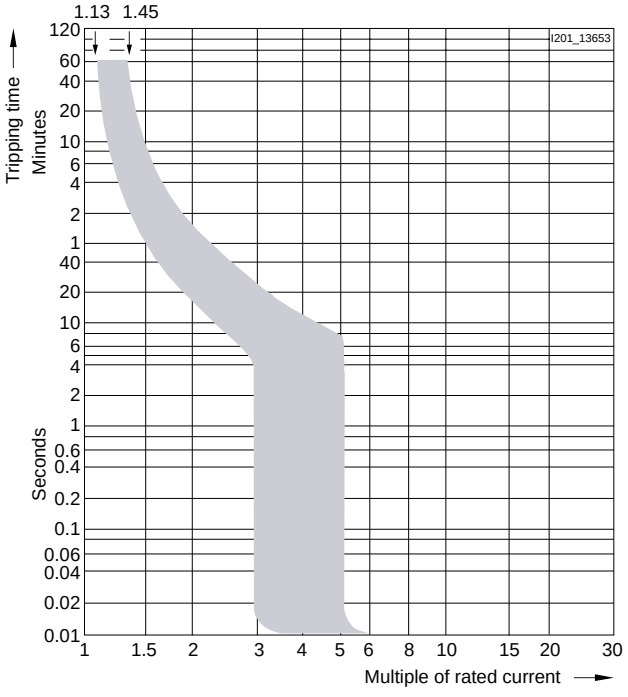

© Siemens 2025

Molded case circuit breakers (MCCBs)

The choice of electronic trip unit is based on the protective function required in power distribution.

The trip units are classified as:

- thermal-magnetic trip units (TMTU; previously known as electromechanical trip units)
- electronic trip units (ETU).

Depending on the application and requirements, TMTUs are available with different protection setting options for both overload and short-circuit.

See Equipment Manual – 3VA molded case circuit breakers with IEC certificate
www.siemens.com/lowvoltage/manuals (90318775)

FTFM (Fixed Thermal Fixed Magnetic)

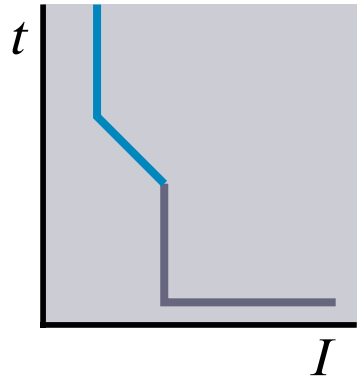

Permanently set thermal overload trip unit, permanently set magnetic trip unit with short-circuit protection

ATFM (Adjustable Thermal Fixed Magnetic)

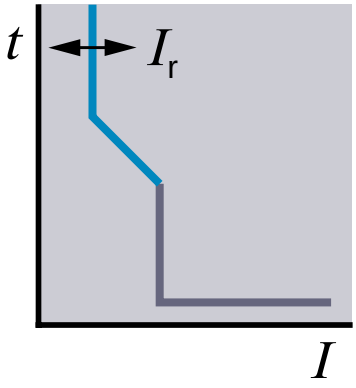

Adjustable thermal overload trip unit, permanently set magnetic trip unit with short-circuit protection

ATAM (Adjustable Thermal Adjustable Magnetic)

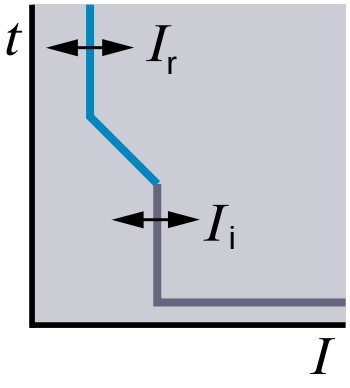

Adjustable thermal overload trip unit, adjustable magnetic trip unit with short-circuit protection

© Siemens 2025

Tripping characteristics

Molded case circuit breakers (MCCBs)/air circuit breakers (ACBs) with ETU

Selection of the electronic trip unit determines the protective function in power distribution.
Electronic trip units offer the most extensive and variable protection settings of all protection and switching devices for low-voltage power distribution.

- See Equipment Manual – 3VA molded case circuit breakers with IEC certificate **www.siemens.com/lowvoltage/manuals (90318775)**
- See Equipment Manual – 3WA1 air circuit breakers **www.siemens.com/lowvoltage/manuals (109763061)**

The graphs below show an overview of the time-current characteristic curve.

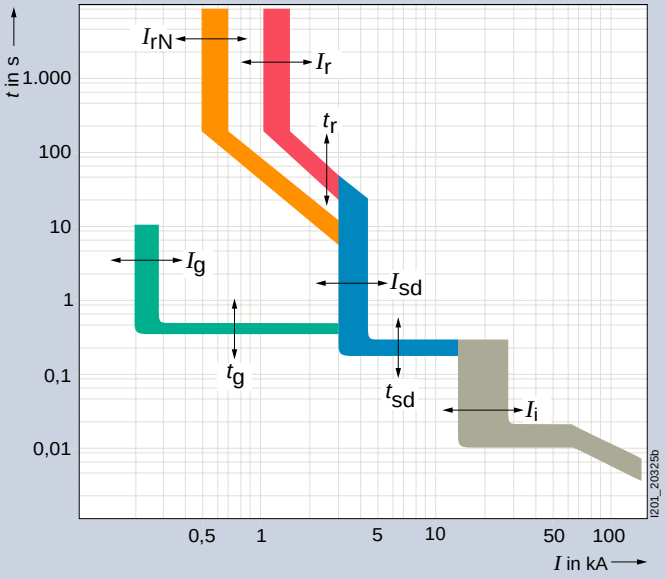

- **LT** Overload protection LT
- **N** Neutral conductor protection N
- **ST** Short-circuit protection, delayed ST
- **INST** Short-circuit protection, instantaneous INST
- **GF** Ground-fault protection GF

Overload protection LT

The ID letter for overload protection is LT (stands for "Long-time delay"). The trip unit is inverse-time delayed and exhibits the following characteristics depending on the trip unit type:

- Bimetal characteristic with thermal-magnetic trip units
- I^2t characteristics for molded case circuit breakers MCCBs and I^2t and I^4t characteristics for ACBs
- Depending on the electronic trip units, only I^2t characteristic or I^2t and I^4t characteristic

The letters I_r refer to the current setting value; the associated tripping time is identical to t_r.

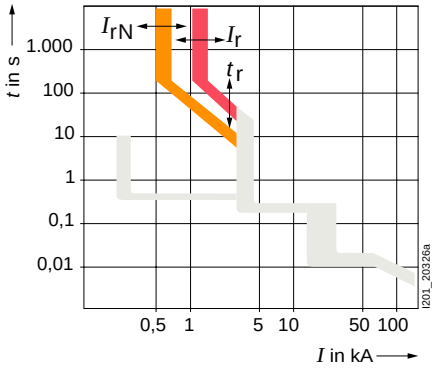

Neutral conductor protection N

The ID letter for neutral conductor protection is N.

The letters I_N refer to the current setting value for the overload protection; the associated tripping time is identical to t_r.

The short-circuit protection of the circuit breaker also protects the neutral conductor.

Possible reasons for implementing overload protection in the neutral conductor include:

- The neutral conductor has a smaller cross-section than the phase conductors.
- Higher harmonic components in the system can be expected.
- A large number of loads, or predominantly 1-phase loads, are connected.

© Siemens 2025

E

Short-circuit protection, delayed ST

The ID letter for short-time delayed short-circuit protection is ST (stands for “Short-time“). The ST function of the electronic trip unit can be used to implement time-selective short-circuit tripping in low-voltage networks in which multiple circuit breakers are installed in series.

The short-time delayed short-circuit protection function protects phases L1 to L3 and the neutral conductor. The protective function responds if the current in at least one phase exceeds the set tripping current I_{sd} for the set delay period t_{sd}.

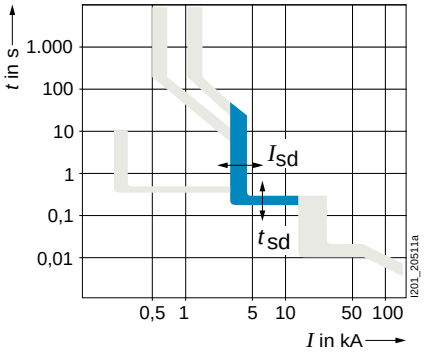

Short-circuit protection, instantaneous INST

The ID letter for instantaneous short-circuit protection is INST (stands for “Instantaneous“). This short-circuit protection function protects phases L1 to L3. The instantaneous short-circuit protection function responds if the instantaneous value equal to the rms of the current in at least one phase exceeds the instantaneous tripping current I_i.

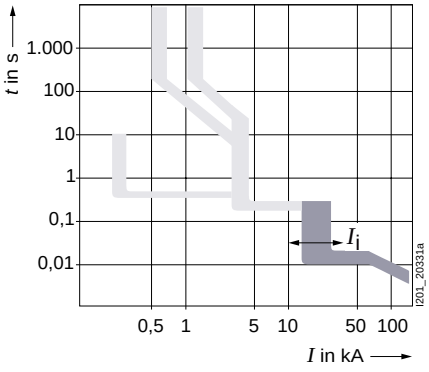

Ground-fault protection GF

The ID letter for ground-fault protection is GF (ground fault). The G release measures fault currents between phases and grounded, electrically conductive parts. Ground-fault protection protects against the flow of current to ground in the rated current range. As ground-fault currents can produce arcing, ground-fault protection consequently offers extended fire protection.

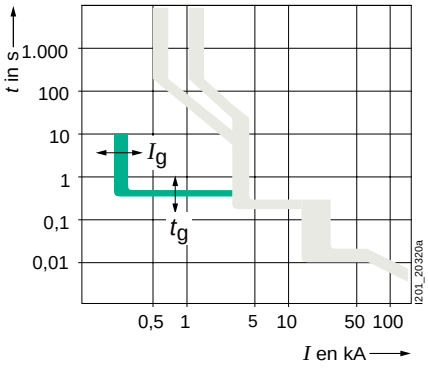

© Siemens 2025

Overview of protection, switching, measuring and monitoring tasks

Overvoltage protection

Overvoltage protection refers to the protection of electrical and electronic devices against excessively high electrical voltages. Overvoltage can be caused by switching operations or electrostatic discharging (ESD).

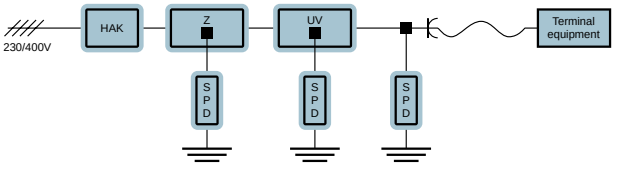

Personnel safety/fault current protection

Protection in the event of direct contact:
Additional protection contact refers to direct contact with a part that is live under operating conditions.

Protection against indirect contact:
Fault protection refers to contact with an electrically conductive part which is not live under operating conditions.

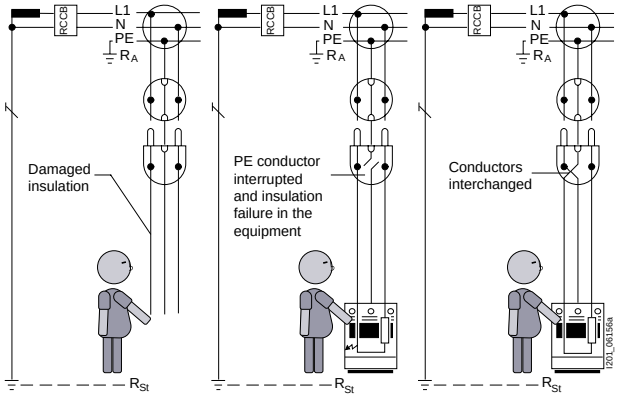

Preventive fire protection

Arc fault detection devices evaluate occurring faults in the current and voltage wave using an electronic switch and shutting off the current when it recognizes a contact fault. This prevents overheating at poor contact points which can prevent fires.

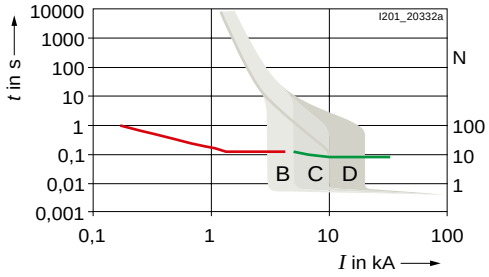

Potential failure causes

- Damaged cable insulation, e.g. by nails, screws or brackets
- The risk of a cable break exists for cables with a too-tight bending radius
- Cables which are laid through open doors and windows can be crushed when doors or windows are closed resulting in damaged insulation and arcing faults
- Environmental influences such as UV rays, temperature, humidity, gases can damage or age the insulation
- Damage caused by rodents
- Loose contact, e.g. caused by too low torque
- Conductor damaged by claw fixing

© Siemens 2025

SIMARIS planning tools

For planning and visualizing the power distribution system

From planning to operation

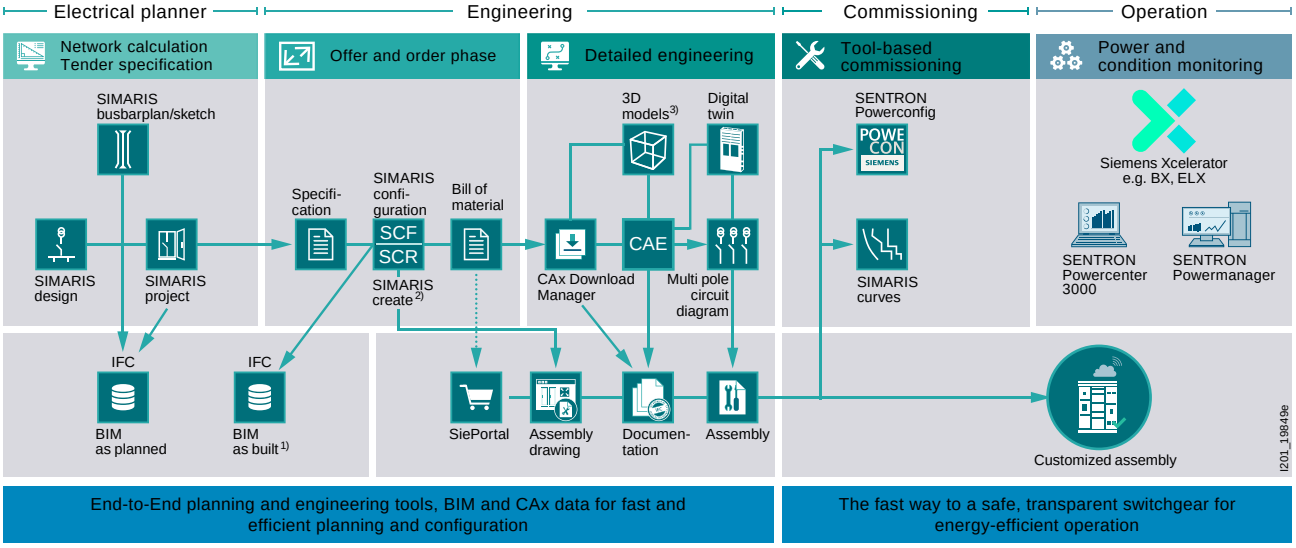

1) available for SIVACON S8
2) available for ALPHA DIN/NF
3) available for ALPHA 3200 Eco and SIVACON S4

Highlights

- Thorough support of the engineering process with interlinked software tools
- Provision of extensive CAx data for systems and components
- Reduction of cost and time aspects during planning

© Siemens 2025

Distribution systems

For industrial plants or in infrastructure

E

SIVACON S8 power distribution board and motor control center

- Reliable, economical, flexible and communication-capable
- For all applications in infrastructure and process industry

See page 15/10 for the overview

ALPHA 3200 switchboard (DIN technology)

- Safe investment, enhances productivity and performance
- Optimized for applications in modern building infrastructures
- Integrated system for all SENTRON components

See page 15/12 for the overview

ALPHA distribution boards (DIN technology)

- Comprehensive portfolio with wall-mounted and floor-mounted distribution boards for currents between 160 A to 1250 A

See page 15/220 for the overview

SIVACON 8PS busbar trunking systems

- For economic and reliable power supply
- Space-saving and simple to install
- Low fire load, good electromagnetic compatibility

See page 16/4 for the overview

ALPHA 3200 Eco switchboard (DIN technology)

- **Saves resources:** lower use of copper with centrally positioned busbar
- **Practical:** optimized performance – from the transformer connection via the busbar to the outgoing feeders
- **Modular:** a high packing density in a compact space due to flexible use of ALPHA assembly kits
- **Innovative:** 3D processor generates a digital twin of the configured system at the press of a button

See page 15/12 for the overview

© Siemens 2025

SIVACON S4 switchboard (NF technology)

- Consistent portfolio for applications from 800 A to 6300 A
- High flexibility in system planning thanks to a modular platform structure
- 3D processor generates digital twin of the configured system at the touch of a button
- Safe to use thanks to independent VDE approval

See page 15/70 for the overview

ALPHA UNIVERSAL distribution boards (NF technology)

- Comprehensive portfolio with wall-mounted and floor-mounted distribution boards for currents between 125 A to 800 A
- Simple planning thanks to the modular platform structure

See page 15/188 for the overview

© Siemens 2025

Control cabinets/System cubicles

For plant engineering, process control, network technology, secondary systems/energy automation

E

SIVACON 8MF1 system cubicles

- Modular system
- Fully assembled, adapted according to your specifications, or entirely customized

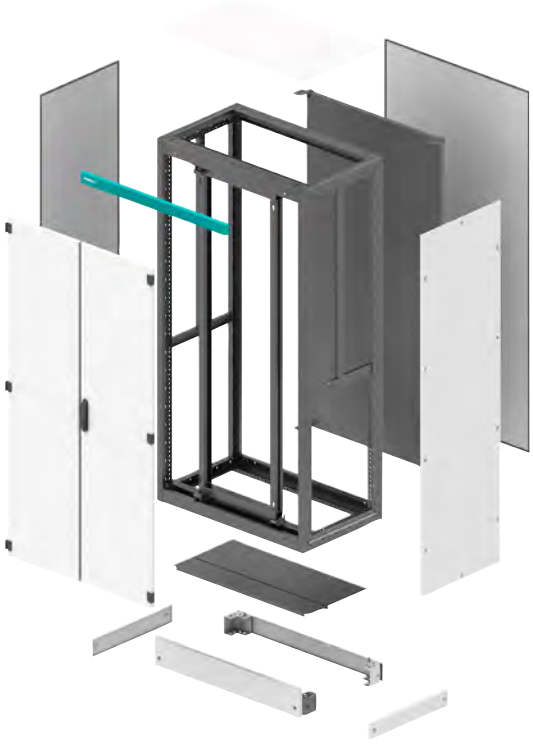

See page 17/6 for the overview

SIVACON 8MF/8MR system lighting – LED lights

The LED lights offer optimum lighting conditions for installation and maintenance. The LED technology is energy-efficient and maintenance-free.

See page 17/34 for the overview

SIVACON 8MF/8MR system lighting – Slimline lights

The Slimline lights are an alternative with energy-saving lamps and are available as a version with an integrated socket.

See page 17/35 for the overview

SIVACON 8MR system air-conditioning

Ensures fault-free operation of the electrical and electronic built-in units installed in the cubicle, even under the harshest ambient conditions.

See page 17/40 for the overview

© Siemens 2025

© Siemens 2025

Made for makers. Simply reliable.

All power distribution systems rely on a secure infeed of electrical energy. The 3WA air circuit breaker combines all of the functions which are required of power distribution equipment in the digital companies of today: from reliably protecting people and equipment from electrical accidents and damage, to flexible application and retrofit options, a long service life and low maintenance, to innovative features for integrated e-engineering, reliable energy data recording and seamless integration into digital environments. As the central component of the electrical power distribution, the 3WA air circuit breaker provides the basis for a holistic energy system in the digital age. The 3WA air circuit breaker is also part of the Siemens Xcelerator portfolio and therefore provides support with achieving digital and sustainable transformation – faster, simpler, and scalable.

Reliable, versatile and perfectly integrated

The 3WL air circuit breakers reliably protect electrical equipment from damage or fire resulting from short circuit, ground fault or overload failures.

Note:
Products bearing our Siemens EcoTech label are identified by this clickable symbol in the catalog:

Siemens EcoTech

www.siemens.com/lowvoltage/SiemensEcoTech

© Siemens 2025

Air Circuit Breakers

All the information you need 1/2
3WA1 quick selection guide 1/4
- 3WA1 circuit breakers and non-automatic circuit breakers for AC and DC 1/4
- 3WA1 circuit breakers and non-automatic circuit breakers for AC 1/8
- 3WA1 non-automatic circuit breakers for DC 1/14
- Electronic trip unit 1/18
- ETU300 electronic trip unit 1/19
- ETU600 electronic trip unit 1/20
- Connection 1/26
- Communication 1/27

3WA11 – 3WA13 1/28
- System overview 1/28
- Online configurator highlights 1/30
- Structure of the article numbers 1/32
- Accessory options 1/46
- Summary of power consumption data 1/57
- Guide frames for AC 1/58
- Guide frames for DC 1/61
- Accessories and spare parts 1/62

3WL1 quick selection guide 1/76
- 3WL1 circuit breakers and non-automatic circuit breakers for AC and DC 1/76
- 3WL1 circuit breakers and non-automatic circuit breakers for AC 1/78
- 3WL1 non-automatic circuit breakers for DC 1/82
- ETU electronic trip units 1/86
- Connection 1/90
- Operating mechanism, auxiliary release, auxiliary switch 1/91

3WL11 – 3WL13 (product phase-out) 1/92
- Structure of the article numbers 1/92
- Accessory options 1/96
- Guide frames for AC 1/106
- Guide frames for DC 1/107
- Accessories and spare parts 1/108

3WL10 1/124
- Online configurator highlights 1/124
- Structure of the article numbers 1/126
- Accessory options 1/128
- Guide frames 1/130
- ETU electronic trip units and accessories 1/131
- Accessories and spare parts 1/136

Siemens Xcelerator

© Siemens 2025

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about air circuit breakers, please visit our website **www.siemens.com/sentron-3wa**

Your product in detail

The SiePortal platform (knowledge base) provides comprehensive information
www.siemens.com/lowvoltage/product-support

- Quick Selection Guide
  - 3WA air circuit breakers **(109781967)**
  - 3WL air circuit breakers **(109751638)**
- Brochure
  - 3WA air circuit breakers **(109800077)**

The relevant tender specifications can be found at
www.siemens.com/tenderspecifications

Use our conversion tool for quick and easy conversion to Siemens products **www.siemens.com/conversion-tool**

Siemens YouTube channel

- 3WA air circuit breaker – Teaserfilm
  sie.ag/2Myvit
- 3WA air circuit breaker – Highlightfilm
  sie.ag/3dy65A

Everything you need for your order

Refer to SiePortal to find an overview of your products (product catalog)

- Air circuit breakers **sie.ag/2IXiZjB**

Direct forwarding to the individual products in SiePortal by clicking on the article number in the catalog or entering this web address incl. article number
www.siemens.com/product_catalog_SIEP?Article No.

Order supports can be found in SiePortal at
www.siemens.com/lowvoltage/product-support

- Order Support
  - 3WA air circuit breakers – Made for makers. Simply reliable. **(109800074)**

Configurators

The configurator reduces the time and effort required in the planning and ordering process, and allows for individual adaptations. Configure your air circuit breaker at
www.siemens.com/lowvoltage/3wa-configurator
www.siemens.com/lowvoltage/3wl-configurator
www.siemens.com/lowvoltage/3wl10-configurator

The following are additionally available for your configured air circuit breaker:

- 3D views
- CAD data
- Unit wiring diagrams
- Dimension drawings

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services.
You can find your local contacts at
www.siemens.com/lowvoltage/components/contact

You will find further information on services at
www.siemens.com/service-offers

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at
www.siemens.com/support-request

© Siemens 2025

… can be found in our online services

Commissioning + operation

SENTRON Powerconfig

The combined commissioning and service tool SENTRON Powerconfig for communication-capable measuring devices, circuit protection devices and circuit breakers.

Free download **SENTRON Powerconfig**

Free download SENTRON Powerconfig mobile via **App Store** and **Play Store**

Your product in detail

The SiePortal platform (knowledge base) provides detailed technical information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Characteristic curves
- Certificates

Online Support app available for download from the **App Store** and **Play Store**
You will find further information at
www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)

- SiePortal (product catalog)
  www.siemens.com/lowvoltage/product-catalog
- Image database
  www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAx Download Manager at
www.siemens.com/cax

Manuals

Manuals can be found in SiePortal at
www.siemens.com/lowvoltage/manuals

- Equipment Manual
  - 3WA1 air circuit breakers **(109763061)**
  - 3VA27 molded case circuit breakers & 3WL10 air circuit breakers **(109753821)**
- System Manual
  - 3WA air circuit breaker communication **(109792368)**
  - 3WL/3VL circuit breakers with communications capability – Modbus **(39850157)**
  - 3WL/3VL PROFIBUS circuit breakers with communications capability – PROFIBUS **(12560390)**
- Configuration Manual
  - Low-voltage protection devices selectivity tables **(109748621)**
- Communication Manual
  - 3WL air circuit breakers via COM35 – PROFINET IO, Modbus TCP **(109757987)**
  - 3WL10 air circuit breakers & 3VA27 molded case circuit breakers **(109760220)**

Face-to-face or online training

Our training courses can be found at
www.siemens.com/sitrain-lowvoltage

- 3WA air circuit breakers (WT-LV3WA)
- 3WL10 air circuit breaker, size 0 (WT-LVA3WL0)
- 3WL air circuit breakers, sizes 1-3 (WT-LVA3WL)
- Protection systems in low-voltage power distribution (WT-LVAPS)
- Maintenance and operation of 3WL and 3WA circuit breakers (LV-CBMAIN)
- Certification: Maintenance and operation of 3WL and 3WA circuit breakers (LV-CBCERT)

Video tutorial on the 3WL air circuit breaker
www.lowvoltage.siemens.com/wcms/3wl-tutorial

Technical overview – Air circuit breakers

The fast way to get you to our online services

This page provides you with comprehensive information and links on air circuit breakers
www.siemens.com/lowvoltage/product-support (109781188)

© Siemens 2025

3WA1 circuit breakers and non-automatic circuit breakers for AC and DC

IEC 60947-2

AC

		3WA11					3WA12				
Basic data											
Rated operational voltage U_e	V	≤ 1000					≤ 1150				
Rated current I_n	A	630 ... 2500					2000 ... 4000				
Size		1					2				
Type of mounting		Withdrawable		Fixed-mounted			Withdrawable			Fixed-mounted	
Number of poles		3/4-pole		3/4-pole			3/4-pole			3/4-pole	
Dimensions											
Width (3-pole | 4-pole)	mm	320 | 410		320 | 410			460 | 590			460 | 590	
Height (for breaking capacity N, S, M, H and D | C and E)	mm	466 | 516		437 | 462			466 | 516			437 | 462	
Depth	mm	471		357			471			357	
Approvals											
General product approvals		VDE, EAC, CCC, CE, C-Tick					VDE, EAC, CCC, CE, C-Tick				
Marine/shipbuilding		ABS, DNV, LRS, BV, PRS, CCS					ABS, DNV, LRS, BV, PRS, CCS				
Breaking capacity		**N**	**S**	**M**	**H**	**E**	**S**	**M**	**H**	**C**	**E**
Rated short-circuit breaking capacity											
I_{cu} | I_{cs} at U_e up to 415/440 V AC	kA	55 | 55	66 | 66	85 | 85	100 | 100	– | –	66 | 66	85 | 85	100 | 100	130 | 130	– | –
I_{cu} | I_{cs} at U_e up to 500 V AC	kA	55 | 55	66 | 66	85 | 85	100 | 100	– | –	66 | 66	85 | 85	100 | 100	130 | 130	– | –
I_{cu} | I_{cs} at U_e up to 690 V AC	kA	42 | 42	50 | 50	66 | 66	66 | 66	85 | 85	50 | 50	66 | 66	85 | 85	100 | 100	85 | 85
I_{cu} | I_{cs} at U_e up to 1000 V AC	kA	– | –	– | –	– | –	– | –	50 | 50	– | –	– | –	– | –	– | –	85 | 85
I_{cu} | I_{cs} at U_e up to 1150 V AC	kA	– | –	– | –	– | –	– | –	– | –	– | –	– | –	– | –	– | –	70 | 70
Rated short-circuit making capacity I_{cm}											
I_{cm} at U_e up to 415 V AC	kA	121	145	187	220	–	145	187	220	286	–
I_{cm} at U_e up to 500 V AC	kA	121	145	187	220	–	145	187	220	286	–
I_{cm} at U_e up to 690 V AC	kA	88	105	145	145	187	105	145	187	220	187
I_{cm} at U_e up to 1000 V AC	kA	–	–	–	–	105	–	–	–	–	187
I_{cm} at U_e up to 1150 V AC	kA	–	–	–	–	–	–	–	–	–	154

System overview, page 1/28

© Siemens 2025

AC		DC	
3WA13		**3WA12**	
≤ 1150		≤ 1000 (≤ 1500 for 4-pole, Breaking capacity E)	
4000 ... 6300		1000 ... 4000	
3		2	
Withdrawable	Fixed-mounted	Withdrawable	Fixed-mounted
3/4-pole	3/4-pole	3/4-pole	3/4-pole
704 | 914	704 | 914	460 | 590	460 | 590
466 | 516	437 | 462	466 | 516	437 | 462
471	357	471	357
VDE, EAC, CCC, CE, C-Tick		VDE, EAC, CCC, CE, C-Tick	
ABS, DNV, LRS, BV, PRS, CCS		ABS, DNV, LRS, BV, PRS, CCS	

H	C	E	D	E
100 | 100	150 | 150 (3-pole); 130 | 130 (4-pole)	– | –	– | –	– | –
100 | 100	150 | 150 (3-pole); 130 | 130 (4-pole)	– | –	– | –	– | –
85 | 85	150 | 150 (3-pole); 130 | 130 (4-pole)	150 | 150 (3-pole); 130 | 130 (4-pole)	– | –	– | –
– | –	– | –	125 | 125	– | –	– | –
– | –	– | –	70 | 70	– | –	– | –
220	330 (3-pole); 286 (4-pole)	–	–	–
220	330 (3-pole); 286 (4-pole)	–	–	–
187	330 (3-pole); 286 (4-pole)	330 (3-pole); 286 (4-pole)	–	–
–	–	275	–	–
–	–	154	–	–

System overview, page 1/28

© Siemens 2025

3WA1 circuit breakers and non-automatic circuit breakers for AC and DC

IEC 60947-2 (continued)

AC

			3WA11					3WA12				
Breaking capacity			**N**	**S**	**M**	**H**	**E**	**S**	**M**	**H**	**C**	**E**
Rated short-time withstand current I_{cw} [1]												
I_{cw} at U_e up to 500 V AC	0.5 s	kA	55	66	85	85	–	66	85	100	100	–
	1 s	kA	50	66	85	85	–	66	85	85	100	–
	2 s	kA	35 [2]/45 [3]	45	70	70	–	66	66 [4]/85 [5]	66 [4]/85 [5]	85	–
	3 s	kA	30 [2]/35 [3]	35	60	60	–	55 [4]/66 [5]	55 [4]/75 [5]	55 [4]/75 [5]	75	–
I_{cw} at U_e up to 690 V AC	0.5 s	kA	42	50	66	66	85	50	66	85	100	85
	1 s	kA	42	50	66	66	85	50	66	85	100	85
	2 s	kA	35 [2]/42 [3]	45	66	66	70	50	66	66 [4]/85 [5]	85	66 [4]/85 [5]
	3 s	kA	30 [2]/35 [3]	35	60	60	60	50	55 [4]/66 [5]	55 [4]/75 [5]	75	55 [4]/75 [5]
I_{cw} at U_e up to 1000 V AC	0.5 s	kA	–	–	–	–	50	–	–	–	–	85
	1 s	kA	–	–	–	–	50	–	–	–	–	85
	2 s	kA	–	–	–	–	50	–	–	–	–	66 [4]/85 [5]
	3 s	kA	–	–	–	–	50	–	–	–	–	55 [4]/75 [5]
I_{cw} at U_e up to 1150 V AC	0.5 s	kA	–	–	–	–	–	–	–	–	–	70
	1 s	kA	–	–	–	–	–	–	–	–	–	70
	2 s	kA	–	–	–	–	–	–	–	–	–	50
	3 s	kA	–	–	–	–	–	–	–	–	–	50
I_{cw} at U_e up to 220 V DC	1 s	kA	–	–	–	–	–	–	–	–	–	–
I_{cw} at U_e up to 300 V DC	1 s	kA	–	–	–	–	–	–	–	–	–	–
I_{cw} at U_e up to 600 V DC	1 s	kA	–	–	–	–	–	–	–	–	–	–
I_{cw} at U_e up to 1000 V DC	1 s	kA	–	–	–	–	–	–	–	–	–	–
I_{cw} at U_e up to 1500 V DC	1 s	kA	–	–	–	–	–	–	–	–	–	–
Rated conditional short-circuit current I_{cc} of the non-automatic air circuit breakers												
Up to 500 V AC		kA	55	66	85	–	–	66	85	100	100	–
Up to 690 V AC		kA	42	50	66	–	85	50	66	85	100	85
Up to 1000 V AC		kA	–	–	–	–	50	–	–	–	–	85
Up to 1150 V AC		kA	–	–	–	–	–	–	–	–	–	70
Up to 220 V DC		kA	–	–	–	–	–	–	–	–	–	–
Up to 300 V DC		kA	–	–	–	–	–	–	–	–	–	–
Up to 600 V DC		kA	–	–	–	–	–	–	–	–	–	–
Up to 1000 V DC		kA	–	–	–	–	–	–	–	–	–	–
Up to 1500 V DC		kA	–	–	–	–	–	–	–	–	–	–
IT network capability												
1-pole short-circuit breaking capacity I_{IT} acc. to IEC 60947-2 Annex H	≤ 500 V	kA	50	50	50	50	–	50	50	50	50	–
	≤ 690 V	kA	–	–	–	–	50	–	–	–	–	50
	1000 V	kA	–	–	–	–	–	–	–	–	–	–

[1] At rated operational voltage $U_e \geq 690$ V, the I_{cw} value of the circuit breaker corresponds to the I_{cu} or I_{cs} value

[2] Size 1 with $I_{n\,max} \leq 1250$ A

[3] Size 1 with $I_{n\,max} \geq 1600$ A

[4] $I_{n\,max} \leq 2500$ A

[5] $I_{n\,max} \geq 3200$ A

System overview, page 1/28

© Siemens 2025

AC

DC

3WA13			3WA12	
H	C	E	D	E
100	130 (3-pole); 120 (4-pole)	–	–	–
100	130 (3-pole); 120 (4-pole)	–	–	–
100	130 (3-pole); 120 (4-pole)	–	–	–
100	130 (3-pole); 120 (4-pole)	–	–	–
85	130 (3-pole); 120 (4-pole)	130 (3-pole); 120 (4-pole)	–	–
85	130 (3-pole); 120 (4-pole)	130 (3-pole); 120 (4-pole)	–	–
85	130 (3-pole); 120 (4-pole)	130 (3-pole); 120 (4-pole)	–	–
85	130 (3-pole); 120 (4-pole)	130 (3-pole); 120 (4-pole)	–	–
–	–	125 (3-pole); 120 (4-pole)	–	–
–	–	125 (3-pole); 120 (4-pole)	–	–
–	–	125 (3-pole); 120 (4-pole)	–	–
–	–	125 (3-pole); 120 (4-pole)	–	–
–	–	70	–	–
–	–	70	–	–
–	–	70	–	–
–	–	70	–	–
–	–	–	35	–
–	–	–	30	–
–	–	–	25	–
–	–	–	–	20
–	–	–	–	– (3-pole); 20 (4-pole)
100	130 (3-pole); 120 (4-pole)	–	–	–
85	130 (3-pole); 120 (4-pole)	130 (3-pole); 120 (4-pole)	–	–
–	–	125 (3-pole); 120 (4-pole)	–	–
–	–	70	–	–
–	–	–	35	–
–	–	–	30	–
–	–	–	25	–
–	–	–	–	20
–	–	–	–	– (3-pole); 20 (4-pole)
50	50	–	–	–
–	–	50	–	–
–	–	–	–	–

System overview, page 1/28

© Siemens 2025

3WA1 circuit breakers and non-automatic circuit breakers for AC

IEC 60947-2

3WA11

Rated current I_n			630 A	800 A	1000 A	1250 A	1600 A	2000 A	2500 A
General data									
Isolating function acc. to EN 60947-2			Yes						
Utilization category			B						
Permissible ambient temperature	Operation	°C	–40 ... +70						
	Storage	°C	–40 ... +80						
Mounting position			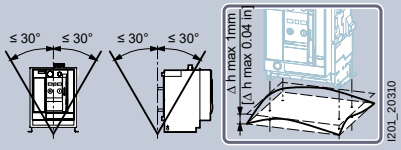						
Degree of protection			IP20 without control cabinet door, IP41 with door sealing frame, IP55 with cover						
Voltage									
Rated operational voltage U_e at 50/60 Hz	1000 V version	V AC	≤ 1000						
Rated insulation voltage U_i		V AC	1000						
Rated impulse withstand voltage U_{imp}	Main conducting paths	kV	12						
	Auxiliary circuits	kV	4						
	Control circuits	kV	2.5						
Permissible load [1]									
Permissible load for withdrawable versions									
For all connection types (except rear vertical main connections)	Up to 40 °C (Cu bare)	A	630	800	1000	1250	1600	2000	–
	Up to 55 °C (Cu bare)	A	630	800	1000	1250	1600	2000	–
	Up to 60 °C (Cu bare)	A	630	800	1000	1250	1600	1930	–
	Up to 70 °C (Cu bare)	A	630	800	1000	1210	1490	1780	–
With rear vertical connections	Up to 55 °C (Cu bare)	A	630	800	1000	1250	1600	2000	2500
	Up to 60 °C (Cu bare)	A	630	800	1000	1250	1600	2000	2370
	Up to 70 °C (Cu bare)	A	630	800	1000	1250	1545	1855	2060
Permissible load for fixed-mounted versions									
For all connection types (except rear vertical main connections)	Up to 55 °C (Cu bare)	A	630	800	1000	1250	1600	2000	–
	Up to 60 °C (Cu bare)	A	630	800	1000	1250	1600	2000	–
	Up to 70 °C (Cu bare)	A	630	800	1000	1250	1600	2000	–
With rear vertical connections	Up to 55 °C (Cu bare)	A	630	800	1000	1250	1600	2000	2500 [2]
	Up to 60 °C (Cu bare)	A	630	800	1000	1250	1600	2000	2500 [2]
	Up to 70 °C (Cu bare)	A	630	800	1000	1250	1600	2000	2500 [2]
Power loss at I_n									
With 3-phase symmetrical load with maximum rated current, complete device (3/4p), with rear horizontal connections	Fixed-mounted	W	30	45	70	105	135	240	360
	Withdrawable versions	W	55	85	130	205	310	440	600

[1] The stated temperatures are the ambient temperatures of the circuit breaker
[2] Copper bars painted black
[3] Only flange connections are available
[4] 4000 A up to 65 °C
[5] For 4000 A circuit breakers with horizontal connection, 5 × 100 × 10 mm bars are required

System overview, page 1/28

© Siemens 2025

3WA12

3WA13

2000 A	2500 A	3200 A	3600 A	4000 A [5] 3-pole	4000 A [5] 4-pole	4000 A [5] 4-pole N pole left with option D04	4000 A	5000 A	6300 A
Yes							Yes		
B							B		
–40 … +70							–40 … +70		
–40 … +80							–40 … +80		
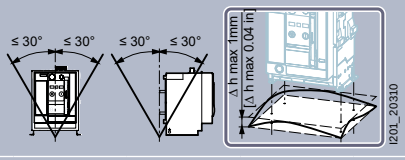							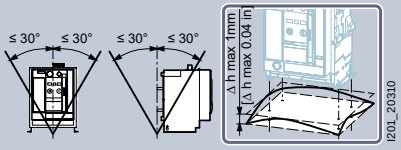		
IP20 without control cabinet door, IP41 with door sealing frame, IP55 with cover							IP20 without control cabinet door, IP41 with door sealing frame, IP55 with cover		
≤ 1150							≤ 1150		
≤ 1150							≤ 1150		
12							12		
4							4		
2.5							2.5		
2000	2500	3200	3600 [3]	4000	4000	4000	4000	5000	–
2000	2500	3020	3490 [3]	3750	3750	3750	4000	5000	–
2000	2500	3020	3380 [3]	3620	3620	3620	4000	5000	–
2000	2280	2870	3150 [3]	3360	3360	3360	4000	5000	–
2000	2500	3200	–	4000	4000	4000	4000	5000	5920
2000	2500	3200	–	3910	3910	3910	4000	5000	5810
2000	2390	2945	–	3645	3645	3645	4000	5000	5500
2000	2500	3200	–	4000	4000	4000	4000	5000	–
2000	2500	3200	–	4000	4000 [4]	4000	4000	5000	–
2000	2500	3200	–	4000	3860	4000	4000	5000	–
2000	2500	3200	–	4000	4000	4000	4000	5000	6300
2000	2500	3200	–	4000	4000	4000	4000	5000	6300
2000	2500	3200	–	4000	4000	4000	4000	5000	5920
180	270	410	–	805	830	805	520	630	900
320	520	710	800	1170	1200	1170	810	1050	1600

System overview, page 1/28

© Siemens 2025

3WA1 circuit breakers and non-automatic circuit breakers for AC

IEC 60947-2 (continued)

3WA11

Rated current I_n			630 A	800 A	1000 A	1250 A	1600 A	2000 A	2500 A
Switching times									
Make time (mechanical)		ms				35			
Electrical make time (through closing coil 100% OP)		ms				80			
Electrical make time (through closing coil 5% OP)		ms				50			
Opening time (mechanical)		ms				38			
Electrical opening time (through shunt trip 100% OP)		ms				80			
Electrical opening time (through shunt trip 5% OP)		ms				50			
Electrical opening time (through undervoltage release)		ms				80 [2]			
Opening time due to ETU (instantaneous short-circuit release)		ms				50			
Service life/endurance									
Breaking capacity N, 3/4-pole									
Mechanical	Without maintenance	Operating cycles				15000			
	With maintenance [1]	Operating cycles				30000			
Electrical	Without maintenance 690 V	Operating cycles			10000			7500	5000
	With maintenance [1]	Operating cycles				30000			
Breaking capacity S, 3/4-pole									
Mechanical	Without maintenance	Operating cycles				15000			
	With maintenance [1]	Operating cycles				30000			
Electrical	Without maintenance 690 V	Operating cycles			10000			7500	5000
	With maintenance [1]	Operating cycles				30000			
Breaking capacity M, 3/4-pole									
Mechanical	Without maintenance	Operating cycles				10000			
	With maintenance [1]	Operating cycles				20000			
Electrical	Without maintenance 690 V	Operating cycles			10000			7500	5000
	With maintenance [1]	Operating cycles				20000			
Breaking capacity E, 3/4-pole [3]									
Mechanical	Without maintenance	Operating cycles				10000			
	With maintenance [1]	Operating cycles				20000			
Electrical	Without maintenance 690 V	Operating cycles			10000			7500	5000
	Without maintenance 1000 V	Operating cycles				1000			
	Without maintenance 1150 V	Operating cycles				–			
	With maintenance [1]	Operating cycles				20000			
Breaking capacity H, 3/4-pole									
Mechanical	Without maintenance	Operating cycles				10000			
	With maintenance [1]	Operating cycles				20000			
Electrical	Without maintenance 690 V	Operating cycles			10000			7500	5000
	With maintenance [1]	Operating cycles				20000			
Breaking capacity C, 3/4-pole									
Mechanical	Without maintenance	Operating cycles				–			
	With maintenance [1]	Operating cycles				–			
Electrical	Without maintenance 690 V	Operating cycles				–			
	With maintenance 690 V [1]	Operating cycles				–			
Switching frequency (electrical operating cycles)									
Breaking capacity N and S									
	3-pole	1/h				45			
	4-pole	1/h				45			
Breaking capacity M and H									
	3- pole	1/h				45			
	4-pole	1/h				60			
Breaking capacity C									
	3-pole	1/h				–			
	4-pole	1/h				–			
Breaking capacity E [3]									
≤ 690 V	3-pole	1/h				45			
	4-pole	1/h				60			
1000 V/1150 V	3-pole	1/h				20			
	4-pole	1/h				20			

[1] Maintenance means: Replacing main contacts and arc chutes (see operating instructions: www.siemens.com/lowvoltage/manuals).
[2] Opening time with short-time delay of the undervoltage release can be set up to 200 ms
[3] On E class circuit breakers, the main contacts can only be replaced in the factory

System overview, page 1/28

© Siemens 2025

3WA12					3WA13		
2000 A	**2500 A**	**3200 A**	**3600 A**	**4000 A**	**4000 A**	**5000 A**	**6300 A**
		35				35	
		80				100	
		50				50	
		34				34	
		80				73	
		50				50	
		80 [2]				80 [2]	
		50				50	
		–				–	
		–				–	
		–				–	
		–				–	
		10000				–	
		20000				–	
7500	7500	4000	2000	2000		–	
		20000				–	
		10000				–	
		20000				–	
7500	7500	4000	2000	2000		–	
		20000				–	
		10000				5000	
		20000				10000	
7500	7500	4000	2000	2000		1000	
		1000				1000	
		500				500	
		20000				10000	
		10000				7500	
		20000				15000	
7500	7500	4000	2000	2000		2000	
20000	20000	20000	20000	20000		15000	
5000	5000	5000	–	–		5000	
10000	10000	10000	–	–		10000	
5000	5000	4000	–	–		1000	
10000	10000	10000	–	–		10000	
		45 [4]				–	
		60 [4]				–	
		45				60 [5]	
		60				60 [5]	
	60		–			60	
	60		–			60	
		45				60	
		60				60	
		20				20	
		20				20	

[4] Breaking capacity N not available in size 2
[5] Breaking capacity M not available in size 3

System overview, page 1/28

© Siemens 2025

3WA1 circuit breakers and non-automatic circuit breakers for AC

IEC 60947-2 (continued)

3WA11

Rated current I_n			630 A	800 A	1000 A	1250 A	1600 A	2000 A	2500 A
Connection									
Minimum main conductor cross-sections (horizontal, front and flange connection)									
Copper bars, Cu, bare	Unit × mm × mm		1 × 40 × 10	1 × 50 × 10	1 × 60 × 10	2 × 40 × 10	2 × 50 × 10	3 × 50 × 10	4 × 50 × 10
Copper bars, Cu, painted black	Unit × mm × mm		1 × 40 × 10	1 × 50 × 10	1 × 60 × 10	2 × 40 × 10	2 × 50 × 10	3 × 50 × 10	4 × 50 × 10
Minimum main conductor cross-sections (vertical connection)									
Copper bars, Cu, bare	Unit × mm × mm		1 × 40 × 10	1 × 50 × 10	1 × 60 × 10	2 × 40 × 10	2 × 50 × 10	3 × 50 × 10	4 × 100 × 5 2 × 100 × 10
Copper bars, Cu, painted black	Unit × mm × mm		1 × 40 × 10	1 × 50 × 10	1 × 60 × 10	2 × 40 × 10	2 × 50 × 10	3 × 50 × 10	4 × 100 × 5 2 × 100 × 10
Auxiliary conductor (Cu) max. number of auxiliary conductors × cross-section (solid/stranded)									
Standard connection = push-in	Without end sleeve		2 × 0.5 ... 2.5 mm² (AWG 20 ... 14)						
	With end sleeve acc. to DIN 46228 Part 1		2 × 0.5 ... 2.5 mm² (AWG 20 ... 14)						
	With end sleeve acc. to DIN 46228 Part 4		2 × 0.5 ... 2.5 mm² (AWG 20 ... 14)						
	With twin end sleeve		2 × 0.5 ... 1.5 mm² (AWG 20 ... 16)						
	Stripped length		10 ... 11 mm (0.39 ... 0.43 inch)						
Optional connection with screw connection	Without end sleeve		2 × 0.5 ... 1.5 mm² (AWG 20 ... 16)/1 × 0.5 ... 2.5 mm² (AWG 20 ...14)						
	With end sleeve acc. to DIN 46228 Part 1		2 × 0.5 ... 1.5 mm² (AWG 20 ... 16)/1 × 0.5 ... 2.5 mm² (AWG 20 ...14)						
	With end sleeve acc. to DIN 46228 Part 4		1 × 0.5 ... 1.5 mm² (AWG 20 ... 16)						
	With twin end sleeve		1 × 0.5 ... 1.5 mm² (AWG 20 ... 16)						
	Stripped length		7 ... 8 mm (0.28 ... 0.31 inch)						
Position signaling switch modul									
Spring-loaded terminals for standard signaling contacts	Without end sleeve		0.2 ... 2.5 mm² (AWG 28 ... 12)						
	With end sleeve acc. to DIN 46228 Part 4		0.25 ... 1.5 mm² (AWG 20 ... 16)						
	Stripped length		5 ... 6 mm (0.2 ... 0.24 inch)						
Push-in connection for standard signaling contacts	Solid		0.5 ... 2.5 mm² (AWG 20 ... 12)						
	With end sleeve		0.5 ... 1.5 mm² (AWG 20 ... 16)						
	Stripped length		10 ... 12 mm (0.39 ... 0.47 inch)						
Push-in connection for COM signaling contacts	Solid		0.5 ... 2.5 mm² (AWG 20 ... 12)						
	With end sleeve		0.5 ... 1.5 mm² (AWG 20 ... 16)						
	Stripped length		10 ... 12 mm (0.39 ... 0.47 inch)						
Weights [1]									
3-pole	Fixed-mounted circuit breaker	kg	38.5	38.5	38.5	42.5	42.5	43.5	43.5
	Withdrawable circuit breaker without guide frame	kg	39	39	39	40	40	41	41
	Guide frames	kg	26	26	26	27	27	29	29
4-pole	Fixed-mounted circuit breaker	kg	47	47	47	52	52	53	53
	Withdrawable circuit breaker without guide frame	kg	45	45	45	46	46	47	47
	Guide frames	kg	30	30	30	32	32	34	34

[1] Weights refer to:
- Breakers with the lowest breaking capacity in each case (size 1: breaking capacity N, size 2: breaking capacity S, size 3: breaking capacity H)
- Breakers with ETU600 (LSI)
- Fixed-mounted circuit breakers/guide frames with vertical connections
- Guide frame with position signaling switch
- Without any other accessories
- Size 2, 3600 A with flange connections

[2] Only available as a flange connection

System overview, page 1/28

© Siemens 2025

3WA12					3WA13		
2000 A	**2500 A**	**3200 A**	**3600 A** [2]	**4000 A**	**4000 A**	**5000 A**	**6300 A**
3 × 100 × 5 (3 × 50 × 10) 2 × 80 × 10	2 × 100 × 10	3 × 100 × 10	5 × 100 × 10	5 × 100 × 10	4 × 100 × 10	6 × 100 × 10	–
3 × 100 × 5 (3 × 50 × 10) 2 × 80 × 10	2 × 100 × 10	3 × 100 × 10	5 × 100 × 10	5 × 100 × 10	4 × 100 × 10	6 × 100 × 10	–
3 × 100 × 5 (3 × 50 × 10) 2 × 80 × 10	2 × 100 × 10	3 × 100 × 10	–	4 × 120 × 10	4 × 100 × 10	6 × 100 × 10	6 × 120 × 10
3 × 100 × 5 (3 × 50 × 10) 2 × 80 × 10	2 × 100 × 10	3 × 100 × 10	–	4 × 120 × 10	4 × 100 × 10	6 × 100 × 10	6 × 120 × 10
2 × 0.5 ... 2.5 mm² (AWG 20 ... 14)					2 × 0.5 ... 2.5 mm² (AWG 20 ... 14)		
2 × 0.5 ... 2.5 mm² (AWG 20 ... 14)					2 × 0.5 ... 2.5 mm² (AWG 20 ... 14)		
2 × 0.5 ... 2.5 mm² (AWG 20 ... 14)					2 × 0.5 ... 2.5 mm² (AWG 20 ... 14)		
2 × 0.5 ... 1.5 mm² (AWG 20 ... 16)					2 × 0.5 ... 1.5 mm² (AWG 20 ... 16)		
10 ... 11 mm (0.39 ... 0.43 inch)					10 ... 11 mm (0.39 ... 0.43 inch)		
2 × 0.5 ... 1.5 mm² (AWG 20 ... 16)/1 × 0.5 ... 2.5 mm² (AWG 20 ...14)					2 × 0.5 ... 1.5 mm² (AWG 20 ... 16)/1 × 0.5 ... 2.5 mm² (AWG 20 ...14)		
2 × 0.5 ... 1.5 mm² (AWG 20 ... 16)/1 × 0.5 ... 2.5 mm² (AWG 20 ...14)					2 × 0.5 ... 1.5 mm² (AWG 20 ... 16)/1 × 0.5 ... 2.5 mm² (AWG 20 ...14)		
1 × 0.5 ... 1.5 mm² (AWG 20 ... 16)					1 × 0.5 ... 1.5 mm² (AWG 20 ... 16)		
1 × 0.5 ... 1.5 mm² (AWG 20 ... 16)					1 × 0.5 ... 1.5 mm² (AWG 20 ... 16)		
7 ... 8 mm (0.28 ... 0.31 inch)					7 ... 8 mm (0.28 ... 0.31 inch)		
0.2 ... 2.5 mm² (AWG 28 ... 12)					0.2 ... 2.5 mm² (AWG 28 ... 12)		
0.25 ... 1.5 mm² (AWG 20 ... 16)					0.25 ... 1.5 mm² (AWG 20 ... 16)		
5 ... 6 mm (0.2 ... 0.24 inch)					5 ... 6 mm (0.2 ... 0.24 inch)		
0.5 ... 2.5 mm² (AWG 20 ... 12)					0.5 ... 2.5 mm² (AWG 20 ... 12)		
0.5 ... 1.5 mm² (AWG 20 ... 16)					0.5 ... 1.5 mm² (AWG 20 ... 16)		
10 ... 12 mm (0.39 ... 0.47 inch)					10 ... 12 mm (0.39 ... 0.47 inch)		
0.5 ... 2.5 mm² (AWG 20 ... 12)					0.5 ... 2.5 mm² (AWG 20 ... 12)		
0.5 ... 1.5 mm² (AWG 20 ... 16)					0.5 ... 1.5 mm² (AWG 20 ... 16)		
10 ... 12 mm (0.39 ... 0.47 inch)					10 ... 12 mm (0.39 ... 0.47 inch)		
55	57	69	–	77	113	115	115
52	54	59	59	59	91	92	92
33.5	35.5	36.5	27.5	40	85.5	87	87
68.5	71.5	86.5	–	97.5	147.5	149.5	149.5
63.5	66	73	73	73	115.5	116.5	116.5
40	42.5	51.5	36	53	103.5	105.5	105.5

System overview, page 1/28

© Siemens 2025

3WA1 non-automatic circuit breakers for DC

IEC 60947-2

3WA12

Rated current I_n			1000 A	2000 A	4000 A
General data					
Isolating function acc. to EN 60947-2			Yes		
Utilization category			B		
Permissible ambient temperature	During operation (in operation with LCD max. 55 °C)	°C	−40 ... +70		
	Storage	°C	−40 ... +80		
Mounting position			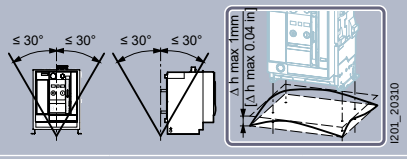		
Degree of protection			IP20 without control cabinet door, IP41 with door sealing frame, IP55 with cover		
Voltage					
Rated operational voltage U_e	Breaking capacity D | E	V DC	600 | 1000 (3-pole); 1500 (4-pole)		
Rated insulation voltage U_i	Breaking capacity D | E	V DC	600 | 1000 (3-pole); 1500 (4-pole)		
Rated impulse withstand voltage U_{imp}	Main conducting paths	kV	12		
	Auxiliary circuits	kV	4		
	Control circuits	kV	2.5		
Permissible load					
Permissible load for withdrawable versions					
For all connection types (except rear vertical main connections)	Up to 40 °C (Cu bare)	A	1000	2000	4000
	Up to 55 °C (Cu bare)	A	1000	2000	3640
	Up to 60 °C (Cu bare)	A	1000	2000	3500
	Up to 70 °C (Cu bare)	A	1000	1950	3250
With rear vertical connections	Up to 40 °C (Cu bare)	A	1000	2000	4000
	Up to 55 °C (Cu bare)	A	1000	2000	4000
	Up to 60 °C (Cu bare)	A	1000	2000	3640
	Up to 70 °C (Cu bare)	A	1000	2000	3400
Permissible load for fixed-mounted versions					
For all connection types (except rear vertical main connections)	Up to 40 °C (Cu bare)	A	1000	2000	4000
	Up to 55 °C (Cu bare)	A	1000	2000	4000
	Up to 60 °C (Cu bare)	A	1000	2000	4000
	Up to 70 °C (Cu bare)	A	1000	2000	3900
With rear vertical connections	Up to 40 °C (Cu bare)	A	1000	2000	4000
	Up to 55 °C (Cu bare)	A	1000	2000	4000
	Up to 60 °C (Cu bare)	A	1000	2000	4000
	Up to 70 °C (Cu bare)	A	1000	2000	4000
Power loss at I_n					
With 3-phase symmetrical load, complete device (3/4p)	Withdrawable versions 3/4-pole	W	170 | 220	320 | 420	750 | 1000
	Fixed-mounted 3/4-pole	W	130 | 190	240 | 360	500 | 660
Switching times					
Make time (mechanical)		ms	35	35	35
Electrical make time (through closing coil 100% OP)		ms	80	80	80
Electrical make time (through closing coil 5% OP)		ms	50	50	50
Opening time (mechanical)		ms	34	34	34
Electrical opening time (through shunt trip 100% OP)		ms	80	80	80
Electrical opening time (through shunt trip 5% OP)		ms	50	50	50
Electrical opening time (through undervoltage release)		ms	80 [1)]	80 [1)]	80 [1)]
Service life/endurance					
Breaking capacity D, 3/4-pole					
Mechanical	Without maintenance	Operating cycles	10000	10000	10000
	With maintenance [1)]	Operating cycles	20000	20000	20000
Electrical	Without maintenance 600 V	Operating cycles	6000	6000	4000
	With maintenance [1)]	Operating cycles	20000	20000	20000

[1)] Opening time with short-time delay of the undervoltage release can be set up to 200 ms

System overview, page 1/28

© Siemens 2025

3WA12

Rated current I_n			1000 A	2000 A	4000 A
Service life/endurance					
Breaking capacity E, 3/4-pole					
Mechanical	Without maintenance	Operating cycles	10000	10000	10000
	With maintenance [1]	Operating cycles	20000	20000	20000
Electrical	Without maintenance 1000 V	Operating cycles	1000	1000	1000
	With maintenance [1]	Operating cycles	20000	20000	20000
Breaking capacity E, 4-pole					
Electrical	Without maintenance 1500 V [2]	Operating cycles	1000	1000	1000
	With maintenance [1]	Operating cycles	20000	20000	20000
Switching frequency (electrical operating cycles)					
Breaking capacity D					
	3- and 4-pole	1/h	45/60	45/60	45/60
Breaking capacity E					
	3- and 4-pole [3]	1/h	20/20	20/20	20/20
Connection					
Minimum cross-sections of main conductor bars (infeed and load connections)					
Copper bars, bare or painted black		Unit × mm × mm	1 × 60 × 10	3 × 100 × 5; 2 × 80 × 10	4 × 100 × 10
Minimum cross-sections of main conductor bars (pole straps) [4]					
Copper bars, bare or painted black		Unit × mm × mm	1 × 100 × 10; (2 × 100 × 5)	2 × 100 × 5; (2 × 100 × 10)	3 × 100 × 10; vertical
Auxiliary conductor (Cu) max. number of auxiliary conductors × cross-section (solid/stranded)					
Standard connection = push-in	Without end sleeve		2 × 0.5 ... 2.5 mm² (AWG 20 ... 14)		
	With end sleeve acc. to DIN 46228 Part 1		2 × 0.5 ... 2.5 mm² (AWG 20 ... 14)		
	With end sleeve acc. to DIN 46228 Part 4		2 × 0.5 ... 2.5 mm² (AWG 20 ... 14)		
	With twin end sleeve		2 × 0.5 ... 1.5 mm² (AWG 20 ... 16)		
	Stripped length		10 ... 11 mm (0.39 ... 0.43 inch)		
Optional connection with screw connection	Without end sleeve		2 × 0.5 ... 1.5 mm² (AWG 20 ... 16)/ 1 × 0.5 ... 2.5 mm² (AWG 20 ....14)		
	With end sleeve acc. to DIN 46228 Part 1		2 × 0.5 ... 1.5 mm² (AWG 20 ... 16)/ 1 × 0.5 ... 2.5 mm² (AWG 20 ....14)		
	With end sleeve acc. to DIN 46228 Part 4		1 × 0.5 ... 1.5 mm² (AWG 20 ... 16)		
	With twin end sleeve		1 × 0.5 ... 1.5 mm² (AWG 20 ... 16)		
	Stripped length		7 ... 8 mm (0.28 ... 0.31 inch)		
Position signaling switch module					
Spring-loaded terminals for standard signaling contacts	Without end sleeve		0.2 ... 2.5 mm² (AWG 28 ... 12)		
	With end sleeve acc. to DIN 46228 Part 4		0.25 ... 1.5 mm² (AWG 20 ... 16)		
	Stripped length		5 ... 6 mm (0.2 ... 0.24 inch)		
Push-in connection for standard signaling contacts	Solid		0.5 ... 2.5 mm² (AWG 20 ... 12)		
	With end sleeve		0.5 ... 1.5 mm² (AWG 20 ... 16)		
	Stripped length		10 ... 12 mm (0.39 ... 0.47 inch)		
Push-in connection for COM signaling contacts	Solid		0.5 ... 2.5 mm² (AWG 20 ... 12)		
	With end sleeve		0.5 ... 1.5 mm² (AWG 20 ... 16)		
	Stripped length		10 ... 12 mm (0.39 ... 0.47 inch)		
Weights [3]					
3-pole	Fixed-mounted circuit breaker	kg	55	55	68
	Withdrawable circuit breaker without guide frame	kg	52	52	59
	Guide frames	kg	34	34	50
4-pole	Fixed-mounted circuit breaker	kg	68.5	68.5	86.5
	Withdrawable circuit breaker without guide frame	kg	63.5	63.5	74
	Guide frames	kg	40.5	40.5	61.5

[1] Maintenance means: Replacing main contacts and arc chutes (see operating instructions: www.siemens.com/lowvoltage/manuals).
[2] 1500 V DC applications only possible with 4-pole circuit breakers and breaking capacity E.
[3] Weights refer to:
- Breakers with breaking capacity E
- Fixed-mounted circuit breakers/guide frames with vertical connections
- Guide frame with position signaling switch
- Without any other accessories

[4] For more information on the DC pole straps, see the Equipment Manual for 3WA1

System overview, page 1/28

© Siemens 2025

3WA1 non-automatic circuit breakers for DC

Application examples

The connection to the non-automatic circuit breakers is not dependent on direction and polarity; the circuit diagrams can be adapted accordingly. If the parallel or series connections are made directly to the connection bars, for thermal reasons the continuous load on the non-automatic circuit breakers must only be 80% of the permissible operational current. If the parallel or series connection is made at a distance of 1 m from the connection bars, the non-automatic circuit breaker can be used at full operational current load.

Minimum required contact gaps at rated voltage	DC 1-pole disconnection Grounded system	DC 2-pole (all-pole) disconnection Grounded system	DC 2-pole (all-pole) disconnection Non-grounded system
Rated operational voltage up to 300 V			
			
Rated operational voltage up to 600 V			
			
Rated operational voltage up to 1000 V			
			
Rated operational voltage up to 1500 V			
			

Note:
DC 2-pole (all-pole) disconnection; grounded system
The grounded conductor must always be assigned to the individual switching pole of the non-automatic air circuit breaker, so that in the event of a ground fault there are always 2 conducting paths in series in a circuit with 3-pole circuit breakers, and 3 conducting paths in series in a circuit with 4-pole circuit breakers. The jumpers between the switching poles must be short-circuit and ground-fault proof.

System overview, page 1/28

© Siemens 2025

System overview, page 1/28

© Siemens 2025

Electronic trip unit

Differentiation

	ETU300 electronic trip unit	ETU600 electronic trip unit
Function		
Protective function LSI	■	■
Protective function LSIG	■	■
Protective function LSIG Hi-Z	–	■
Neutral conductor protection (N)	■	■
Metering function	–	■
Enhanced Protective functions	–	■
CubicleBUS[2]	–	■
Display	–	■
DAS+ input/output	■	■
LED display of reason for tripping	■	■
Bluetooth and USB	–	■
FW Updates	–	■
Internal self-test with and without tripping	■	■
Extended test option (tripping characteristic)	–	■
Activation of the ETU via powerbank	–	■
Activation of the ETU for self-test via TD400	■	–

Note:
By replacing the electronic trip unit, it is possible to upgrade from ETU300 to ETU600.

System overview, page 1/28

© Siemens 2025

ETU300 electronic trip unit

Protective functions

ETU300 LSI, ETU300 LSIG

Protective function	Setting range and invariable parameters	Values
L: Overload protection LT		
Tripping	Switched on	
Current setting I_r	0.4 ... 1.0 × I_n	0.4/0.5/0.6/0.7/0.75/0.8/0.85/0.9/0.95/1.0 × I_n
Tripping time t_r at 6 × I_r	0.75 ... 25 s	0.75/1/2/5/8/10/14/17/21/25 s
Characteristic LT curve	I^2t	
Thermal memory	Switched on	
Cooling time constant	18 × t_r	
Phase failure detection	Switched on	
L: Overload protection LT, neutral conductor		
Tripping	Switched on	
Current setting I_N	1.0 × I_n	
S: Short-time-delayed short-circuit protection ST		
Tripping	Can be switched on/off	
Current setting I_{sd}	1.5 ... 10 × I_n max. 0.8 × I_{cw} [1]	OFF/1.5/2/2.5/3/4/5/6/8/10 × I_r max. 0.8 × I_{cw} [1]
Tripping time t_{sd}	0.08 ... 0.4 s	0.08/0.15/0.22/0.3/0.4 s
Characteristic ST curve	I^0t and I^2t	
Reference point $I_{ST\ ref}$	8 × I_r	
I: Instantaneous short-circuit protection INST		
Tripping	Switched on	
Current setting I_i	1.5 ... 15 × I_n max. 0.8 × I_{cs} [1]	1.5/2/3/4/5/6/8/10/12/15 × I_n max. 0.8 × I_{cs} [1]
Maintenance mode DAS+		
Current setting $I_{i\ DAS+}$	1.5 × I_n	Activation via ETU input

ETU300 LSIG

Protective function	Setting range	
G: Ground-fault protection GF		
Tripping	Switched on	
Method of ground fault detection	Residual	Detection of ground-fault current via summation current formation in all phases and the N conductor
Characteristic GF curve		I^0t
Current setting I_g		0.2 × I_n (min. 100 A, max. 1200 A)
Tripping time t_g	0.2 s	

[1] The setting value is limited as a function of the breaking capacity at rated operational voltage U_e.

System overview, page 1/28

© Siemens 2025

ETU600 electronic trip unit

Protective functions

ETU600 LSI, ETU600 LSIG, ETU600 LSIG Hi-Z			Current metering	ready4COM	PMF-I Energy efficiency	PMF-II Basic Power Monitoring	PMF-III Advanced Power Monitoring
Protective function	**Variable setting range**	**Setting values with rotary switch**					
L: Overload protection LT							
Tripping	Can be switched on/off		■	■	■	■	■
Current setting I_r	0.4 ... 1.0 × I_n	0.5/0.6/0.7/0.75/0.8/0.85/0.9/0.95/1.0 × I_n	■	■	■	■	■
Tripping time t_r at 6 × I_r	At I^2t: 0.5 ... 30 s and at I^4t: 0.5 ... 5 s	1/2/5/8/10/14/17/21/25 s	■	■	■	■	■
Characteristic LT curve	I^2t and I^4t		■	■	■	■	■
Thermal memory	Can be switched on/off		■	■	■	■	■
Cooling time constant	10 and 18 × t_r		■	■	■	■	■
Phase failure detection	Can be switched on/off		■	■	■	■	■
Overload pre-alarm PAL	Can be switched on/off		■	■	■	■	■
Current setting $I_{r\ PAL}$	0.7 ... 1.0 × I_r		■	■	■	■	■
Delay time $t_{r\ PAL}$	0.5 ... 1.0 × t_r		■	■	■	■	■
L: Overload protection LT, neutral conductor							
Tripping	Can be switched on/off		■	■	■	■	■
Current setting I_{rN}	3-pole: 0.2 ... 2.0 × I_n		■	■	■	■	■
	4-pole: 0.2 × I_n ... $I_{n\ max}$		■	■	■	■	■
Current setting $I_{rN\ PAL}$	0.7 ... 1.0 × I_N		■	■	■	■	■
S: Short-time-delayed short-circuit protection ST							
Tripping	Can be switched on/off		■	■	■	■	■
Current setting I_{sd}	0.6 × I_n ... 0.8 × I_{cw} max. 0.8 × I_{cw} [1]	1.5/2/2.5/3/4/5/6/8/10 × I_r max. 0.8 × I_{cw} [1]	■	■	■	■	■
Tripping time t_{sd}	0.02 ... 0.4 s	At Fix: 0.08/0.15/0.22/0.3/0.4 s At I^2t: 0.1/0.2/0.3/0.4 s	■	■	■	■	■
Characteristic ST curve	I^0t and I^2t		■	■	■	■	■
Reference point $I_{ST\ ref}$	6-12 × I_r		■	■	■	■	■
Intermittent detection	Can be switched on/off		■	■	■	■	■
S: Directional short-time-delayed short-circuit protection dST							
Tripping	Can be switched on/off		□	□	□	■	■
Direction setting	Forward: ↓ or ↑		□	□	□	■	■
Current setting I_{sd} FW	0.6 × I_n ... 0.8 × I_{cw}		□	□	□	■	■
Current setting I_{sd} REV	0.6 × I_n ... 0.8 × I_{cw}		□	□	□	■	■
Tripping time t_{sd} FW	0.05 ... 0.4 s		□	□	□	■	■
Tripping time t_{sd} REV	0.05 ... 0.4 s		□	□	□	■	■
Characteristic dST-curve FW	I^0t and I^2t		□	□	□	■	■
Characteristic dST-curve REV	I^0t and I^2t		□	□	□	■	■
Reference point $I_{dST\ ref}$ FW	6-12 × I_r		□	□	□	■	■
Reference point $I_{dST\ ref}$ REV	6-12 × I_r		□	□	□	■	■
Intermittent detection FW	Can be switched on/off		□	□	□	■	■
Intermittent detection REV	Can be switched on/off		□	□	□	■	■
I: Instantaneous short-circuit protection INST							
Tripping	Can be switched on/off [2]		■	■	■	■	■
Current setting I_i	1.5 × I_n ... 0.8 × I_{cs} max. 0.8 × I_{cs} [1]	1.5/2/3/4/6/8/10/12/15 × I_n max. 0.8 × I_{cs} [1]	■	■	■	■	■

[1] The setting value is limited as a function of the breaking capacity at the set rated voltage.
[2] Cannot be switched off if rated short-time withstand current I_{cw} is less than rated short-circuit breaking capacity I_{cs}

■ Available, feature of the application package
□ Can be retrofitted

System overview, page 1/28

© Siemens 2025

ETU600 LSI, ETU600 LSIG, ETU600 LSIG Hi-Z			Current metering	ready4COM	PMF-I Energy efficiency	PMF-II Basic Power Monitoring	PMF-III Advanced Power Monitoring
Protective function	**Variable setting range**	**Setting values with rotary switch**					
I: Making-current release MCR							
Tripping	Can be switched on/off		□	□	□	■	■
Current setting I_{MCR}	1.5 ... 15 × I_n		□	□	□	■	■
Monitoring time t_{MCR}	0.04 ... 0.5 × s		□	□	□	■	■
Reverse power protection RP							
Tripping	Can be switched on/off		□	□	□	■	■
Setting value P_{RP}	0.05 ... 0.5 × P_n		□	□	□	■	■
Tripping time t_{RP}	0.01 ... 25 s		□	□	□	■	■
Enhanced Protective functions EPF							
Phase unbalance current and phase unbalance voltage			□	□	□	■	■
Undervoltage and overvoltage			□	□	□	■	■
Active power import and active power export			□	□	□	■	■
Underfrequency and overfrequency			□	□	□	■	■
Total harmonic distortion for current and voltage			□	□	□	■	■
Phase sequence detection			□	□	□	■	■
Network and system protection			–	–	□	□	□
Decoupling protection			–	–	□	□	□
Maintenance mode DAS+							
Current setting $I_{i\ DAS+}$	1.5 ... 10 × I_n		■	■	■	■	■
Current setting $I_{g\ DAS+}$	With LSIG GFx option plug Residual: – Sizes 1 and 2: 100 ... 2000 A and – Size 3: 400 ... 2000 A Direct: 15 ... 2000 A		■	■	■	■	■
Tripping time $t_{g\ DAS+}$	0 ... 5 s		■	■	■	■	■
Options							
Parameter set changeover	Switchable between parameter set A and B		□	□	□	■	■
Limit values	Undershooting, overshooting		■	■	■	■	■
Zone-selective interlocking ZSI	Requires ZSI200 module		□	□	□	□	□
Waveform memory			□	□	□	□	■
Condition monitoring	Health indicator and remaining life time		–	□	■	■	■

– Not available
■ Available, feature of the application package
□ Can be retrofitted

System overview, page 1/28

© Siemens 2025

ETU600 electronic trip unit

Protective functions

ETU600 LSI			Current metering	ready4COM	PMF-I Energy efficiency	PMF-II Basic Power Monitoring	PMF-III Advanced Power Monitoring
Protective function	**Variable setting range**						
G: Ground fault GF alarm							
Alarm	Can be switched on/off		□	□	□	■	■
Current setting $I_{g\ alarm}$	Detection method Residual	Sizes 1 and 2: 100 ... 5000 A Size 3: 400 ... 5000 A	□	□	□	■	■
Alarm time $t_{g\ alarm}$		0 ... 0.5 s	□	□	□	■	■

■ Available, feature of the application package
□ Can be retrofitted

ETU600 LSIG with LSIG GFx option plug (GF extended)			Current metering	ready4COM	PMF-I Energy efficiency	PMF-II Basic Power Monitoring	PMF-III Advanced Power Monitoring
Protective function	**Variable setting range**						
G: Ground fault GF							
Tripping	Can be switched on/off		■	■	■	■	■
Method of ground fault detection	Residual	Detection of ground-fault current via summation current formation in all phases and the N conductor	■	■	■	■	■
	Direct	Direct metering of the ground-fault current with a current transformer	■	■	■	■	■
	Dual	Protection zone UREF: Detection of the ground-fault current by means of summation current formation, Protection zone REF: Metering of the ground-fault current with an external current transformer	■	■	■	■	■
Characteristic GF curve		For Fix (I^0t)/I^2t/I^4t/I^6t	■	■	■	■	■
Current setting I_g	Detection method Residual	Sizes 1 and 2: 100 ... 2000 A Size 3: 300 ... 2000 A	■	■	■	■	■
	Detection method Direct	15 ... 2000 A	■	■	■	■	■
Tripping time t_g	For Fix (I^0t)	0 ... 5 s	■	■	■	■	■
	For I^xt at 3 × I_g	0 ... 30 s	■	■	■	■	■
	$t_{g\ def}$ at I^xt	0.05 ... 0.5 s	■	■	■	■	■
Intermittent detection	Can be switched on/off		■	■	■	■	■
G: Ground fault GF alarm							
Alarm	Can be switched on/off		■	■	■	■	■
Current setting $I_{g\ alarm}$	Detection method Residual	Sizes 1 and 2: 100 ... 5000 A Size 3: 400 ... 5000 A	■	■	■	■	■
	Detection method Direct	15 ... 5000 A	■	■	■	■	■
Alarm time $t_{g\ alarm}$		0 ... 0.5 s	■	■	■	■	■

■ Available, feature of the application package

System overview, page 1/28

© Siemens 2025

ETU600 LSIG Hi-Z with LSIG GFx option plug (GF extended)			Current metering	ready4COM	PMF-I Energy efficiency	PMF-II Basic Power Monitoring	PMF-III Advanced Power Monitoring
Protective function	**Variable setting range**						
G: Ground fault GF Hi-Z							
Tripping	Can be switched on/off		■	■	■	■	■
Method of ground fault detection	Residual	Detection of ground-fault current via summation current formation in all phases and the N conductor	■	■	■	■	■
	Dual Hi-Z, for high-impedance connection of the external current transformers	Protection zone UREF: Detection of the ground-fault current by means of summation current formation Protection zone REF: Metering of the ground-fault current with an external current transformer combination	■	■	■	■	■
Characteristic GF curve		For Fix (I^0t)/I^2t/I^4t/I^6t	■	■	■	■	■
Current setting I_g	Protection zone UREF	Size 2: 100 ... 2000 A and Size 3: 300 ... 2000 A	■	■	■	■	■
	Protection zone REF	15 ... 2000 A	■	■	■	■	■
Tripping time t_g	For Fix (I^0t)	0 ... 5 s	■	■	■	■	■
	For I^xt 3 × I_g in protection zone UREF	0 ... 30 s	■	■	■	■	■
	$t_{g\ def}$ at I^xt	0.05 ... 0.5 s	■	■	■	■	■
Intermittent detection	Can be switched on/off		■	■	■	■	■
G: Ground fault GF alarm							
Alarm	Can be switched on/off		■	■	■	■	■
Current setting $I_{g\ alarm}$	Protection zone UREF	Size 2: 100 ... 5000 A and Size 3: 400 ... 5000 A	■	■	■	■	■
Alarm time $t_{g\ alarm}$		0 ... 0.5 s	■	■	■	■	■

■ Available, feature of the application package

System overview, page 1/28

© Siemens 2025

ETU600 electronic trip unit

Operation, interfaces and metering function

ETU600		Current metering	ready4COM	PMF-I Energy efficiency	PMF-II Basic Power Monitoring	PMF-III Advanced Power Monitoring	Non-automatic air circuit breakers
Operation and interfaces							
Rotary switch		■	■	■	■	■	–
Display and operating keys		■	■	■	■	■	–
SENTRON Powerconfig configuration software		■	■	■	■	■	–
Fieldbus communication		■	■	■	■	■	–
Color display		■	■	■	■	■	–
Bluetooth [1] and USB interface		■	■	■	■	■	–
Communication							
Prepared for connection of a communications module (ready4COM feature)	Status messages of the circuit breaker	□	■	■	■	■	□
	Status messages of the ETU600 electronic trip unit	□	■	■	■	■	–
	Remote operation, requires a communications module, closing coil, shunt trip	□	■	■	■	■	□
Communications module		□	□	□	□	□	□
Digital input and output on the ETU600 electronic trip unit							
Parameterizable input	For activating Maintenance mode DAS+ or can be used for parameter set changeover	■	■	■	■	■	–
Parameterizable output	Usable as "life contact", early trip contact, and for displaying "Parameter set B active" or "Maintenance mode DAS+ active"	■	■	■	■	■	–

[1] A country-specific radio license is required to operate the Bluetooth interface. Before activating the Bluetooth function, ensure that the license is available: www.siemens.com/lowvoltage/certificates

– Not available
■ Available, feature of the application package
□ Can be retrofitted

System overview, page 1/28

© Siemens 2025

ETU600		Current metering	ready4COM	PMF-I Energy efficiency	PMF-II Basic Power Monitoring	PMF-III Advanced Power Monitoring
Metering function						
Integrated voltage tap at top/bottom		–	–	■	■	■
Voltage tap module VTM		–	–	■	■	■
Type acc. to IEC 61557-12	PMF-I	–	–	■	■	■
	PMF-II	–	–	–	■	■
	PMF-III	–	–	–	–	■
Metering values						
Temperature in/at circuit breaker		–	■	■	■	■
Accuracy class to IEC 61557-12	**Accuracy class**					
Phase current I_{L1}, I_{L2}, I_{L3}	1	–	–	■	■	■
Neutral conductor current I_N [1]	1	–	–	■	■	■
Voltage U_{LI}	0.5	–	–	■	■	■
Voltage U_{LN}	0.5	–	–	■	■	■
Active energy E_a	1	–	–	■	■	■
Reactive energy E_r	3	–	–	□	■	■
Apparent energy E_{ap}	1	–	–	□	■	■
Active power P	1	–	–	□	■	■
Reactive power Q	3	–	–	□	■	■
Apparent power S	1	–	–	□	■	■
Power factor PF	1	–	–	□	■	■
Frequency f	0.5	–	–	□	■	■
Accuracy class to manufacturer's specifications	**Accuracy class**					
Phase current I_{L1}, I_{L2}, I_{L3}	1	■	■	–	–	–
Neutral conductor current I_N [1]	1	■	■	–	–	–
Neutral conductor current I_N [2]	2	■	■	■	■	■
Ground-fault current I_g with ETU600 LSI	2	–	–	□	■	■
Ground-fault current I_g with ETU600 LSIG, ETU600 LSIG Hi-Z [3]	2	■	■	■	■	■
cos φ	6	–	–	□	■	■
Current unbalance I_{nba}	2.5	–	–	□	■	■
Voltage unbalance U_{nba}	1.5	–	–	□	■	■
Total harmonic distortion *THD-I* [4]	2	–	–	□	□	■
Total harmonic distortion *THD-U* [4]	2	–	–	□	□	■
Harmonic *I, U* [4]	2	–	–	□	□	■

[1] For 4-pole with internal current sensor for the N conductor
[2] For 3-pole with external current sensor for the N conductor
[3] Excluding external transformers/load
[4] For 2nd to 15th harmonic ±2% and for 16th to 31st harmonic ±5%

– Not available
■ Available, feature of the application package
□ Retrofittable using "Metering function extension" function packages

Licenses for activating the test function in SENTRON Powerconfig software

License (ALM)	Test scope	Test values can be set	Documentation	Article No.
Basic (unlimited)	LSIG	No	No	Free available
Standard (365 days)	LSIG	Yes	Yes	7KN2720-0CE00-1YC1
Extended (365 days)	• LSIG • dST • Phase unbalance current • Phase unbalance voltage • Total harmonic distortion (THD) for current and voltage (from Powerconfig V3.28) • Undervoltage, overvoltage • Forward power • Reverse power • Underfrequency • Overfrequency • Phase sequence detection	Yes	Yes	7KN2720-0CE00-2YC1

System overview, page 1/28

© Siemens 2025

Connection

Main circuit connection

3WA11 – 3WA13

Fixed-mounted		Withdrawable	
Rear horizontal		 Rear horizontal	
 Rear vertical		 Rear vertical	
 Horizontal on top, vertical at the bottom	 Vertical on top, horizontal at the bottom	 Horizontal on top, vertical at the bottom	 Vertical on top, horizontal at the bottom
 Front connection with double hole		 Front connection with double hole	
		 Flange	
		 Flange on top and horizontal at bottom	 Flange on bottom and horizontal at top

Secondary disconnect terminal

The auxiliary and control cables are connected at the manual connectors using the push-in technology of the auxiliary conductor connections of the circuit breaker.

Coding pins on the manual connectors prevent them being inserted in the wrong slots.



Screwless connection (push in)



Screw connection (optional)

For size 1, up to 4 secondary disconnect terminal blocks are possible; for sizes 2 and 3, up to 5 secondary disconnect terminal blocks are possible

- Circuit breakers and non-automatic circuit breakers with secondary disconnect terminal blocks are supplied from the factory:
  - Non-automatic circuit breakers with 3 blocks
  - Non-automatic circuit breakers with ready4COM feature with 4 blocks
  - Circuit breakers with ETU600 LSI or LSIG with 4 blocks
  - Circuit breakers with ETU600 LSIG-HiZ with 5 blocks
  - Circuit breakers with ETU300 LSI/LSIG with 4 blocks

For dimension drawings, see Equipment Manual – 3WA1 air circuit breakers **www.siemens.com/lowvoltage/manuals (109763061)**

System overview, page 1/28

© Siemens 2025

Communication

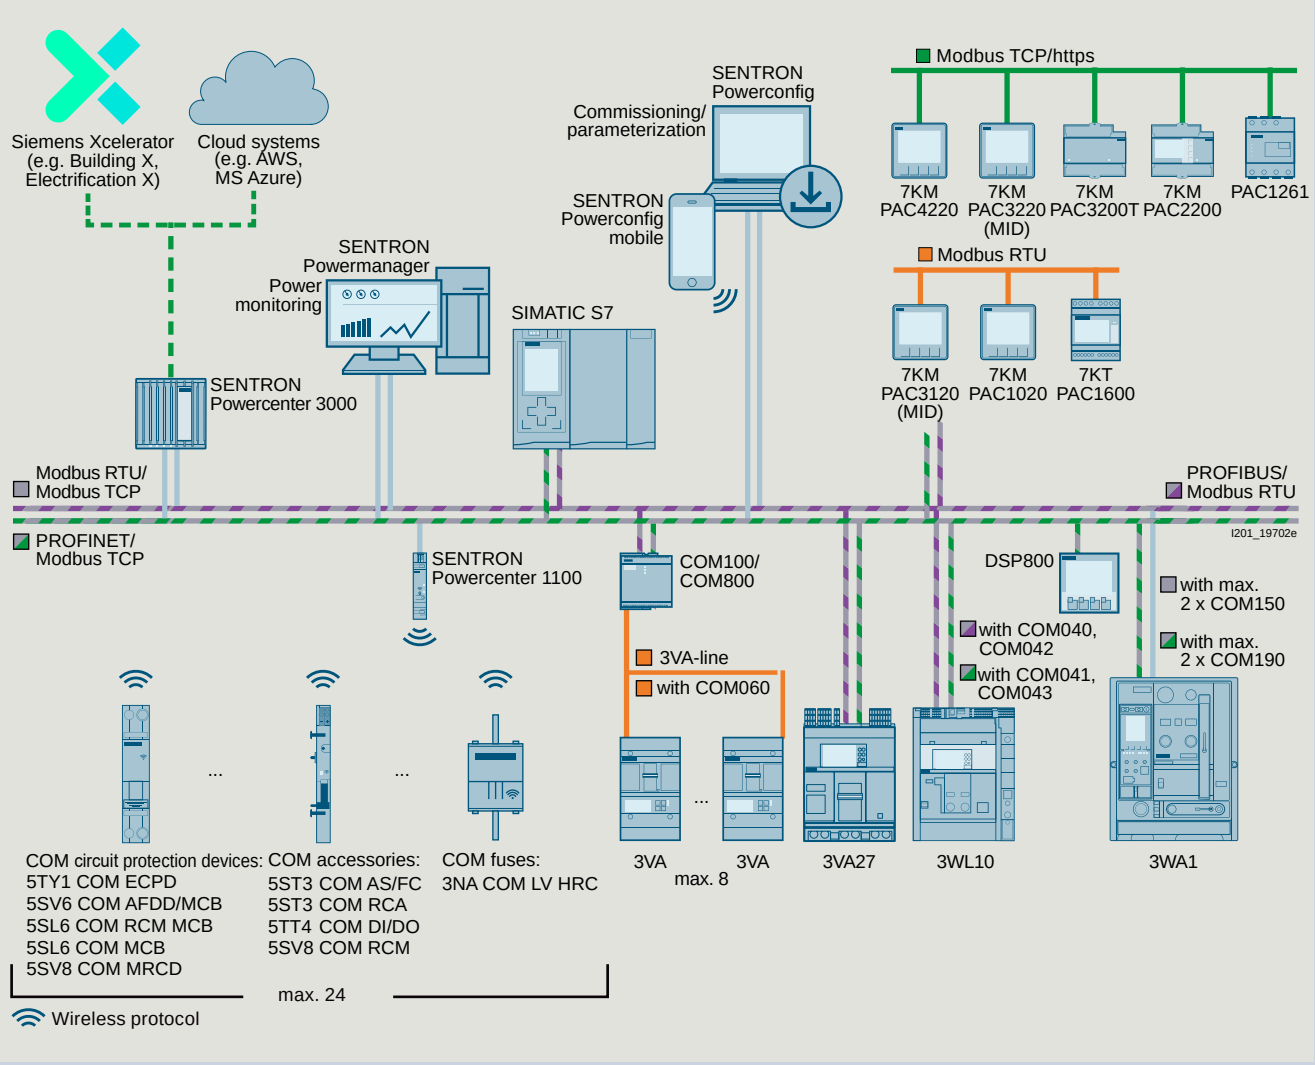

The 3WA can be equipped with up to two PROFINET IO/Modbus TCP COM190 communications modules or Modbus RTU COM150 and up to five IOM230 digital input/output modules.

For the optional communications interface with the COM190 or COM150 communications module, a circuit breaker with the ready4COM feature must be selected as the circuit breaker/non-automatic air circuit breaker. The first COM190 or COM150 communications module must be selected via a Z option. If you want to use a further COM190 or COM150 communications module, this must be ordered separately as an accessory. Both COM190 or COM150 communications modules can be run in parallel.

The first IOM230 digital input/output module can be selected via a Z option.
The up to four further digital input/output modules must be ordered separately as accessories.

You will find further information on the COM190 in the Equipment Manual – 3WA1 air circuit breakers
www.siemens.com/lowvoltage/manuals (109763061)

System overview, page 1/28

© Siemens 2025

3WA11 – 3WA13 system overview

Circuit breakers and non-automatic circuit breakers for AC and DC

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

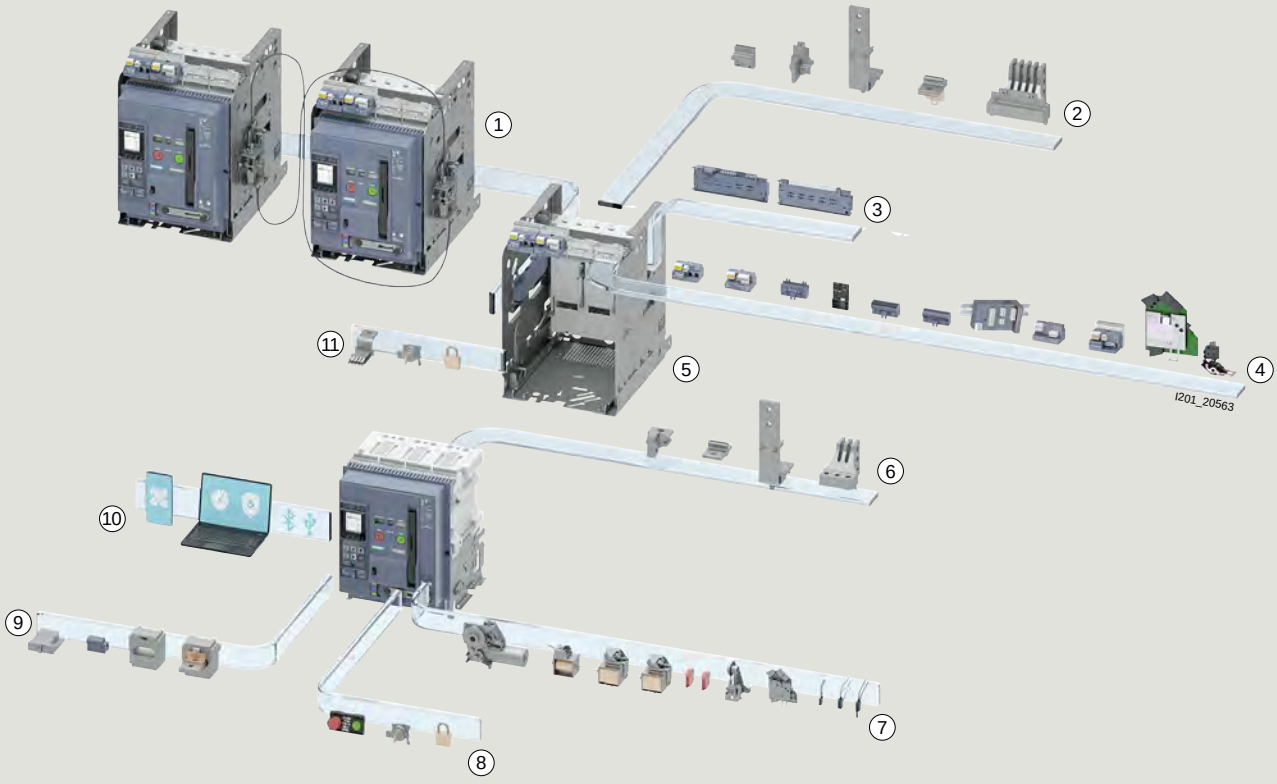

1. Interlocking solutions with Bowden cable
2. Main connection variants for guide frame
3. Position signaling switch (PSS) for the guide frame
4. Interfaces/COM-modules/Aux. terminals
5. Guide frame with shutter
6. Main connection variants for fixed-mounted version
7. Internal accessories: aux. release, spring charging motor, aux. contacts
8. Locking solutions for fixed-mounted version
9. Electronic trip units (ETU)
10. Digital function packages can be activated for the ETU
11. Interlocking solutions for withdrawable version

© Siemens 2025

© Siemens 2025

Online configurator highlights

www.siemens.com/lowvoltage/3wa-configurator

Graphical display

- Integration of the legend as a color system
  - Orange: still to be selected
  - Petrol: already selected
  - Gray: preselected (default)
- Graphical highlighting of the individual configuration steps: "What you see is what you get"

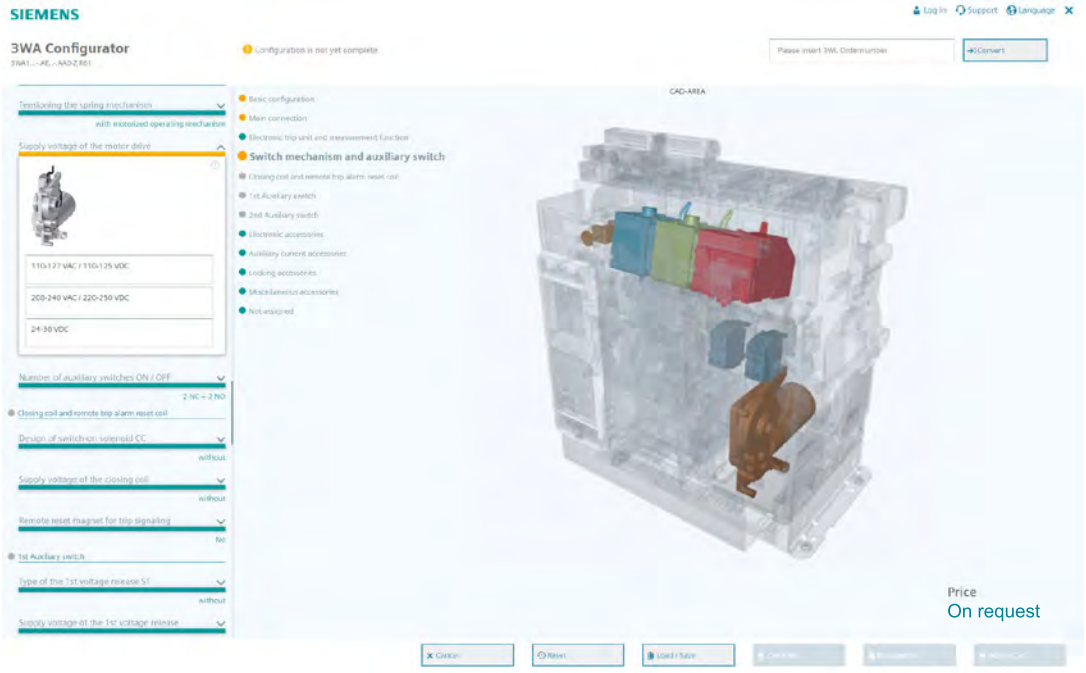

Splitting function (Frame and circuit breaker can be ordered separately)

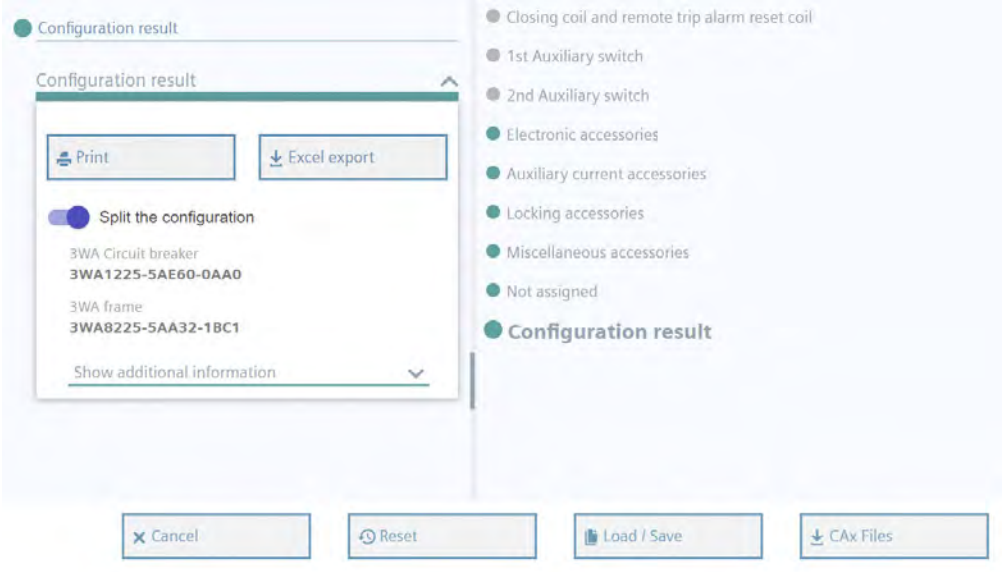

© Siemens 2025

Direct conversion of a 3WL article number to a 3WA article number in the configurator

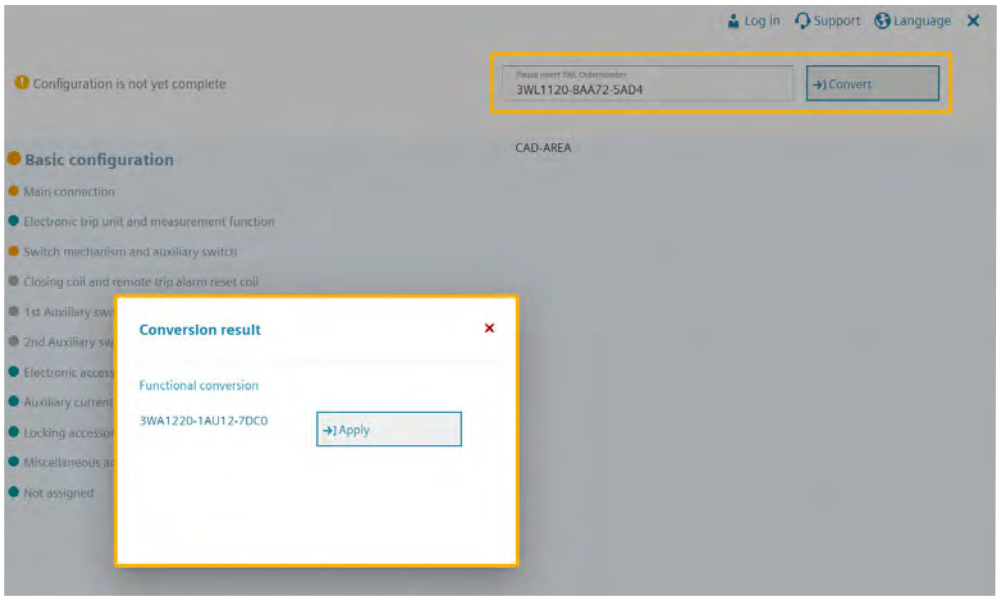

Responsive design (adapted to the differing requirements of the displaying devices)

Dynamic customer price during configuration

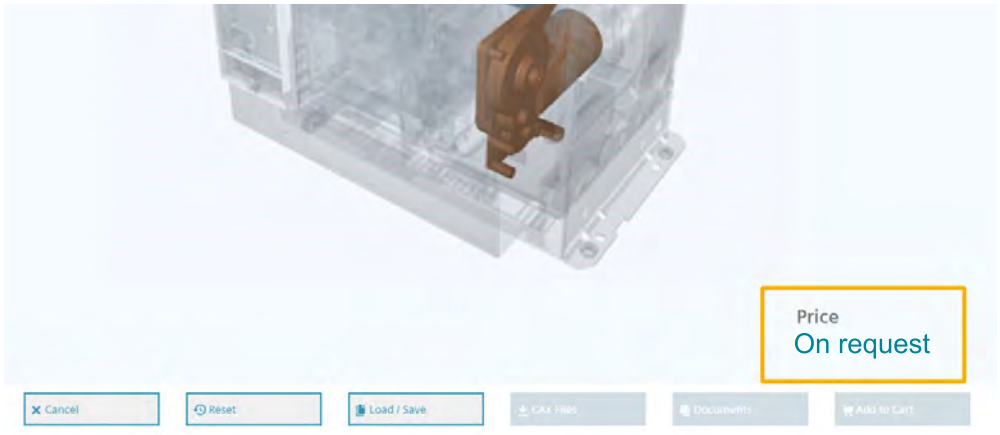

© Siemens 2025

Structure of the article numbers

Siemens EcoTech

Basic configuration for AC circuit breakers and AC non-automatic circuit breakers up to 690 V

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your air circuit breaker, please use our online configurator at
www.siemens.com/lowvoltage/3wa-configurator

1

3WA1									5	6	7	–	8	9	10	11	12 – 13	14 15 16

Circuit breakers and non-automatic circuit breakers

		SZ 1	SZ 2	SZ 3				
Size (SZ)	1						1	
	2						2	
	3						3	
Max. rated current $I_{n\,max}$	630 A	■	–	–		0	6	
	800 A	■	–	–		0	8	
	1000 A	■	–	–		1	0	
	1250 A	■	–	–		1	2	
	1600 A	■	–	–		1	6	
	2000 A	■	■	–		2	0	
	2500 A	■	■	–		2	5	
	3200 A	–	■	–		3	2	
	3600 A	–	■ [1]	–		3	6	
	4000 A	–	■ [1]	■		4	0	
	5000 A	–	–	■		5	0	
	6300 A	–	–	■		6	3	
Short-circuit breaking capacity I_{cu} at 500/690 V	N	■	–	–	55/42 kA			2
	S	■	■	–	66/50 kA			3
	M	■	■	–	85/66 kA			4
	H	■ [2]	–	–	100/66 kA			5
		–	■	■	100/85 kA			5
	C	–	■	–	130/100 kA			6
		–	–	■	3-pole: 150/150 kA 4-pole: 130/130 kA			6
Non-automatic circuit breakers [2]							A	A
Non-automatic circuit breakers, ready4COM feature [3]							C	A
Application packages with protective and metering functions for circuit breakers	ETU300 electronic trip unit	Protective function			LSI		A	B
					LSIG		A	C
	ETU600 electronic trip unit	Current metering					A	
		Current metering, ready4COM feature [3]					C	
	ETU600 electronic trip unit with metering function, internal voltage tap in the circuit breaker, power supply of the ETU600 via the VTM680 voltage tap module and ready4COM	PMF-I Energy efficiency			Voltage tap on top		L	
					Voltage tap on bottom		E	
		PMF-II Basic Power Monitoring			Voltage tap on top		M	
					Voltage tap on bottom		F	
		PMF-III Advanced Power Monitoring			Voltage tap on top		N	
					Voltage tap on bottom		G	
	Protective functions	■	■	■	LSI			E
		■	■	■	LSIG			F
		–	■	■	LSIG Hi-Z			G
Number of poles	Fixed-mounted					3-pole		0
						4-pole, Neutral left		1
						4-pole, Neutral right		2
	Withdrawable	Without position signaling switch				3-pole		3
						4-pole, Neutral left		4
						4-pole, Neutral right		5
		With position signaling switch [4]				3-pole		6
						4-pole, Neutral left		7
						4-pole, Neutral right		8

[1] Not available for breaking capacity C
[2] Available as a circuit breaker, not available as a non-automatic circuit breaker
[3] If ready4COM circuit breakers are ordered with closing coils/shunt trips, these are installed in the factory as communication-capable versions (CC-COM/ST-COM). Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71. The circuit breakers are then supplied with standard CC/ST.
[4] Position signaling switch for circuit breakers/non-automatic circuit breakers without ready4COM: 3 × connected position, 2 × test position, 1 × disconnected position; Position signaling switch for circuit breakers/non-automatic circuit breakers with ready4COM: 1 × connected position, 1 × test position, 1 × disconnected position + message through communications interface for disconnected position and for "not available"

Quick selection guide, pages 1/4 and 1/8

© Siemens 2025

3WA1 5 6 7 – 8 9 10 11 12 – 13 14 15 16

Connection

			Fixed-mounted					Withdrawable								
			Vertical	Horizontal	Front connection with double hole	Vertical on top/horizontal at the bottom	Horizontal on top/vertical at the bottom	Without guide frame	Vertical	Horizontal	Front connection with double hole	Flange	Vertical on top/horizontal at the bottom	Horizontal on top/vertical at the bottom	Flange on top/horizontal at the bottom	Horizontal on top/flange at the bottom
Size 1																
Short-circuit Breaking capacity	N, S, M	630 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		800 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		1000 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		1250 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		1600 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		2000 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		2500 A	1	2	–	5	6	0	1	–	–	–	–	–	–	–
	H	630 A	1	2	–	5	6	0	1	2	–	4	5	6	7	8
		800 A	1	2	–	5	6	0	1	2	–	4	5	6	7	8
		1000 A	1	2	–	5	6	0	1	2	–	4	5	6	7	8
		1250 A	1	2	–	5	6	0	1	2	–	4	5	6	7	8
		1600 A	1	2	–	5	6	0	1	2	–	4	5	6	7	8
		2000 A	1	2	–	5	6	0	1	2	–	4	5	6	7	8
		2500 A	1	2	–	5	6	0	1	–	–	–	–	–	–	–
Size 2																
Short-circuit Breaking capacity	S, M, H	2000 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		2500 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		3200 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		3600 A	–	–	–	–	–	–	–	–	–	4	–	–	–	–
		4000 A	1 [1) 2)]	2 [2)]	–	5	6	0	1 [1)]	2 [2)]	–	–	5	6	–	–
	C	2000 A	1	2	–	5	6	0	1	2	–	4	5	6	7	8
		2500 A	1	2	–	5	6	0	1	2	–	4	5	6	7	8
		3200 A	1	2	–	5	6	0	1	2	–	4	5	6	7	8
Size 3																
Short-circuit Breaking capacity	H	4000 A	1	2	3	5	6	0	1	2	3	4	5	6	–	–
		5000 A	1	2	–	5	6	0	1	2	–	–	5	6	–	–
		6300 A	1	–	–	–	–	0	1	–	–	–	–	–	–	–
	C	4000 A	1	2	–	5	6	0	1	2	–	4	5	6	–	–
		5000 A	1	2	–	5	6	0	1	2	–	–	5	6	–	–
		6300 A	1	–	–	–	–	0	1	–	–	–	–	–	–	–

[1)] The dimensions of the 4000 A vertical connections for the 3WA1 differ from those of 3WL1. Dimensionally compatible connections can be ordered with the additional Z option D01.

[2)] Also available for 4-pole circuit breakers with Z option D04: rear main connections (top and bottom) with same pole spacing of phases (only for N pole, left).

Quick selection guide, pages 1/4 and 1/8

© Siemens 2025

Structure of the article numbers

Siemens EcoTech

Basic configuration for AC circuit breakers and AC non-automatic circuit breakers up to 690 V

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your air circuit breaker, please use our online configurator at
www.siemens.com/lowvoltage/3wa-configurator

1

	5	6	7	8		9	10	11	12		13	14	15	16
3WA1					–					–				

Operating mechanisms, auxiliary switches and auxiliary releases

Operating mechanism and auxiliary switch	Manual recharging of the stored energy mechanism	Without spring charging motor	2 NO, 2 NC	0
			4 NO, 4 NC	1
	Recharging of the stored energy mechanism by spring charging motor (M)	24 ... 30 V DC	2 NO, 2 NC	2
			4 NO, 4 NC	5
		48 ... 60 V DC	4 NO, 4 NC	6
		110 ... 127 V AC/ 110 ... 125 V DC	2 NO, 2 NC	3
			4 NO, 4 NC	7
		208 ... 240 V AC/ 220 ... 250 V DC	2 NO, 2 NC	4
			4 NO, 4 NC	8

Closing coil and remote trip alarm reset coil [1]	Without closing coil	Without remote trip alarm reset coil		A
	With closing coil (CC/CC-COM) [2] for uninterrupted duty, 100% OP	Without remote trip alarm reset coil	24 ... 30 V DC	B
			48 ... 60 V DC	C
			110 ... 127 V AC/110 ... 125 V DC	D
			208 ... 240 V AC/220 ... 250 V DC	E
		With remote trip alarm reset coil (RR) for momentary duty 1% OP	24 ... 30 V DC	F
			48 ... 60 V DC	G
			110 ... 127 V AC/110 ... 125 V DC	H
			208 ... 240 V AC/220 ... 250 V DC	J
	With closing coil (CC) for momentary duty, 5% OP	Without remote trip alarm reset coil	24 ... 30 V DC	K
			48 ... 60 V DC	L
			110 ... 127 V AC/110 ... 125 V DC	M
			208 ... 240 V AC/220 ... 250 V DC	N
		With remote trip alarm reset coil (RR) for momentary duty 1% OP	24 ... 30 V DC	P
			48 ... 60 V DC	Q
			110 ... 127 V AC/110 ... 125 V DC	R
			208 ... 240 V AC/220 ... 250 V DC	S

Note:
When using the remote trip alarm reset coil, the reclosing lockout is generally deactivated. The circuit breaker can be closed again immediately if the conditions for closing are fulfilled.

2nd auxiliary release	Without 2nd auxiliary release		A
	With shunt trip (ST), uninterrupted duty 100% OP	24 ... 30 V DC	B
		48 ... 60 V DC	C
		110 ... 127 V AC/110 ... 125 V DC	D
		208 ... 240 V AC/220 ... 250 V DC	E
	With shunt trip (ST), momentary duty 5% OP	24 ... 30 V DC	F
		48 ... 60 V DC	G
		110 ... 127 V AC/110 ... 125 V DC	H
		208 ... 240 V AC/220 ... 250 V DC	J
	With undervoltage release (UVR), instantaneous (≤ 0.08 s) and short-time delayed (≤ 0.2 s)	24 ... 30 V DC	L
		48 ... 60 V DC	N
		110 ... 127 V AC/110 ... 125 V DC	P
		208 ... 240 V AC/220 ... 250 V DC	Q
		380 ... 415 V AC	R
	With undervoltage release (UVR-t) [3], adjustable delay 0.2 ... 3.2 s	48 V DC	S
		60 V DC	T
		110 ... 127 V AC/110 ... 125 V DC	U
		208 ... 240 V AC/220 ... 250 V DC	V
		380 ... 415 V AC	W

[1] Remote trip alarm reset coil is not available for non-automatic circuit breakers
[2] If the property ready4COM is selected in conjunction with 100% OP closing coils/shunt trips, communication-capable closing coils (CC-COM)/shunt trips (ST-COM) are installed in the factory. Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71.
[3] The maximum allowable cable length to the actuator for quick shutdown is currently ≤ 50 m (maximum allowable cable length between the terminals ≤ 100 m).

Quick selection guide, pages 1/4 and 1/8

© Siemens 2025

3WA1	5	6	7	8	–	9	10	11	12	–	13	14	15	16

Auxiliary releases

1st auxiliary release	Without 1st auxiliary release		**0**
	With shunt trip (ST/ST-COM) [1], uninterrupted duty 100% OP	24 ... 30 V DC	**1**
		48 ... 60 V DC	**2**
		110 ... 127 V AC/110 ... 125 V DC	**3**
		208 ... 240 V AC/220 ... 250 V DC	**4**
	With shunt trip (ST), momentary duty 5% OP	24 ... 30 V DC	**5**
		48 ... 60 V DC	**6**
		110 ... 127 V AC/110 ... 125 V DC	**7**
		208 ... 240 V AC/220 ... 250 V DC	**8**

[1] If the property ready4COM is selected in conjunction with 100% OP closing coils/shunt trips, communication-capable closing coils (CC-COM)/shunt trips (ST-COM) are installed in the factory. Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71.

Quick selection guide, pages 1/4 and 1/8

© Siemens 2025

Structure of the article numbers

Siemens EcoTech

Basic configuration for AC circuit breakers and AC non-automatic circuit breakers in a 690 V IT system and for 1000 V

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your air circuit breaker, please use our online configurator at
www.siemens.com/lowvoltage/3wa-configurator

1

3WA1																
				5	6	7	–	8	9	10	11	12	13	14	15	16

Circuit breakers and non-automatic circuit breakers

Size (SZ)	1				1											
	2				2											
	3				3											

		SZ 1	SZ 2	SZ 3												
Max. rated current $I_{n\,max}$	630 A	■	–	–		0	6									
	800 A	■	–	–		0	8									
	1000 A	■	–	–		1	0									
	1250 A	■	–	–		1	2									
	1600 A	■	–	–		1	6									
	2000 A	■	■	–		2	0									
	2500 A	■	■	–		2	5									
	3200 A	–	■	–		3	2									
	3600 A	–	■	–		3	6									
	4000 A	–	■	■		4	0									
	5000 A	–	–	■		5	0									
	6300 A	–	–	■		6	3									
Short-circuit breaking capacity I_{cu} at 690 V/ 690 V IT network/ 1000 V	E	■	–	–	85/50/50 kA			8								
		–	■	–	85/50/50 kA			8								
		–	–	■	3-pole: 150/50/125 kA 4-pole: 130/50/125 kA			8								
Non-automatic circuit breakers									A	A						
Non-automatic circuit breakers, ready4COM feature [1]									C	A						

Application packages with protective and metering functions for circuit breakers	ETU300 electronic trip unit	Protective function	LSI						A	B						
			LSIG						A	C						
	ETU600 electronic trip unit	Current metering							A							
		Current metering, ready4COM feature [1]							C							
	ETU600 electronic trip unit with metering function, internal voltage tap in the circuit breaker, VTM640 voltage tap module and ready4COM	PMF-I	Voltage tap on top						U							
		Energy efficiency	Voltage tap on bottom						Q							
		PMF-II Basic Power Monitoring	Voltage tap on top						V							
			Voltage tap on bottom						R							
		PMF-III Advanced Power Monitoring	Voltage tap on top						W							
			Voltage tap on bottom						S							
	Protective functions	■	■	■	LSI					E						
		■	■	■	LSIG					F						
		–	■	■	LSIG Hi-Z					G						

Number of poles	Fixed-mounted			3-pole							0					
				4-pole, Neutral left							1					
				4-pole, Neutral right							2					
	Withdrawable	Without position signaling switch		3-pole							3					
				4-pole, Neutral left							4					
				4-pole, Neutral right							5					
		With position signaling switch [2]		3-pole							6					
				4-pole, Neutral left							7					
				4-pole, Neutral right							8					

[1] If ready4COM circuit breakers are ordered with closing coils/shunt trips, these are installed in the factory as communication-capable versions (CC-COM/ST-COM). Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71. The circuit breakers are then supplied with standard CC/ST.

[2] Position signaling switch for circuit breakers/non-automatic circuit breakers without ready4COM: 3 × connected position, 2 × test position, 1 × disconnected position; Position signaling switch for circuit breakers/non-automatic circuit breakers with ready4COM: 1 × connected position, 1 × test position, 1 × disconnected position + message through communications interface for disconnected position and for "not available"

Quick selection guide, pages 1/4 and 1/8

© Siemens 2025

3WA1 5 6 7 – 8 9 10 11 12 – 13 14 15 16

Connection

			Fixed-mounted					Withdrawable								
			Vertical	Horizontal	Front connection with double hole	Vertical on top/horizontal at the bottom	Horizontal on top/vertical at the bottom	Without guide frame	Vertical	Horizontal	Front connection with double hole	Flange	Vertical on top/horizontal at the bottom	Horizontal on top/vertical at the bottom	Flange on top/horizontal at the bottom	Horizontal on top/flange at the bottom
Size 1																
Short-circuit Breaking capacity	E	630 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		800 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		1000 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		1250 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		1600 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		2000 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		2500 A	1	2	–	5	6	0	1	–	–	–	–	–	–	–
Size 2																
Short-circuit Breaking capacity	E	2000 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		2500 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		3200 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		3600 A	–	–	–	–	–	–	–	–	–	4	–	–	–	–
		4000 A	1 [1)]	2 [2)]	–	5	6	0	1 [1)]	2 [2)]	–	–	5	6	–	–
Size 3																
Short-circuit Breaking capacity	E	4000 A	1	2	–	5	6	0	1	2	–	4	5	6	–	–
		5000 A	1	2	–	5	6	0	1	2	–	–	5	6	–	–
		6300 A	1	–	–	–	–	0	1	–	–	–	–	–	–	–

[1)] The dimensions of the 4000 A vertical connections for the 3WA1 differ from those of 3WL1. Dimensionally compatible connections can be ordered with the additional Z option D01.

[2)] Also available for 4-pole circuit breakers with Z option D04: rear main connections (top and bottom) with same pole spacing of phases (only for N pole, left).

Quick selection guide, pages 1/4 and 1/8

© Siemens 2025

Structure of the article numbers

Siemens EcoTech

Basic configuration for AC circuit breakers and AC non-automatic circuit breakers in a 690 V IT system and for 1000 V

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your air circuit breaker, please use our online configurator at
www.siemens.com/lowvoltage/3wa-configurator

1

	5	6	7	8		9	10	11	12		13	14	15	16
3WA1					–					–				

Operating mechanisms, auxiliary switches and auxiliary releases

Operating mechanism and auxiliary switch	Manual recharging of the stored energy mechanism	Without spring charging motor	2 NO, 2 NC	0
			4 NO, 4 NC	1
	Recharging of the stored energy mechanism by spring charging motor (M)	24 … 30 V DC	2 NO, 2 NC	2
			4 NO, 4 NC	5
		48 … 60 V DC	4 NO, 4 NC	6
		110 … 127 V AC/ 110 … 125 V DC	2 NO, 2 NC	3
			4 NO, 4 NC	7
		208 … 240 V AC/ 220 … 250 V DC	2 NO, 2 NC	4
			4 NO, 4 NC	8

Closing coil and remote trip alarm reset coil [1]	Without closing coil	Without remote trip alarm reset coil		A
	With closing coil (CC/CC-COM) [2] for uninterrupted duty, 100% OP	Without remote trip alarm reset coil	24 … 30 V DC	B
			48 … 60 V DC	C
			110 … 127 V AC/110 … 125 V DC	D
			208 … 240 V AC/220 … 250 V DC	E
		With remote trip alarm reset coil (RR) for momentary duty 1% OP	24 … 30 V DC	F
			48 … 60 V DC	G
			110 … 127 V AC/110 … 125 V DC	H
			208 … 240 V AC/220 … 250 V DC	J
	With closing coil (CC) for momentary duty, 5% OP	Without remote trip alarm reset coil	24 … 30 V DC	K
			48 … 60 V DC	L
			110 … 127 V AC/110 … 125 V DC	M
			208 … 240 V AC/220 … 250 V DC	N
		With remote trip alarm reset coil (RR) for momentary duty 1% OP	24 … 30 V DC	P
			48 … 60 V DC	Q
			110 … 127 V AC/110 … 125 V DC	R
			208 … 240 V AC/220 … 250 V DC	S

Note:
When using the remote trip alarm reset coil, the reclosing lockout is generally deactivated. The circuit breaker can be closed again immediately if the conditions for closing are fulfilled.

2nd auxiliary release	Without 2nd auxiliary release		A
	With shunt trip (ST), uninterrupted duty 100% OP	24 … 30 V DC	B
		48 … 60 V DC	C
		110 … 127 V AC/110 … 125 V DC	D
		208 … 240 V AC/220 … 250 V DC	E
	With shunt trip (ST), momentary duty 5% OP	24 … 30 V DC	F
		48 … 60 V DC	G
		110 … 127 V AC/110 … 125 V DC	H
		208 … 240 V AC/220 … 250 V DC	J
	With undervoltage release (UVR), instantaneous (≤ 0.08 s) and short-time delayed (≤ 0.2 s)	24 … 30 V DC	L
		48 … 60 V DC	N
		110 … 127 V AC/110 … 125 V DC	P
		208 … 240 V AC/220 … 250 V DC	Q
		380 … 415 V AC	R
	With undervoltage release (UVR-t) [3], adjustable delay 0.2 … 3.2 s	48 V DC	S
		60 V DC	T
		110 … 127 V AC/110 … 125 V DC	U
		208 … 240 V AC/220 … 250 V DC	V
		380 … 415 V AC	W

[1] Remote trip alarm reset coil is not available for non-automatic circuit breakers
[2] If the property ready4COM is selected in conjunction with 100% OP closing coils/shunt trips, communication-capable closing coils (CC-COM)/shunt trips (ST-COM) are installed in the factory. Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71.
[3] The maximum allowable cable length to the actuator for quick shutdown is currently ≤ 50 m (maximum allowable cable length between the terminals ≤ 100 m).

Quick selection guide, pages 1/4 and 1/8

© Siemens 2025

	5	6	7	8		9	10	11	12		13	14	15	16
3WA1					–					–				

Auxiliary releases

1st auxiliary release	Without 1st auxiliary release		**0**
	With shunt trip (ST/ST-COM) [1], uninterrupted duty 100% OP	24 ... 30 V DC	**1**
		48 ... 60 V DC	**2**
		110 ... 127 V AC/110 ... 125 V DC	**3**
		208 ... 240 V AC/220 ... 250 V DC	**4**
	With shunt trip (ST), momentary duty 5% OP	24 ... 30 V DC	**5**
		48 ... 60 V DC	**6**
		110 ... 127 V AC/110 ... 125 V DC	**7**
		208 ... 240 V AC/220 ... 250 V DC	**8**

[1] If the property ready4COM is selected in conjunction with 100% OP closing coils/shunt trips, communication-capable closing coils (CC-COM)/shunt trips (ST-COM) are installed in the factory. Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71.

Quick selection guide, pages 1/4 and 1/8

© Siemens 2025

Structure of the article numbers

Siemens EcoTech

Basic configuration for AC circuit breakers and AC non-automatic circuit breakers for 1150 V

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your air circuit breaker, please use our online configurator at
www.siemens.com/lowvoltage/3wa-configurator

1

3WA1 | 5 | 6 | 7 | – | 8 | 9 | 10 | 11 | 12 | – | 13 | 14 | 15 | 16 |

Circuit breakers and non-automatic circuit breakers

Size (SZ)	2						**2**								
	3						**3**								
		SZ 2	SZ 3												
Max. rated current $I_{n\,max}$	2000 A	■	–					**2**	**0**						
	2500 A	■	–					**2**	**5**						
	3200 A	■	–					**3**	**2**						
	4000 A	■	■					**4**	**0**						
	5000 A	–	■					**5**	**0**						
	6300 A	–	■					**6**	**3**						
Short-circuit breaking capacity I_{cu} at 690 V/1000 V/ 1150 V	E	■	–	85/85/50 kA						**8**					
		–	■	3-pole: 150/125/70 kA 4-pole: 130/125/70 kA						**8**					
Non-automatic circuit breakers											**A**	**A**			
Non-automatic circuit breakers, ready4COM feature [1]											**C**	**A**			
Application packages with protective and metering functions for circuit breakers	ETU300 electronic trip unit			Protective function	LSI						**A**	**B**			
					LSIG						**A**	**C**			
	ETU600 electronic trip unit			Current metering							**A**				
				Current metering, ready4COM feature [1]							**C**				
	Protective functions	■	■	LSI								**E**			
		■	■	LSIG								**F**			
		■	■	LSIG Hi-Z								**G**			
Number of poles	Fixed-mounted					3-pole							**0**		
						4-pole, Neutral left							**1**		
						4-pole, Neutral right							**2**		
	Withdrawable			Without position signaling switch		3-pole							**3**		
						4-pole, Neutral left							**4**		
						4-pole, Neutral right							**5**		
				With position signaling switch [2]		3-pole							**6**		
						4-pole, Neutral left							**7**		
						4-pole, Neutral right							**8**		

[1] If ready4COM circuit breakers are ordered with closing coils/shunt trips, these are installed in the factory as communication-capable versions (CC-COM/ST-COM). Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71. The circuit breakers are then supplied with standard CC/ST.

[2] Position signaling switch for circuit breakers/non-automatic circuit breakers without ready4COM:
3 × connected position, 2 × test position, 1 × disconnected position;
Position signaling switch for circuit breakers/non-automatic circuit breakers with ready4COM:
1 × connected position, 1 × test position, 1 × disconnected position + message through communications interface for disconnected position and for "not available".

Quick selection guide, pages 1/4 and 1/8

© Siemens 2025

3WA1	5	6	7	–	8	9	10	11	12	–	13	14	15	16

Connection

			Fixed-mounted					Withdrawable								
			Vertical	Horizontal	Front connection with double hole	Vertical on top/horizontal at the bottom	Horizontal on top/vertical at the bottom	Without guide frame	Vertical	Horizontal	Front connection with double hole	Flange	Vertical on top/horizontal at the bottom	Horizontal on top/vertical at the bottom	Flange on top/horizontal at the bottom	Horizontal on top/flange at the bottom
Size 2																
Short-circuit Breaking capacity	E	2000 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		2500 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		3200 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		3600 A	–	–	–	–	–	–	–	–	–	4	–	–	–	–
		4000 A	1 [1]	2 [2]	–	5	6	0	1 [1]	2 [2]	–	–	5	6	–	–
Size 3																
Short-circuit Breaking capacity	E	4000 A	1	2	–	5	6	0	1	2	–	4	5	6	–	–
		5000 A	1	2	–	5	6	0	1	2	–	–	5	6	–	–
		6300 A	1	–	–	–	–	0	1	–	–	–	–	–	–	–

[1] Vertical connection for 3WA size 2 for 4000 A has different dimensions than for the 3WL.
With Z option D01, vertical connection can be changed to the connection compatible with 3WL.

[2] Also available for 4-pole circuit breakers with Z option D04: rear main connections (top and bottom) with same pole spacing of phases (only for N pole, left).

Quick selection guide, pages 1/4 and 1/8

© Siemens 2025

Structure of the article numbers

Siemens EcoTech

Basic configuration for AC circuit breakers and AC non-automatic circuit breakers for 1150 V

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your air circuit breaker, please use our online configurator at
www.siemens.com/lowvoltage/3wa-configurator

1

	5	6	7	8		9	10	11	12		13	14	15	16
3WA1					–					–				

Operating mechanisms, auxiliary switches and auxiliary releases

				13	14	15
Operating mechanism and auxiliary switch	Manual recharging of the stored energy mechanism	Without spring charging motor	2 NO, 2 NC	0		
			4 NO, 4 NC	1		
	Recharging of the stored energy mechanism by spring charging motor (M)	24 ... 30 V DC	2 NO, 2 NC	2		
			4 NO, 4 NC	5		
		48 ... 60 V DC	4 NO, 4 NC	6		
		110 ... 127 V AC/ 110 ... 125 V DC	2 NO, 2 NC	3		
			4 NO, 4 NC	7		
		208 ... 240 V AC/ 220 ... 250 V DC	2 NO, 2 NC	4		
			4 NO, 4 NC	8		
Closing coil and remote trip alarm reset coil [1]	Without closing coil	Without remote trip alarm reset coil			A	
	With closing coil (CC/CC-COM) [2] for uninterrupted duty, 100% OP	Without remote trip alarm reset coil	24 ... 30 V DC		B	
			48 ... 60 V DC		C	
			110 ... 127 V AC/110 ... 125 V DC		D	
			208 ... 240 V AC/220 ... 250 V DC		E	
		With remote trip alarm reset coil (RR) for momentary duty 1% OP	24 ... 30 V DC		F	
			48 ... 60 V DC		G	
			110 ... 127 V AC/110 ... 125 V DC		H	
			208 ... 240 V AC/220 ... 250 V DC		J	
	With closing coil (CC) for momentary duty, 5% OP	Without remote trip alarm reset coil	24 ... 30 V DC		K	
			48 ... 60 V DC		L	
			110 ... 127 V AC/110 ... 125 V DC		M	
			208 ... 240 V AC/220 ... 250 V DC		N	
		With remote trip alarm reset coil (RR) for momentary duty 1% OP	24 ... 30 V DC		P	
			48 ... 60 V DC		Q	
			110 ... 127 V AC/110 ... 125 V DC		R	
			208 ... 240 V AC/220 ... 250 V DC		S	

Note:
When using the remote trip alarm reset coil, the reclosing lockout is generally deactivated. The circuit breaker can be closed again immediately if the conditions for closing are fulfilled.

			15
2nd auxiliary release	Without 2nd auxiliary release		A
	With shunt trip (ST), uninterrupted duty 100% OP	24 ... 30 V DC	B
		48 ... 60 V DC	C
		110 ... 127 V AC/110 ... 125 V DC	D
		208 ... 240 V AC/220 ... 250 V DC	E
	With shunt trip (ST), momentary duty 5% OP	24 ... 30 V DC	F
		48 ... 60 V DC	G
		110 ... 127 V AC/110 ... 125 V DC	H
		208 ... 240 V AC/220 ... 250 V DC	J
	With undervoltage release (UVR), instantaneous (≤ 0.08 s) and short-time delayed (≤ 0.2 s)	24 ... 30 V DC	L
		48 ... 60 V DC	N
		110 ... 127 V AC/110 ... 125 V DC	P
		208 ... 240 V AC/220 ... 250 V DC	Q
		380 ... 415 V AC	R
	With undervoltage release (UVR-t) [3], adjustable delay 0.2 ... 3.2 s	48 V DC	S
		60 V DC	T
		110 ... 127 V AC/110 ... 125 V DC	U
		208 ... 240 V AC/220 ... 250 V DC	V
		380 ... 415 V AC	W

[1] Remote trip alarm reset coil is not available for non-automatic circuit breakers
[2] If the property ready4COM is selected in conjunction with 100% OP closing coils/shunt trips, communication-capable closing coils (CC-COM)/shunt trips (ST-COM) are installed in the factory. Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71.
[3] The maximum allowable cable length to the actuator for quick shutdown is currently ≤ 50 m (maximum allowable cable length between the terminals ≤ 100 m).

Quick selection guide, pages 1/4 and 1/8

© Siemens 2025

3WA1	5	6	7	8	–	9	10	11	12	–	13	14	15	16

Auxiliary releases

1st auxiliary release	Without 1st auxiliary release		**0**
	With shunt trip (ST/ST-COM) [1], uninterrupted duty 100% OP	24 ... 30 V DC	**1**
		48 ... 60 V DC	**2**
		110 ... 127 V AC/110 ... 125 V DC	**3**
		208 ... 240 V AC/220 ... 250 V DC	**4**
	With shunt trip (ST), momentary duty 5% OP	24 ... 30 V DC	**5**
		48 ... 60 V DC	**6**
		110 ... 127 V AC/110 ... 125 V DC	**7**
		208 ... 240 V AC/220 ... 250 V DC	**8**

[1] If the property ready4COM is selected in conjunction with 100% OP closing coils/shunt trips, communication-capable closing coils (CC-COM)/shunt trips (ST-COM) are installed in the factory. Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71.

Quick selection guide, pages 1/4 and 1/8

© Siemens 2025

Structure of the article numbers

Siemens EcoTech

Basic configuration for DC non-automatic circuit breakers

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your air circuit breaker, please use our online configurator at
www.siemens.com/lowvoltage/3wa-configurator

1

				5	6	7		8	9	10	11	12		13	14	15	16
3WA1							–						–				
Non-automatic circuit breakers																	
Size (SZ)	2			2													
		BG 2															
Max. rated current $I_{n\,max}$	1000 A	■			1	0											
	2000 A	■			2	0											
	4000 A	■			4	0											
Short-circuit breaking capacity I_{cc}	D	■	25 kA, 600 V DC					1									
	E	■	20 kA, 1000 V DC 20 kA, 1500 V DC [1]					8									
Non-automatic circuit breakers									A	U							
Non-automatic circuit breakers, ready4COM feature [2]									C	U							
Number of poles	Fixed-mounted		3-pole								0						
			4-pole								1						
	Withdrawable	Without position signaling switch	3-pole								3						
			4-pole								4						
		With position signaling switch [3]	3-pole								6						
			4-pole								7						

Connection

Size 2			Fixed-mounted					Withdrawable								
			Vertical	Horizontal	Front connection with double hole	Vertical on top/horizontal at the bottom	Horizontal on top/vertical at the bottom	Without guide frame	Vertical	Horizontal	Front connection with double hole	Flange	Vertical on top/horizontal at the bottom	Horizontal on top/vertical at the bottom	Flange on top/horizontal at the bottom	Horizontal on top/flange at the bottom
Short-circuit Breaking capacity	D	1000 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		2000 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		4000 A	1	2	–	5	6	0	1	2	–	4	5	6	7	8
	E	1000 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		2000 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		4000 A	1	2	–	5	6	0	1	2	–	4	5	6	7	8

[1] 1500 V DC only for 4-pole circuit breakers and for breaking capacity E

[2] If the property ready4COM is selected in conjunction with 100% OP closing coils/shunt trips, communication-capable closing coils (CC-COM)/shunt trips (ST-COM) are installed in the factory. Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71. The circuit breakers are then supplied with standard CC/ST.

[3] Position signaling switch for circuit breakers/non-automatic circuit breakers without ready4COM:
3 × connected position, 2 × test position, 1 × disconnected position;
Position signaling switch for circuit breakers/non-automatic circuit breakers with ready4COM:
1 × connected position, 1 × test position, 1 × disconnected position + message through communications interface for disconnected position and for "not available"

Quick selection guide, pages 1/4 and 1/14

© Siemens 2025

3WA1 5 6 7 8 – 9 10 11 12 – 13 14 15 16

Operating mechanisms, auxiliary switches and auxiliary releases

				13	14	15	16
Operating mechanism and auxiliary switch	Manual recharging of the stored energy mechanism	Without spring charging motor	2 NO, 2 NC	0			
			4 NO, 4 NC	1			
	Recharging of the stored energy mechanism by spring charging motor (M)	24 ... 30 V DC	2 NO, 2 NC	2			
			4 NO, 4 NC	5			
		48 ... 60 V DC	4 NO, 4 NC	6			
		110 ... 127 V AC/ 110 ... 125 V DC	2 NO, 2 NC	3			
			4 NO, 4 NC	7			
		208 ... 240 V AC/ 220 ... 250 V DC	2 NO, 2 NC	4			
			4 NO, 4 NC	8			
Closing coil	Without closing coil				A		
	With closing coil (CC/CC-COM) [1] for uninterrupted duty, 100% OP		24 ... 30 V DC		B		
			48 ... 60 V DC		C		
			110 ... 127 V AC/110 ... 125 V DC		D		
			208 ... 240 V AC/220 ... 250 V DC		E		
	With closing coil (CC) for momentary duty, 5% OP		24 ... 30 V DC		K		
			48 ... 60 V DC		L		
			110 ... 127 V AC/110 ... 125 V DC		M		
			208 ... 240 V AC/220 ... 250 V DC		N		
2nd auxiliary release	Without 2nd auxiliary release					A	
	With shunt trip (ST), uninterrupted duty 100% OP [1]		24 ... 30 V DC			B	
			48 ... 60 V DC			C	
			110 ... 127 V AC/110 ... 125 V DC			D	
			208 ... 240 V AC/220 ... 250 V DC			E	
	With shunt trip (ST), momentary duty 5% OP		24 ... 30 V DC			F	
			48 ... 60 V DC			G	
			110 ... 127 V AC/110 ... 125 V DC			H	
			208 ... 240 V AC/220 ... 250 V DC			J	
	With undervoltage release (UVR), instantaneous (≤ 0.08 s) and short-time delayed (≤ 0.2 s)		24 ... 30 V DC			L	
			48 ... 60 V DC			N	
			110 ... 127 V AC/110 ... 125 V DC			P	
			208 ... 240 V AC/220 ... 250 V DC			Q	
			380 ... 415 V AC			R	
	With undervoltage release (UVR-t) [2], adjustable delay 0.2 ... 3.2 s		48 V DC			S	
			60 V DC			T	
			110 ... 127 V AC/110 ... 125 V DC			U	
			208 ... 240 V AC/220 ... 250 V DC			V	
			380 ... 415 V AC			W	
1st auxiliary release	Without 1st auxiliary release						0
	With shunt trip (ST/ST-COM) [1], uninterrupted duty 100% OP		24 ... 30 V DC				1
			48 ... 60 V DC				2
			110 ... 127 V AC/110 ... 125 V DC				3
			208 ... 240 V AC/220 ... 250 V DC				4
	With shunt trip (ST), momentary duty 5% OP		24 ... 30 V DC				5
			48 ... 60 V DC				6
			110 ... 127 V AC/110 ... 125 V DC				7
			208 ... 240 V AC/220 ... 250 V DC				8

[1] If the property ready4COM is selected in conjunction with 100% OP closing coils/shunt trips, communication-capable closing coils (CC-COM)/shunt trips (ST-COM) are installed in the factory. Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71.

[2] The maximum allowable cable length to the actuator for quick shutdown is currently ≤ 50 m (maximum allowable cable length between the terminals ≤ 100 m).

Quick selection guide, pages 1/4 and 1/14

© Siemens 2025

Accessory options

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

1

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WA....-.....-.... -Z

						Order code
Test report						
Test report of routine test						P81
Option plug for electronic trip unit						
• To reduce the rated current of the circuit breaker • Only one module is possible per circuit breaker. As standard, the electronic trip unit is equipped with an option plug which is equal to the maximum rated breaker current ($I_{n\,max}$). The rated current of the selected option plug must be less than $I_{n\,max}$.						
	Rated current I_n	SZ 1	SZ 2	SZ 3		
Option plug	250 A	■	■	–		B02
	315 A	■	■	–		B03
	400 A	■	■	–		B04
	500 A	■	■	–		B05
	630 A	■	■	–		B06
	800 A	■	■	■		B08
	1000 A	■	■	■		B10
	1250 A	■	■	■		B12
	1600 A	■	■	■		B16
	2000 A	■	■	■		B20
	2500 A	–	■	■		B25
	3200 A	–	■	■		B32
	3600 A new	–	■	■		B36
	4000 A	–	–	■		B40
	5000 A	–	–	■		B50
IOM230 digital input/output module [1]						
Module with 2 inputs and 3 outputs	A module including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, connecting cables and **Cubicle**BUS[2] terminating resistor; five modules can be operated at the same time. Further modules must be ordered separately as 3WA9111-0EC11, which includes the adapter for mounting on the secondary disconnect terminal system of the circuit breaker and the adapter for external mounting on a DIN rail.					F23
ZSI200 Zone-selective interlocking module [1]						
Zone-selective interlocking with ETU600	A module, circuit breaker internal. A module including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, connecting cables and **Cubicle**BUS[2] terminating resistor					F20
COM190 communications module [1] [2]						
• The precondition for connection is a circuit breaker or non-automatic circuit breaker with the ready4COM feature						
PROFINET IO/Modbus TCP [2]	A module including 2 Switched Ethernet ports, circuit breaker internal. A module including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, connecting cables and **Cubicle**BUS[2] terminating resistor; two communications modules can be run at the same time. The second communications module must be ordered separately as 3WA9111-0EC13.					F19
COM150 communications module [1]						
• The precondition for connection is a circuit breaker or non-automatic circuit breaker with the ready4COM feature						
Modbus RTU	A module with terminal connection and optional internal terminating resistor, circuit breaker internal. A module including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, connecting cables and **Cubicle**BUS[2] terminating resistor; two communications modules can be run at the same time. The second communications module must be ordered separately as 3WA9111-0EC15.					F15

[1] When ordering this option for a circuit breaker or a non-automatic air circuit breaker of the installation type "withdrawable version without guide frame", this must be used as the order option for the guide frame.

[2] For connecting the Ethernet cable, connectors angled 90° to the right are recommended, e.g. PROFINET connector 6GK1901-1BB20-2AA0.

System overview, page 1/28

© Siemens 2025

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WA....-.....-.... -Z

			Order code
ready4COM circuit breakers without communication-capable closing coils/shunt trips			
Note	If this option is used, remote switching directly via communication is no longer possible.		M71
Automatic reset			
• Only possible for circuit breakers with an electronic trip unit			
Automatic reset	Automatic reset of the reclosing lockout after ETU tripping; this option is not required when ordering a circuit breaker with a remote trip alarm reset coil RR.		K01
Circuit breakers with a metering function for connection of an external voltage transformer			
• The circuit breaker is equipped with a metering function. The scope of measured values is the same as for the PMF metering function. Unlike the metering function with internal voltage tap, this version is not certified according to IEC 61557-12. • External voltage transformers are required for the function. • Only possible for circuit breakers of sizes 2 and 3 with ETU600 and A or C in position 9 of the article number.	Scope of measured values Metering function	PMF-I	V61
		PMF-II	V62
		PMF-III	V63
Special approval according to UL 489b in addition to IEC 60947			
DC non-automatic circuit breakers up to 1500 V	Sizes 2, 4-pole, 2000 A with I_{cc} = 20 kA		U09
	Available for:	3WA1220-8AU12-_ _ _ _	
		3WA1220-8AU42-_ _ _ _	
		3WA1220-8AU72-_ _ _ _	
		3WA1220-8CU12-_ _ _ _	
		3WA1220-8CU42-_ _ _ _	
		3WA1220-8CU72-_ _ _ _	

System overview, page 1/28

© Siemens 2025

Accessory options

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

1

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WA....-.....-.... -Z

					Order code
Rear main connections (top and bottom) with same pole spacing of phases (only possible for 4-pole circuit breakers with N pole, left)					
AC circuit breakers/ AC non-automatic circuit breakers and AC guide frames	Sizes 2, 4-pole, 4000 A breaking capacity S/M/H/E				**D04**
	Rear vertical		Standard	N – L1 160 mm L1 – L2 130 mm L2 – L3 160 mm	
			Option	N – L1 130 mm L1 – L2 160 mm L2 – L3 160 mm	
	Rear horizontal		Standard	N – L1 160 mm L1 – L2 130 mm L2 – L3 160 mm	
			Option	N – L1 130 mm L1 – L2 160 mm L2 – L3 160 mm	
Tinned version of the main circuit connections on the guide frame • Only for withdrawable circuit breakers with horizontal connection or flange connection • Cannot be ordered for circuit breakers without a guide frame • The normal delivery time increases to 15 work days					
Tinned connections	Sizes 1, 2, 3 [1]				**D08**
Broadened vertical main circuit connection • Only possible on complete order for a withdrawable circuit breaker or when ordering the guide frame separately					
Main circuit connection	For 3WA1, 4000 A, size 2		Compatible with 3WL1240 for retrofit		**D01**
Circuit breakers without Bluetooth function					
Circuit breakers without Bluetooth function	In this version of the circuit breaker, Bluetooth is not provided. Neither can Bluetooth be retrofitted by replacing the electronic trip unit.				**D80**
Secondary disconnect terminal system • Can be ordered for circuit breakers with guide frames and for guide frames					
Manual connector with screw terminal	With screw connection instead of push-in connection (standard)				**N03**
Manual connector for ring lugs	With screw connection for ring lugs instead of push-in connection (standard)				**N05**
Mechanical operating cycles counters					
Mechanical operating cycles counter, 5-digit	Can be used with all circuit breakers and non-automatic circuit breakers including those without a spring charging motor				**C01**
Signaling switches					
Trip alarm switch	2nd trip alarm switch (S25) 1st trip alarm switch included as standard for circuit breakers. Can only be used with circuit breakers with an electronic trip unit without ready4COM.		1 NO		**K06**

[1] Not available for size 2, breaking capacity C

System overview, page 1/28

© Siemens 2025

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WA....-.....-.... -Z

			Order code
Pushbuttons/disconnect switches/closing lockouts/special packaging/arc chute cover			
Emergency OPEN button	Mushroom pushbutton instead of the mechanical OFF pushbutton		C25
Local electric close on operator panel (S10)	This prevents unauthorized electrical closing from the operator panel. Mechanical closing and remote closing remain possible. Only possible in combination with a closing coil (CC)	With sealing cap	C11
		With CES lock	C12
Motor disconnect switch on operator panel (S12)	This prevents automatic charging of the stored energy mechanism by the spring charging motor		C24
Cardboard packaging with water-repellent coating on corrugated cardboard (moisture protection)			P61
Arc chute cover mounted on the guide frame	Not available for: – Fixed-mounted – Breaking capacity C, E and D – 3600/4000 A size 2		R10
Cover for electronic trip unit	Top cover with safety lock (The lower sealable cover of the rotary coding switch is included in the scope of supply of the circuit breaker)		F40
Internal current sensors without energy core for applications with frequency converters • Used in converter applications with high harmonic components; can only be used for circuit breakers with an ETU600 electronic trip unit – External 24 V DC supply required – Instantaneous undervoltage release UVR required (15th position in article number: L, N, P, Q) – Not possible with instantaneous undervoltage release UVR 380 ... 415 V AC – Not possible with delayed undervoltage release UVR-t (15th position in article number: S, T, U, V, W) – Additionally contains a relay for monitoring the 24 V DC and warning labels – If Z option = K60 is provided, an optional PMF-I to PMF-III metering function is feasible. The accuracy of this metering function is in accordance with the manufacturer's specifications. A certificate according to IEC 61557-12 cannot be provided for this version.			
Internal current sensors	Sizes 1, 2, 3		K60
Mechanical interlocks • Interlocking module with Bowden cable 2 m			
Mechanical interlocks	For fixed-mounted breakers		S55
	For withdrawable circuit breakers with guide frame [1]		R55
	For guide frames (ordered separately)		R56
	For withdrawable circuit breakers (ordered separately)		R57
Locking provisions (for fixed-mounted and withdrawable circuit breakers)			
Locking provisions	Against unauthorized closing from the operator panel of the circuit breaker. The disconnector unit fulfills the requirements for main circuit breakers according to EN 60204-1	Made by CES	S01
		Made by IKON	S03
		Assembly kit FORTRESS or CASTELL [2]	S05
		Assembly kit for padlocks [3]	S07
		Made by RONIS	S08
		Made by PROFALUX	S09
Locking provisions	For charging handle with padlock [3]		S33
Locking provisions (for withdrawable circuit breaker)			
Locking provision to prevent movement of the withdrawable circuit breaker	Safety lock for mounting onto the circuit breaker	Made by CES	S71
		Made by PROFALUX	S75
		Made by RONIS	S76

[1] Not available in combination with R40
[2] Locks must be ordered from the manufacturer.
[3] Padlock not included in the scope of supply.

System overview, page 1/28

© Siemens 2025

Accessory options

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

1

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WA....-.....-.... -Z

		Order code
Locking provisions against unauthorized closing, for withdrawable circuit breakers • The disconnector unit fulfills the requirements for main circuit breakers acc. to EN 60204-1, consisting of a lock in the guide frame, active in the connected position, function is retained when circuit breaker is replaced. • Not possible in combination with order code "R81", "R85" or "R86". • Only possible on complete order for a withdrawable circuit breaker or when ordering the guide frame separately		
Made by CES		**R61**
Made by RONIS		**R68**
Made by PROFALUX		**R60**
Locking mechanisms • R30 and R50 not possible in combination with order code "R81", "R85" or "R86". • R30 and R50 only possible on complete order for a circuit breaker with a guide frame or when ordering the guide frame separately • R40 can only be ordered with the circuit breaker		
For fixed-mounted circuit breakers	To prevent opening of the control cabinet door in ON position	**S30**
For withdrawable circuit breakers	To prevent opening of the control cabinet door in connected position	**R30**
	To prevent activation when the control cabinet door is open [1]	**R40**
	To prevent movement when the control cabinet door is open [2]	**R50**
Locking provisions to prevent movement of the withdrawable circuit breaker in disconnected position • Consisting of Bowden cable and lock in the control cabinet door • Not possible in combination with order code "R30", "R50", "R61", "R68" or "R60" • Only possible for a complete order for a circuit breaker with a guide frame or when ordering the guide frame separately		
Made by CES		**R81**
Made by PROFALUX		**R85**
Made by RONIS		**R86**
Increased degree of protection for installation in a control cabinet		
Door sealing frame for degree of protection IP41		**T40**

[1] Not available in combination with R50 and R55
[2] Not available in combination with R40

System overview, page 1/28

© Siemens 2025

System overview, page 1/28

© Siemens 2025

Accessory options

Further technical specifications

Manual operating mechanism	3WA11 – 3WA13
Switching on/charging energy store	
Maximum force required to operate the hand lever	≤ 230 N
Required number of strokes on the hand lever	9

Closing coils (CC/CC-COM) [1]		3WA11 – 3WA13	
Rated operational voltage			
Rated control supply voltage U_s		24 … 30 V DC	
		48 … 60 V DC	
		110 … 127 V AC/110 … 125 V DC	
		208 … 240 V AC/220 … 250 V DC	
Primary operating range			
Primary operating range (acc. to IEC 60947-2)		75 … 110% U_s	
Extended operating range for battery operation		75 … 126% U_s	
Integrated freewheeling diode		Yes	No
Operation			
Version		100% OP	5% OP
Closing power	AC/DC	60 VA/60 W	300 VA/300 W
Continuous power	AC/DC	8 VA/8 W	–
Minimum command time at 100% U_s		60 ms	60 ms
Maximum command time at 100% U_s		–	2000 ms
Opening time of the circuit breaker at 100% U_s		80 ms	50 ms
Fuse protection of the control circuit at U_s for closing coil			
Fuse gG	24 … 30 V DC	2 A	10 A
	48 … 60 V DC	2 A	10 A
	110 … 127 V AC/110 … 125 V DC	2 A	4 A
	208 … 240 V AC/220 … 250 V DC	2 A	2 A
Automatic circuit breaker with C characteristic	24 … 30 V DC	2 A	10 A
	48 … 60 V DC	2 A	10 A
	110 … 127 V AC/110 … 125 V DC	2 A	4 A
	208 … 240 V AC/220 … 250 V DC	2 A	2 A
Fuse protection of the control circuit at U_s for spring charging motor + closing coil [2]			
Fuse gG	24 … 30 V DC	8 A	10 A
	48 … 60 V DC	8 A	10 A
	110 … 127 V AC/110 … 125 V DC	4 A	4 A
	208 … 240 V AC/220 … 250 V DC	4 A	2 A
Automatic circuit breaker with C characteristic	24 … 30 V DC	8 A	10 A
	48 … 60 V DC	8 A	10 A
	110 … 127 V AC/110 … 125 V DC	4 A	4 A
	208 … 240 V AC/220 … 250 V DC	4 A	2 A

[1] Technical specifications also apply to 3WL see page 1/104
[2] With the same control circuit for the closing coil and spring charging motor

Spring charging motor [1]		3WA11 – 3WA13
Rated operational voltage		
Rated control supply voltage U_s		24 … 30 V DC
		48 … 60 V DC
		110 … 127 V AC/110 … 125 V DC
		208 … 240 V AC/220 … 250 V DC
Primary operating range		
Primary operating range (acc. to IEC 60947-2)		85 … 110% U_s
Extended operating range for battery operation		85 … 126% U_s
Operation		
Closing power	AC/DC	135 VA/135 W
Continuous power	AC/DC	135 VA/135 W
Charging time at 100% U_s		≤ 10 s

[1] Technical specifications also apply to 3WL see page 1/104

System overview, page 1/28

© Siemens 2025

Spring charging motor [1]

		3WA11 – 3WA13
Fuse protection of the control circuit at U_s for spring charging motor		
Fuse gG	24 … 30 V DC	6 A
	48 … 60 V DC	6 A
	110 … 127 V AC/110 … 125 V DC	2 A
	208 … 240 V AC/220 … 250 V DC	2 A
Automatic circuit breaker with C characteristic	24 … 30 V DC	6 A
	48 … 60 V DC	6 A
	110 … 127 V AC/110 … 125 V DC	2 A
	208 … 240 V AC/220 … 250 V DC	2 A

[1] Technical specifications also apply to 3WL see page 1/104

Undervoltage releases UVR and UVR-t [1]

		3WA11 – 3WA13
Rated operational voltage		
Rated control supply voltage U_s: UVR		24 … 30 V DC
		48 … 60 V DC
		110 … 127 V AC/110 … 125 V DC
		208 … 240 V AC/220 … 250 V DC
		380 … 415 V AC
Rated control supply voltage U_s: UVR-t [2]		48 V DC
		60 V DC
		110 … 127 V AC/110 … 125 V DC
		208 … 240 V AC/220 … 250 V DC
		380 … 415 V AC
Operating limits	Operate voltage	< 7% U_s
	Pick-up voltage	85 … 126% U_s
Integrated freewheeling diode		Yes
Closing power	AC/DC	60 VA/50 W
Continuous power	AC/DC	5 VA/5 W
Break time		
U_s = 0 with UVR instantaneous		≤ 80 ms
U_s = 0 with UVR short-time delayed		≤ 200 ms
U_s = 0 with UVR-t delayed		0.2 … 3.2 s
With UVR-t by disconnection at terminals X5.13 and X5.14 (EMERGENCY-STOP circuit) (quick shutdown) [2]		≤ 100 ms (maximum allowable cable length between the terminals)/cable length ≤ 50 m
Fuse protection of the control circuit		
Fuse gG	24 … 30 V DC (UVR)	2 A
	48 … 60 V DC (UVR)	2 A
	48 V DC (UVR-t)	2 A
	60 V DC (UVR-t)	2 A
	110 … 127 V AC/110 … 125 V DC	2 A
	208 … 240 V AC/220 … 250 V DC	2 A
	380 … 415 V AC	2 A
Automatic circuit breaker with C characteristic	24 … 30 V DC (UVR)	4 A
	48 … 60 V DC (UVR)	4 A
	48 V DC (UVR-t)	4 A
	60 V DC (UVR-t)	4 A
	110 … 127 V AC/110 … 125 V DC	4 A
	208 … 240 V AC/220 … 250 V DC	6 A
	380 … 415 V AC	6 A
Automatic circuit breaker with D characteristic	24 … 30 V DC (UVR)	2 A
	48 … 60 V DC (UVR)	2 A
	48 V DC (UVR-t)	2 A
	60 V DC (UVR-t)	2 A
	110 … 127 V AC/110 … 125 V DC	2 A
	208 … 240 V AC/220 … 250 V DC	4 A
	380 … 415 V AC	4 A

[1] Technical specifications also apply to 3WL see page 1/104
[2] The maximum allowable cable length to the actuator for quick shutdown is currently ≤ 50 m (maximum allowable cable length between the terminals ≤ 100 m).

System overview, page 1/28

© Siemens 2025

Accessory options

Further technical specifications

Shunt trip (ST/ST-COM/ST2) [1]		3WA11 – 3WA13	
Rated operational voltage			
Rated control supply voltage U_s		24 ... 30 V DC	
		48 ... 60 V DC	
		110 ... 127 V AC/110 ... 125 V DC	
		208 ... 240 V AC/220 ... 250 V DC	
Primary operating range			
Primary operating range (acc. to IEC 60947-2)		75 ... 110% U_s	
Extended operating range for battery operation		75 ... 126% U_s	
Integrated freewheeling diode		Yes	No
Operation			
Version		100% OP	5% OP
Closing power AC/DC	24 ... 30 V DC, 48 ... 60 V DC	60 VA/60 W	300 VA/300 W
	110 ... 127 V AC/110 ... 125 V DC		
	208 ... 240 V AC/220 ... 250 V DC		
Continuous power AC/DC		8 VA/8 W	–
Minimum command time at 100% U_s		60 ms	60 ms
Maximum command time at 100% U_s		–	2000 ms
Make time of the circuit breaker at 100% U_s		80 ms	50 ms
Fuse protection of the control circuit			
Fuse gG	24 ... 30 V DC	2 A	10 A
	48 ... 60 V DC	2 A	10 A
	110 ... 127 V AC/110 ... 125 V DC	2 A	4 A
	208 ... 240 V AC/220 ... 250 V DC	2 A	2 A
Automatic circuit breaker with C characteristic	24 ... 30 V DC	2 A	10 A
	48 ... 60 V DC	2 A	10 A
	110 ... 127 V AC/110 ... 125 V DC	2 A	4 A
	208 ... 240 V AC/220 ... 250 V DC	2 A	2 A

[1] Technical specifications also apply to 3WL see page 1/104

Remote trip alarm reset coil for mechanical tripped indicator (F7) [1]		3WA11 – 3WA13
Rated operational voltage		
Rated control supply voltage U_s		24 ... 30 V DC
		48 ... 60 V DC
		110 ... 127 V AC/110 ... 125 V DC
		208 ... 240 V AC/220 ... 250 V DC
Primary operating range		
Primary operating range (acc. to IEC 60947-2)		85 ... 110% U_s
Operation		
Power consumption	AC/DC	60 VA/60 W
Minimum command time at 1 × U_s		60 ms
Fuse protection of the control circuit		
Fuse gG	24 ... 30 V DC	2 A
	48 ... 60 V DC	
	110 ... 127 V AC/110 ... 125 V DC	1 A
	208 ... 240 V AC/220 ... 250 V DC	
Automatic circuit breaker with C characteristic	24 ... 30 V DC	2 A
	48 ... 60 V DC	
	110 ... 127 V AC/110 ... 125 V DC	1 A
	208 ... 240 V AC/220 ... 250 V DC	

[1] Technical specifications also apply to 3WL see page 1/104

Contact position-driven auxiliary switches (S1 bis S8) [1]	3WA11 – 3WA13
Type	NO or NC
Contact reliability	From 1 mA at 5 V DC
Rated insulation voltage U_i	660 V AC 50/60 Hz 660 V DC
Rated impulse withstand voltage U_{imp}	6 kV

[1] Technical specifications also apply to 3WL see page 1/104

System overview, page 1/28

© Siemens 2025

Contact position-driven auxiliary switches (S1 bis S8) [1)]

		3WA11 – 3WA13	
Breaking capacity			
Rated operational current I_e	DC12	24 V	10 A
		48 V	8 A
		110 V	3.5 A
		220/240 V	1 A
	DC13	24 V	6 A
		48 V	4 A
		110 V	1.2 A
		220/240 V	0.4 A
		440 V	0.2 A
	AC12	≤ 660 V	10 A
	AC15	≤ 230 V	6 A
		400 V	4 A
		500 V	3 A
		690 V	2 A

[1)] Technical specifications also apply to 3WL see page 1/104

Ready-to-close signaling switches (S20) (acc. to DIN VDE 0630)

		3WA11 – 3WA13	
Type		NO contact	
Contact reliability		From 1 mA at 5 V DC [1)]	
Rated insulation voltage U_i		250 V DC/250 V AC	
Breaking capacity			
Rated operational current I_e	DC12	24 V	5 A
		60 V	0.4 A
		110/127 V	0.4 A
		220/240 V	0.2 A
	DC13	24 V	2.5 A
		60 V	0.22 A
		110/127 V	0.22 A
		220/240 V	0.1 A
	AC12	≤ 240 V	6 A
	A300 AC	≤ 250 V	6 A
	R300 DC	110 ... 125 V	0.22 A
		220 ... 240 V	0.11 A
	AC15	220 V	5 A
		240 V	4 A

[1)] To ensure contact reliability at 1 mA, the contacts are gold-plated. If 1 mA is exceeded, the gold-plating is eroded. As a consequence, contact reliability at 1 mA can no longer be ensured.

Trip alarm switches (S24, S25)

		3WA11 – 3WA12	
1st trip alarm switch S24		CO contact	
2nd trip alarm switch S25		NO contact	
Contact reliability		From 1 mA at 5 V DC [1)]	
Rated insulation voltage U_i		250 V AC 50/60 Hz 250 V DC	
Breaking capacity			
Rated operational current I_e	DC12	24 V	5 A
		60 V	0.4 A
		110/127 V	0.4 A
		220/240 V	0.2 A
	DC13	24 V	2.5 A
		60 V	0.2 A
		110/127 V	0.2 A
		220/240 V	0.1 A
	AC12	≤ 240 V	6 A
	A300 AC	≤ 250 V	6 A
	R300 DC	110 ... 125 V	0.22 A
		220 ... 240 V	0.11 A
	AC15	220 V	5 A
		240 V	4 A

[1)] To ensure contact reliability at 1 mA, the contacts are gold-plated. If 1 mA is exceeded, the gold-plating is eroded. As a consequence, contact reliability at 1 mA can no longer be ensured.

System overview, page 1/28

© Siemens 2025

Accessory options

Further technical specifications

Position signaling switches on guide frame [1]			3WA11 – 3WA13	
Type			Changeover contact (not COM)	
Contact reliability from [1]			1 mA at 5 V DC	
Rated insulation voltage U_i			250 V, 50/60 Hz	
Rated impulse withstand voltage U_{imp}			4 kV	
Connection type				
PSS321			Spring-loaded terminal or push-in (depending on version)	
PSS600			Push-in	
PSS111 COM			• COM contacts: Push-in • Other contacts: Spring-loaded terminal or push-in	
PSS400 COM			Push-in	
Conductor cross-section that can be connected by customer				
Spring-type terminals			1 × 0.2 mm² (AWG 28) ... 1 × 2.5 mm² (AWG 14)	
Push-in solid			1 × 0.5 mm² (AWG 20) ... 1 × 2.5 mm² (AWG 14)	
Push-in finely stranded with end sleeve			1 × 0.5 mm² (AWG 20) ... 1 × 1.5 mm² (AWG 16)	
Breaking capacity				
Rated operational current I_e	Utilization category according to IEC 60947-5	DC12	24 V	5 A
			60 V	0.4 A
			127 V	0.4 A
			220/240 V	0.2 A
		DC13	24 V	2.5 A
			60 V	0.22 A
			127 V	0.22 A
			250 V	0.2 A
		AC12	≤ 240 V AC	6 A
		AC15	250 V	4 A
			220 V	5 A

The COM (X89) contacts may only be connected to the communications module.

[1] To ensure contact reliability at 1 mA, the contacts are gold-plated. If 1 mA is exceeded, the gold-plating is eroded. As a consequence, contact reliability at 1 mA can no longer be ensured.

ETU600		3WA11 – 3WA13
Power supply		
Required power supply design		DC power supply unit with safety requirements according to IEC 61558-1/IEC 62368-1/ANSI/UL 62368-1
Rated control supply voltage U_s	DC	24 V
Primary operating range		U_s ±20%
Power consumption		2.9 W
Max. current consumption		0.12 A
Max. starting current		0.35 A
Overvoltage category		CAT I
Integrated short-circuit protection		Yes
Protected against polarity reversal		Yes

System overview, page 1/28

© Siemens 2025

Summary of power consumption data

Composants	Voltage	Power consumption
ETU600	24 V DC	2.9 W
Closing coil CC/CC-COM 100% OP	24 ... 30 V DC 48 ... 60 V DC 110 ... 127 V AC/110 ... 125 V DC 208 ... 240 V AC/220 ... 250 V DC	60 W 60 W 60 VA/60 W 60 VA/60 W
Closing coil CC/CC-COM 5% OP	24 ... 30 V DC 48 ... 60 V DC 110 ... 127 V AC/110 ... 125 V DC 208 ... 240 V AC/220 ... 250 V DC	300 W 300 W 300 VA/300 W 300 VA/300 W
Shunt trip ST/ST-COM 100% OP	24 ... 30 V DC 48 ... 60 V DC 110 ... 127 V AC/110 ... 125 V DC 208 ... 240 V AC/220 ... 250 V DC	60 W 60 W 60 VA/60 W 60 VA/60 W
Shunt trip ST/ST-COM 5% OP	24 ... 30 V DC 48 ... 60 V DC 110 ... 127 V AC/110 ... 125 V DC 208 ... 240 V AC/220 ... 250 V DC	300 W 300 W 300 VA/300 W 300 VA/300 W
Spring charging motors	24 ... 30 V DC 48 ... 60 V DC 110 ... 127 V AC/110 ... 125 V DC 208 ... 240 V AC/220 ... 250 V DC	135 W 135 W 135 VA/135 W 135 VA/135 W
Remote trip alarm reset coils	24 ... 30 V DC 48 ... 60 V DC 110 ... 127 V AC/110 ... 125 V DC 208 ... 240 V AC/220 ... 250 V DC	60 W 60 W 60 VA/60 W 60 VA/60 W
Undervoltage releases (UVR/UVR-t)	24 V DC 30 V DC 48 V DC 60 V DC 110 ... 127 V AC/110 ... 125 V DC 208 ... 240 V AC/220 ... 250 V DC 380 ... 415 V AC	50 W 50 W 50 W 50 W 60 VA/50 W 60 VA/50 W 60 VA
IOM230	24 V DC	1.25 W
IOM350	24 V DC	1.25 W
COM190/COM150	24 V DC	1.7 W

System overview, page 1/28

© Siemens 2025

Guide frames for AC

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your guide frame, please use our online configurator at
www.siemens.com/lowvoltage/3wa-configurator

1

		5	6	7		8	9	10	11	12		13	14	15	16
3WA8					–		A	A			–				

Guide frames

Size	1						1	
	2						2	
	3						3	

			SZ 1	SZ 2	SZ 3			
Max. rated current $I_{n\,max}$ **Note:** Generate the selection of positions 6, 7 and 8 according to the list below	630 ... 1000 A		■	–	–		1	0
	1250 ... 1600 A		■	–	–		1	6
	2000 A		■	■	–		2	0
	2500 A		■	■	–		2	5
	2000 ... 3200 A		–	■	–		3	2
	4000 A		–	■	■		4	0
	4000 ... 5000 A		–	–	■		5	0
	6300 A		–	–	■		6	3

Short-circuit breaking capacity I_{cu} **Note:** Generate the selection of positions 6, 7 and 8 according to the list below	At 500/690 V	N	■	–	–	55/42 kA	2
		S	■	■	–	66/50 kA	3
		M	■	■	–	85/66 kA	4
		H	■	–	–	100/66 kA	5
			–	■	■	100/85 kA	5
		C	–	■	–	130/100 kA	6
			–	–	■	3-pole: 150/150 kA 4-pole: 130/130 kA	8
	At 690/1000/1150 V	E	■	–	–	80/50 kA/–	8
			–	■	–	85/85/50 kA	8
			–	–	■	3-pole: 150/125/70 kA 4-pole: 130/125/70 kA	8

Number of poles	3-pole	3
	4-pole, Neutral left	4

The following combinations of positions 6, 7 and 8 of the article number are technically feasible

Size	Breaking capacity at $I_{n\,max}$	630 A	800 A	1000 A	1250 A	1600 A	2000 A	2500 A	3200 A	4000 A	5000 A	6300 A
		Representation 6, 7, 8										
1	N	10-2	10-2	10-2	16-2	16-2	20-3	25-3	–	–	–	–
	S	10-3	10-3	10-3	16-3	16-3	20-3	25-3	–	–	–	–
	M	20-4	20-4	20-4	20-4	20-4	20-4	25-4	–	–	–	–
	H	20-5	20-5	20-5	20-5	20-5	20-5	25-5	–	–	–	–
	E	20-8	20-8	20-8	20-8	20-8	20-8	25-8	–	–	–	–
2	S	–	–	–	–	–	20-5	25-5	32-5	40-5	–	–
	M	–	–	–	–	–	20-5	25-5	32-5	40-5	–	–
	H	–	–	–	–	–	20-5	25-5	32-5	40-5	–	–
	E	–	–	–	–	–	20-8	25-8	32-8	40-8	–	–
	C	–	–	–	–	–	32-6	32-6	32-6	–	–	–
3	H	–	–	–	–	–	–	–	–	40-5	50-5	63-5
	E	–	–	–	–	–	–	–	–	50-8	50-8	63-8
	C	–	–	–	–	–	–	–	–	50-8	50-8	63-8

System overview, page 1/28

© Siemens 2025

3WA8 5 6 7 8 – 9 10 A A 11 12 – 13 14 15 16

Connection

			Withdrawable							
			Vertical	Horizontal	Front connection with double hole	Flange	Vertical on top/horizontal at the bottom	Horizontal on top/vertical at the bottom	Flange on top/horizontal at the bottom	Horizontal on top/flange at the bottom
Size 1										
Short-circuit Breaking capacity	N, S, M, E	630 A	1	2	3	4	5	6	7	8
		800 A	1	2	3	4	5	6	7	8
		1000 A	1	2	3	4	5	6	7	8
		1250 A	1	2	3	4	5	6	7	8
		1600 A	1	2	3	4	5	6	7	8
		2000 A	1	2	3	4	5	6	7	8
		2500 A	1	–	–	–	–	–	–	–
	H	630 A	1	2	–	4	5	6	7	8
		800 A	1	2	–	4	5	6	7	8
		1000 A	1	2	–	4	5	6	7	8
		1250 A	1	2	–	4	5	6	7	8
		1600 A	1	2	–	4	5	6	7	8
		2000 A	1	2	–	4	5	6	7	8
		2500 A	1	–	–	–	–	–	–	–
Size 2										
Short-circuit Breaking capacity	S, M, H, E	2000 A	1	2	3	4	5	6	7	8
		2500 A	1	2	3	4	5	6	7	8
		3200 A	1	2	3	4	5	6	7	8
		3600 A	–	–	–	4	–	–	–	–
		4000 A	1 [1)]	2 [2)]	–	–	5	6	–	–
	C	2000 A	1	2	–	4	5	6	7	8
		2500 A	1	2	–	4	5	6	7	7
		3200 A	1	2	–	4	5	6	7	7
Size 3										
Short-circuit Breaking capacity	H	4000 A	1	2	3	4	5	6	–	–
		5000 A	1	2	–	–	5	6	–	–
		6300 A	1	–	–	–	–	–	–	–
	E, C [3)]	4000 A	1	2	–	4	5	6	–	–
		5000 A	1	2	–	–	5	6	–	–
		6300 A	1	–	–	–	–	–	–	–

[1)] The 4000 A vertical connections for the 3WA1 have different dimensions from the 3WL1. Dimensionally compatible connections can be ordered with the additional Z option D01.
[2)] Also available for 4-pole circuit breakers with Z option D04: rear main connections (top and bottom) with same pole spacing of phases (only for N pole, left).
[3)] 130 kA for 4-pole circuit breakers

System overview, page 1/28

© Siemens 2025

Guide frames for AC

**The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your guide frame, please use our online configurator at
www.siemens.com/lowvoltage/3wa-configurator**

	5	6	7	8		9	10	11	12		13	14	15	16
3WA8					–	A	A			–	1			1

Push-in connection [1]	SZ 1, SZ 2, SZ 3	X7, X6, X5	Non-automatic circuit breakers without ready4COM feature	A
		X8, X7, X6, X5	Circuit breakers/non-automatic circuit breakers with ready4COM feature	B
	SZ 2, SZ 3	X9, X8, X7, X6, X5	Including external trip controller ETC600 for circuit breakers with ETU600 LSIG Hi-Z	K

Position signaling switch	Without position signaling switch	A
	Position signaling switch PSS (3 × connected position, 2 × test position, 1 × disconnected position)	C
	Position signaling switch PSS-COM (1 × connected position, 1 × test position, 1 × disconnected position) plus connection to a communications module	G

[1] Conversion to screw connection is possible with Z option N03.

System overview, page 1/28

© Siemens 2025

Guide frames for DC

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your guide frame, please use our online configurator at
www.siemens.com/lowvoltage/3wa-configurator

	5	6	7		8	9	10	11	12		13	14	15	16
3WA8				–		A	U			–	1			1

Guide frames

Size (SZ)	2				2
Max. rated current $I_{n\,max}$	2000 A				2 0
	4000 A				4 0
Short-circuit breaking capacity	D	≤ 600 V DC	25 kA at 600 V DC		1
	E	≤ 1000 V DC	20 kA at 1000 V DC		8
		≤ 1500 V DC	20 kA at 1500 V DC [1]		8
Number of poles	3-pole				3
	4-pole				4
Connection	Withdrawable		Vertical		1
			Horizontal		2
			Front double hole		3
			Flange		4
			Vertical on top/horizontal at the bottom		5
			Horizontal on top/vertical at the bottom		6
			Flange on top/horizontal at the bottom		7
			Horizontal on top/flange at the bottom		8
Secondary disconnect terminal	Push-in connection		X7, X6, X5	Non-automatic circuit breakers	A
			X8, X7, X6, X5	Non-automatic circuit breakers with ready4COM	B
Position signaling switch	Without position signaling switch				A
	Position signaling switch PSS (3 × connected position, 2 × test position, 1 × disconnected position)				C
	Position signaling switch PSS-COM (1 × connected position, 1 × test position, 1 × disconnected position) plus connection to a communications module				G

[1] 1500 V DC applications only possible with 4-pole circuit breakers and breaking capacity E.

System overview, page 1/28

© Siemens 2025

Accessories and spare parts

Accessories for electronic trip unit

Electronic trip unit

- **Note:** The electronic trip unit is supplied without an option plug.
  The option plug must be ordered separately. The range of functions of the ETU600 corresponds to the "Current metering" application package.

Basic protective functions	Article No.
ETU300 LSI/LSIG	3WA9111-0EE32
ETU600 LSI/LSIG with Bluetooth and USB interface	3WA9111-0EE62
ETU600 LSIG Hi-Z with Bluetooth and USB interface	3WA9111-0EE63

Retrofit kit for ETU600 LSI/LSIG new	Artikel-Nr.
Retrofit kit for ETU600 LSI/LSIG for replacing an existing ETU300 in the circuit breaker. **Note:** The ETU600 LSI/LSIG and the option plug must be ordered separately.	3WA9111-0EE83

Spare part battery for ETU600

Article No.
3WA9111-0EE81

Option plug

Basic configuration	Rated current I_n	SZ 1	SZ 2	SZ 3	Article No.	
Protective function LSI: LT, ST, INST					3WA9111-0EB	..
Protective function LSIG: LT, ST, INST, GF (ground-fault protection GFx with extended setting range)					3WA9111-0EX	..
	250 A	■	■	–		02
	315 A	■	■	–		03
	400 A	■	■	–		04
	500 A	■	■	–		05
	630 A	■	■	–		06
	800 A	■	■	■		08
	1000 A	■	■	■		10
	1250 A	■	■	■		12
	1600 A	■	■	■		16
	2000 A	■	■	■		20
	2500 A	■	■	■		25
	3200 A	–	■	■		32
	3600 A new	–	■	■		36
	4000 A	–	■	■		40
	5000 A	–	–	■		50
	6300 A	–	–	■		63

Function packages for ETU600

Protective and alarm functions	Article No.
Ground fault alarm (GF alarm)	3WA9111-0ES01
Directional short-time-delayed short-circuit protection (dST) and reverse power protection (RP) [1]	3WA9111-0ES05

Enhanced protective functions (EPF) [1]	Article No.
Full package with unbalance, voltage, active power, frequency, THD and phase sequence detection	3WA9111-0ES11
Phase unbalance current and phase unbalance voltage	3WA9111-0ES12
Undervoltage and overvoltage	3WA9111-0ES13
Active power import and active power export	3WA9111-0ES14
Underfrequency and overfrequency	3WA9111-0ES15
Total harmonic distortion for current and voltage	3WA9111-0ES16
Phase sequence detection	3WA9111-0ES17

Functional expansions	Article No.
Second protection parameter set	3WA9111-0ES21
Waveform memory	3WA9111-0ES24
Condition monitoring (retrofitting only possible for ETU600 with ready4COM application package) new	3WA9111-0ES25

Extended metering function	Article No.
Upgrade to metering values of the metering function PMF-II Basic Power Monitoring (metering values, see catalog page 1/25)	3WA9111-0ES52
Upgrade to metering values of the metering function PMF-III Advanced Power Monitoring (metering values, see catalog page 1/25)	3WA9111-0ES53

Upgrade of properties following replacement of ETU600 [2] new	Article No.
The functionality of the ETU600 corresponds to the PMF-II application package on the day the circuit breaker is delivered	3WA9111-0ES82
The functionality of the ETU600 corresponds to the PMF-III application package on the day the circuit breaker is delivered	3WA9111-0ES83

[1] Requires an internal voltage tap and a voltage tap module
[2] All metering values from the metering function comply with the manufacturer's accuracy specifications

System overview, page 1/28

© Siemens 2025

Accessories for electronic trip unit

Licenses to activate test function in SENTRON Powerconfig software

Version	Article No.
Standard test license for testing the protective functions of SENTRON circuit breakers. The license is time-limited to 365 days.	7KN2720-0CE00-1YC1
Advanced test license for testing the protective functions and the enhanced protective functions (EPF) of the SENTRON circuit breakers. The license is time-limited to 365 days.	7KN2720-0CE00-2YC1

Upgrading to ready4COM feature through BSS200 breaker status sensor for ETU600

Version	Article No.
• Gathers information about the statuses of the circuit breaker via signaling switches and transmits it to the **Cubicle**BUS[2] • Controls the communication-capable CC-COM closing coil and the ST-COM shunt trip in a circuit breaker with the ready4COM feature • The BSS200 breaker status sensor is fitted in every circuit breaker with ETU600 of the ready4COM application package and with the PMF-I to PMF-III metering function	3WA9111-0EC40

External current sensors for the N conductor

Version	Size	Article No.
For mounting on busbar	1	3WA9111-0AA21
	2	3WA9111-0AA22
	3	3WA9111-0AA23
For busbar connection DIN connection	1	3WA9111-0AA31
	2	3WA9111-0AA32
	3	3WA9111-0AA33

Sealable and lockable covers

- The scope of supply includes both the top cover with safety lock and the sealable bottom cover of the rotary coding switches.

Accessory for	Article No.
ETU300	3WA9111-0EM21
ETU600	3WA9111-0EM22

Adapter for connecting the ETU300 to the TD400



Version	Article No.
Via the adapter, the ETU300 can be connected to the TD400 to supply it with an external voltage. There is no parameterization or documentation option via SENTRON Powerconfig. **Note:** The TD400 test device, including description and article number, can be found in the chapter Molded case circuit breakers, see page 2/69	3VW9011-0AT46

Automatic reset of the reclosing lockout

Version	Article No.
Spare part for option K01 or for retrofitting	3WA9111-0EM31

Remote trip alarm reset coils [1)]

- For mechanical tripped indicator
- Including automatic reset of the reclosing lockout 3WA9111-0EM31

Voltage	Article No.
24 ... 30 V DC	3WA9111-0EM42
48 ... 60 V DC	3WA9111-0EM44
110 ... 127 V AC/110 ... 125 V DC	3WA9111-0EM45
208 ... 240 V AC/220 ... 250 V DC	3WA9111-0EM46

Second tripping solenoid (F6) with reclosing lockout

Version	Article No.
For external control via the external trip controller ETC600, including the necessary parts for the secondary disconnect terminal	3WA9111-0EM61

[1)] Article numbers also apply to 3WL see page 1/109

System overview, page 1/28

© Siemens 2025

Accessories and spare parts

Accessories for electronic trip unit

External trip controller ETC600

Version	Article No.
Including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, adapter for mounting on DIN rail	3WA9111-0EM62

Locking provisions and interlocks

Interlocking sets for mechanical Open/Close



- Consisting of two transparent covers each for sealing or for attaching padlocks (padlocks not included in scope of supply)
- Cover with 6.35 mm hole (for tool actuation)
- Lock mount for safety lock for key operation

Version	Article No.
Without safety lock	3WA9111-0BA21
Made by CES	3WA9111-0BA22
Made by IKON	3WA9111-0BA23

Locking provision against unauthorized closing from the operator panel

- The disconnector unit fulfills the requirements for main circuit breakers acc. to EN 60204-1
- Spare part for options S01 to S09

Type	Scope of supply	Article No.
Made by CES	Locks, cylinders and keys included (S01)	3WA9111-0BA35
Made by IKON	Locks, cylinders and keys included (S03)	3WA9111-0BA36
Assembly kit FORTRESS [1] or CASTELL [2]	Without locks, cylinders or keys (S05)	3WA9111-0BA31
Made by KIRK-Key [3]	Without locks, cylinders or keys (S06)	3WA9111-0BA33
Assembly kit for padlocks	Without padlock (S07)	3WA9111-0BA37
Made by RONIS	Locks, cylinders and keys included (S08)	3WA9111-0BA32
Made by PROFALUX	Locks, cylinders and keys included (S09)	3WA9111-0BA34

Locking provision against unauthorized closing of the withdrawable circuit breaker

- The disconnector unit fulfills the requirements for main circuit breakers acc. to EN 60204-1
- Consisting of lock in the guide frame, active in connected position, function is retained when circuit breaker is replaced
- Spare part for option R60, R61, R68

Type	Scope of supply	Article No.
Made by CES	Locks, cylinders and keys included	3WA9111-0BA51
Made by IKON	Locks, cylinders and keys included	3WA9111-0BA53
Made by KIRK-Key [3]	Without locks, cylinders or keys	3WA9111-0BA57
Made by RONIS	Locks, cylinders and keys included	3WA9111-0BA58
Made by PROFALUX	Locks, cylinders and keys included	3WA9111-0BA50

Locking provisions for charging handle with padlock

Version	Scope of supply	Article No.
Spare part for S33	Without padlock	3WA9111-0BA71

Locking provision to prevent movement of the withdrawable circuit breaker

- Safety lock for mounting onto the circuit breaker
- Spare part for option S71, S75, S76

Type	Scope of supply	Article No.
Made by CES	Locks, cylinders and keys included	3WA9111-0BA73
Made by IKON	Locks, cylinders and keys included	3WA9111-0BA75
Made by PROFALUX	Locks, cylinders and keys included	3WA9111-0BA76
Made by RONIS	Locks, cylinders and keys included	3WA9111-0BA77
Made by KIRK-Key [3]	Without locks, cylinders or keys	3WA9111-0BA80

Locks, cylinders and keys must be ordered from the manufacturer:

[1] Suitable lock FORTRESS CLIS X005.
[2] Suitable lock CASTELL FS2.
[3] Suitable cylinder lock KIRK Key C 900-301.

System overview, page 1/28

© Siemens 2025

Locking provisions and interlocks

Interlocking systems

- 2 of the same keys for 3 circuit breakers
- Locking provision in OFF position
- Lock in the operator panel
- A maximum of 2 circuit breakers can be switched on

Type	Article No.
Made by CES	3WA9111-0BA43

Locking mechanisms to prevent movement of the withdrawable circuit breakers in the disconnected position

- Consisting of Bowden cable and the breaker mechanism in the control cabinet door
- Spare part for option R81, R85, R86
- **Note:** Not possible in combination with "Locking mechanism to prevent opening of the control cabinet door" (order code "R30") or "Locking mechanism to prevent movement with the control cabinet door open" (order code "R50")

Type	Article No.
Made by CES	3WA9111-0BA81
Made by IKON	3WA9111-0BA82
Made by PROFALUX	3WA9111-0BA83
Made by RONIS	3WA9111-0BA84

Locking mechanisms to prevent opening of the control cabinet door when the circuit breaker is closed

- Defeatable
- **Note:** Not possible in combination with "Locking mechanisms to prevent movement of the withdrawable circuit breakers in the disconnected position" (order codes "R81", "R85" or "R86").

Version		Article No.
Spare part for option S30	Fixed-mounted circuit breaker	3WA9111-0BB12
Spare part for option R30	Guide frames	3WA9111-0BB13

Locking mechanisms to prevent movement when the control cabinet door is open



- Mounted on guide frame
- **Note:** Not possible in combination with "Locking mechanisms to prevent movement of the withdrawable circuit breakers in the disconnected position" (order codes "R81", "R85" or "R86").

Version	Article No.
Spare part for option R50	3WA9111-0BB15

Mechanical interlocks

- With Bowden cable 2000 mm (one required for each circuit breaker)

Type	Circuit breaker and guide frame when ordered separately	Spare part for	Article No.
Fixed-mounted circuit breaker	–	Option S55	3WA9111-0BB21
Module for withdrawable circuit breakers with guide frame	–	Option R55 [1]	3WA9111-0BB22
Module for guide frame	✓	Option R56	3WA9111-0BB23
Module for withdrawable circuit breaker	✓	Option R57	3WA9111-0BB24
Adapter for size 3 withdrawable circuit breaker	✓	–	3WA9111-0BB25

Coupling on the circuit breaker for mutual interlocking with Bowden cable

- Can be used in all circuit breakers

	Article No.
	3WA9111-0BB31

Bowden cable for mutual mechanical interlocking

Length	Article No.
2000 mm	3WA9111-0BB41
3000 mm	3WA9111-0BB42
4500 mm	3WA9111-0BB43

[1] Not available in combination with R40

System overview, page 1/28

© Siemens 2025

Accessories and spare parts

Indicators and control elements

Ready-to-close signaling switches (S20)

Version	Article No.
Spare part for signaling switch installed as standard	3WA9111-0AH01

1st trip alarm switch (S24)

Version	Article No.
Spare part for signaling switch installed as standard	3WA9111-0AH02

2nd trip alarm switch (S25)

- Can only be used with a circuit breaker with an electronic trip unit without ready4COM
- The 1st trip alarm switch (1 changeover contact) is installed in every circuit breaker with a trip unit as standard

Version	Contacts	Article No.
Spare part for option K06	1 NO	3WA9111-0AH03

Mechanical operating cycles counter (5-digit)

Version	For circuit breakers/non-automatic circuit breakers	Article No.
Spare part for option C01	With manual operating mechanism	3WA9111-0AH04
	With spring charging motor	3WA9111-0AH05

Spring charge signaling switch (S21)

- Standard when a spring charging motor is installed to charge the stored energy mechanism
- When a spring charging motor is retrofitted, the spring charge signaling switch can also be retrofitted

Contacts	Article No.
1 NO	3WA9111-0AH06

Position signaling switch for withdrawable circuit breakers

- All conventional contacts are implemented as changeover contacts.

Contacts	Version	Article No.
PSS321	3 × connected position, 2 × test position, 1 × disconnected position	3WA9111-0AH11
PSS111-COM	1 × connected position, 1 × test position, 1 × disconnected position and option for connection to a communications module COM (Signal: “disconnected position” and “absent”)	3WA9111-0AH12
PSS400-COM	4 × connected position and option for connection to a communications module COM (Signal: “disconnected position” and “absent”)	3WA9111-0AH13
PSS600	6 × connected position	3WA9111-0AH14
PSS111	1 × connected position, 1 × test position, 1 × disconnected position	3WA9111-0AH15

Local electric close (S10) for operator panel

- Scope of supply: Button + wiring
- Not possible with motor disconnect switch
- **Note:** Possible only for circuit breakers with closing coil

Version	Article No.
With sealing cap, spare part for option C11	3WA9111-0AH21
With CES assembly kit, spare part for option C12	3WA9111-0AH22
With IKON assembly kit	3WA9111-0AH23

Motor disconnect switch (S12)

- Mounting onto operator panel
- Only in combination with the spring charging motor for charging the stored energy mechanism
- Not available in combination with local electric close

Version	Article No.
Spare part for option C24	3WA9111-0AH24

Emergency OPEN button

- Mushroom pushbutton instead of local mechanical open

Version	Article No.
Spare part for option C25	3WA9111-0AH25

System overview, page 1/28

© Siemens 2025

Secondary disconnect terminals for circuit breakers and guide frames

- For size 1, up to 4 secondary disconnect terminal blocks are possible; for sizes 2 and 3, up to 5 secondary disconnect terminal blocks are possible
- Circuit breakers and non-automatic circuit breakers with secondary disconnect terminal blocks are supplied from the factory:
  - Non-automatic circuit breakers with 3 blocks
  - Non-automatic circuit breakers with ready4COM feature with 4 blocks
  - Circuit breakers with ETU600 LSI or LSIG with 4 blocks
  - Circuit breakers with ETU600 LSIG-HiZ with 5 blocks

Secondary disconnect terminal

	Version	Type	Article No.
	Base part (1)		3WA9111-0AB01
	1000 V extension [1]		3WA9111-0AB02
	Manual connector (2)	Screw connection	3WA9111-0AB03
		Push-in connection	3WA9111-0AB04
		Ring lug connection	3WA9111-0AB05
	Coding kits (3)	For secondary disconnect terminal blocks X5 to X9 for fixed-mounted circuit breakers	3WA9111-0AB07
	Sliding contact module (4)	For guide frames	3WA9111-0AB08
	Blanking block		3WA9111-0AB12

For a complete secondary disconnect terminal block, you must order:
Fixed-mounted version: (1) + (2) + (3)
Withdrawable version: (1) + (4) + (2)

[1] Secondary disconnect terminal for circuit breakers with breaking capacity C and E must be ordered separately

Auxiliary releases

Closing coil (CC)/shunt trip (ST) [1]

- Suitable for uninterrupted duty

Version	Voltage	Article No.
100% OP Switching time ≤ 80 ms	24 ... 30 V DC	3WA9111-0AD02
	48 ... 60 V DC	3WA9111-0AD04
	110 ... 127 V AC/110 ... 125 V DC	3WA9111-0AD05
	208 ... 240 V AC/220 ... 250 V DC	3WA9111-0AD06

Closing coil (CC-COM)/shunt trip (ST-COM)

- Suitable for uninterrupted duty

Version	Voltage	Article No.
For circuit breakers and non-automatic circuit breakers with the ready4com feature 100% OP Switching time ≤ 80 ms Switching time via COM ≤ 120 ms	24 ... 30 V DC	3WA9111-0AD32
	48 ... 60 V DC	3WA9111-0AD34
	110 ... 127 V AC/110 ... 125 V DC	3WA9111-0AD35
	208 ... 240 V AC/220 ... 250 V DC	3WA9111-0AD36

[1] Article numbers also apply to 3WL see page 1/114

System overview, page 1/28

© Siemens 2025

Accessories and spare parts

Auxiliary release

Closing coils (CC) [1]

- For momentary duty, with cut-off switch S15 (NC)

Version	Voltage	Article No.
5% OP Switching time 50 ms	24 ... 30 V DC	3WA9111-0AD12
	48 ... 60 V DC	3WA9111-0AD14
	110 ... 127 V AC/110 ... 125 V DC	3WA9111-0AD15
	208 ... 240 V AC/220 ... 250 V DC	3WA9111-0AD16

Shunt trips (ST) [1]

- For momentary duty, with cut-off switch S14 (NO)

Version	Voltage	Article No.
5% OP Switching time 50 ms	24 ... 30 V DC	3WA9111-0AD22
	48 ... 60 V DC	3WA9111-0AD24
	110 ... 127 V AC/110 ... 125 V DC	3WA9111-0AD25
	208 ... 240 V AC/220 ... 250 V DC	3WA9111-0AD26

Capacitor trip device

- For shunt trips
- Storage time 5 min
- Also suitable for 3VL, 3VA, 3WL and 3WN circuit breakers
- **Note:** Rated control supply voltage must match the rated control supply voltage of the shunt trips.

Rated control supply voltage/rated operational voltage		Article No.
50/60 Hz AC	DC	
208 ... 240 V	220 ... 250 V	3WA9111-0AD81

Undervoltage release (UVR) [1]

Version	Voltage	Article No.
Instantaneous ≤ 0.08 s (UVR) and short-time delayed ≤ 0.2 s	24 ... 30 V DC	3WA9111-0AE02
	48 ... 60 V DC	3WA9111-0AE04
	110 ... 127 V AC/110 ... 125 V DC	3WA9111-0AE05
	208 ... 240 V AC/220 ... 250 V DC	3WA9111-0AE06
	380 ... 415 V AC	3WA9111-0AE07
Delayed (UVR-t) [2] adjustable delay 0.2 ... 3.2 s	48 V DC	3WA9111-0AE13
	60 V DC	3WA9111-0AE14
	110 ... 127 V AC/110 ... 125 V DC	3WA9111-0AE15
	208 ... 240 V AC/220 ... 250 V DC	3WA9111-0AE16
	380 ... 415 V AC	3WA9111-0AE17

[1] Article numbers also apply to 3WL see page 1/114
[2] The maximum allowable cable length to the actuator for quick shutdown is currently ≤ 50 m (maximum allowable cable length between the terminals ≤ 100 m).

Operating mechanism [1]

Spring charging motor to charge the stored energy mechanism

Voltage	Article No.
24 ... 30 V DC	3WA9111-0AF02
48 ... 60 V DC	3WA9111-0AF04
110 ... 127 V AC/110 ... 125 V DC	3WA9111-0AF05
208 ... 240 V AC/220 ... 250 V DC	3WA9111-0AF06

[1] Article numbers also apply to 3WL see page 1/114

Auxiliary contacts

Auxiliary switches (AUX)

Contacts	Article No.
2 NO + 2 NC	3WA9111-0AG01
2 NO	3WA9111-0AG02
1 NO + 1 NC	3WA9111-0AG03

System overview, page 1/28

© Siemens 2025

Door sealing frame, protective cover

Door sealing frame

Version	Article No.
Spare part for option T40	3WA9111-0AP01

Protective covers IP55

- Cannot be used in conjunction with door sealing frames
- Hood removable and can be opened on both sides

Article No.
3WA9111-0AP03

Arc chute, arc chute cover

Arc chute

Voltage	Size	Breaking capacity		Article No.
690 V AC	1	N, S		3WA9111-0AS01
		M		3WA9111-0AS02
	2	S, M, H		3WA9111-0AS10
		C		3WA9111-0AS11
	3	H		3WA9111-0AS17
		C		3WA9111-0AS18
1000 V AC	1	E	For fixed-mounted breakers	3WA9111-0AS04
			For withdrawable circuit breakers	3WA9111-0AS05
	2	E		3WA9111-0AS12
	3	E		3WA9111-0AS18
600 V DC	2	D		3WA9111-0AS13
1000 V DC	2	E		3WA9111-0AS14

Arc chute cover



- Parts kit for guide frame
- Spare part for option R10
- Not available for:
  - Breaking capacity C, D and E
  - 4000 A size 2

Number of poles	Size	Article No.
3-pole	1	3WA9111-0AS31
	2	3WA9111-0AS32
	3	3WA9111-0AS33
4-pole	1	3WA9111-0AS41
	2	3WA9111-0AS42
	3	3WA9111-0AS43

Coding for withdrawable version

Coding for withdrawable version

- Variant coding by the customer with 36 coding options

Size	Article No.
1, 2	3WA9111-0AR11
3	3WA9111-0AR12

System overview, page 1/28

© Siemens 2025

Accessories and spare parts

Grounding connection

Grounding connection between the guide frame and the circuit breaker

- Up to 30 kA or 60 kA ground-fault current
- 2 modules must be used for up to 60 kA ground-fault current

Contact module	Size	Number of poles	Article No.
For guide frames	1, 2 [1]		3WA9111-0BG01
	3		3WA9111-0BG02
For withdrawable circuit breakers	1	3-pole	3WA9111-0BG11
		4-pole	3WA9111-0BG21
	2	3-pole [1]	3WA9111-0BG12
		4-pole [1]	3WA9111-0BG22
	3	3-pole [2]	3WA9111-0BG13
		4-pole [2]	3WA9111-0BG23

[1] Cannot be used for size 2 with breaking capacity C and size 2, 4000 A.
[2] Not for breaking capacity E

Support bracket

Support bracket

- For mounting fixed-mounted circuit breakers on vertical plane
- Only for sizes 1 and 2 (1 set = 2 units)

Article No.
3WA9111-0BB50

Modules of the **Cubicle**BUS²

COM190 PROFINET IO/Modbus TCP communications module [1]

Version	Article No.
Including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, adapter for mounting on DIN rail, connecting cables and **Cubicle**BUS² terminating resistor	3WA9111-0EC13

COM150 communications module Modbus RTU

Version	Article No.
Including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, adapter for mounting on DIN rail, connecting cables and **Cubicle**BUS² terminating resistor	3WA9111-0EC15

IOM230 digital input/output module (2 inputs and 3 outputs)

Version	Article No.
Including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, adapter for mounting on DIN rail, connecting cables and terminating resistor for **Cubicle**BUS² • Type of output contact: NO • Maximum uninterrupted current of an output at 110 ... 230 V AC: 0.2 A	3WA9111-0EC11

IOM350 digital input/output module (3 inputs and 5 outputs)

Version	Article No.
For mounting on DIN rail, including connecting cables and terminating resistor for **Cubicle**BUS² • Type of output contact: CO • Maximum uninterrupted current of an output at 110 ... 230 V AC: 10 A	3WA9111-0EC12

Terminating resistor for CubicleBUS²

Version	Article No.
For **Cubicle**BUS² on the last module	3WA9111-0EC50

[1] For connecting the Ethernet cable, connectors angled 90° to the right are recommended, e.g. PROFINET connector 6GK1901-1BB20-2AA0.

System overview, page 1/28

© Siemens 2025

Modules of the **Cubicle**BUS²

Adapters

Version	Article No.
For mounting the modules of the **Cubicle**BUS² on the secondary disconnect terminal system of the circuit breaker	3WA9111-0EC60
For mounting the modules of the **Cubicle**BUS² on DIN rail	3WA9111-0EC61

ZSI200 Zone-selective interlocking module

Version	Article No.
Including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, adapter for mounting on DIN rail, connecting cables and terminating resistor for **Cubicle**BUS²	3WA9111-0EC10

Internal voltage tap

Set of components for conversion of an existing internal voltage tap on the main conducting paths

Conversion	Circuit breaker	Size	Article No.
From bottom to top	3-pole	1 [1]	3WA9111-0EK11
		2	3WA9111-0EK12
		3	3WA9111-0EK13
	4-pole	1 [1]	3WA9111-0EK21
		2	3WA9111-0EK22
		3	3WA9111-0EK23
From top to bottom	3-pole	1	3WA9111-0EK31
		2	3WA9111-0EK32
		3	3WA9111-0EK33
	4-pole	1	3WA9111-0EK41
		2	3WA9111-0EK42
		3	3WA9111-0EK43

Retrofit of the internal voltage tap on the lower main conducting paths



For breaking capacity	Set for circuit breaker	Size	Article No.
N, S, M, H, C with VTM680 voltage tap module, with power supply of ETU600	3-pole	1	3WA9111-0EK51
		2	3WA9111-0EK52
		3	3WA9111-0EK53
	4-pole	1	3WA9111-0EK61
		2	3WA9111-0EK62
		3	3WA9111-0EK63
E with VTM640 voltage tap module	3-pole	1	3WA9111-0EK55
		2	3WA9111-0EK56
		3	3WA9111-0EK57
	4-pole	1	3WA9111-0EK65
		2	3WA9111-0EK66
		3	3WA9111-0EK67

Retrofit kit to connect an external voltage transformer

Size	Article No.
2, 3 including VTM640 voltage tap module and the necessary connection components	3WA9111-0EK81

Voltage tap module

Version	For breaking capacity	Article No.
VTM680, with power supply of ETU600 [2]	N, S, M, H, C	3WA9111-0EM12
VTM640	E	3WA9111-0EM11

[1] For 3WA1 circuit breakers (size 1, fixed-mounted) with front connections at the bottom, modification from voltage tap at the bottom to voltage tap at the top is not permissible.
[2] When replacing the VTM680 voltage tap module in an 3WA air circuit breaker with an ID number lower than ID No. OE/230101500000, the internal cable harness of the voltage tap must also be replaced. In this case, the accessory "Retrofit of the internal voltage tap on the lower main conducting paths" is required.

System overview, page 1/28

© Siemens 2025

Accessories and spare parts

Main conductor connections, fixed-mounted versions

Front-accessible main connections according to DIN 43673, double hole for main connection at top

Size	Breaking capacity | Rated current I_n	Article No.
1	N, S | ≤ 1000 A AC	3WA9111-0AL11
	N, S | 1250 ... 2000 A AC; M, E | ≤ 2000 A AC	3WA9111-0AL12
2	S, M, H, E | 2000 A AC; D, E | ≤ 2000 A DC	3WA9111-0AL21
	S, M, H, E | 2500 A AC	3WA9111-0AL22
	S, M, H, E | 3200 A AC; D, E | 4000 A DC	3WA9111-0AL23
3	4000 A AC (up to a max. short-circuit current of 100 kA)	3WA9111-0AL31

Front-accessible main connections according to DIN 43673, double hole for main connection at bottom

Size	Breaking capacity | Rated current I_n	Article No.
1 [1]	N, S | ≤ 1000 A AC	3WA9111-0AL13
	N, S | 1250 ... 2000 A AC; M, E | ≤ 2000 A AC	3WA9111-0AL14
2	S, M, H, E | 2000 A AC; D, E | ≤ 2000 A DC	3WA9111-0AL24
	S, M, H, E | 2500 A AC	3WA9111-0AL25
	S, M, H, E | 3200 A AC; D, E | 4000 A DC	3WA9111-0AL26
3	4000 A AC (up to a max. short-circuit current of 100 kA)	3WA9111-0AL32

Rear vertical main connections

Size	Breaking capacity | Rated current I_n	Article No.
1	N, S, M, E | ≤ 2000 A AC [2]	3WA9111-0AM11
	N, S, M, E | 2500 A AC	3WA9111-0AM12
2	S, M, H, C, E | ≤ 3200 A AC [3]	3WA9111-0AM21
3	H, C, E | ≤ 6300 A AC	3WA9111-0AM33

Rear horizontal connection sets [4]

Size	Breaking capacity | Rated current I_n | Number of poles	Article No.
2	S, M, H, E | 4000 A, 3-pole	3WA9111-0AX28
	S, M, H, E | 4000 A, 4-pole	3WA9111-0AX30
	S, M, H, E | 4000 A, 4-pole (Spare part for Z option D04)	3WA9111-0AX32

[1] For 3WA1 circuit breakers (size 1, fixed-mounted) with front connections at the bottom, modification from voltage tap at the bottom to voltage tap at the top is not permissible.
[2] In the case of vertical connection size 1 with breaking capacity N and S, up to 1000 A one 3WA9111-0AM11 vertical connection is required for each connection, from 1250 A to 2000 A or with breaking capacity M or E two 3WA9111-0AM11 vertical connections are required for each connection.
[23] In the case of vertical connection size 2, up to 2500 A one 3WA9111-0AM21 vertical connection is required for each connection for breaking capacity S, M, H, E, D, for 3200 A and always for breaking capacity C, two 3WA9111-0AM21 vertical connections are required for each connection
[4] A set contains top and bottom terminals and is approved only as a spare part for circuit breakers with the following article numbers: 3WL1240-3xxx2-xxxx, 3WL1240-4xxx2-xxxx, 3WL1240-5xxx2-xxxx 3WL1240-8xxx2-xxxx

Main conductor connections for withdrawable units

Front-accessible main connections according to DIN 43673, double hole at top or at bottom [1]

Size	Breaking capacity | Rated current I_n	Article No.
1	N, S | ≤ 1000 A AC	3WA9111-0AN11
	N, S | 1250 ... 2000 A AC; M, E | ≤ 2000 A AC	3WA9111-0AN12
2	N, S | 1250 ... 2000 A AC; M, E | ≤ 2000 A AC	3WA9111-0AN21
	S, M, H, E | 2500 A AC	3WA9111-0AN22
	S, M, H, E | 3200 A AC; D, E | 4000 A DC	3WA9111-0AN23
3	H | 4000 A AC	3WA9111-0AN31

Supports for front-accessible main connections according to DIN 43673

Number of poles	Size	Article No.
3-pole, set for 3 bars, top or bottom	1	3WA9111-0AN81
	2	3WA9111-0AN82
	3	3WA9111-0AN83
4-pole, set for 4 bars, top or bottom	1	3WA9111-0AN84
	2	3WA9111-0AN85
	3	3WA9111-0AN86

Rear vertical main connections

Size	Breaking capacity | Rated current I_n	Article No.
1	N, S | ≤ 1000 A AC	3WA9111-0AV11
	N, S | 1250 ... 2000 A AC	3WA9111-0AV12
2	S, M, H, E | 2000 A AC; D, E | ≤ 2000 A DC [2]	3WA9111-0AV21
	S, M, H, E | 2500 A AC [2]	3WA9111-0AV22
	S, M, H, E | 3200 A AC; D, E | 4000 A DC [2]	3WA9111-0AV23
3	H, C, E | ≤ 5000 A AC	3WA9111-0AV31

[1] When using front-accessible main connections (withdrawable circuit breakers) supports are required
[2] Not for circuit breakers with very high breaking capacity C

System overview, page 1/28

© Siemens 2025

Main conductor connections for withdrawable units

Rear horizontal main connections

Size	Breaking capacity | Rated current I_n	Article No.
1	N, S | ≤ 1000 A AC	3WA9111-0AX11
	N, S | 1250 ... 2000 A AC	3WA9111-0AX12
2	S, M, H, E | 2000 A AC; D, E | ≤ 2000 A DC [1]	3WA9111-0AX21
	S, M, H, E | 2500 A AC [1]	3WA9111-0AX22
	S, M, H, E | 3200 A AC; D, E | 4000 A DC [1]	3WA9111-0AX23
3	H, C, E | ≤ 5000 A AC	3WA9111-0AX31

Rear horizontal main connections, set new

Number of poles	Size	Breaking capacity | Rated current I_n	Article No.
3-pole	2	S, M, H, E | 4000 A AC	3WA9111-0AX25

Connecting flange

Size	Breaking capacity | Rated current I_n	Article No.
1	N, S | ≤ 1000 A AC	3WA9111-0AW11
	N, S | 1250 ... 2000 A AC	3WA9111-0AW12
2	S, M, H, E | 2000 A AC; D, E | ≤ 2000 A DC	3WA9111-0AW21
	S, M, H, E | 2500 A AC	3WA9111-0AW22
	S, M, H, E | 3200 A AC; D, E | 4000 A DC	3WA9111-0AW23
	C | 2000 ... 3200 A	3WA9111-0AW24
3	H | 4000 A AC	3WA9111-0AW31
	C, E | 4000 A AC	3WA9111-0AW32

[1] Not for circuit breakers with very high breaking capacity C

Conversion kit

Conversion kit for converting fixed-mounted circuit breakers into withdrawable circuit breakers

- Guide frames and sliding contact modules must be ordered separately
- Conversion from fixed-mounted to withdrawable circuit breakers is not possible for 3WA circuit breakers with breaking capacity C and breaking capacity E

Number of poles	Size	Article No.
3-pole	1	3WA9111-0BC11
	2	3WA9111-0BC12
	3	3WA9111-0BC13
4-pole	1	3WA9111-0BC14
	2	3WA9111-0BC15
	3	3WA9111-0BC16

System overview, page 1/28

© Siemens 2025

Accessories and spare parts

Main contact elements

Main contact elements for AC circuit breakers

- **Notes:**
  - To be ordered only once for each circuit breaker
  - On the following circuit breakers, the main contacts can only be replaced at the factory:
    3WA1 size 1 breaking capacity M, H and E
    3WA1 size 2 breaking capacity C
    3WA1 size 3 breaking capacity C and E

Number of poles	Size	Breaking capacity	Rated current I_n	Article No.
3	1	N	≤ 1000 A	3WA9111-0AQ01
			1250 A	3WA9111-0AQ02
			1600 A	3WA9111-0AQ04
		S	≤ 1000 A	3WA9111-0AQ03
			1250 ... 1600 A	3WA9111-0AQ04
		N, S	2000 ... 2500 A	3WA9111-0AQ05
	2	S, M, H, E	2000 A	3WA9111-0AQ08
			2500 A	3WA9111-0AQ11
			3200 A	3WA9111-0AQ13
			4000 A	3WA9111-0AQ15
	3	H	4000 A	3WA9111-0AQ20
			5000 ... 6300 A	3WA9111-0AQ22
4	1	N	≤ 1000 A	3WA9111-0AQ51
			1250 A	3WA9111-0AQ52
			1600 A	3WA9111-0AQ54
		S	≤ 1000 A	3WA9111-0AQ53
			1250 ... 1600 A	3WA9111-0AQ54
		N, S	2000 ... 2500 A	3WA9111-0AQ55
	2	S, M, H, E	2000 A	3WA9111-0AQ58
			2500 A	3WA9111-0AQ61
			3200 A	3WA9111-0AQ63
			4000 A	3WA9111-0AQ65
	3	H	4000 A	3WA9111-0AQ70
			5000 ... 6300 A	3WA9111-0AQ72

Main contact elements for DC non-automatic circuit breakers



- **Note:** To be ordered only once for each circuit breaker

Number of poles	Size	Breaking capacity	Rated current I_n	Article No.
3	2	D, E	1000/2000 A	3WA9111-0AQ17
			4000 A	3WA9111-0AQ18
4	2	D, E	1000/2000 A	3WA9111-0AQ67
			4000 A	3WA9111-0AQ68

System overview, page 1/28

© Siemens 2025

Interfaces

Interface to the IEC 61850

- The SICAM A8000 smart data concentrator connects the circuit breakers from the SENTRON portfolio via the Modbus TCP/IP protocol and transmits data via communication protocols (e.g.: IEC 61850, IEC 60870-5-104, IEC 60870-5-101, Modbus and DNP) to higher-level systems.

Type	Operational voltage	Article No.
SICAM CP-8021 [1]	–	6MF2802-1AA00
SICAM CP-8031 [2]	–	6MF2803-1AA00
SICAM CP-8050 [2]	–	6MF2805-0AA00
SICAM PS-8620	24 ... 60 V DC (12 W)	6MF2862-0AA00
SICAM PS-8622	110 ... 220 V DC (12 W)	6MF2862-2AA00

[1] Dimensioned for device quantities of max. 1 × 3WA and 1 × 3VA
[2] Dimensioned for device quantities of max. 1 × 3WA and 8 × 3VA
[3] Dimensioned for device quantities of max. 3 × 3WA and 8 × 3VA or 2 × 3WA and 8 × 3VA and 1 × PAC4200

You will find further information at:
www.siemens.com/sicam-a8000
For the SICAM CP-8021 and SICAM CP-8050, predefined modules were created to reduce commissioning work to a minimum.
The modules can be obtained free of charge via SiePortal www.siemens.com/lowvoltage/product-support (109816057)

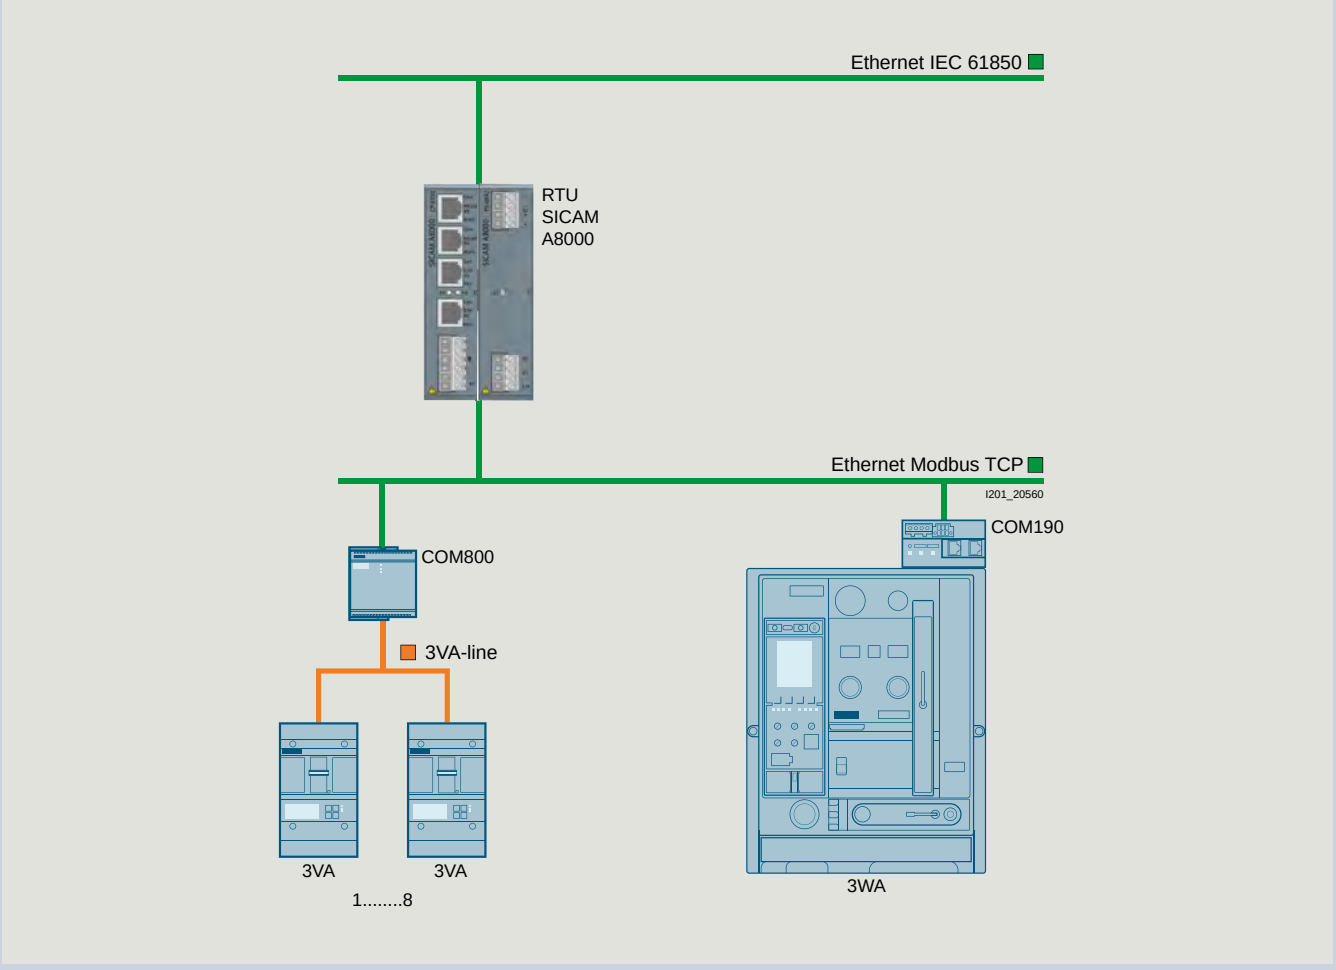

System overview, page 1/28

© Siemens 2025

3WL1 circuit breakers and non-automatic circuit breakers for AC and DC

IEC 60947-2

1

Phase-out

AC

			3WL10		3WL11	
Basic data						
Rated operational voltage U_e		V	≤ 690		≤ 1000	
Rated current I_n		A	630 ... 1250		630 ... 2000	
Size			0		1	
Type of mounting			Withdrawable	Fixed-mounted	Withdrawable	Fixed-mounted
Number of poles			3/4-pole	3/4-pole	3/4-pole	3/4-pole
Dimensions						
Width (3-pole | 4-pole)		mm	278 | 348	210 | 280	320 | 410	320 | 410
Height (standard | A05, A15, A16, DC greater than 600 V)		mm	363.5	296	468 | 518	462
Depth		mm	271	183	471	357
Approvals						
General product approvals			VDE, EAC, CCC, CE, C-Tick		VDE, EAC, CCC, CE, C-Tick	
Marine/shipbuilding			RMRS		ABS, DNV, LR, BV, GL, PRS, RMRS	
Breaking capacity			B	N	S	N	S	H
Rated short-circuit breaking capacity								
Rated operational voltage U_e up to 415 V AC I_{cu} | I_{cs}		kA	42 | 42	55 | 50	66 | 50	55 | 55	66 | 66	85 | 85
Rated operational voltage U_e up to 500 V AC I_{cu} | I_{cs}		kA	42 | 42	50 | 50	50 | 50	55 | 55	66 | 66	85 | 85
Rated operational voltage U_e up to 690 V AC I_{cu} | I_{cs}		kA	– | –	42 | 42	50 | 50	42 | 42	50 | 50	66 | 66 [6]
Rated operational voltage U_e up to 690 V AC +20% [6], with Z option: A16 I_{cu} | I_{cs}		kA	– | –	– | –	– | –	– | –	– | –	50 | 50
Rated operational voltage U_e up to 1000 V AC, with Z option: A05 I_{cu} | I_{cs}		kA	– | –	– | –	– | –	– | –	– | –	50 | 50
Rated operational voltage U_e up to 1150 V AC, with Z option: A15 I_{cu} | I_{cs}		kA	– | –	– | –	– | –	– | –	– | –	– | –
Rated short-time withstand current I_{cw} [5]								
Rated short-time withstand current I_{cw} at U_e up to 500 V AC	0.5 s	kA	–	–	–	55	66	85
	1 s	kA	42	42	50	50	66	85
	2 s	kA	–	–	–	35 [1]/45 [2]	45	70
	3 s	kA	24	24	36	35 [1]/45 [2]	35	60
Rated short-time withstand current I_{cw} at U_e up to 690 V AC	0.5 s	kA	–	–	–	42	50	66 [7]
	1 s	kA	42	42	50	42	50	66 [7]
	2 s	kA	–	–	–	35 [1]/42 [2]	45	66 [8]
	3 s	kA	24	24	36	30 [1]/45 [2]	35	60
Rated short-time withstand current I_{cw} at DC	1 s	kA	–	–	–	–	–	–
Rated conditional short-circuit current I_{cc} of the non-automatic air circuit breakers								
Up to 500 V AC		kA	–	42	50	55	66	85
Up to 690 V AC		kA	–	42	50	42	50	66
Up to 1000 V/1150 V AC, with Z option: A05, A16		kA	–	–	–	–	–	50
Up to 1000 V/1150 V AC, with Z option: A15		kA	–	–	–	–	–	–
Up to 220 V DC		kA	–	–	–	–	–	–
Up to 300 V DC		kA	–	–	–	–	–	–
Up to 600 V DC		kA	–	–	–	–	–	–
Up to 1000 V DC		kA	–	–	–	–	–	–
Rated short-circuit making capacity I_{cm}								
I_{cm} at 415 V AC		kA	88	121	145	121	145	187
I_{cm} at 500 V AC		kA	88	105	105	121	145	187
I_{cm} at 690 V AC		kA	–	88	105	88	105	145
I_{cm} at 1000 V AC		kA	–	–	–	–	–	105
I_{cm} at 1150 V AC		kA	–	–	–	–	–	–

[1] Size 1 with $I_{n\,max} \leq 1250$ A
[2] Size 1 with $I_{n\,max} \geq 1600$ A
[3] Size 2 with $I_{n\,max} \leq 2500$ A
[4] Size 2 with $I_{n\,max} \geq 3200$ A
[5] At rated operational voltage $U_e > 690$ V, the I_{cw} value of the circuit breaker corresponds to the I_{cu} or I_{cs} value
[6] For breakers with Z options A05 and A16 $I_{cu} = I_{cs} = 85$ kA
[7] For breakers with Z options A05 and A16 $I_{cw} = 85$ kA
[8] For breakers with Z options A05 and A16 $I_{cw} = 70$ kA

© Siemens 2025

Phase-out

AC

DC

3WL12		3WL13		3WL11	3WL12	
≤ 1150		≤ 1150		1000 DC	≤ 600/1000 DC	
800 ... 4000		4000 ... 6300		2000	1000 ... 4000	
2		3		1	2	
Withdrawable	Fixed-mounted	Withdrawable	Fixed-mounted	Fixed-mounted	Withdrawable	Fixed-mounted
3/4-pole	3/4-pole	3/4-pole	3/4-pole	4-pole	3/4-pole	3/4-pole
460 | 590	460 | 590	704 | 914	704 | 914	410	460 | 590	460 | 590
468 | 518	462	468 | 518	462	462	468 | 518	462
471	357	471	357	357	471	357
VDE, EAC, CCC, CE, C-Tick		VDE, EAC, CCC, VDE, CE, C-Tick		VDE, EAC, CCC, CE, C-Tick	VDE, EAC, CCC, CE, C-Tick	
ABS, DNV, LR, BV, GL, PRS, RMRS		ABS, DNV, LR, BV, GL, PRS, RMRS		ABS, DNV, LR, BV, GL, PRS, RMRS	ABS, DNV, LR, BV, GL, PRS, RMRS	
N	**S**	**H**	**C** [9]	**H**	**C 3p**	**C 4p**	**DC**	**DC**
66 | 66	85 | 85	100 | 100	130 | 130	100 | 100	150 | 150	130 | 130	–	–
66 | 66	85 | 85	100 | 100	130 | 130	100 | 100	150 | 150	130 | 130	–	–
50 | 50	75 | 75	85 | 85	100 | 100	85 | 85	150 | 150	130 | 130	–	–
– | –	– | –	– | –	– | –	– | –	– | –	– | –	–	–
– | –	– | –	85 | 85	– | –	85 | 85	125 | 125	125 | 125	–	–
– | –	– | –	50 | 50	– | –	70 | 70	– | –	– | –	–	–
66	85	100	100	100	130	120	–	–
66	85	85	100	100	130	120	–	–
66	66 [3]/85 [4]	66 [3]/85 [4]	85	100	130	120	–	–
55 [3]/66 [4]	55 [3]/75 [4]	55 [3]/75 [4]	75	100	130	120	–	–
50	75	85	100	85	130	120	–	–
50	75	85	100	85	130	120	–	–
50	66 [3]/75 [4]	66 [3]/85 [4]	85	85	130	120	–	–
50	55 [3]/75 [4]	55 [3]/75 [4]	75	85	130	120	–	–
–	–	–	–	–	–	–	20	35 [10]/30 [11]/25 [12]/20 [13]
66	85	100	130	100	130	120	–	–
50	75	85	100	85	130	120	–	–
–	–	85/85	–	85/85	–	–	–	–
–	–	–/50	–	70/70	–	–	–	–
–	–	–	–	–	–	–	20	35
–	–	–	–	–	–	–	20	30
–	–	–	–	–	–	–	20	25
–	–	–	–	–	–	–	20	20
145	187	220	286	220	330	286	–	–
145	187	220	286	220	330	286	–	–
105	165	187	220	187	330	286	–	–
–	–	105	–	187	267	267	–	–
–	–	105	–	147	–	–	–	–

[9] Up to 3200 A
[10] At U_e = 220 V DC
[11] At U_e = 300 V DC
[12] At U_e = 600 V DC
[13] At U_e = 1000 V DC

© Siemens 2025

3WL1 circuit breakers and non-automatic circuit breakers for AC

IEC 60947-2

Phase-out

			3WL10				3WL11	
Rated current I_n			**630 A**	**800 A**	**1000 A**	**1250 A**	**1000 A**	**1250 A**
General data								
Isolating function acc. to IEC 60947-2			Yes				Yes	
Utilization category			B				B	
Permissible ambient temperature	During operation (in operation with LCD max. 55 °C) [1]	°C	–25 ... +70				–40 ... +70	
	Storage	°C	–40 ... +70				–40 ... +80	
Mounting position								
Degree of protection			IP20 without cabinet door, IP30 with door sealing frame, IP54 with cover				IP20 without cabinet door, IP41 with door sealing frame, IP55 with cover	
Voltage								
Rated operational voltage U_e at 50/60 Hz	1000 V version	V AC	≤ 690				690/1000	
Rated insulation voltage U_i		V AC	1000				1000	
Rated impulse withstand voltage U_{imp}	Main conducting paths	kV	12				12	
	Auxiliary circuits	kV	4				4	
	Control circuits [8]	kV	2.5				2.5	
Rated rotor operational voltage U_{er}		V					2000	
Permissible load for withdrawable versions [2] [4] [9]								
At rear horizontal main connections	Up to 55 °C (Cu bare)	A	630	800	1000	1250	1000	1250
	Up to 60 °C (Cu bare)	A	630	800	1000	1250	1000	1250
	Up to 70 °C	A	630	800	1000	1250	1000 [7]	1210 [7]
Power loss at I_n								
With 3-phase symmetrical load, complete device (3/4p)	Fixed-mounted circuit breaker	W	31	50	78	122	100	105
	Withdrawable circuit breaker	W	62	100	156	244	195	205
Service life/endurance								
Breaking capacity N and S, 3/4-pole								
Mechanical	Without maintenance	Operating cycles	20000 [3]	20000 [3]	20000 [3]	20000 [3]	15000	15000
	With maintenance [5]	Operating cycles	–	–	–	–	25000	25000
Electrical	Without maintenance 440 V	Operating cycles	8000 [3] [6]	8000 [3] [6]	8000 [3] [6]	8000 [3] [6]	–	–
	Without maintenance 690 V	Operating cycles	8000 [3] [6]	8000 [3] [6]	8000 [3] [6]	6500 [3] [6]	10000	10000
	With maintenance [5]	Operating cycles	–	–	–	–	25000	25000
Breaking capacity H, 3-pole								
Mechanical	Without maintenance	Operating cycles	–	–	–	–	10000	10000
	With maintenance [5]	Operating cycles	–	–	–	–	15000	15000
Electrical	Without maintenance 690 V	Operating cycles	–	–	–	–	7500	7500
	Without maintenance 1000 V, with Z option: A05	Operating cycles	–	–	–	–	1000	1000
	Without maintenance 1150 V, with Z option: A15	Operating cycles	–	–	–	–	–	–
	With maintenance [5]	Operating cycles	–	–	–	–	15000	15000

[1] The LCD on the 3WL10 is always active.
[2] 4000 A, size 2 in fixed-mounted version, 3-pole
[3] 2000 in conjunction with mechanical interlock
[4] ETU76B with graphics display can be used up to max. 55 °C.
[5] Maintenance means: Replacing main contacts and arc chutes (see operating instructions). Greasing the breaker mechanism on the 3WL10, no spare part of components.

© Siemens 2025

Phase-out

	3WL11					3WL12					3WL13		
	1600 A	2000 A	800 A	1000 A	1250 A	1600 A	2000 A	2500 A	3200 A	4000 A	4000 A	5000 A	6300 A
Withdrawable	Yes		Yes								Yes		
Design verification per IEC/EN 61439	B		B								B		
Ambient temperature, operation	–40 ... +70		–40 ... +70								–40 ... +70		
Ambient temperature, storage	–40 ... +80		–40 ... +80								–40 ... +80		
											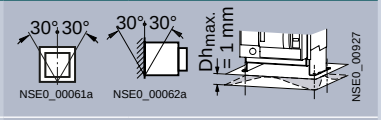		
Degree of protection	IP20 without cabinet door, IP41 with door sealing frame, IP55 with cover		IP20 without cabinet door, IP41 with door sealing frame, IP55 with cover								IP20 without cabinet door, IP41 with door sealing frame, IP55 with cover		
Rated voltage U_e	690/1000		690/1000/1150								690/1000/1150		
Rated insulation voltage U_i	1000		≤ 1150								≤ 1150		
Rated impulse withstand voltage U_{imp}	12		12								12		
Number of poles	4		4								4		
Rated frequency	2.5		2.5								2.5		
Rated current I_n (40 °C)	2000		2000								2000		
Rated current I_n (50 °C)	1600	2000	800	1000	1250	1600	2000	2500	3200	3950	4000	5000	5920
Rated current I_n (55 °C)	1600	1930	800	1000	1250	1600	2000	2500	3020	3810	4000	5000	5810
Rated current I_n (65 °C)	1490 [7]	1780 [7]	800 [7]	1000 [7]	1250 [7]	1600 [7]	2000 [7]	2280 [7]	2870 [7]	3600 [7]	4000 [7]	5000 [7]	5500 [7]
Power loss	150	240	40	45	80	85	180	270	410	750	520	630	900
	350	440	85	95	165	175	320	520	710	925	810	1050	1600
Short-circuit breaking capacity													
Rated ultimate short-circuit breaking capacity I_{cu} (AC) 50/60 Hz, 690 V	15000	15000	10000	10000	10000	10000	10000	10000	10000	10000	–	–	–
Rated ultimate short-circuit breaking capacity I_{cu} (AC) 50/60 Hz, 1000 V	25000	25000	17500	17500	17500	17500	17500	17500	17500	17500	–	–	–
Rated ultimate short-circuit breaking capacity I_{cu} (AC) 50/60 Hz, 1150 V	–	–	–	–	–	–	–	–	–	–	–	–	–
Rated service short-circuit breaking capacity I_{cs} (AC) 50/60 Hz, 690 V	10000	7500	7500	7500	7500	7500	7500	7500	4000	2000 [3]	–	–	–
Rated service short-circuit breaking capacity I_{cs} (AC) 50/60 Hz, 1000 V	25000	25000	17500	17500	17500	17500	17500	17500	17500	17500	–	–	–
Short-circuit making capacity													
Rated short-circuit making capacity I_{cm} (AC) 50/60 Hz, 690 V	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	5000	5000	5000
Rated short-circuit making capacity I_{cm} (AC) 50/60 Hz, 1000 V	15000	15000	15000	15000	15000	15000	15000	15000	15000	15000	10000	10000	10000
Rated short-time withstand current I_{cw} (AC) 50/60 Hz, 690 V, 1 s	7500	7500	7500	7500	7500	7500	7500	7500	4000	2000	2000	2000	2000
Rated short-time withstand current I_{cw} (AC) 50/60 Hz, 690 V, 3 s	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
Rated short-time withstand current I_{cw} (AC) 50/60 Hz, 690 V, 10 s	–	–	500	500	500	500	500	500	500	500	500	500	500
Rated short-time withstand current I_{cw} (AC) 50/60 Hz, 1000 V, 1 s	15000	15000	15000	15000	15000	15000	15000	15000	15000	15000	10000	10000	10000

[6] Periodic greasing of breaker mechanism on the 3WL10 (see Manual), no spare part of components
[7] Cu painted black
[8] Motorized operating mechanisms U_{imp} = 1.2 kV
[9] For 3WL size 2 4000 A and size 3 6300 A with rear vertical main connections.

© Siemens 2025

3WL1 circuit breakers and non-automatic circuit breakers for AC

IEC 60947-2 (continued)

Phase-out

			3WL10				3WL11	
Rated current I_n			**630 A**	**800 A**	**1000 A**	**1250 A**	**1000 A**	**1250 A**
Service life/endurance								
Breaking capacity H, 4-pole								
Mechanical	Without maintenance	Operating cycles	–	–	–	–	10000	10000
	With maintenance [1]	Operating cycles	–	–	–	–	15000	15000
Electrical	Without maintenance 690 V	Operating cycles	–	–	–	–	7500	7500
	Without maintenance 1000 V	Operating cycles	–	–	–	–	1000	1000
	Without maintenance 1150 V [2]	Operating cycles	–	–	–	–	–	–
	With maintenance [1]	Operating cycles	–	–	–	–	10000	10000
Breaking capacity C								
Mechanical	Without maintenance	Operating cycles	–	–	–	–	–	–
	With maintenance [1]	Operating cycles	–	–	–	–	–	–
Electrical	Without maintenance 690 V	Operating cycles	–	–	–	–	–	–
	With maintenance 690 V [1]	Operating cycles	–	–	–	–	–	–
Connection								
Minimum main conductor cross-sections								
Copper bars, bare		Unit × mm × mm	2 × 40 × 5	2 × 50 × 5	2 × 50 × 10 [3] 2 × 50 × 8 [4]	2 × 50 × 10 [3] 2 × 50 × 8 [3]	1 × 60 × 10	2 × 40 × 10
Copper bars, painted black		Unit × mm × mm	–	–	–	–	1 × 60 × 10	2 × 40 × 10
Auxiliary conductor (Cu) max. number of auxiliary conductors × cross-section (solid/stranded)								
Standard connection = screw	Without end sleeve				–		2 × 0.5 ... 2 × 1.5 mm² (AWG 20 ... 16); 1 × 2.5 mm² (AWG 14)	
	With end sleeve acc. to DIN 46228 Part 2				–		1 × 0.5 ... 1 × 1.5 mm² (AWG 20 ... 16)	
	With twin end sleeve				–		2 × 0.5 ... 2 × 1.5 mm² (AWG 20 ... 16)	
Screwless connection technology	Without end sleeve				0.5 ... 2.5 mm² (AWG 20 ... 14)		2 × 0.5 ... 2 × 2.5 mm² (AWG 20 ... 14)	
	With end sleeve acc. to DIN 46228 Part 2				0.5 ... 1.5 mm² (AWG 20 ... 16)		2 × 0.5 ... 2 × 1.5 mm² (AWG 20 ... 16)	
Position signaling switch								
Screwless connection technology					1 × 0.5 ... 1 × 2.5 mm² (AWG 20 ... 14)		1 × 0.5 ... 1 × 2.5 mm² (AWG 20 ... 14)	
Weights								
3-pole	Fixed-mounted circuit breaker	kg			14		43	43
	Withdrawable circuit breaker (without guide frames)	kg			17.3		45	45
	Guide frames	kg			21		25	25
4-pole	Fixed-mounted circuit breaker	kg			16		50	50
	Withdrawable circuit breaker (without guide frames)	kg			19.3		54	54
	Guide frames	kg			25		30	30

[1] Maintenance means: Replacing main contacts and arc chutes (see operating instructions).

[2] Size 2 with order code "A15" and size 3. Data for very high breaking capacity.

[3] Horizontal

[4] Vertical

© Siemens 2025

Phase-out

3WL11		3WL12								3WL13		
1600 A	**2000 A**	**800 A**	**1000 A**	**1250 A**	**1600 A**	**2000 A**	**2500 A**	**3200 A**	**4000 A**	**4000 A**	**5000 A**	**6300 A**
10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	5000	5000	5000
15000	15000	15000	15000	15000	15000	15000	15000	15000	15000	10000	10000	10000
7500	7500	7500	7500	7500	7500	7500	7500	4000	2000	2000	2000	2000
1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
–	–	500	500	500	500	500	500	500	500	500	500	500
10000	10000	15000	15000	15000	15000	15000	15000	15000	15000	10000	10000	10000
–	–	5000	5000	5000	5000	5000	5000	5000	–	5000	5000	5000
–	–	10000	10000	10000	10000	10000	10000	10000	–	10000	10000	10000
–	–	5000	5000	5000	5000	5000	5000	4000	–	1000	1000	1000
–	–	10000	10000	10000	10000	10000	10000	8000	–	–	–	–
2 × 50 × 10	3 × 50 × 10	1 × 50 × 10	1 × 60 × 10	2 × 40 × 10	2 × 50 × 10	3 × 50 × 10	2 × 100 × 10	3 × 100 × 10	4 × 120 × 10	4 × 100 × 10	6 × 100 × 10	6 × 120 × 10
2 × 50 × 10	3 × 50 × 10	1 × 50 × 10	1 × 60 × 10	2 × 40 × 10	2 × 50 × 10	3 × 50 × 10	2 × 100 × 10	3 × 100 × 10	4 × 100 × 10	4 × 100 × 10	6 × 100 × 10	6 × 120 × 10
2 × 0.5 … 2 × 1.5 mm² (AWG 20 … 16); 1 × 2.5 mm² (AWG 14)					2 × 0.5 … 2 × 1.5 mm² (AWG 20 … 16); 1 × 2.5 mm² (AWG 14)					2 × 0.5 … 2 × 1.5 mm² (AWG 20 … 16); 1 × 2.5 mm² (AWG 14)		
1 × 0.5 … 1 × 1.5 mm² (AWG 20 … 16)					1 × 0.5 … 1 × 1.5 mm² (AWG 20 … 16)					1 × 0.5 … 1 × 1.5 mm² (AWG 20 … 16)		
2 × 0.5 … 2 × 1.5 mm² (AWG 20 … 16)					2 × 0.5 … 2 × 1.5 mm² (AWG 20 … 16)					2 × 0.5 … 2 × 1.5 mm² (AWG 20 … 16)		
2 × 0.5 … 2 × 2.5 mm² (AWG 20 … 14)					2 × 0.5 … 2 × 2.5 mm² (AWG 20 … 14)					2 × 0.5 … 2 × 2.5 mm² (AWG 20 … 14)		
2 × 0.5 … 2 × 1.5 mm² (AWG 20 … 16)					2 × 0.5 … 2 × 1.5 mm² (AWG 20 … 16)					2 × 0.5 … 2 × 1.5 mm² (AWG 20 … 16)		
1 × 0.5 … 1 × 2.5 mm² (AWG 20 … 14)					1 × 0.5 … 1 × 2.5 mm² (AWG 20 … 14)					1 × 0.5 … 1 × 2.5 mm² (AWG 20 … 14)		
43	43	56	56	56	56	56	59	64	85	82	82	90
45	45	60	60	60	60	60	63	68	121	88	88	96
25	25	31	31	31	31	31	39	45	52	60	60	70
50	50	67	67	67	67	67	71	77	103	99	99	108
54	54	72	72	72	72	72	76	82	146	106	106	108
30	30	37	37	37	37	37	47	54	62	84	84	119

© Siemens 2025

3WL1 non-automatic circuit breakers for DC

IEC 60947-2

Phase-out

			3WL11	3WL12		
Rated current I_n			**2000 A**	**1000 A**	**2000 A**	**4000 A**
General data						
Size			1	2		
Isolating function acc. to IEC 60947-2			Yes	Yes		
Utilization category			B	B		
Permissible ambient temperature	Operation	°C	–40 ... +70	–40 ... +70		
	Storage	°C	–40 ... +80	–40 ... +80		
Mounting position						
Degree of protection			IP20 without cabinet door, IP41 with door sealing frame, IP55 with cover	IP20 without cabinet door, IP41 with door sealing frame, IP55 with cover		
Voltage						
Rated operational voltage U_e at 50/60 Hz	1000 V version	V DC	1000	600/1000		
Rated insulation voltage U_i		V DC	1000	1000		
Rated impulse withstand voltage U_{imp}	Main conducting paths	kV	12	12		
	Auxiliary circuits	kV	4	4		
	Control circuits	kV	2.5	2.5		
Permissible load						
At rear horizontal main connections	Up to 40 °C (Cu black painted)	A	2000	1000	2000	4000
	Up to 55 °C (Cu black painted)	A	1910	1000	2000	3640
	Up to 60 °C (Cu black painted)	A	1850	1000	2000	3500
	Up to 70 °C (Cu black painted)	A	1710	1000	1950	3250
Power loss at I_n						
With symmetrical load	Withdrawable circuit breaker	W	150	280	770	1640
Service life/endurance [1]						
Mechanical	Without maintenance	Operating cycles	10000	10000	10000	10000
	With maintenance [2]	Operating cycles	15000	17500	17500	17500
Electrical	Without maintenance	Operating cycles	1000	6000	6000	4000
	Without maintenance 1000 V	Operating cycles	1000	1000	1000	1000
	With maintenance [2]	Operating cycles	2000	17500	17500	17500

[1] Further technical specifications on request.
[2] Maintenance means: Replacing main contacts and arc chutes (see operating instructions).

© Siemens 2025

Phase-out

3WL11 3WL12

Rated current I_n			2000 A	1000 A	2000 A	4000 A
Short-circuit breaking capacity I_{cc}						
Up to 220 V DC		kA	20	35		
Up to 300 V DC		kA	20	30		
Up to 600 V DC		kA	20	25		
Up to 1000 V DC		kA	20	20		
Rated short-time withstand current I_{cw}						
0.5 s		kA	–	–		
1 s		kA	20	35 [1]/30 [2]/25 [3]/20 [4]		
2 s		kA	–	–		
3 s		kA	–	–		
Connection						
Auxiliary conductor (Cu) max. number of auxiliary conductors × cross-section (solid/stranded)						
Standard connection = strain-relief clamp	Without end sleeve		2 × 0.5 … 2 × 1.5 mm² (AWG 20 … 16); 1 × 2.5 mm² (AWG 14)	2 × 0.5 … 2 × 1.5 mm² (AWG 20 … 16); 1 × 2.5 mm² (AWG 14)		
	With end sleeve acc. to DIN 46228 Part 2		1 × 0.5 … 1 × 1.5 mm² (AWG 20 … 16)	1 × 0.5 … 1 × 1.5 mm² (AWG 20 … 16)		
	With twin end sleeve		2 × 0.5 … 2 × 1.5 mm² (AWG 20 … 16)	2 × 0.5 … 2 × 1.5 mm² (AWG 20 … 16)		
Optional connection = tension spring	Without end sleeve		2 × 0.5 … 2 × 2.5 mm² (AWG 20 … 14)	2 × 0.5 … 2 × 2.5 mm² (AWG 20 … 14)		
	With end sleeve acc. to DIN 46228 Part 2		2 × 0.5 … 2 × 1.5 mm² (AWG 20 … 16)	2 × 0.5 … 2 × 1.5 mm² (AWG 20 … 16)		
Weights						
3-pole	Fixed-mounted circuit breaker	kg	43	56	56	64
	Withdrawable circuit breaker	kg	–	60	60	68
	Guide frames	kg	–	31	31	45
4-pole	Fixed-mounted circuit breaker	kg	50	67	67	77
	Withdrawable circuit breaker	kg	–	72	72	82
	Guide frames	kg	–	37	37	54

[1] At U_e = 220 V DC
[2] At U_e = 300 V DC
[3] At U_e = 600 V DC
[4] At U_e = 1000 V DC

© Siemens 2025

3WL1 non-automatic circuit breakers for DC

Phase-out

Application examples

The connection to the non-automatic circuit breakers is not dependent on direction and polarity; the circuit diagrams can be adapted accordingly. If the parallel or series connections are made directly to the connection bars, for thermal reasons the continuous load on the non-automatic circuit breakers must only be 80% of the permissible operational current. If the parallel or series connection is made at a distance of 1 m from the connection bars, the non-automatic circuit breaker can be used at full operational current load.

Required contact gaps at rated voltage [1]	Size 2 For 3-pole non-automatic circuit breakers 1-pole	Size 2 For 3-pole non-automatic circuit breakers 2-pole	Size 1 and Size 2 For 4-pole non-automatic circuit breakers 1-pole	Size 1 and Size 2 For 4-pole non-automatic circuit breakers 2-pole
Rated operational voltage up to 300 V	  Grounded system [2]		 Grounded system [3]	
Rated operational voltage up to 600 V		 Grounded system	 Grounded system [2]	
Rated operational voltage up to 1000 V [4]		 Grounded system	 Grounded system	 Grounded system

Required contact gaps at rated voltage [1]	Size 1 For 4-pole non-automatic circuit breakers 2-pole
Rated operational voltage up to 1000 V [4]	

[1] Contact gaps connected in series
[2] 2 conducting paths in parallel
[3] 3 conducting paths in parallel
[4] Version for 1000 V required, order with "-Z" and order code A05
⊣⊩ Grounded system
▭ Load

© Siemens 2025

© Siemens 2025

ETU electronic trip units

With watchdog monitoring

3WL10

			ETU320 (LI)	ETU350 (LSI)	ETU360 (LSIG)
Basic protective functions					
L	Overload protection (L tripping)	Setting range of operating value $I_r = I_n \times ...$	0.4 | 0.5 | 0.6 | 0.7 | 0.75 | 0.8 | 0.85 | 0.9 | 0.95 | 1 | Default 0.4	0.4 | 0.5 | 0.6 | 0.7 | 0.75 | 0.8 | 0.85 | 0.9 | 0.95 | 1 | Default 0.4	0.4 | 0.5 | 0.6 | 0.7 | 0.75 | 0.8 | 0.85 | 0.9 | 0.95 | 1 | Default 0.4
		Switchable overload protection (from I^2t- to I^4t-dependent function)	–	–	–
		Setting range of the delay t_r at I^2t (Reference point 6 × I_n)	0.75 | 1 | 2 | 5 | 8 | 10 | 14 | 17 | 21 | 25 s | Default 0.75 s	0.75 | 1 | 2 | 5 | 8 | 10 | 14 | 17 | 21 | 25 s | Default 0.75 s	0.75 | 1 | 2 | 5 | 8 | 10 | 14 | 17 | 21 | 25 s | Default 0.75 s
		Setting range of the delay t_r at I^4t (Reference point 6 × I_n)	–	–	–
		Thermal memory can be switched on/off	Permanently switched on	Permanently switched on	Permanently switched on
		Phase failure sensitivity/asymmetry	–	–	–
S	Short-time-delayed short-circuit protection (ST tripping)	Setting range of operating value $I_{sd} = I_n \times ...$	–	1 | 1.5 | 2 | 2.5 | 3 | 4 | 6 | 8 | 10 | Default OFF	1 | 1.5 | 2 | 2.5 | 3 | 4 | 6 | 8 | 10 | Default OFF
		Setting range of the delay time t_{sd} at I^2t	–	0.1 | 0.2 | 0.3 | 0.4 | 0.5 | (Ref. 10 × I_n)	0.1 | 0.2 | 0.3 | 0.4 | 0.5 | (Ref. 10 × I_n)
		Setting range of the delay time t_{sd} (t = const.)	–	0.08 | 0.15 | 0.22 | 0.3 | 0.4 s	0.08 | 0.15 | 0.22 | 0.3 | 0.4 s
		ZSI function	–	–	–
I	Instantaneous short-circuit protection (INST tripping)	Setting range $I_i = I_n \times ...$	OFF | 1.5 | 2 | 3 | 4 | 6 | 8 | 10 | 12 | 15	OFF | 1.5 | 2 | 3 | 4 | 6 | 8 | 10 | 12 | 15	OFF | 1.5 | 2 | 3 | 4 | 6 | 8 | 10 | 12 | 15
N	Neutral conductor protection	N conductor setting range $I_N = I_n \times ...$	OFF | 50% | 100% | 200%	OFF | 50% | 100% | 200%	OFF | 50% | 100% | 200%
G	Ground-fault tripping (GF tripping) Detection of ground-fault current through summation current formation with internal or external neutral conductor transformer	Tripping function can be switched on/off	–	–	■
		Alarm function can be switched on/off	–	–	Permanently switched on
		Detection of ground-fault current through external current transformer	–	–	–
		Setting range of the operating current $I_g = I_n \times ...$	–	–	0.1 | 0.2 | 0.3 | 0.4 | 0.5 | 0.6 | 0.7 | 0.8 | 1
		Setting range of the operating current I_g for alarm	–	–	–
		Setting range of the delay time t_g	–	–	0.1 | 0.2 | 0.4 | 0.6 | 0.8 s | (fixed delay)
		Switchable ground-fault protection characteristic (I^2t-dependent function)	–	–	t = const./I^2t | Default I^2t
		Setting range of the delay time t_g at I^2t	–	–	0.1 | 0.2 | 0.4 | 0.6 | 0.8 s (Ref. 2 × I_n) (I^2t dependent) | Default 0.1 (I^2t)
		ZSI-G function	–	–	–

[1] Sizes 1 and 2/size 3

■ Available – Not available/not present

© Siemens 2025

3WL10

3WL11 – 3WL13

Phase-out

ETU650 (LSI)	ETU660 (LSIG)	ETU15B (LI)	ETU25B (LSI)	ETU27B (LSIG)	ETU45B (LSIG)	ETU76B (LSIG)
0.4 ... 1 | Default 1 (in steps of 0.001)	0.4 ... 1 | Default 1 (in steps of 0.001)	0.5 | 0.55 | 0.6 | 0.65 | 0.7 | 0.75 | 0.8 | 0.85 | 0.9 | 1	0.4 | 0.45 | 0.5 | 0.55 | 0.6 | 0.65 | 0.7 | 0.8 | 0.9 | 1	0.4 | 0.45 | 0.5 | 0.55 | 0.6 | 0.65 | 0.7 | 0.8 | 0.9 | 1	0.4 | 0.45 | 0.5 | 0.55 | 0.6 | 0.65 | 0.7 | 0.8 | 0.9 | 1	0.4 ... 1
■	■	–	–	–	■	■
0.75 ... 36 s | (in steps of 0.25 s) | Default 36 s	0.75 ... 36 s | (in steps of 0.25 s) | Default 36 s	10 s fixed	10 s fixed	10 s fixed	2 | 3.5 | 5.5 | 8 | 10 | 14 | 17 | 21 | 25 | 30 s	2 ... 30 s
0.75 ... 5 s | (in steps of 0.25 s) | Default 5 s	0.75 ... 5 s | (in steps of 0.25 s) | Default 5 s	–	–	–	1 | 2 | 3 | 4 | 5 s	1 ... 5 s
■	■	–	–	–	■	■
2% ... 90% (default 50%)	2% ... 90% (default 50%)	–	At t_{sd} = 20 ms (M)	At t_{sd} = 20 ms (M)	At t_{sd} = 20 ms (M)	■ (on/off)
0.6 ... 10 | OFF | (in steps of 0.1)	0.6 ... 10 | OFF | (in steps of 0.1)	–	1.25 | 1.5 | 2 | 2.5 | 3 | 4 | 6 | 8 | 10 | 12	1.25 | 1.5 | 2 | 2.5 | 3 | 4 | 6 | 8 | 10 | 12	1.25 | 1.5 | 2 | 2.5 | 3 | 4 | 6 | 8 | 10 | 12 | OFF	1.25 × I_n ... 0.8 × I_{cw} OFF
0.05 ... 0.5 s (Ref. 10 × I_n)	0.05 ... 0.5 s (Ref. 10 × I_n)	–	–	–	100 | 200 | 300 | 400 ms	100 ... 400 ms
0.05 ... 0.4 s	0.05 ... 0.4 s	–	M (0.02 ms) | 100 | 200 | 300 | 400 ms	M (0.02 ms) | 100 | 200 | 300 | 400 ms	M (0.02 ms) | 100 | 200 | 300 | 400 ms	M (0.02 ms) | 80 ... 4000 ms
–	–	–	–	–	Via module of the **Cubicle**BUS	Via module of the **Cubicle**BUS
OFF | 1.5 ... 15 | (in steps of 0.1)	OFF | 1.5 ... 15 | (in steps of 0.1)	2 | 3 | 4 | 5 | 6 | 7 | 8	Fixed at $I_i \geq 20 \times I_n$, max. 50 kA	Fixed at $I_i \geq 20 \times I_n$, max. 50 kA	OFF | 1.5 | 2.2 | 3 | 4 | 6 | 8 | 10 | 12 | 0.8 × I_{cs}	OFF | 1.5 × I_n ... 0.8 × I_{cs}
OFF | 50% | 100% | 150% | 200%	OFF | 50% | 100% | 200%	–	–	100%	OFF | 50% | 100%	OFF | 20% ... 200%
–	■	–	–	■	■	■
–	■	–	–	–	–	■
–	Alternative Rc or G-ret ground-fault monitoring	–	–	–	■	■
–	0.1 ... 1 | (in steps of 0.001) $I_g = I_n \times$ ...	–	–	A [1] (100/400 A) | B [1] (300/600 A); C [1] (600/800 A) | D [1] (900/ 1000 A); E [1] (1200/1200 A)	A [1] (100/400 A) | B [1] (300/600 A); C [1] (600/800 A) | D [1] (900/ 1000 A); E [1] (1200/1200 A)	SZ 1, 2: 100 ... 1200 A SZ 3: 400 ... 1200 A
–	50% ... 90% × I_r | (in steps of 1%) PreAlarm	–	–	–	A [1] (100/400 A); B [1] (300/600 A); C [1] (600/800 A); D [1] (900/ 1000 A); E [1] (1200/1200 A)	SZ 1, 2: 100 ... 1200 A SZ 3: 400 ... 1200 A
–	0.1 ... 1 s | Default 0.1 s | (in steps of 0.05 s)	–	–	100 | 200 | 300 | 400 | 500 ms	100 | 200 | 300 | 400 | 500 ms	100 ... 500 ms
–	t = const./I^2t | Default const.	–	–	–	■	■
–	0.1 ... 1 s | (in steps of 0.05 s) (Ref. 2 × I_n)	–	–	–	100 | 200 | 300 | 400 | 500 ms	100 ... 500 ms
–	–	–	–	–	Via module of the **Cubicle**BUS	Via module of the **Cubicle**BUS

© Siemens 2025

ETU electronic trip units

With watchdog monitoring (continued)

3WL10

		ETU320 (LI)	ETU350 (LSI)	ETU360 (LSIG)
Parameter set changeover	Switchable between parameter set A and B	–	–	–
LCD		–	–	–
Voltage tap on top/bottom		–	–	–
Metering function		–	–	–
Tripping as a result of enhanced protective function: (including: phase asymmetry current/voltage, harmonic distortion current/voltage, under/ overvoltage, phase rotation direction, active power in/opposite to normal direction, under/ over-frequency, protective functions dependent on direction of power flow)		–	–	–
Mode of communication				
Communication PROFIBUS | PROFINET | Modbus RTU | Modbus TCP		–	–	–
Output modules				
Signals via relay: Overload warning, load shedding/load carrying, leading signal, overload tripping 200 ms, temperature alarm, phase asymmetry, instantaneous short-circuit release, short-time-delayed short-circuit release, overload trip, neutral conductor trip, auxiliary relay, ETU faults, ground-fault protection tripping and ground-fault alarm (only with ground-fault protection module)		IOM300	IOM300	IOM300

■ Available – Not available/not present

Increment size when settings are made for the ETU76B using the menu

From ... to	Increment size
0 ... 1	0.1
1 ... 100	1
100 ... 500	5
500 ... 1000	10
1000 ... 1600	50
1600 ... 10000	100
10000 ... max.	1000

© Siemens 2025

Phase-out

3WL10

3WL11 – 3WL13

ETU650 (LSI)	ETU660 (LSIG)	ETU15B (LI)	ETU25B (LSI)	ETU27B (LSIG)	ETU45B (LSIG)	ETU76B (LSIG)
■	■	–	–	–	–	■
Integrated	Integrated	–	–	–	Optional	Integrated
Optional	Optional	–	–	–	Optional	Optional
Basic/Advanced	Basic/Advanced	–	–	–	Metering function Plus	Metering function Plus
■	■	–	–	–	■	■
■	■	–	–	–	■	■
IOM040/IOM300	IOM040/IOM300	–	–	–	■	■

© Siemens 2025

Connection

Main circuit connection

Phase-out

	3WL10		3WL11 – 3WL13			
Connection	**Fixed-mounted**	**Withdrawable**	**Fixed-mounted**		**Withdrawable**	
Front-mounted	 Direct	 Extended	 1-hole	 2-hole	 1-hole	 2-hole
	 Extended					
	 Broadened					
Rear-mounted	 Vertical	 Vertical	 Vertical		 Vertical	 Flanges
	 Horizontal	 Horizontal	 Horizontal		 Horizontal	
		Broadened				
Cable	 Cable terminals	 Cable lug				

Auxiliary circuit connections

3WL10: Withdrawable/fixed-mounted version

- Direct engagement of the auxiliary conductor vertically onto the circuit breaker or horizontally in the guide frame



Screwless connection technology (push in)

3WL11 – 3WL13: Withdrawable version

- Connection of the internal auxiliary switches to the male connector on the switch side
- When fully inserted, connection with the sliding contact module in the guide frame

3WL11 – 3WL13: Fixed-mounted version

- Engagement of the auxiliary supply connectors directly onto the circuit breaker

Coding pins on the connectors prevent them being inserted in the wrong slots



Screw connection (standard)



Screwless connection (tension spring) (optional)

© Siemens 2025

Operating mechanism, auxiliary release, auxiliary switch

Phase-out

Operating mechanism

The circuit breakers are available with various optional operating mechanisms:

- Manual operating mechanism with mechanical closing (standard design)
- Manual operating mechanism with mechanical and electrical closing
- Motorized operating mechanism with mechanical and electrical closing

The operating mechanisms with electrical closing are suitable for synchronization tasks.

Available for air circuit breakers	3WL10	3WL11 – 3WL13
Closing coils (CC)	■	■
Undervoltage releases (UVR)/ shunt trips (ST)	■	■
Shunt trips (ST)	■	■
Remote trip alarm reset coils (RR)	■	■
Spring charging motors/ Motorized operating mechanisms (MO)	■	■
Mechanical operating cycles counters	■	■

© Siemens 2025

Structure of the article numbers

Phase-out

Basic configuration for AC circuit breakers

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your air circuit breaker, please use our online configurator at
www.siemens.com/lowvoltage/3wl-configurator

1

	5	6	7	8	9	10	11	12	13	14	15	16
3WL1				–					–			

Circuit breakers, non-automatic circuit breakers and ETU

Size (SZ)	1							1		
	2							2		
	3							3		

		SZ 1	SZ 2	SZ 3						
Max. rated current $I_{n\,max}$	630 A	■	–	–		0	6			
	800 A	■	■ [6]	–		0	8			
	1000 A	■	■ [6]	–		1	0			
	1250 A	■	■ [6]	–		1	2			
	1600 A	■	■	–		1	6			
	2000 A	■	■	–		2	0			
	2500 A	–	■	–		2	5			
	3200 A	–	■	–		3	2			
	4000 A	–	■ [6]	■		4	0			
	5000 A	–	–	■		5	0			
	6300 A	–	–	■		6	3			

			SZ 1	SZ 2	SZ 3					
Short-circuit breaking capacity I_{cu} at 500 V	N	ECO	■	–	–	55 kA			2	
			–	■	–	66 kA			2	
	S	Standard	■	–	–	66 kA			3	
			–	■	–	85 kA			3	
	H	High	■	–	–	85 kA			4	
			–	■	■	100 kA			4	
	C	Very high	–	■	■ [8]	130 kA			5	
			–	–	■ [9]	150 kA			5	

Trip units	Without trip unit			A	A	
	With trip unit, without ground-fault tripping	ETU15B [7]	LI	B	B	
		ETU25B	LSI	C	B	
		ETU45B (without display)	LSIN	E	B	
		ETU45B (with display)	LSIN	F	B	
		ETU76B	LSIN	N	B	
	With trip unit, with ground-fault tripping	ETU27B (without display)	LSING	D	G	
		ETU45B (without display)	LSING	E	G	
		ETU45B (with display)	LSING	F	G	
		ETU76B	LSING	N	G	

Number of poles	3-pole (3WL upgrade)	6	
	4-pole (3WL upgrade)	7	

Connection

		SZ 1	SZ 2	SZ 3		
Type of mounting	Fixed-mounted	■	■	■	Vertical	1
		■	■ [2]	■ [3]	Horizontal	2
		■ [4]	■ [1]	■ [5]	Front single hole	3
		■	■ [1]	■ [5]	Front double hole	4
	Withdrawable	■	■	■	Without guide frame	5
		■	■ [2]	■ [3]	Horizontal	6
		■	■	■	Vertical	7
		■	■ [1]	■ [5]	Flanges	8

[1] Not available for 4000 A and for breaking capacity C
[2] Not available for 4000 A
[3] Not available for 6300 A
[4] Not available for 2000 A and for breaking capacity H
[5] Not available for 5000 A, 6300 A and for breaking capacity C
[6] Not available for breaking capacity C
[7] Not available for size 3
[8] Not available for 3-pole
[9] Not available for 4-pole

Quick selection guide, pages 1/76 and 1/78

© Siemens 2025

Phase-out

1

3WL1 5 6 7 8 – 9 10 11 12 – 13 14 15 16

Operating mechanisms and auxiliary releases

Stored energy mechanism	Manual recharging of the stored energy mechanism	With mechanical operation		1
		With mechanical and electrical operation, closing coil (CC) suitable for uninterrupted duty, 100% OP	110 V AC 50/60 Hz/110 V DC	2
			230 V AC 50/60 Hz/220 V DC	3
	Motorized recharging	With mechanical and electrical operation, closing coil (CC) suitable for uninterrupted duty, 100% OP	208 ... 240 V AC 50/60 Hz/220 ... 250 V DC	4
			110 ... 127 V AC 50/60 Hz/110 ... 125 V DC	5
			24 V DC	6

1st auxiliary release	Without 1st auxiliary release		A
	With shunt trip (ST) 100% OP	24 V DC	B
		30 V DC	C
		48 V DC	D
		60 V DC	E
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC	F
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC	G

2nd auxiliary release	Without 2nd auxiliary release		A
	With shunt trip (ST) 100% OP	24 V DC	B
		30 V DC	C
		48 V DC	D
		60 V DC	E
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC	F
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC	G
	With undervoltage release (UVR), instantaneous	24 V DC	J
		30 V DC	K
		48 V DC	L
		60 V DC	U
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC	M
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC	N
		380 ... 415 V AC 50/60 Hz	P
	With undervoltage release (UVR-t) [1], delay 0.2 ... 3.2 s	48 V DC	Q
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC	R
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC	S
		380 ... 415 V AC 50/60 Hz	T

Auxiliary switches

1st auxiliary switch block	2 NO + 2 NC	2
1st + 2nd auxiliary switch block	4 NO + 4 NC	4
	6 NO + 2 NC	7
	5 NO + 3 NC	8

[1] The maximum allowable cable length to the actuator for quick shutdown is currently ≤ 50 m (maximum allowable cable length between the terminals ≤ 100 m).

Quick selection guide, pages 1/76 and 1/78

© Siemens 2025

Structure of the article numbers

Phase-out

Basic configuration for DC non-automatic circuit breakers

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your air circuit breaker, please use our online configurator at
www.siemens.com/lowvoltage/3wl-configurator

1

3WL1	5	6	7	–	8	9	10	11	12	–	13	14	15	16

Non-automatic circuit breakers and ETU

Size (SZ)	1				1										
	2				2										
		SZ 1	SZ 2												
Max. rated current I_n	1000 A	–	■			1	0								
	2000 A	■	■			2	0								
	4000 A	–	■			4	0								
Short-circuit breaking capacity I_{cc}	1000 V DC 20 kA	■	–					8							
	600 V DC 25 kA	–	■					8							
Non-automatic circuit breakers	Without trip unit						A	A							
Number of poles	3-pole (3WL upgrade)	–	■						6						
	4-pole (3WL upgrade)	■	■						7						

Connection

		SZ 1	SZ 2		
Type of mounting	Fixed-mounted	■	■	Vertical	1
		■	■	Horizontal	2
		–	■[1)]	Front single hole	3
		–	■[1)]	Front double hole	4
	Withdrawable	–	■	Without guide frame	5
		–	■	Horizontal	6
		–	■	Vertical	7
		–	■	Flanges	8

[1)] Not available for 4000 A

Quick selection guide, pages 1/76 and 1/82

© Siemens 2025

Phase-out

1

3WL1 5 6 7 8 – 9 10 11 12 – 13 14 15 16

Operating mechanisms and auxiliary releases

Stored energy mechanism	Manual recharging of the stored energy mechanism	With mechanical operation		1
		With mechanical and electrical operation, closing coil (CC) suitable for uninterrupted duty, 100% OP	110 V AC 50/60 Hz/110 V DC	2
			230 V AC 50/60 Hz/220 V DC	3
	Motorized recharging	With mechanical and electrical operation, closing coil (CC) suitable for uninterrupted duty, 100% OP	208 ... 240 V AC 50/60 Hz/220 ... 250 V DC	4
			110 ... 127 V AC 50/60 Hz/110 ... 125 V DC	5
			24 V DC	6

1st auxiliary release	Without 1st auxiliary release		A
	With shunt trip (ST) 100% OP	24 V DC	B
		30 V DC	C
		48 V DC	D
		60 V DC	E
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC	F
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC	G

2nd auxiliary release	Without 2nd auxiliary release		A
	With shunt trip (ST) 100% OP	24 V DC	B
		30 V DC	C
		48 V DC	D
		60 V DC	E
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC	F
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC	G
	With undervoltage release (UVR), instantaneous	24 V DC	J
		30 V DC	K
		48 V DC	L
		60 V DC	U
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC	M
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC	N
		380 ... 415 V AC 50/60 Hz	P
	With undervoltage release (UVR-t) [1], delay 0.2 ... 3.2 s	48 V DC	Q
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC	R
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC	S
		380 ... 415 V AC 50/60 Hz	T

Auxiliary switches

1st auxiliary switch block	2 NO + 2 NC	2
1st + 2nd auxiliary switch block	4 NO + 4 NC	4
	6 NO + 2 NC	7
	5 NO + 3 NC	8

[1] The maximum allowable cable length to the actuator for quick shutdown is currently ≤ 50 m (maximum allowable cable length between the terminals ≤ 100 m).

Quick selection guide, pages 1/76 and 1/82

© Siemens 2025

Accessory options

Phase-out

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wl-configurator

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WL....-.....-.... -Z

Accessories for basic configuration

			Order code
Rated operational voltage 1000 V AC and 690 V IT networks [4]			
• Only for circuit breakers of size 1–3 with high breaking capacity H and of size 3 breaking capacity C.			
• Cannot be combined with rated operational voltage 1150 V AC, order code "A15".			
	Size 1 [1]	≤ 2000 A	A05
	Size 2 [1] [2]	≤ 4000 A	A05
	Size 3 [1]	≤ 6300 A	A05
Rated operational voltage 1150 V AC			
• Only for circuit breakers with high breaking capacity H (8th digit of the article number is a "4").			
• Cannot be combined with rated operational voltage 1000 V AC, order code "A05".			
	Size 2 [1] [2]	≤ 4000 A	A15
	Size 3 [1] [3]	≤ 6300 A	A15
Rated operational voltage 690 V AC (+20%) [4]			
• Only for 3WL11 circuit breakers, size 1 [4], with high breaking capacity H (8th digit of the article number is a "4").			
	Size 1	≤ 2000 A	A16

[1] When ordering withdrawable circuit breaker and guide frame separately, specify order code "A05" only for withdrawable circuit breaker and guide frame.

[2] Not possible for circuit breakers with very high breaking capacity C.

[3] Front connections are tinned as standard.

[4] When using withdrawable circuit breakers in conjunction with old guide frames (3WL92..-.A..-.... or 3WL92..-.B..-....), additional Z option A41 must be ordered.

© Siemens 2025

Phase-out

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WL....-.....-.... -Z

Order code

Accessories for ETU electronic trip units

Rating plugs

- Only one module is possible per circuit breaker (not in conjunction with ETU15B electronic trip unit).
- As standard, the electronic trip units are equipped with a rating plug which is equal to the maximum rated circuit breaker current ($I_{n\ max}$). The rated current of the selected rating plug must be less than $I_{n\ max}$.

Module	Sizes 1, 2	250 A	**B02**
		315 A	**B03**
		400 A	**B04**
		500 A	**B05**
		630 A	**B06**
		800 A	**B08**
		1000 A	**B10**
	Sizes 1, 2, 3	1250 A	**B12**
		1600 A	**B16**
		2000 A	**B20**
	Sizes 2, 3	2500 A	**B25**
		3200 A	**B32**
		4000 A	**B40**
	Size 3	5000 A	**B50**
		6300 A	**B63**

Communication [1]

Breaker status sensor (BSS)	**For determining the statuses ON/OFF/Tripped**	**F01**
PROFIBUS DP communication port [2]	Including COM15 and breaker status sensor (BSS)	**F02**
Modbus RTU communication port [2]	Including COM16 and breaker status sensor (BSS)	**F12**
PROFINET IO/Modbus TCP communication port [2]	Including COM35 and breaker status sensor (BSS)	**F35**

Metering function (communications modules not included) [1]

Metering function Plus	With internal voltage tap on the lower main conducting paths [3]	**F36**
	With internal voltage tap on the upper main conducting paths [3]	**F37**
	For combination with external voltage transformer	**F38**

EMC filter

- Common-mode interference suppressor filters (e.g. in converter applications)
- Insertion loss (asymmetric) in the range 40 kHz to 10 MHz > 40 dB.

EMC filter		**F31**

Overload and short-circuit protection for neutral conductors

- Only possible with 4-pole circuit breaker with ETU27B to ETU76B

Internal current transformer for N conductor	Size 1	**F23**
	Size 2	**F23**
	Size 3	**F23**

[1] The precondition is an ETU45B or ETU76B

[2] When ordering withdrawable circuit breaker and guide frame separately, specify order code "F02", "F12" or "F35" only for withdrawable circuit breaker.

[3] Can only be used for rated operational voltages up to 690 V AC.

© Siemens 2025

Accessory options

Phase-out

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wl-configurator

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WL....-.....-.... -Z

			Order code
Accessories for ETU electronic trip units			
Remote resetting			
Automatic reset of the reclosing lockout			**K01**
• Remote reset for displays and reset buttons including automatic reset of the reclosing lockout • Includes automatic reset of the reclosing lockout			
Remote trip alarm reset coils	24 V DC		**K10**
	48 V DC		**K11**
	110 ... 127 V AC 50/60 Hz/110 ... 125 V DC		**K12**
	208 ... 240 V AC 50/60 Hz/220 ... 250 V DC		**K13**
Connection			
Tinned version of the customer's connections on the guide frame			
• Only for withdrawable circuit breakers with horizontal connection or flange connection • The normal delivery time increases to 15 work days			
Customer's connections [1) 2)]	Size 1		**A08**
	Size 2		**A08**
	Size 3		**A08**
Connection technology for main connections (fixed-mounted versions)			
Top: [3)] **horizontal** **Bottom: accessible from front, single hole**	Size 1	≤ 1600 A	**N11**
	Size 2	≤ 3200 A	**N11**
	Size 3 [4)]	≤ 4000 A	**N11**
Top: vertical **Bottom: horizontal**	Size 1	≤ 2000 A	**N20**
	Size 2	≤ 3200 A	**N20**
	Size 3	≤ 5000 A	**N20**
Top: horizontal **Bottom: vertical**	Size 1	≤ 2000 A	**N24**
	Size 2	≤ 3200 A	**N24**
	Size 3	≤ 5000 A	**N24**
Connection technology for main connections (withdrawable versions)			
Top and bottom: [5) 6)] **accessible from front, single hole**	Size 1	≤ 1600 A	**P00**
	Size 2	≤ 3200 A	**P00**
	Size 3	≤ 4000 A	**P00**
Top and bottom: [5)] **accessible from front, double hole**	Size 1	≤ 1600 A	**P01**
	Size 2	≤ 3200 A	**P01**
	Size 3	≤ 4000 A	**P01**
Top: [5) 6)] **horizontal** **Bottom: accessible from front, single hole**	Size 1	≤ 1600 A	**P07**
	Size 2	≤ 3200 A	**P07**
	Size 3	≤ 4000 A	**P07**

1) Front connections are tinned as standard.
2) The permissible temperature rise limits according to IEC 60947-2 are 5 K lower for a tin surface than for a silver surface.
3) Not for 3WL1 size 1 with high breaking capacity H and circuit breakers with very high breaking capacity C.
4) Not for size 3 with very high breaking capacity C.
5) Not for size 2, 3 circuit breakers with very high breaking capacity C.
6) Not for 3WL1 size 1 with high breaking capacity H

© Siemens 2025

Phase-out

1

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WL....-.....-.... -Z

			Order code
Connection			
Connection technology for main connections (withdrawable versions)			
Top: vertical **Bottom: horizontal**	Size 1	≤ 2000 A	P18
	Size 2	≤ 3200 A	P18
	Size 3	≤ 5000 A	P18
Top: [1] connecting flange **Bottom: horizontal**	Size 1	≤ 2000 A	P19
	Size 2	≤ 3200 A	P19
	Size 3	≤ 4000 A	P19
Top: horizontal **Bottom: vertical**	Size 1	≤ 2000 A	P23
	Size 2	≤ 3200 A	P23
	Size 3	≤ 5000 A	P23
Top: [1] horizontal **Bottom: connecting flange**	Size 1	≤ 2000 A	P28
	Size 2	≤ 3200 A	P28
	Size 3	≤ 4000 A	P28
Connection technology for auxiliary conductors (for fixed-mounted and withdrawable versions)			
Connection technology for screwless terminals (tension spring)	Fixed-mounted		N61
	Withdrawable		P61
Operating mechanisms and auxiliary releases			
Motorized operating mechanisms	Only possible if the 13th digit of the article number = "1"	24 ... 30 V DC	M01
		48 ... 60 V DC	M03
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC	M05
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC	M06
Mechanical operating cycles counter, 5-digit [2]			C01
Closing coils	• Suitable for uninterrupted duty, 100% OP • Only possible if the 13th digit of the article number = "1"	24 V DC	M21
		30 V DC	M22
		48 V DC	M23
		60 V DC	M24
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC	M25
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC	M26
	• Not suitable for uninterrupted duty, 5% OP, synchronizable [3] • Only possible if the 13th digit of the article number = "1"	24 V DC	M31
		48 V DC	M33
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC	M35
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC	M36
Opening coils (shunt trips) [3] [4]	Not suitable for uninterrupted duty, 5% OP, synchronizable	24 V DC	M41
		48 V DC	M43
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC	M45
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC	M46

[1] Not for size 2, 3 circuit breakers with very high breaking capacity C.

[2] Only possible with motorized operating mechanism.

[3] Overexcited, i.e. switching time 50 ms (standard > 80 ms).

[4] Only possible if the 14th digit of the article number for the circuit breaker is "A", i.e. "without 1st auxiliary release".

© Siemens 2025

Accessory options

Phase-out

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wl-configurator

1

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WL....-.....-.... -Z

Auxiliary switches and signaling switches

			Order code
Position signaling switches for guide frames	1 CO | 1 CO | 1 CO (connected | test | disconnected position)		R15
	3 CO | 2 CO | 1 CO (connected | test | disconnected position)		R16
Signaling switches	Ready-to-close signaling switch (S20)	1 NO	C22
	Spring charge signaling switch [1] (S21)	1 NO	C20
	For the first auxiliary release [1] (S22)	1 CO	C26
	For the second auxiliary release [1] (S23)	1 CO	C27
	1st tripped signaling switch [1] [2] (S24)	1 CO	K07
	2nd tripped signaling switch [1] [2] [3] (S25)	1 NO	K06

Further accessories

Pushbuttons/disconnect switches/closing lockouts

EMERGENCY-OFF pushbuttons	Mushroom pushbutton instead of the mechanical OFF pushbutton		S24
Local electric close on operator panel [1] (S10)	This prevents unauthorized electrical closing from the operator panel. Mechanical closing and remote closing remain possible. Possible only for circuit breakers with closing coil (CC)	With sealing cap	C11
		With CES lock	C12
Motor disconnect switch on operator panel [4] (S12)	This prevents automatic charging of the stored energy mechanism by motorized operating mechanism		S25

Special packaging for increased transport requirements (moisture protection)

Cardboard packaging with water-repellent coating on corrugated cardboard (moisture protection)	A61

Arc chute covers

- Not available for:
  - 1000 V version (order code "A05"),
  - DC version
  - 4000 A size 2
  - 1150 V version (order code "A15")
  - 130 kA version, size 2
  - 150 kA version, size 3

Arc chute covers	3-pole/4-pole	R10

Shutters

Shutter: 2-part, lockable, with padlocks [5]	3-pole/4-pole	R21

[1] Not possible with "communications interface" option, order code "F02", "F12" or "F35".
[2] Not available for non-automatic air circuit breakers.
[3] Only possible with option "K07".
[4] Only for breakers with motorized operating mechanism, not possible with order codes "C11", "C12".
[5] Padlock not included in the scope of supply.

© Siemens 2025

Phase-out

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WL....-.....-.... -Z

Order code

Further accessories

Instrument transformers (without energy transformers), for powering the ETU

- Used in converter applications with high harmonic components; can only be used with ETU45B or ETU76B
  - External 24 V DC supply required
  - Instantaneous undervoltage release UVR required
  - Not possible with instantaneous undervoltage release UVR 380 ... 415 V AC
  - Not possible with delayed undervoltage release UVR-t
- Comprises:
  - 3 (3-pole) or 4 (4-pole) transformers
  - 24 V DC relay
  - Warning signs
  - Manual

Transformer	3-pole/4-pole	Sizes 2, 3	K60

Operating instructions in printed form

- As of June 1, 2023, 3WL circuit breakers and non-automatic circuit breakers are no longer supplied with operating instructions as standard. However, they can be supplied together with the circuit breaker for an additional charge.

Article numbers for separate ordering of operating instructions can be found in chapter "Accessories and spare parts"

3WL operating instructions German/English	A80
3WL operating instructions Italian/French	A81
3WL operating instructions Spanish/Portuguese	A82

© Siemens 2025

Accessory options

Phase-out

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wl-configurator

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WL....-.....-.... -Z

			Order code
Interlocking			
Mechanical interlocking mechanism			
• Interlocking module with Bowden cable 2 m			
Mechanical interlocks		For fixed-mounted breakers	S55
		For withdrawable circuit breakers with guide frame [1]	R55
		For guide frames (ordered separately)	R56
		For withdrawable circuit breakers (ordered separately)	R57
Locking provisions (for fixed-mounted and withdrawable versions)			
• The disconnector unit fulfills the requirements for main circuit breakers according to EN 60204-1			
Locking provisions	Against unauthorized closing from the operator panel	Made by CES	S01
		Made by IKON	S03
		Assembly kit FORTRESS or CASTELL [2]	S05
		Assembly kit for padlocks [3]	S07
		Made by RONIS	S08
		Made by PROFALUX	S09
Locking provisions (for fixed-mounted and withdrawable versions)			
Locking provisions	For charging handle with padlock [3]		S33

[1] Not available in combination with R40.
[2] Locks must be ordered from the manufacturer.
[3] Padlock not included in the scope of supply.

© Siemens 2025

Phase-out

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WL....-.....-.... -Z

			Order code
Interlocking			
Locking provisions (for withdrawable version)			
• The disconnector unit fulfills the requirements for main circuit breakers acc. to EN 60204-1, consisting of a lock in the guide frame, active in the connected position, function is retained when circuit breaker is replaced.			
• Not possible in combination with order code "R81", "R85" or "R86".			
Locking provisions	Against unauthorized closing from the operator panel	Made by CES	**R61**
		Made by RONIS	**R68**
		Made by PROFALUX	**R60**
Locking provisions (for withdrawable version)			
• Safety lock for mounting onto the circuit breaker			
Locking provisions	To prevent movement of the withdrawable circuit breaker	Made by CES	**S71**
		Made by PROFALUX	**S75**
		Made by RONIS	**S76**
Locking mechanisms			
• Not possible in combination with order code "R81", "R85" or "R86".			
For fixed-mounted circuit breakers	To prevent opening of the cabinet door in ON position		**S30**
For withdrawable circuit breakers	To prevent opening of the cabinet door in connected position		**R30**
	To prevent activation when the cabinet door is open [1]		**R40**
	To prevent movement when the cabinet door is open [2]		**R50**
Locking mechanisms to prevent movement of the withdrawable circuit breakers in disconnected position			
• Consisting of Bowden cable and lock in the control cabinet door			
• Not possible in combination with order code "R30", "R50", "R61", "R68" or "R60"			
Made by CES			**R81**
Made by PROFALUX			**R85**
Made by RONIS			**R86**
Seals			
Door sealing frame for degree of protection IP41			**T40**
Accessories from current catalog			
Use of the withdrawable circuit breaker in combination with an older guide frame			
Reduction of the technical specifications for withdrawable circuit breakers 3WL1 for use in combination with older guide frames supplied			
• Possible article numbers of the existing "older" guide frames			
– 3WL92..-.A..-....			
– 3WL92..-.B..-....			
– 3WL92..-.D..-....			
– 3WL92..-.E..-....			
• Article numbers of circuit breakers with reduced technical specifications			
– 3WL1...-...3.-.... – Z			
– 3WL1...-...4.-.... - Z			
For sizes 1, 2, 3.			
Use of the circuit breaker in older guide frames, including the appropriate guide frame coding			**A41**

[1] Not available in combination with R50 and R55 [2] Not available in combination with R40

© Siemens 2025

Accessory options

Further technical specifications

Manual operating mechanism	3WL11 – 3WL13
Switching on/charging energy store	
Maximum force required to operate the hand lever	≤ 230 N
Required number of strokes on the hand lever	9

Closing coils

Note:
The closing coils (CC) and shunt trips (ST) are identical for the 3WL and 3WA and can be used in both circuit breaker lines.
You will find the technical specifications in section 3WA see page 1/52
Please note: The communication-capable closing coils (CC-COM) can be used only in conjunction with 3WA.

Motor

Note:
The motor operators are identical for the 3WL and 3WA and can be used in both circuit breaker lines.
You will find the technical specifications in section 3WA see page 1/52

Signals of the electronic trip unit	3WL11 – 3WL13
Signals of the electronic trip unit	
Measuring accuracy of the electronic trip unit	Protective functions acc. to EN 60947; current indication ≤ 10%; metering function for base quantities ≤ 1%; metering function for derived quantities ≤ 4%

Undervoltage releases UVR (F3) and UVR-t (F4)

Note:
The undervoltage releases (UVR/UVR-t) are identical for the 3WL and 3WA and can be used in both circuit breaker lines.
You will find the technical specifications in section 3WA see page 1/53

Shunt trip (ST) (F1, F2)

Note:
The shunt trips (ST) are identical for the 3WL and 3WA and can be used in both circuit breaker lines.
You will find the technical specifications in section 3WA see page 1/54
Please note: The communication-capable shunt trips (ST-COM) can be used only in conjunction with 3WA.

Remote trip alarm reset coil for mechanical tripped indicator (F7)

Note:
The remote trip alarm reset coils are identical for the 3WL and 3WA and can be used in both circuit breaker lines.
You will find the technical specifications in section 3WA see page 1/54

Contact position-driven auxiliary switches (S1, S2, S3, S4, S7, S8)

Note:
The switch position dependent auxiliary switches are identical for the 3WL and 3WA and can be used in both circuit breaker lines.
You will find the technical specifications in section 3WA see page 1/54

© Siemens 2025

Phase-out

Ready-to-close signaling switches (S20) (acc. to DIN VDE 0630)

		3WL11 – 3WL13		
Breaking capacity				
Alternating current 50/60 Hz	Rated operational voltage U_e	250 V		
	Rated operational current I_e	8 A		
Direct current	Rated operational voltage U_e	125 V	250 V	
	Rated operational current I_e	0.4 A	0.2 A	
	Contact reliability	From 1 mA at 5 V DC		

Tripped signaling switches (S24) and signaling switches for auxiliary releases (S22, S23) (acc. to DIN VDE 0630)

		3WL11 – 3WL13		
Breaking capacity				
Alternating current 50/60 Hz	Rated operational voltage U_e	250 V		
	Rated operational current I_e/AC-12	8 A		
Direct current	Rated operational voltage U_e	24 V	125 V	250 V
	Rated operational current I_e/DC-12	6 A	0.4 A	0.2 A
	Contact reliability	From 1 mA at 5 V DC		
Tripped signaling switches				
Signal duration after tripping		Until manual or electrical remote reset (option)		

Position signaling switch on guide frame

		3WL11 – 3WL13		
Type of contacts				
Message	"Circuit breaker in connected position"	3 W	or	1 W
	"Circuit breaker in test position"	2 W	or	1 W
	"Circuit breaker in disconnected position"	1 W	or	1 W
Contact reliability		From 1 mA at 5 V DC		
Rated operational voltage				
Rated insulation voltage U_i	50/60 Hz AC	440 V		
	DC	250 V		
Rated operational voltage U_e		250 V		
Rated impulse withstand voltage U_{imp}		4 kV		
Breaking capacity				
Rated operational current I_e	I_e/AC-12	24 V 10 A, 110/127 V 10 A, 220/240 V 10 A, 320/440 V 10 A		
	I_e/AC-15	220/240 V 4 A, 320/440 V 3 A,		
	I_e/DC-12	24 V 10 A, 48 V 2.5 A, 220/240 V 0.2 A,		
	I_e/DC-13	24 V 3.0 A, 220/240 V 0.1 A		
	A300 AC	120 V 6 A, 240 V 3 A		
	R300 DC	125 V 0.22 A, 250 V 0.11 A		

© Siemens 2025

Guide frames for AC

Phase-out

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your guide frame, please use our online configurator at
www.siemens.com/lowvoltage/3wl-configurator

1

3WL9	5	6	7		8	9	10	11	12		13	14	15	16
	2	1		–						–				1

		SZ 1	SZ 2	SZ 3	
Size (SZ)	1				1
	2				2
	3				3
Max. rated current $I_{n\,max}$ (guide frames)	1000 A [5) 6)]	■	–	–	1
	1600 A [5) 6)]	■	–	–	2
	2000 A [6)]	■	■	–	3
	2500 A [6)]	–	■	–	4
	3200 A [7)]	–	■	–	5
	4000 A [6)]	–	■	■	6
	5000 A	–	–	■	7
	6300 A	–	–	■	8

Number of poles	3-pole	F
	4-pole	G

Main connection	Front, single hole	■ [1)]	■ [2) 6)]	■ [3)]	A
	Front, double hole	■	■ [2) 6)]	■ [3)]	B
	Horizontal	■	■ [2)]	■ [4)]	C
	Vertical	■	■	■	D
	Connecting flange	■	■ [2) 6)]	■ [3)]	E

Short-circuit breaking capacity I_{cu} at 500 V	N	55 kA	■	–	–	N
	S	66 kA	■	–	–	S
	H	85 kA	■ [5)]	–	–	H
	N, S and H	≤ 100 kA	–	■	■	H
	C	130 kA	–	■	–	C
	C	150 kA	–	–	■	C

1) Not available for rated circuit breaker current 2000 A and breaking capacity H
2) Not available for rated circuit breaker current 4000 A
3) Not available for rated circuit breaker current 5000 A + 6300 A + breaking capacity C
4) Not available for rated circuit breaker current 6300 A
5) For size 1 with breaking capacity H, please select the max. rated current I_n 2000 A of the guide frame
6) Not available for breaking capacity C
7) For all rated circuit breaker currents up to 3200 A with breaking capacity C

Options

3WL9	5	6	7		8	9	10	11	12		13	14	15	16
	2	1		–						–				1

Number of auxiliary supply connectors	Without				0	
	1 connector				1	
	2 connectors				2	
	3 connectors				3	
	4 connectors				4	
Type of auxiliary circuit connections	Without [8)]					0
	With screw terminals (SIGUT, standard)					1
	With screwless terminals (tension spring)					2
Position signaling switch	Without					0
	1 CO | 1 CO | 1 CO (connected | test | disconnected position)					1
	3 CO | 2 CO | 1 CO (connected | test | disconnected position)					2
Shutters	Without					A
	With shutter, 2-part, lockable					B

8) Can only be selected if the number of auxiliary supply connectors is zero.

© Siemens 2025

Guide frames for DC

Phase-out

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your guide frame, please use our online configurator at
www.siemens.com/lowvoltage/3wl-configurator

	5	6	7	8	9	10	11	12	13	14	15	16
3WL9	2	1	2	–					–		0	1

Max. rated current $I_{n\,max}$	2000 A	3
	4000 A	6
Number of poles	3-pole	H
	4-pole	J
Main connection	Front, single hole[1]	A
	Front, double hole[1]	B
	Horizontal	C
	Vertical	D
	Connecting flange	E

[1] Not available for rated circuit breaker current 4000 A

Options

	5	6	7	8	9	10	11	12	13	14	15	16
3WL9	2	1	2	–					–		0	1

Number of auxiliary supply connectors	Without	0
	1 connector	1
	2 connectors	2
	3 connectors	3
	4 connectors	4
Type of auxiliary circuit connections	Without [2]	0
	With screw terminals (SIGUT, standard)	1
	With screwless terminals (tension spring)	2
Position signaling switch	Without	0
	1 CO | 1 CO | 1 CO (connected | test | disconnected position)	1
	3 CO | 2 CO | 1 CO (connected | test | disconnected position)	2
Shutters	Without	A
	With shutter, 2-part, lockable	B

[2] Can only be selected if the number of auxiliary supply connectors is zero.

© Siemens 2025

Accessories and spare parts

Phase-out

Accessories for ETU electronic trip units

Electronic trip units and optional metering function

NSE0_01610b

- For replacement in existing circuit breakers, please specify the circuit breaker ID No. when ordering.
- The electronic trip unit is supplied without a rating plug
- The rating plug must be ordered separately

Type	With protective function	Metering function	Article No.
ETU15B	LI	Without	3WL9311-5AA00-0AA2
ETU25B	LSI	Without	3WL9312-5AA00-0AA2
ETU27B	LSING	Without	3WL9312-7AA00-0AA2
ETU45B (without display)	LSIN(G)	Without	3WL9314-5AA00-0AA2
		With metering function Plus	3WL9314-5AA30-0AA2
ETU76B	LSIN(G)	Without	3WL9317-6AA00-0AA2
		With metering function Plus	3WL9317-6AA30-0AA2

Rating plugs


NSE0_00992b

- With the rating plug selected, the maximum rated current $I_{n\,max}$ of the circuit breaker must not be exceeded. The following applies: $I_n \leq I_{n\,max}$

Size	Rated current I_n	Article No.
1, 2	250 A	3WL9111-0AA51-0AA0
	315 A	3WL9111-0AA52-0AA0
	400 A	3WL9111-0AA53-0AA0
	500 A	3WL9111-0AA54-0AA0
	630 A	3WL9111-0AA55-0AA0
	800 A	3WL9111-0AA56-0AA0
	1000 A	3WL9111-0AA57-0AA0
1, 2, 3	1250 A	3WL9111-0AA58-0AA0
	1600 A	3WL9111-0AA61-0AA0
	2000 A	3WL9111-0AA62-0AA0
2, 3	2500 A	3WL9111-0AA63-0AA0
	3200 A	3WL9111-0AA64-0AA0
	4000 A	3WL9111-0AA65-0AA0
3	5000 A	3WL9111-0AA66-0AA0
	6300 A	3WL9111-0AA67-0AA0

Ground-fault modules

NSE0_01027a

- Alarm and tripping
- For direct metering of the ground-fault current, e.g. in the neutral point of the transformer, a 1200 A/1 A current transformer, class 1, is required. The internal load of the 3WL circuit breaker is 0.11 Ω. If the ground-fault current is to be determined using the vectorial sum of the phases, a transformer must be installed in the neutral conductor.

Type	Accessory for	Article No.
GFM AT 45B	ETU45B	3WL9111-0AT53-0AA0
GFM AT 55B – 76B	ETU76B	3WL9111-0AT56-0AA0

Display

NSE0_01609

Accessory for	Version	Article No.
ETU45B	4-line	3WL9111-0AT81-0AA0

Internal current transformers, for N conductor including wiring kit

ETU Release 2	Size	Article No.
–	1	3WL9111-0AA11-0AA0
	2	3WL9111-0AA12-0AA0
	3	3WL9111-0AA13-0AA0
✓	1	3WL9111-0AA14-0AA0
	2	3WL9111-0AA15-0AA0
	3	3WL9111-0AA16-0AA0

External current transformers for N conductor

NSE0_00990a

NSE0_00991a

Copper connection pieces	Size	Article No.
–	1	3WL9111-0AA21-0AA0
	2	3WL9111-0AA22-0AA0
	3	3WL9111-0AA23-0AA0
✓	1	3WL9111-0AA31-0AA0
	2	3WL9111-0AA32-0AA0
	3	3WL9111-0AA33-0AA0

© Siemens 2025

Phase-out

Accessories for ETU electronic trip units

EMC filter

- Common-mode interference suppressor filters (e.g. in IT networks, caused by frequency converters)
- Insertion loss (asymmetric) in the range 40 kHz to 10 MHz > 40 dB.

Types	Article No.
Only for ETU Release 2	3WL9111-0AK34-0AA0

Sealable and lockable covers

Accessory for	Article No.
ETU15B to ETU45B	3WL9111-0AT45-0AA0
ETU76	3WL9111-0AT46-0AA0

Automatic reset of the reclosing lockout

Version	Article No.
Spare part for option K01	3WL9111-0AK21-0AA0

Remote trip alarm reset coils



Note:
The remote trip alarm reset coils are identical for the 3WL and 3WA and can be used in both circuit breaker lines.
You will find the article numbers of the remote trip alarm reset coils in section 3WA – Accessories and spare parts see page 1/63

Retrofittable internal wiring

Use	Male connector	Accessory for	Article No.
Internal wiring of **Cubicle**BUS for connection to terminal X8	Without male connector	ETU45B and ETU76B	3WL9111-0AK30-0AA0
For connection of the external N and G transformers to terminal X8	Without male connector	Not for ETU Release 2	3WL9111-0AK31-0AA0
		ETU Release 2	3WL9111-0AK33-0AA0

Locking provisions and interlocks

Interlocking sets for mechanical Open/Close



- Consisting of two transparent covers each for sealing or for attaching padlocks (padlocks not included in scope of supply)
- Cover with 6.35 mm hole (for tool actuation)
- Lock mount for safety lock for key operation

Version	Article No.
Without safety lock	3WL9111-0BA21-0AA0
Made by CES	3WL9111-0BA22-0AA0
Made by IKON	3WL9111-0BA24-0AA0

Locking provision against unauthorized closing from the operator panel



- The disconnector unit fulfills the requirements for main circuit breakers acc. to EN 60204-1
- Spare part for options S01 to S09

Type	Scope of supply	Article No.
Assembly kit FORTRESS or CASTELL	Without locks, cylinders or keys	3WL9111-0BA31-0AA0
Made by RONIS	Locks, cylinders and keys included	3WL9111-0BA33-0AA0
Made by KIRK-Key	Without locks, cylinders or keys	3WL9111-0BA34-0AA0
Made by PROFALUX	Locks, cylinders and keys included	3WL9111-0BA35-0AA0
Made by CES	Locks, cylinders and keys included	3WL9111-0BA36-0AA0
Made by IKON	Locks, cylinders and keys included	3WL9111-0BA38-0AA0
Assembly kit for padlocks	Without padlock	3WL9111-0BA41-0AA0

© Siemens 2025

Accessories and spare parts

Phase-out

Locking provisions and interlocks

Locking provision against unauthorized closing, for withdrawable circuit breakers



- The disconnector unit fulfills the requirements for main circuit breakers acc. to EN 60204-1
- Consisting of lock in the guide frame, active in connected position, function is retained when circuit breaker is replaced
- Spare part for option R60, R61, R68

Type	Scope of supply	Article No.
Made by CES	Locks, cylinders and keys included	3WL9111-0BA51-0AA0
Made by IKON	Locks, cylinders and keys included	3WL9111-0BA53-0AA0
Made by KIRK-Key [1]	Without locks, cylinders or keys	3WL9111-0BA57-0AA0
Made by RONIS	Locks, cylinders and keys included	3WL9111-0BA58-0AA0
Made by PROFALUX	Locks, cylinders and keys included	3WL9111-0BA50-0AA0

Locking provisions for charging handle with padlock



Version	Scope of supply	Article No.
Spare part for option S33	Without padlock	3WL9111-0BA71-0AA0

Locking provision to prevent movement of the withdrawable circuit breaker



- Safety lock for mounting onto the circuit breaker
- Spare part for option S71, S75, S76

Type	Scope of supply	Article No.
Made by CES	Locks, cylinders and keys included	3WL9111-0BA73-0AA0
Made by IKON	Locks, cylinders and keys included	3WL9111-0BA75-0AA0
Made by PROFALUX	Locks, cylinders and keys included	3WL9111-0BA76-0AA0
Made by RONIS	Locks, cylinders and keys included	3WL9111-0BA77-0AA0
Made by KIRK-Key [1]	Without locks, cylinders or keys	3WL9111-0BA80-0AA0

Interlocking systems

- 2 of the same keys for 3 circuit breakers
- Locking provision in OFF position
- Lock in the operator panel
- A maximum of 2 circuit breakers can be switched on

Type	Article No.
Made by CES	3WL9111-0BA43-0AA0

Locking mechanisms to prevent movement of the withdrawable circuit breakers in disconnected position



- Consisting of Bowden cable and lock in the cabinet door on the circuit breaker
- Spare part for option R81, R85, R86
- **Note:** Not possible in combination with “Locking mechanism to prevent opening of the cabinet door” (order code “R30”) or “Locking mechanism to prevent movement with the cabinet door open” (order code “R50”)

Type	Article No.
Made by CES	3WL9111-0BA81-0AA0
Made by IKON	3WL9111-0BA83-0AA0
Made by PROFALUX	3WL9111-0BA85-0AA0
Made by RONIS	3WL9111-0BA86-0AA0

Locking mechanisms to prevent opening of the cabinet door in ON position

- Fixed-mounted
- Defeatable
- **Note:** Not possible in combination with “Locking mechanism to prevent movement of the withdrawable circuit breakers in disconnected position” (order codes “R81”, “R85” or “R86”).

Version	Article No.
Spare part for option S30	3WL9111-0BB12-0AA0

[1] Locks, cylinders and keys must be ordered from the manufacturer.

© Siemens 2025

Phase-out

Locking provisions and interlocks

Locking mechanisms to prevent opening of the cabinet door

- Guide frames
- Defeatable
- **Note:** Not possible in combination with "Locking mechanism to prevent movement of the withdrawable circuit breakers in disconnected position" (order codes "R81", "R85" or "R86").

Version	Article No.
Spare part for option R30	3WL9111-0BB13-0AA0

Locking mechanisms to prevent movement with the cabinet door open

- Guide frames
- **Note:** Not possible in combination with "Locking mechanism to prevent movement of the withdrawable circuit breakers in disconnected position" (order codes "R81", "R85" or "R86").

Version	Article No.
Spare part for option R50	3WL9111-0BB15-0AA0

Mechanical interlocks



- With Bowden cable 2000 mm (one required for each circuit breaker)

Type	When ordered separately	Spare part for	Article No.
Fixed-mounted circuit breaker	–	Option S55	3WL9111-0BB21-0AA0
Module for withdrawable circuit breakers with guide frame	–	Option R55 [1]	3WL9111-0BB24-0AA0
Module for guide frame	✓	Option R56	3WL9111-0BB22-0AA0
Module for withdrawable circuit breaker	✓	Option R57	3WL9111-0BB23-0AA0
Adapter for size 3 withdrawable circuit breaker	✓	–	3WL9111-0BB30-0AA0

Couplings on the circuit breaker (with ring) for mutual interlocking

- Can be used in all circuit breakers

Article No.
3WL9112-8AH47-0AA0

Bowden cable

Length	Article No.
2000 mm	3WL9111-0BB45-0AA0
3000 mm	3WL9111-0BB46-0AA0
4500 mm	3WL9111-0BB47-0AA0

[1] Not available in combination with R40

Test devices

Manual tester

- For testing the overcurrent release functions for electronic trip units ETU15B to ETU76B (Release 1 and Release 2)

Article No.
3WL9111-0AT32-0AA0

Function test unit

- For testing the tripping characteristics for ETU15B to ETU76B electronic trip units (Release 1 and Release 2)

Article No.
3WL9111-0AT44-0AA0

TD400 test device [1]

- Commissioning/service tool for 3VA and 3WL with ETU Release 2
- Not suitable for 3WL10 and 3VA27
- Power supply via batteries or the USB-C interface
- USB-C interface for connecting a PC with SENTRON Powerconfig
- Bluetooth interface for connection to a PC, smartphone or tablet
- Including adapter, connecting cable and case

Connection	Article No.
On the front interface of the ETU	3VW9011-0AT40

TD400 adapter (spare part)

Version	Article No.
For 3VA	3VW9011-0AT43
For 3WL ETU Release 1	3VW9011-0AT44
For 3WL ETU Release 2	3VW9011-0AT45
For 3WA ETU300	3VW9011-0AT46

[1] A country-specific radio license is required to operate the Bluetooth interface.
Before activating the Bluetooth function, ensure that the license is available: www.siemens.com/lowvoltage/certificates

© Siemens 2025

Accessories and spare parts

Phase-out

Indicators and control elements

Ready-to-close signaling switches (S20)



Version	Contacts	Article No.
Spare part for option C22	1 NO	3WL9111-0AH01-0AA0

Signaling switch (S22 or S23)



- Not possible with communication port, order code "F02", "F12" or "F35".
- Auxiliary supply connector X7 required for circuit breakers or guide frames. If this is not already available, please order additionally

Version	Contacts	Article No.
Spare part for options C26 and C27	1st or 2nd auxiliary release	3WL9111-0AH02-0AA0

1st tripped signaling switch (S24)

- Not possible with communication port, order code "F02", "F12" or "F35".
- Auxiliary supply connector X7 required for circuit breakers or guide frames. If this is not already available, please order additionally

Version	Contacts	Article No.
Spare part for option K07	1 CO	3WL9111-0AH14-0AA0

2nd tripped signaling switch (S25)

- Not possible with communication port, order code "F02", "F12" or "F35".
- Auxiliary supply connector X7 required for circuit breakers or guide frames. If this is not already available, please order additionally
- Can only be used in combination with 1st tripped signaling switch

Version	Contacts	Article No.
Spare part for option K06	1 NO	3WL9111-0AH17-0AA0

Operating cycles counters



- Only in conjunction with motorized operating mechanism

Version	Version	Article No.
Spare part for option C01	Mechanical	3WL9111-0AH07-0AA0

Spring charge signaling switch

- Not possible with communication port, order code "F02", "F12" or "F35".
- Auxiliary supply connector X7 required for circuit breakers or guide frames. If this is not already available, please order additionally

Version	Contacts	Article No.
Spare part for option C20	1 NO	3WL9111-0AH08-0AA0

Position signaling switches for guide frames



Version	Contacts	Article No.
Spare part for options R15	3 changeover contacts (1 × connected/1 × test/1 × disconnected position)	3WL9111-0AH11-0AA0
Spare part for options R16	6 changeover contacts (3 × connected/2 × test/1 × disconnected position)	3WL9111-0AH12-0AA0

Local electric close (S10) for operator panel



- Not possible with communication port, order code "F02", "F12" or "F35".
- Not possible with motor disconnect switch
- Button + wiring (Auxiliary supply connector X7 required for circuit breakers or guide frames. If this is not already available, please order additionally)
- **Note:** Possible only for circuit breakers with closing coil.

Version	Type	Article No.
Spare part for options C11 and C12	With sealing cap C11	3WL9111-0AJ02-0AA0
	With CES assembly kit C12	3WL9111-0AJ03-0AA0
	With IKON assembly kit	3WL9111-0AJ05-0AA0

© Siemens 2025

Phase-out

Indicators and control elements

Motor disconnect switch (S12)

- Mounting onto operator panel
- Not possible with local electric close

Version	Article No.
Spare part for option S25	3WL9111-0AJ06-0AA0

EMERGENCY-OFF pushbuttons



- Mushroom pushbutton instead of the mechanical OFF pushbutton

Type	Article No.
Spare part for option S24	3WL9111-0BA72-0AA0

Auxiliary conductor connections

Male connectors for circuit breakers 1



Article No.
3WA9111-0AB01

Extension for male connector

- Male connector must be ordered separately

Version	Article No.
1000 V	3WA9111-0AB02

Auxiliary supply connector for circuit breakers or guide frames 2

Version	Article No.
Screw connection (SIGUT)	3WA9111-0AB03
Screwless connection (tension spring)	3WL9111-0AB04-0AA0





Coding kits 3

Version	Article No.
For fixed-mounted X5 to X8	3WA9111-0AB07

Sliding contact modules for guide frames 4



Article No.
3WA9111-0AB08

One-part sliding contact modules for guide frames 5



Version	Article No.
Screw connection (SIGUT)	3WL9111-0AB18-0AA0

Blanking blocks for circuit breakers

Article No.
3WA9111-0AB12

For a complete auxiliary circuit connection you must order:
Fixed-mounted version: 1 + 2 + 3
Withdrawable version: 1 + 4 + 2 or 1 + 5

© Siemens 2025

Accessories and spare parts

Phase-out

Auxiliary release

Closing coils/shunt trips



Note:
The closing coils (CC) and shunt trips (ST) are identical for the 3WL and 3WA and can be used in both circuit breaker lines.
You will find article numbers in section 3WA see page 1/67

Please note: The communication-capable closing coils (CC-COM) can be used only in conjunction with 3WA.

Closing coils (CC), 5% OP (momentary duty) with cut-off switch S15

Note:
The closing coils (CC) with 5% OP are identical for the 3WL and 3WA and can be used in both circuit breaker lines.
You will find article numbers in section 3WA see page 1/68

Shunt trip (ST), 5% OP (momentary duty) with cut-off switch S14

Note:
The shunt trips (ST) with 5% OP are identical for the 3WL and 3WA and can be used in both circuit breaker lines.
You will find article numbers in section 3WA see page 1/68

Undervoltage release



Note:
The undervoltage releases (UVR and UVR-t) are identical for the 3WL and 3WA and can be used in both circuit breaker lines.
You will find article numbers in section 3WA see page 1/68

Operating mechanism

Motorized operating mechanisms



Note:
The motor operators are identical for the 3WL and 3WA and can be used in both circuit breaker lines.
You will find article numbers in section 3WA see page 1/68

Auxiliary contacts

Auxiliary switch blocks



Contacts	Article No.
2 NO + 2 NC	3WL9111-0AG01-0AA0
2 NO	3WL9111-0AG02-0AA0
1 NO + 1 NC	3WL9111-0AG03-0AA0

© Siemens 2025

Phase-out

Door sealing frames, hoods, shutters

Door sealing frames

Version	Article No.
Spare part for option T40	3WL9111-0AP01-0AA0

Protective covers IP55

- Cannot be used in conjunction with door sealing frames
- Hood removable and can be opened on both sides

Article No.
3WL9111-0AP02-0AA0

Shutters

Version	Number of poles	Size	Breaking capacity	Article No.
Spare part for option R21	3-pole	1	N, S, H	3WL9111-0AP04-0AA0
		2	N, S, H	3WL9111-0AP06-0AA0
			C	3WL9111-0AP43-0AA0
		3	H, C	3WL9111-0AP07-0AA0
	4-pole	1	N, S, H	3WL9111-0AP08-0AA0
		2	N, S, H	3WL9111-0AP11-0AA0
			C	3WL9111-0AP44-0AA0
		3	H, C	3WL9111-0AP12-0AA0

Arc chute

Arc chute



Voltage	Size	Breaking capacity	Article No.
690 V	1	N, S, H	3WL9111-0AS01-0AA0
	2	N, S, H	3WL9111-0AS02-0AA0
		C	3WL9111-0AS10-0AA0
	3	H, C	3WL9111-0AS03-0AA0
1000 V/1150 V	2	H, C	3WL9111-0AS05-0AA0
	3	H, C	3WL9111-0AS06-0AA0

Arc chute covers

- Parts kit for guide frame
- Spare part for option R10
- Not available for:
  - 1000 V version (order code "A05"),
  - 1150 V version (order code "A15")
  - DC version
  - 4000 A size 2
  - Circuit breakers with very high breaking capacity C.



Number of poles	Size	Article No.
3-pole	1	3WL9111-0AS32-0AA0
	2	3WL9111-0AS36-0AA0
	3	3WL9111-0AS38-0AA0
4-pole	1	3WL9111-0AS42-0AA0
	2	3WL9111-0AS44-0AA0
	3	3WL9111-0AS46-0AA0

Coding for withdrawable version

Coding for withdrawable version



- By customer, for 36 coding variants

Size	Article No.
1, 2	3WL9111-0AR12-0AA0
3	3WL9111-0AR13-0AA0

© Siemens 2025

Accessories and spare parts

Phase-out

Grounding connections

Grounding connection between the guide frame and the withdrawable circuit breaker

- Up to 30 kA or 60 kA ground-fault current
- 2 modules must be used for up to 60 kA ground-fault current

Contact module	Size	Number of poles	Article No.
For guide frames	1, 2 [1]		3WL9111-0BA01-0AA0
	3		3WL9111-0BA02-0AA0
For withdrawable circuit breakers	1	3-pole	3WL9111-0BA05-0AA0
		4-pole	3WL9111-0BA08-0AA0
	2	3-pole [1]	3WL9111-0BA06-0AA0
		4-pole [1]	3WL9111-0BA04-0AA0
	3	3-pole	3WL9111-0BA07-0AA0
		4-pole	3WL9111-0BA10-0AA0

[1] Cannot be used for size 2 with very high breaking capacity C and size 2, 4000 A.

Support bracket

Support bracket

- For mounting fixed-mounted circuit breakers on vertical plane
- Only for sizes 1 and 2 (1 set = 2 units)

	Article No.
	3WL9111-0BB50-0AA0

CubicleBUS modules

- Each **Cubicle**BUS module is supplied with a 0.2 m pre-assembled cable to connect the modules with each other. A longer pre-assembled cable is required for connection to the circuit breaker.
- All communication components, **Cubicle**BUS modules and metering functions are available for the ETU45B and ETU76B electronic trip units.

Modules of the CubicleBUS modules



Type	Article No.
Digital output module with rotary coding switch, relay outputs	3WL9111-0AT26-0AA0
Digital output module, configurable, relay outputs	3WL9111-0AT20-0AA0
Digital input module	3WL9111-0AT27-0AA0
Analog output module	3WL9111-0AT23-0AA0
ZSI module	3WL9111-0AT21-0AA0

Preassembled cables for the CubicleBUS

For connection to 3WL	Length	Article No.
With COM15/COM16/COM35	0.2 m	3WL9111-0BC04-0AA0
	1 m	3WL9111-0BC02-0AA0
	2 m	3WL9111-0BC03-0AA0
Without COM15/COM16/COM35	2 m	3WL9111-0BC05-0AA0

Voltage transformers

- Required for 3WL circuit breakers with metering function Plus, if no direct voltage tap is available.
- 380 ... 690 V/100 V, class 0.5

Number of poles	Metering function	Article No.
3-pole	With metering function Plus	3WL9111-0BB68-0AA0

© Siemens 2025

Phase-out

Retrofitting and spare parts

- For retrofitting the COM15, COM16 or COM35 communications modules in withdrawable 3WL circuit breakers with Z options A05 (1000 V AC), A15 (1150 V AC) or A16 (690 V + 20%), the following additional assembly kits are required: 3WL9111-0AT62-0AA0 for circuit breakers size 1 or 3WL9111-0AT63-0AA0 for circuit breakers size 2/3

COM35 PROFINET IO/Modbus TCP modules

Version	Article No.
For ETU45B and ETU76B electronic trip units	3WL9111-0AT65-0AA0

PROFINET IO/Modbus TCP retrofit kits

- Retrofit kit for the PROFINET IO/Modbus TCP communication including COM35, BSS and set of cables for all 3WL air circuit breakers with ETU45B and ETU76B electronic trip units

Article No.
3WL9111-0AT66-0AA0

PROFIBUS retrofit kits

- Retrofit kit for the PROFIBUS communication including COM15, BSS and set of cables for all 3WL air circuit breakers with ETU45B and ETU76B electronic trip units

Article No.
3WL9111-0AT12-0AA0

COM15 PROFIBUS modules

Version	Article No.
For ETU45B and ETU76B electronic trip units	3WL9111-0AT15-0AA0

COM16 Modbus RTU modules

Version	Article No.
For ETU45B and ETU76B electronic trip units	3WL9111-0AT17-0AA0

Modbus RTU retrofit kits IEC

- Retrofit kit for the Modbus communication including COM16, BSS and set of cables for all 3WL air circuit breakers with ETU45B and ETU76B electronic trip units

Article No.
3WL9111-0AT18-0AA0

Additional parts for retrofitting the COM15/COM16/COM35 communications modules

- In withdrawable 3WL circuit breakers with Z options:
  - A05 (1000 V AC) or
  - A15 (1150 V AC) or
  - A16 (690 V + 20%)

Size	Article No.
1	3WL9111-0AT62-0AA0
2, 3	3WL9111-0AT63-0AA0

Breaker status sensors (BSS)

Version	Article No.
• For acquisition via communication of the circuit breaker states ON/OFF/tripped • For ETU45B and ETU76B electronic trip units	3WL9111-0AT16-0AA0

Operating instructions in printed form

Description	Article No.
3WL operating instructions – Upgrade DE/EN	3ZW1012-0WL11-0AB1
3WL operating instructions – DE/EN	3ZX1812-0WL00-0AN4
3WL operating instructions – Upgrade IT/FR	3ZW1012-0WL11-0AD1
3WL operating instructions – IT/FR	3ZX1812-0WL00-0AJ3
3WL operating instructions – Upgrade ES/PT	3ZW1012-0WL11-0AE1
3WL operating instructions – ES/PT	3ZX1812-0WL00-0AL3
Article number assignment for 3WL or 3WL upgrade	**Article No.**
3WL breakers	3WL1___-___3_-_____
	3WL1___-___4_-_____
3WL breakers upgrade	3WL1___-___6_-_____
	3WL1___-___7_-_____
3WL guide frames	3WL921_-_A___-_____
	3WL921_-_B___-_____
	3WL921_-_D___-_____
	3WL921_-_E___-_____
3WL guide frames upgrade	3WL921_-_F___-_____
	3WL921_-_G___-_____
	3WL921_-_H___-_____
	3WL921_-_J___-_____

© Siemens 2025

Accessories and spare parts

Phase-out

Interfaces

Interface to the IEC 61850

- The SICAM A8000 smart data concentrator connects the circuit breakers from the SENTRON portfolio via the Modbus TCP/IP protocol and transmits data via communication protocols (e.g.: IEC 61850, IEC 60870-5-104, IEC 60870-5-101, Modbus and DNP) to higher-level systems.

Type	Operational voltage	Article No.
SICAM CP-8021 [1]	–	6MF2802-1AA00
SICAM CP-8050 [2]	–	6MF2805-0AA00
SICAM PS-8620	24 ... 60 V DC (12 W)	6MF2862-0AA00
SICAM PS-8622	110 ... 220 V DC (12 W)	6MF2862-2AA00

[1] Dimensioned for device quantities of max. 1 × 3WL and 1 × 3VA
[2] Dimensioned for device quantities of 3 × 3WL and 8 × 3VA

You will find further information at:
www.siemens.com/sicam-a8000
For the SICAM CP-8021 and SICAM CP-8050, predefined modules were created to reduce commissioning work to a minimum.
The modules can be obtained free of charge via SiePortal www.siemens.com/lowvoltage/product-support (109816057)

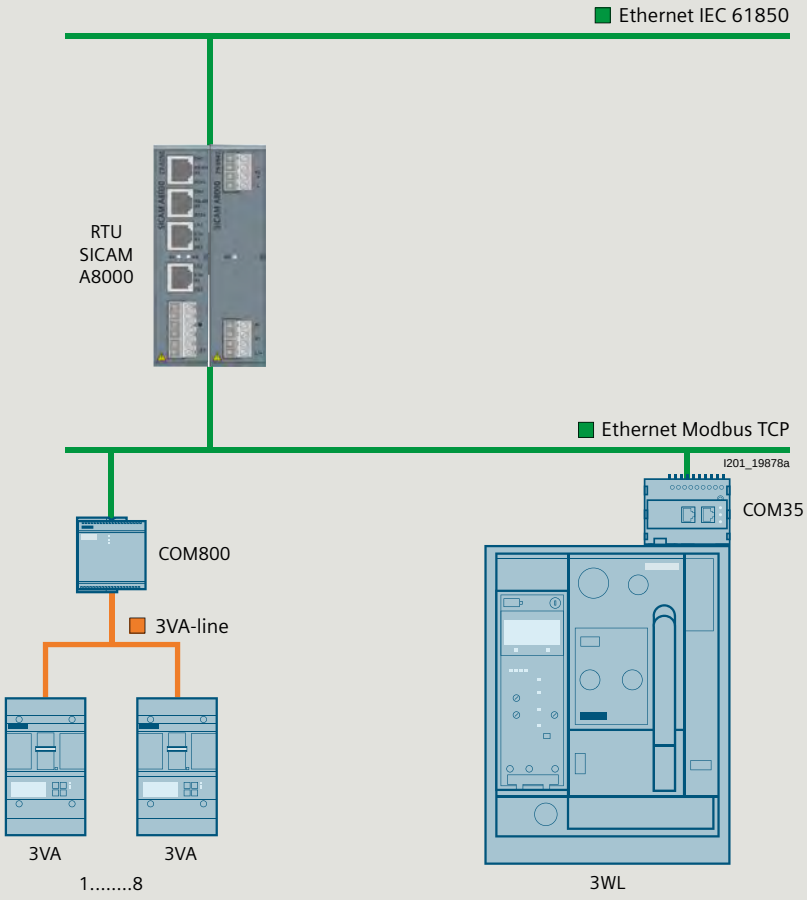

© Siemens 2025

Phase-out

Storage devices

Capacitor trip device

- For shunt trips
- Storage time 5 min
- Also suitable for 3VL, 3VA and 3WN circuit breakers
- **Note:** Rated control supply voltage must match the rated control supply voltage of the shunt trips.

Rated control supply voltage/rated operational voltage		Article No.
50/60 Hz AC	DC	
220 ... 240 V	220 ... 250 V	3WL9111-0BA14-0AA0

Spare parts

Metering function Plus for retrofitting

- As spare part or for retrofitting the metering function Plus with an external voltage transformer
  - For ETU45B or ETU76B Release 2
  - A measuring accuracy of 3% is achieved if retrofitted.
- **Note:** External voltage transformer required

	Article No.
	3WL9111-0AT05-0AA0

Voltage converter

Version	Article No.
As a spare part for the metering function Plus	3WL9111-0AT06-0AA0

Components for conversion of an existing internal voltage tap

- Conversion requires 3 components for 3-pole 3WL
- Conversion requires 4 components for 4-pole 3WL
- Conversion of a metering function (Z option A05) is not possible.

Conversion of internal voltage tap to main contact	Size	Article No.
From bottom to top	1	3WL9111-0AT71-0AA0
	2	3WL9111-0AT72-0AA0
	3	3WL9111-0AT73-0AA0
From top to bottom	1	3WL9111-0AT74-0AA0
	2	3WL9111-0AT75-0AA0
	3	3WL9111-0AT76-0AA0

Transformers (without iron core), Rogowski coil only (instrument transformer for the protective function)

- Used in converter applications with high harmonic components;
  can only be used with ETU45B or ETU76B
  - External 24 V DC supply required
  - Undervoltage release 3WA9111-0AE02 (UVR 24 ... 30 V DC) required
- As retrofit kit or as spare part. With new circuit breakers, please use the Z option K60
- **Scope of supply:**
  - Transformer
  - Warning signs
  - Manual

Number of poles	Size	Article No.
3-pole	1	3WL9111-0AA42-0AA0
	2	3WL9111-0AA43-0AA0
	3	3WL9111-0AA44-0AA0
4-pole	1	3WL9111-0AA45-0AA0
	2	3WL9111-0AA46-0AA0
	3	3WL9111-0AA47-0AA0

© Siemens 2025

Accessories and spare parts

Phase-out

Main conductor connections, fixed-mounted versions (essential accessory)

Front-accessible main connections, single hole at top



- Not for 3WL1 size 1 with high breaking capacity H

Size	Rated current I_n	Article No.
1	≤ 1000 A	3WL9111-0AL01-0AA0
	1250 ... 1600 A	3WL9111-0AL02-0AA0
2 [4]	≤ 2000 A	3WL9111-0AL03-0AA0
	≤ 2500 A	3WL9111-0AL04-0AA0
	≤ 3200 A	3WL9111-0AL05-0AA0
3	≤ 4000 A	3WL9111-0AL06-0AA0

Front-accessible main connections, single hole at bottom



- Not for 3WL1 size 1 with high breaking capacity H

Size	Rated current I_n	Article No.
1	≤ 1000 A	3WL9111-0AL51-0AA0
	1250 ... 1600 A	3WL9111-0AL52-0AA0
2 [4]	≤ 2000 A	3WL9111-0AL53-0AA0
	≤ 2500 A	3WL9111-0AL54-0AA0
	≤ 3200 A	3WL9111-0AL55-0AA0
3	≤ 4000 A	3WL9111-0AL56-0AA0

Front-accessible main connections according to DIN 43673, double hole at top



Size	Rated current I_n	Article No.
1	≤ 1000 A [1]	3WL9111-0AL07-0AA0
	1250 ... 2000 A [5]	3WL9111-0AL08-0AA0
2 [4]	≤ 2000 A	3WL9111-0AL11-0AA0
	≤ 2500 A	3WL9111-0AL12-0AA0
	≤ 3200 A	3WL9111-0AL13-0AA0
3	≤ 4000 A	3WL9111-0AL14-0AA0

Front-accessible main connections according to DIN 43673, double hole at bottom



Size	Rated current I_n	Article No.
1	≤ 1000 A [1]	3WL9111-0AL57-0AA0
	1250 ... 2000 A [5]	3WL9111-0AL58-0AA0
2 [4]	≤ 2000 A	3WL9111-0AL61-0AA0
	≤ 2500 A	3WL9111-0AL62-0AA0
	≤ 3200 A	3WL9111-0AL63-0AA0
3	≤ 4000 A	3WL9111-0AL64-0AA0

Rear vertical main connections



Size	Rated current I_n	Article No.
1 [2]	≤ 2000 A	3WL9111-0AM01-0AA0
2 [3]	≤ 3200 A	3WL9111-0AM02-0AA0
3	≤ 6300 A	3WL9111-0AM03-0AA0

[1] Not for 3WL1 size 1 with high breaking capacity H
[2] In the case of vertical connection size 1 with breaking capacity N and S, up to 1000 A one 3WL9111-0AM01-0AA0 vertical connection is required, up to 2000 A or with breaking capacity H two 3WL9111-0AM01-0AA0 vertical connections are required.
[3] In the case of vertical connection size 2, up to 2500 A one 3WL9111–0AM02–0AA0 vertical connection is required, up to 3200 A two 3WL9111-0AM02-0AA0 vertical connections are required.
[4] Not for circuit breakers with very high breaking capacity C.
[5] Can be used for size 1 with H breaking capacity of 630 ... 2000 A.

© Siemens 2025

Phase-out

Main conductor connections, withdrawable versions (essential accessory)

Front-accessible main connections, single hole at top or at bottom [1] [2]



Size	Rated current I_n	Article No.
1	≤ 1000 A	3WL9111-0AN01-0AA0
	1250 ... 1600 A	3WL9111-0AN02-0AA0
2 [3]	≤ 2000 A	3WL9111-0AN03-0AA0
	≤ 2500 A	3WL9111-0AN04-0AA0
	≤ 3200 A	3WL9111-0AN05-0AA0
3	≤ 4000 A	3WL9111-0AN06-0AA0

Front-accessible main connections according to DIN 43673, double hole at top or at bottom [1]



Size	Rated current I_n	Article No.
1	≤ 1000 A [2]	3WL9111-0AN07-0AA0
	1250 ... 2000 A [3]	3WL9111-0AN08-0AA0
2 [3]	≤ 2000 A	3WL9111-0AN11-0AA0
	≤ 2500 A	3WL9111-0AN12-0AA0
	≤ 3200 A	3WL9111-0AN13-0AA0
3	≤ 4000 A	3WL9111-0AN14-0AA0

Supports for front and DIN connection bars



Number of poles	Size	Article No.
3-pole for 3 bars	1	3WL9111-0AN41-0AA0
	2	3WL9111-0AN42-0AA0
	3	3WL9111-0AN43-0AA0
4-pole for 4 bars	1	3WL9111-0AN44-0AA0
	2	3WL9111-0AN45-0AA0
	3	3WL9111-0AN46-0AA0

Rear vertical main connections

Size	Rated current I_n	Connection pieces	Article No.
1	≤ 1000 A [2]		3WL9111-0AN15-0AA0
	1250 ... 2000 A [2]		3WL9111-0AN16-0AA0
2	≤ 2000 A [4]		3WL9111-0AN17-0AA0
	≤ 2500 A [4]		3WL9111-0AN18-0AA0
	≤ 3200 A [4]		3WL9111-0AN21-0AA0
3	≤ 5000 A		3WL9111-0AN22-0AA0
	≤ 6300 A	3 pieces for 3-pole switches	3WL9111-0AN23-0AA0
	≤ 6300 A, top	4 pieces for 4-pole switches	3WL9111-0AN20-0AA0
	≤ 6300 A, bottom	4 pieces for 4-pole switches	3WL9111-0AN10-0AA0

Rear horizontal main connections

Size	Rated current I_n	Article No.
1	≤ 1000 A [2]	3WL9111-0AN32-0AA0
	1250 ... 2000 A [2]	3WL9111-0AN33-0AA0
2	≤ 2000 A [4]	3WL9111-0AN34-0AA0
	≤ 2500 A [4]	3WL9111-0AN35-0AA0
	≤ 3200 A [4] and 4000 A DC	3WL9111-0AN36-0AA0
3	≤ 5000 A	3WL9111-0AN37-0AA0

Connecting flange



Size	Rated current I_n	Article No.
1	≤ 1000 A [2]	3WL9111-0AN24-0AA0
	1250 ... 2000 A [2]	3WL9111-0AN25-0AA0
2 [3]	≤ 2000 A	3WL9111-0AN26-0AA0
	≤ 2500 A	3WL9111-0AN27-0AA0
	≤ 3200 A	3WL9111-0AN28-0AA0
3	≤ 4000 A	3WL9111-0AN31-0AA0

[1] When using front-accessible main connections (withdrawable circuit breakers) supports are required.
[2] Not for 3WL1 size 1 with high breaking capacity H
[3] Can be used for size 1 with H breaking capacity of 630 A ... 2000 A.
[4] Not for circuit breakers with very high breaking capacity C.

© Siemens 2025

Accessories and spare parts

Phase-out

Conversion kit

Conversion kit for converting fixed-mounted circuit breakers into withdrawable circuit breakers

- Guide frames and sliding contact modules must be ordered separately
- Conversion from fixed-mounted to withdrawable circuit breakers is not possible for 3WL1 circuit breakers with very high breaking capacity C and for circuit breakers with Z options A05, A15 or A16

Number of poles	Size	Article No.
3-pole	1	3WL9111-0BC11-0AA0
	2	3WL9111-0BC12-0AA0
	3	3WL9111-0BC13-0AA0
4-pole	1	3WL9111-0BC14-0AA0
	2	3WL9111-0BC15-0AA0
	3	3WL9111-0BC16-0AA0

Note:
When the conversion kit is ordered, the switch ID (on the operator panel of the 3WL) must also be stated

Main contacts

Main contacts [1) 2)]



- **Notes:**
  - The circuit breaker ID number must be specified when ordering [3)]
  - Specified for each connection (depending on the number of poles on the circuit breaker, order 3 or 4 units)
  - Article number is automatically adapted to the circuit breaker ID No.

Size	Rated current I_n	Article No.
1	≤ 1600 A [4)]	3WL9111-0AM90 L1Y
2	≤ 2500 A	3WL9111-0AM91 L1Y
	≤ 4000 A	3WL9111-0AM92 L1Y
3	≤ 6300 A	3WL9111-0AM93 L1Y

1) Not for circuit breakers with very high breaking capacity C.
2) Replacement of the main contacts for 3WL1 circuit breakers with very high breaking capacity C is only possible at the factory.
3) Please specify the circuit breaker ID No. in plain text when ordering.
4) Not for size 1 circuit breakers with breaking capacity H and circuit breakers with I_n = 2000 A. The main contacts can only be replaced in the factory.

© Siemens 2025

© Siemens 2025

Online configurator highlights

www.siemens.com/lowvoltage/configurators

Direct entry of an already known article number

Including download option of all available documents

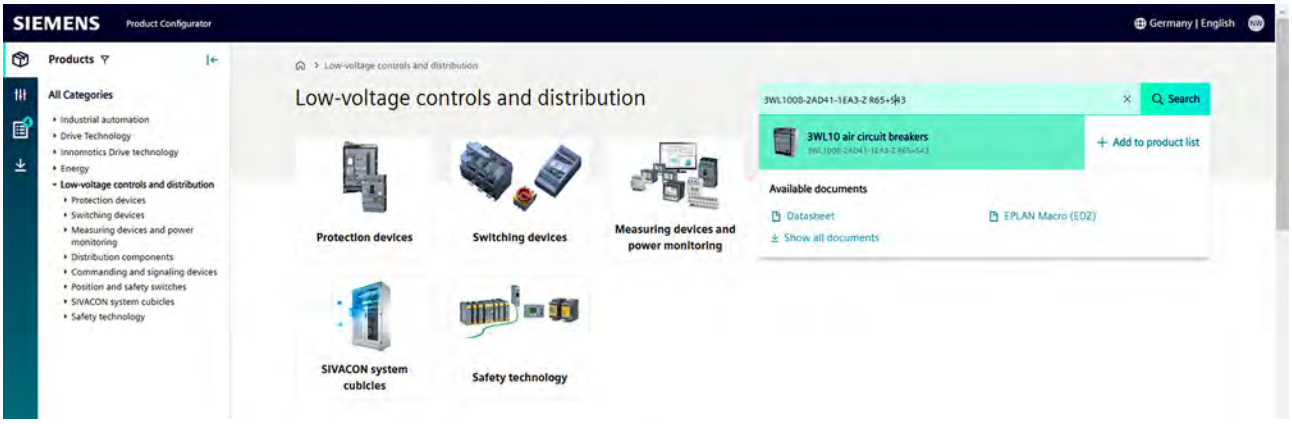

Product list stores multiple configurations and can transfer them collectively to the shopping cart

Recall of completed configurations for modification or additional configuration

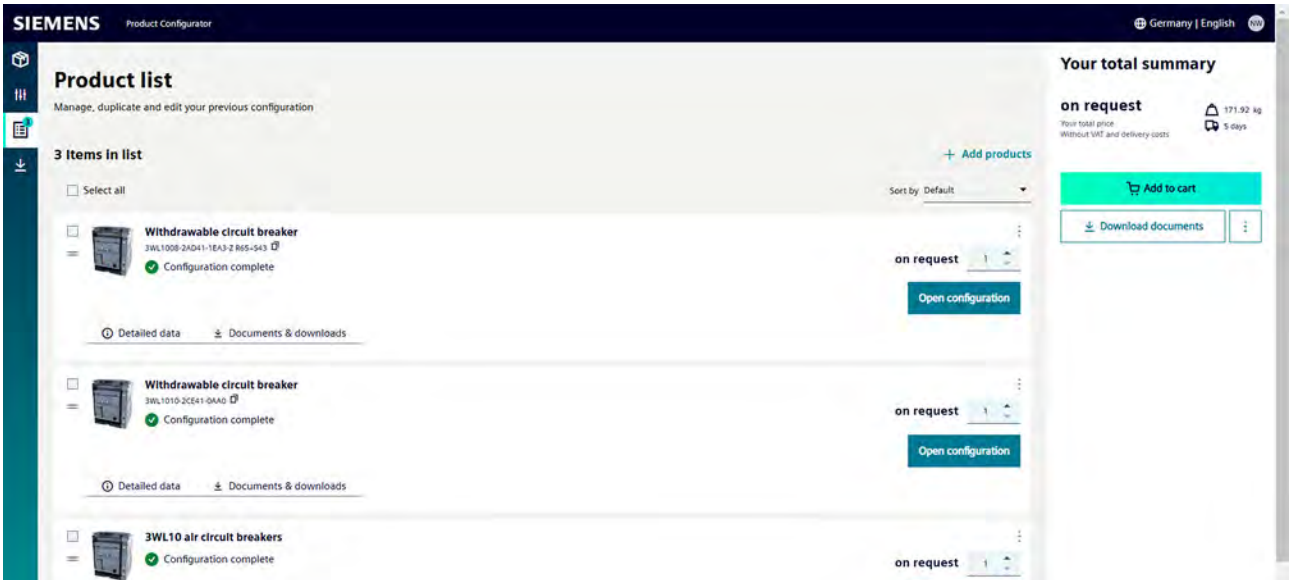

Responsive Design



© Siemens 2025

www.siemens.com/lowvoltage/3wl10-configurator

Download an ePlan selector for 3WL10

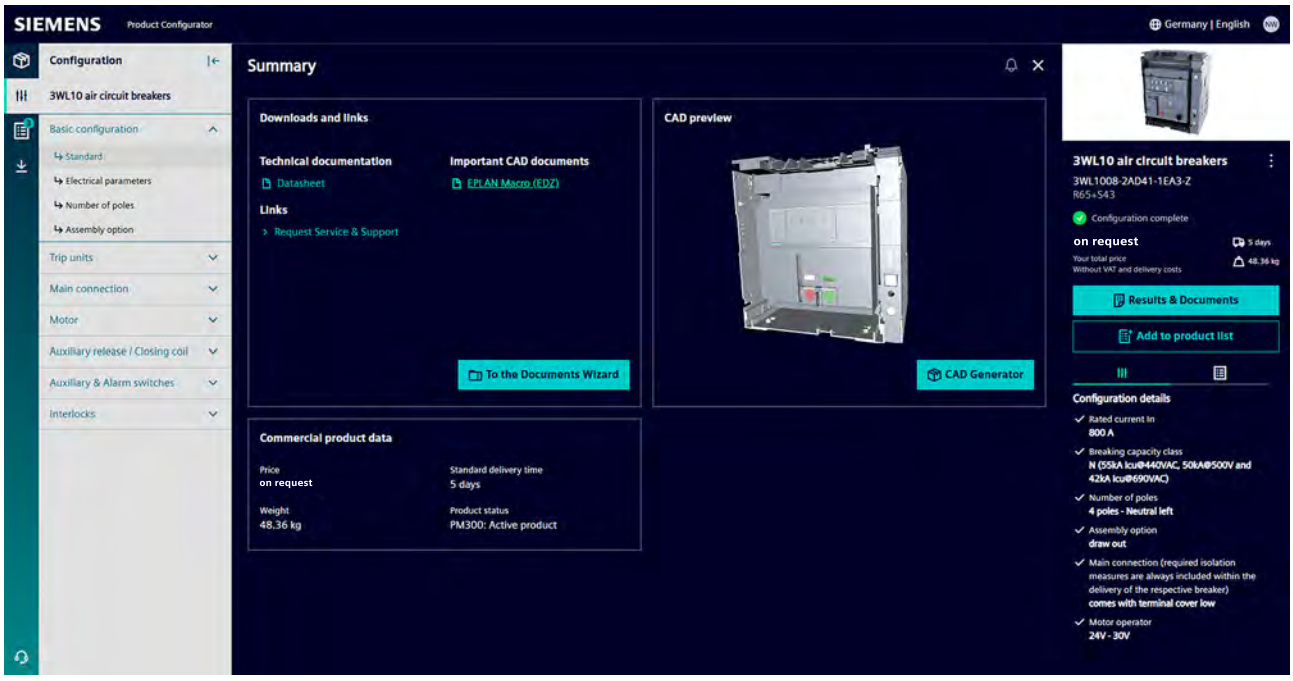

Ungroup into individual components

Divides the finished complete article number into single article numbers

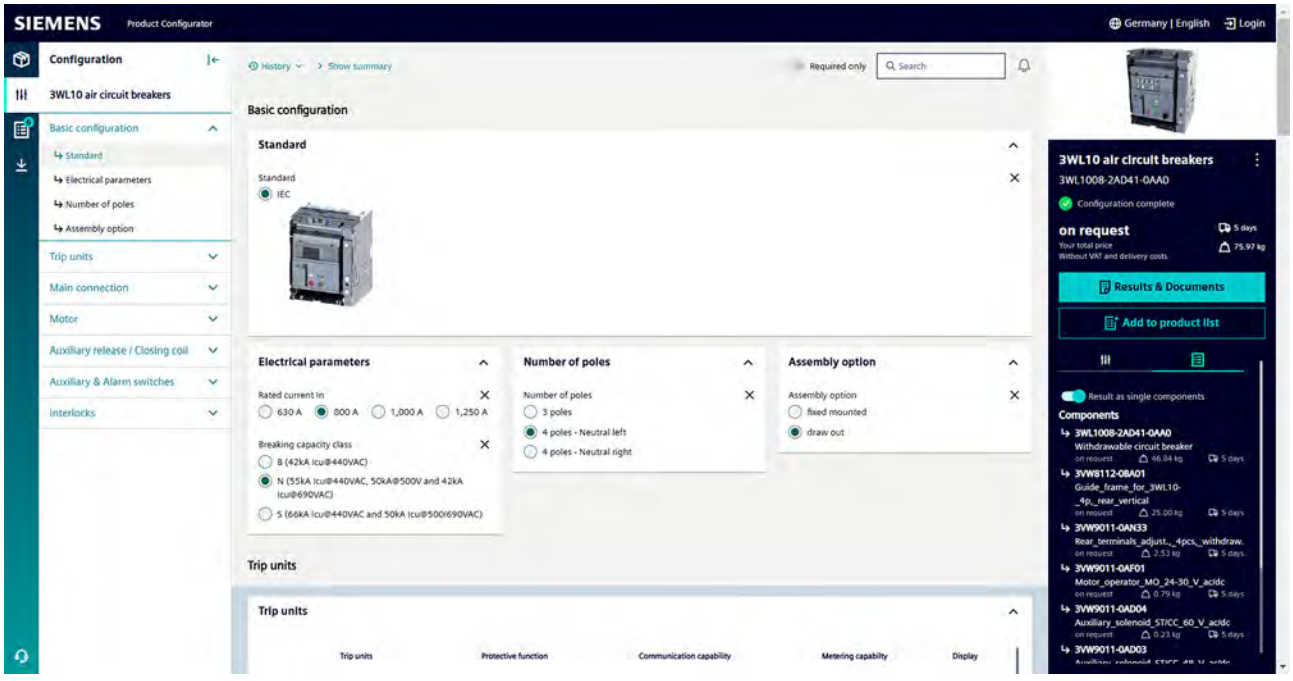

© Siemens 2025

Structure of the article numbers

Basic configuration

**The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your air circuit breaker, please use our online configurator at
www.siemens.com/lowvoltage/3wl10-configurator**

1

3WL10	6	7	–	8	9	10	11	12	–	13	14	15	16

Circuit breakers, non-automatic circuit breakers and ETU

Max. rated current $I_{n\,max}$	630 A					0	6						
	800 A					0	8						
	1000 A					1	0						
	1250 A					1	2						
Short-circuit breaking capacity I_{cu} at 415 V	B	Basic (42 kA)						1					
	N	ECO (55 kA)						2					
	S	Standard (66 kA)						3					
Non-automatic circuit breaker [1]	Without metering function, without communications interface	Without trip unit					A	A					
Circuit breakers, ETU 3-series	Without metering function, without communications interface	With trip unit	ETU320 LI	(N) [2]			A	B					
			ETU350 LSI	(N) [2]			A	C					
			ETU360 LSIG	(N) [2]			A	D					
Circuit breakers, ETU 6-series		With trip unit	ETU650 LSI	(N) [2]				E					
			ETU660 LSIG	(N) [2]				F					
	Without communications interface	Without metering function					A						
	With communications interface	Without metering function					B						
		Metering function Basic	Voltage tap on bottom				C						
			Voltage tap on top				D						
		Metering function Advanced	Voltage tap on bottom				E						
			Voltage tap on top				F						

[1] Only possible with N = ECO (55 kA) and S = Standard (66 kA)
[2] Neutral conductor protection for 3-pole breakers with an external neutral conductor transformer or for 4-pole breakers

Number of poles	Fixed-mounted versions	3-pole						0					
		4-pole	Neutral left					1					
			Neutral right					2					
	Withdrawable	3-pole						3					
		4-pole	Neutral left					4					
			Neutral right					5					

Connection [3]

Type of mounting	Withdrawable	Without frame							0				
		Rear vertical connection							1				
		Rear horizontal connection							2				
		Adapter for cable lug connection (rear)							4				
		Front-accessible, extended main connection							5				
	Fixed-mounted versions	Rear vertical connection							1				
		Rear horizontal connection							2				
		Front main connection							3				
		Circular conductor terminals (front)							4				
		Front-accessible, extended main connection							5				

[3] Broadened connections available as accessories.

Quick selection guide, pages 1/76 and 1/78

© Siemens 2025

3WL10 6 7 – 8 9 10 11 12 13 – 14 15 16

Motor

Operating mechanisms	Manual operating mechanism		0
	Spring charging motor	24 ... 30 V AC/DC	1
		48 ... 60 V AC/DC	2
		110 V AC/DC	3
		230 V AC/DC	4

Auxiliary releases, closing coils

Closing coil (CC), remote reset magnet (RR)	Without closing coil, without remote reset magnet		A
	Closing coils (CC)	24 V AC/DC	B
		30 V AC/DC	C
		48 V AC/DC	D
		60 V AC/DC	E
		110 ... 120 V AC/DC	F
		120 ... 127 V AC/DC	G
		220 ... 240 V AC/DC	H
		240 ... 250 V AC/DC	J
	Closing coil (CC) and additional remote reset magnet (RR)	24 V AC/DC	K
		110 V AC/DC	L
		220 V AC/DC	M
2nd auxiliary release	Without 2nd auxiliary release		A
	With undervoltage release (UVR)	24 V AC/DC	B
		30 V AC/DC	C
		48 V AC/DC	D
		60 V AC/DC	E
		110 ... 120 V AC/DC	F
		120 ... 127 V AC/DC	G
		220 ... 240 V AC/DC	H
		240 ... 250 V AC/DC	J
		380 ... 400 V AC/DC	K
		415 ... 440 V AC/DC	L
	With undervoltage release (UVR), delayable with external time-delay device Scope of supply: UVR + time-delay device	24 ... 30 V AC/DC	M
		110 ... 127 V AC/DC	N
		220 ... 250 V AC/DC	P
	With 2nd shunt trip (ST2)	24 V AC/DC	Q
		30 V AC/DC	R
		48 V AC/DC	S
		60 V AC/DC	T
		110 ... 120 V AC/DC	U
		120 ... 127 V AC/DC	V
		220 ... 240 V AC/DC	W
		240 ... 250 V AC/DC	X
1st auxiliary release	Without 1st Auxiliary release		0
	Shunt trips (ST)	24 V AC/DC	1
		30 V AC/DC	2
		48 V AC/DC	3
		60 V AC/DC	4
		110 ... 120 V AC/DC	5
		120 ... 127 V AC/DC	6
		220 ... 240 V AC/DC	7
		240 ... 250 V AC/DC	8

Quick selection guide, pages 1/76 and 1/78

© Siemens 2025

Accessory options

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wl10-configurator

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WL....-.....-.... -Z

Accessories for basic configuration

Mounting options for fixed-mounted versions

- In the basic configuration, the fixed-mounted circuit breaker is mounted onto the rear panel. Floor mounting is possible as an option. The device must additionally be modified if it is to be extended to include functionalities such as external auxiliary switches or mechanical interlocking mechanism.[1)]

			Order code
Mounting options for fixed-mounted versions [1)]	Floor mounting	Mounting support standard	**A07**
		Mounting support extended [2)]	**S56**
	Rear panel mounting onto mounting plate	Side wall extended [2)]	**S57**

Accessories for ETU electronic trip units

Rating plugs

- As standard, the electronic trip units are equipped with a rating plug for setting the rated current I_n, which is equal to the maximum rated circuit breaker current (< $I_{n\,max}$). The rated current of the selected rating plug must be less than or equal to $I_{n\,max}$.
- To downrate the circuit breaker, a rated current smaller than $I_{n\,max}$ is selected for the rating plug via a Z option.
- Other functions can also be activated using rating plugs (L = OFF or Rc protection).

				Order code
Rating plug	For setting the rated current I_n	For all ETUs	400 A	**B04**
			630 A	**B06**
			800 A	**B08**
			1000 A	**B10**
	For setting the rated current I_n, with overload protection L = OFF	For 6-series ETUs	400 A	**L04**
			630 A	**L06**
			800 A	**L08**
			1000 A	**L10**
			1250 A	**L12**
	For setting the rated current I_n, for enabling of the residual current protective function. The residual current function is only possible with the MF Advanced metering function.	For ETU660 only	400 A	**G04**
			630 A	**G06**
			800 A	**G08**
			1250 A	**G12**

Communications modules

- No more than two different communications modules can be used at the same time.
- When using an IOM040 digital I/O module (Z option K56), only 1 communications module can be used.

			Order code
Communications modules	COM040	PROFIBUS	**F02**
	COM041	PROFINET	**F03**
	COM043	Modbus TCP	**F11**
	COM042	Modbus RTU	**F12**

Breaker Connect modules

- When a circuit breaker with a communications interface is ordered, a Breaker Connect module for external 24 V DC power supply of the electronic components is also supplied ready installed.
- By means of this Z option, the Breaker Connect module for 24 V DC is replaced by a Breaker Connect module for 110 ... 240 V AC/DC.

		Order code
Breaker Connect modules	110 ... 240 V AC/DC	**F26**

I/O modules internal

			Order code
I/O modules internal	Digital I/O module IOM040	2 inputs, 2 outputs	**K56**

[1)] These functionalities can be applied directly to the frame of the withdrawable circuit breaker, without any modification of the side wall.
[2)] Not possible in connection with or as an alternative to the mounting support, standard (A07).

© Siemens 2025

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WL....-.....-.... -Z

				Order code

Accessories for the motor

Mechanical operating cycles counter, 5-digit				**C01**

Auxiliary switches and signaling switches

- Auxiliary and signaling switches for currents > 100 mA and up to 400 V AC are installed as standard.
- For currents < 100 mA for PLC connections, these auxiliary and signaling switches can be replaced.
- The auxiliary/signaling switches for 24 V DC digital signals are designed for
  - a minimum load above 1 mA at 5 V DC, and
  - a maximum breaking capacity of 100 mA at 24 V DC.

Position signaling switches for guide frames [1]		2 CO | 2 CO | 2 CO (connected | test | disconnected position)		**K55**
Signaling switches	Ready-to-close signaling switches		1 CO digital, 24 V DC	**K50**
	Tripped signaling switches (S24)		1 CO digital, 24 V DC	**K53**
	Spring charge signaling switch (S21)		1 CO digital, 24 V DC	**K54**
Auxiliary switches	ON/OFF AUX	4 CO digital, 24 V DC		**K51**
		2 CO 400 V AC + 2 CO digital 24 V DC		**K52**

Locking, blocking and interlocking

Locking provisions [1]	To prevent movement of the withdrawable circuit breaker	Cylinder lock	Made by RONIS	**R78**
		For no more than 3 padlocks, 8 mm		**R65**
Locking mechanisms	To prevent movement to disconnected position			**R79**
Locking provisions	Against unauthorized closing in the operator panel (safe OFF)	Cylinder lock, made by RONIS		**S08**
		For no more than 3 padlocks, plastic 4 mm		**S22**
		For no more than 1 padlock, metal 7 mm		**S23**
		For no more than 2 padlocks, metal 8 mm		**S07**
Interlocking sets	For mechanical Open and/or Close on the operator panel	For no more than 3 padlocks, plastic 4 mm		**S42**
		For no more than 1 padlock, metal 7 mm		**S43**
		For no more than 2 padlocks, metal 8 mm		**S44**
Protective covers	For mechanical Open/Close, not lockable			**S41**
Door sealing frames IP30	IP3x			**T30**

[1] Can be used both for individual orders of the guide frame and complete orders (circuit breaker + guide frame).

© Siemens 2025

Guide frames

Guide frames for ordering separately without circuit breakers

- Guide frames without breakers up to 1250 A
- **Note:** All CB bus modules for communication COM04x/IOM300/Breaker Connect module, as well as COMPSS signaling switches are configured without frames in the withdrawable circuit breaker and defined there by means of Z options, and are included with the circuit breaker. PSS Standard is always included in the frame and can be changed to an electronics-capable signal by means of a Z option.

Number of poles	Connection type	Article No.
3-pole	Rear vertical	3VW8112-0AA01
	Rear horizontal	3VW8112-0AB01
	4 × 240 mm² Cu/Al cable connection, for cable lug connections	3VW8112-0AD01
	Front connection bars, extended	3VW8112-0AE01
4-pole	Rear vertical	3VW8112-0BA01
	Rear horizontal	3VW8112-0BB01
	4 × 240 mm² Cu/Al cable connection, for cable lug connections	3VW8112-0BD01
	Front connection bars, extended	3VW8112-0BE01

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3VW8....-.....-.... -Z

Order code

Locking, blocking and interlocking

			Order code
Locking provisions	To prevent movement of the withdrawable circuit breaker	Cylinder lock, made by RONIS	**R78**
		For no more than 3 padlocks, 8 mm	**R65**
Locking mechanisms	To prevent movement to disconnected position (only in combination with R78 or R65)		**R79**

Auxiliary/signaling switches

Position signaling switch PSS for guide frame	For 24 V DC digital signals, for minimum currents	2 CO | 2 CO | 2 CO (connected | test | disconnected position)	**K55**

Auxiliary and signaling switches for currents > 100 mA and up to 400 V AC are installed as standard.
For currents < 100 mA for PLC connections, these auxiliary and signaling switches can be modified.
The auxiliary/signaling switches for 24 V DC digital signals are designed for

- a minimum load above 1 mA at 5 V DC, and
- a maximum breaking capacity of 100 mA at 24 V DC.

© Siemens 2025

ETU electronic trip units and accessories

Electronic trip units (ETU)

Version	With communications/metering function/ enhanced protective functions	Type	Protective function	Article No.
With rotary coding switches	No	ETU320	LIN	3VW9011-5AA00
		ETU350	LSIN	3VW9012-5AA00
		ETU360	LSING	3VW9012-7AA00
With display	Yes	ETU650	LSIN	3VW9017-5AA00
		ETU660	LSING	3VW9017-7AA00

Metering functions for ETU650 or ETU660

Description	Protective function/version	Arrangement	Article No.
Metering function	MF Basic	–	3VW9011-0AT01
	MF Advanced	–	3VW9011-0AT04
Set of cables for voltage tap for MF	For 4-pole circuit breakers with neutral right	Top or bottom	3VW9011-0AT08
	For 4-pole circuit breakers with neutral left	Top	3VW9011-0AT75
		Bottom	3VW9011-0AT76
	For 3-pole circuit breakers	Top	3VW9011-0AT72
		Bottom	3VW9011-0AT73

External current transformers for N conductor

Accessory for	Use	Article No.
ETU320, ETU350, ETU360, ETU650, ETU660	For 3-pole circuit breakers only	3VW9011-0AA30

External current transformers for transformer neutral point



Accessory for	G_{ret} (Ground return)	Article No.
ETU660	100 A	3VW9011-0GF30
	250 A	3VW9011-0GF31

Summation current transformers external Rc-CT for residual current metering



- Only with MF Advanced metering function and Rc rating plug

Accessory for	Use	Article No.
ETU660	For external residual current metering	3VW9011-0RC30

Remote reset magnets RR for the circuit breakers including tripped signaling

- Remote reset magnet (RR) for resetting the circuit breaker after tripping as a result of overcurrent conditions

Accessory for	Voltage	Article No.
ETU320, ETU350, ETU360, ETU650, ETU660	24 V DC	3VW9011-0AK03
	110 V AC/DC	3VW9011-0AK05
	250 V AC/DC	3VW9011-0AK06

Spare part batteries for ETU electronic trip unit



Accessory for	Article No.
ETU320, ETU350, ETU360, ETU650, ETU660	3VW9011-0AT38

© Siemens 2025

ETU electronic trip units and accessories

Rating plugs

- Only one module is possible per circuit breaker.

Accessory for	Version	Rated current I_n	Article No.
ETU320, ETU350, ETU360, ETU650, ETU660	Rating plugs for setting (< $I_{n\,max}$) the rated current I_n	400 A	3VW9011-0AA53
		630 A	3VW9011-0AA55
		800 A	3VW9011-0AA56
		1000 A	3VW9011-0AA57
		1250 A	3VW9011-0AA58
ETU 6-series	Rating plug without overload protection (L = OFF) and for setting (< $I_{n\,max}$) the rated current I_n	400 A	3VW9011-0LF53
		630 A	3VW9011-0LF55
		800 A	3VW9011-0LF56
		1000 A	3VW9011-0LF57
		1250 A	3VW9011-0LF58
ETU660	Rating plug Rc for ETU660, for enabling the residual current protective function and setting (< $I_{n\,max}$) the rated current I_n. The residual current function is only possible with the MF Advanced metering function.	400 A	3VW9011-0RC53
		630 A	3VW9011-0RC55
		800 A	3VW9011-0RC56
		1250 A	3VW9011-0RC58

CB bus modules – communications modules

- Contains the communications module
- No more than two different communications modules can be used at the same time
- When using a digital I/O module IOM040 (Z option K56), only 1 communications module can be used
- Can only be used with ETU of the 6-series and require a Breaker Connect module for connection to the circuit breaker. This can also be configured directly on the device by means of a Z option if the communications interface to the ETU 6-series is selected.

Communications module	Protocol	Article No.
COM040	PROFIBUS	3VW9011-0AT15
COM041	PROFINET	3VW9011-0AT14
COM043	Modbus TCP	3VW9011-0AT16
COM042	Modbus RTU	3VW9011-0AT17

CB bus modules – I/O modules external IOM300

- For snapping onto DIN rail

Accessory for	Maximum switching current per contact	Inputs	Outputs	Article No.
ETU 6-series	• 2 A at ≤ 30 V DC • 0.8 A at 50 V DC • 0.2 A at 150 V DC • 4 A at 250 V AC	11	10	3VW9011-0AT20

CB bus modules – I/O modules internal IOM040

- When using a digital I/O module IOM040, only 1 communications module can be used

Accessory for	Maximum switching current per contact	Inputs	Outputs	Article No.
ETU 6-series	• 2 A at ≤ 30 V DC • 0.8 A at 50 V DC • 0.2 A at 150 V DC • 4 A at 250 V AC	2	2	3VW9011-0AT30

Actuator module COM ACT

- For switching the circuit breaker on/off remotely via communication
- Actuation of the closing coil (CC) and the 1st shunt trip (ST)
- Can only be used in combination with a communications module, spring charging motor, closing coil and 1st shunt trip
- Automatically included if the communications interface of the ETU 6-series is selected in the basic circuit breaker configuration

Accessory for	Article No.
ETU 6-series	3VW9011-0AT10

© Siemens 2025

Breaker Connect modules

- For external power supply for the electronics components

Voltage	Article No.
110 ... 240 V AC/DC	3VW9011-0AT06
24 ... 48 V DC	3VW9011-0AT07

Auxiliary contact signaling switch for communications interface

- Auxiliary contacts for signaling the readiness to close or for position signaling switches of the withdrawable positions.
- Can only be used in combination with communications module.
- Can be combined with standard position signaling switches or ready-to-close signaling contacts.
- **Note:** Both signaling switches are automatically included in the basic circuit breaker (COM PSS only with withdrawable versions) if the communications interface of the ETU 6-series is selected.

Function	Article No.
Ready-to-close signaling switch for communication COM RTC	3VW9011-0AT11
Position signaling switch COM PSS (for withdrawable breaker only)	3VW9011-0AT12

Test devices and Breaker Data Adapters

- Can be used for all ETU 3-series and 6-series

Function	Type	Article No.
Test device • For the trip test via ETU and tripping solenoid including release • Activation of the ETU and the tripping solenoid by means of a battery built into the test device • On activation in the ETU 6-series, the parameters can be configured on the display	TD310	3VW9011-0AT32
Breaker Data Adapter • As gateway for parameterization of the ETU with SENTRON Powerconfig • For generation of a report of the set parameters with powerservice	TD410	3VW9011-0AT34
Test devices and Breaker Data Adapters • As gateway for parameterization of the ETU with SENTRON Powerconfig – Testing a tripping operation using SENTRON Powerconfig • For use with the powerservice software – Testing of the basic protective functions LSING – Testing of the enhanced protective functions – Test data storage – Readout of ETU buffer – Generation of a report of the set parameters	TD420	3VW9011-0AT33

© Siemens 2025

Accessories and spare parts

Accessories for connection

Front main connections acc. to IEC 60947-2

- To be ordered separately for top and bottom

Mounting	Version	Mounting onto	Number of poles/ quantity	Article No.
Fixed-mounted	Front main connections		3-pole/3 units	3VW9011-0AL01
			4-pole/4 units	3VW9011-0AL02
	Extended main connections, including insulation plate and phase barriers, standard	Front main connections	3-pole/3 units	3VW9011-0AL77
			4-pole/4 units	3VW9011-0AL78
	Broadened main connections, including insulation plate and extended phase barriers	Front main connections, top	3-pole/3 units	3VW9011-0AL73
		Front main connections, bottom	3-pole/3 units	3VW9011-0AL75
		Front main connections, top, bottom	4-pole/4 units	3VW9011-0AL74
Withdrawable	Front-accessible main connections	Flange of the guide frame	3-pole/3 units	3VW9011-0AN01
			4-pole/4 units	3VW9011-0AN02
	Broadened main connections	Front-accessible main connections	3-pole/3 units	3VW9011-0AN73
			4-pole/4 units	3VW9011-0AN74

Rear main connections acc. to IEC 60947-2

- To be ordered separately for top and bottom

Mounting	Version	Mounting onto	Number of poles/ quantity	Article No.
Fixed-mounted	Rear main connections, rotatable for horizontal/vertical connection, including terminal cover		3-pole/3 units	3VW9011-0AL32
			4-pole/4 units	3VW9011-0AL33
Withdrawable	Rear main connections, rotatable for horizontal/vertical connection, including terminal cover		3-pole/3 units	3VW9011-0AN32
			4-pole/4 units	3VW9011-0AN33
	Broadened main connections	Rear horizontal main connections	3-pole/3 units	3VW9011-0AN75
			4-pole/4 units	3VW9011-0AN76

Cu/Al cable connections

- To be ordered separately for top and bottom

Mounting	Version	Mounting onto	Number of poles/ quantity	Article No.
Fixed-mounted	Circular conductor terminals 4 × 240 mm² for front cable connection [1], including insulation plate and high, extended terminal cover	Front main connections	3-pole/3 units	3VW9011-0AL71
			4-pole/4 units	3VW9011-0AL72
Withdrawable	Set of circular conductor connection pieces 4 × 240 mm² for cable lugs for rear cable connection	Rear vertical main connections	3-pole/3 units	3VW9011-0AN71
			4-pole/4 units	3VW9011-0AN72

Auxiliary supply connectors in push-in version

- Control wire tap in push-in version for upgrading fixed-mounted circuit breakers and guide frames.
- The device is always fitted at the factory with the exact number of control wire taps required.

Version	Article No.
Push-in	3VW9011-0AB11

[1] For connecting Al cables up to 1000 A

© Siemens 2025

Accessories for connection

Terminal covers for fixed-mounted circuit breakers



- Finger-proof for front main connection for fixed-mounted versions
- Necessary isolation measures are always supplied with the corresponding connection technology and do not need to be ordered separately.

Version	Number of poles/quantity	Article No.
Standard	3-pole/2 units	3VW9723-0WD30
	4-pole/2 units	3VW9724-0WD40
Extended	3-pole/2 units	3VW9723-0WF30
	4-pole/2 units	3VW9724-0WF40

Phase barriers for fixed-mounted circuit breakers

- Necessary isolation measures are always supplied with the corresponding connection technology and do not need to be ordered separately.
- For operational voltages > 440 V AC the use of phase barriers is mandatory; up to 440 V AC their use is optional.

Height	Number of poles/quantity	Article No.
100 mm (standard)	3-pole/4 units	3VW9723-0WA00
	4-pole/6 units	3VW9724-0WA10
200 mm (extended)	3-pole/4 units	3VW9723-0WA01
	4-pole/6 units	3VW9724-0WA11

Support for floor mounting of fixed-mounted circuit breakers

- For fixed-mounted versions

Version	Use	Article No.
Mounting support standard (circuit breaker feet) (= Z option A07)		3VW9011-0BB51
Mounting support extended (circuit breaker feet), including mechanical transmission of switch position on circuit breaker side panel (= Z option S56)	• Fixation for external auxiliary switches AUX 15 CO (3VW9011-0AG15) • Locking mechanism for control cabinet door, direct (for 3VW9011-0BB10) • Locking mechanism for control cabinet door, Bowden cable (for 3VW9011-0BB16) • Mechanical interlock for 3WL/3VA (for 3VW9011-0BB21)	3VW9011-0BB52

Extension kits for modification of the side wall of the fixed-mounted circuit breaker

- For fixed-mounted versions
- Rear wall fixing on mounting plate
- For modification for mechanical transmission of switch position on circuit breaker side panel (= Z option S57)

Version	Use	Article No.
Extension kit for side wall	• Fixation for external auxiliary switches AUX 15 CO (3VW9011-0AG15) • Locking mechanism for control cabinet door, direct (for 3VW9011-0BB10) • Locking mechanism for control cabinet door, Bowden cable (for 3VW9011-0BB16) • Mechanical interlock for 3WL/3VA (for 3VW9011-0BB21)	3VW9011-0BB53

© Siemens 2025

Accessories and spare parts

Motor

Spring charging motor (MO)

Description	Voltage	Article No.
For automatic charging of the stored energy mechanism	24 ... 30 V AC/DC	3VW9011-0AF01
	48 ... 60 V AC/DC	3VW9011-0AF02
	100 ... 130 V AC/DC	3VW9011-0AF03
	220 ... 250 V AC/DC	3VW9011-0AF04

Mechanical operating cycles counters MOC

Description	Version	Article No.
In combination with a spring charging motor	5 digits	3VW9011-0AH07

Auxiliary releases, closing coils

Closing coils CC/shunt trips ST

Voltage	Article No.
24 V AC/DC	3VW9011-0AD01
30 V AC/DC	3VW9011-0AD02
48 V AC/DC	3VW9011-0AD03
60 V AC/DC	3VW9011-0AD04
110 ... 120 V AC/DC	3VW9011-0AD05
120 ... 127 V AC/DC	3VW9011-0AD06
220 ... 240 V AC/DC	3VW9011-0AD07
240 ... 250 V AC/DC	3VW9011-0AD08
380 ... 400 V AC	3VW9011-0AD17
415 ... 440 V AC	3VW9011-0AD18

TD320 function test units for closing coils/shunt trips

- The TD320 test unit allows the operational availability and functions of the closing coils and shunt trips with a rated operational voltage between 24 V and 250 V (AC and DC) to be tested.
- The operational availability test is performed cyclically at intervals of 30 seconds.
- The unit has visual indicators in the form of LEDs on the front in order to display the following states:
  - LED POWER ON LIT: Correct function of the YO/YC test device
  - LED DEACTIVATION LIT: Power supply failure, wire break
  - LED SHORT-CIRCUIT LIT: Winding short-circuit
  - LED DEACTIVATION and SHORT-CIRCUIT FLASHING: Incorrect power supply
  - LED DEACTIVATION and SHORT-CIRCUIT OFF: Closing coil/shunt trips OK

Version	Article No.
For all closing coils/shunt trips	3VW9011-0AT31

© Siemens 2025

Auxiliary releases, closing coils

Auxiliary/signaling switches

- The auxiliary/signaling switches for 24 V DC digital signals are designed for
  - a minimum load above 1 mA at 5 V DC, and
  - a maximum breaking capacity of 100 mA at 24 V DC.
- For external auxiliary switches ON/OFF AUX 15 CO, a 3VW9011-0AG1x fixation must be ordered in addition, and for fixed-mounted circuit breakers a 3VW9011-0BB5x side wall modification

Type	Contacts	Article No.
Ready-to-close signal RTC	1 CO standard	3VW9011-0AH01
	1 CO digital	3VW9011-0AH02
Auxiliary switch ON/OFF AUX	4 CO standard	3VW9011-0AG01
	4 CO digital	3VW9011-0AG02
	2 CO standard + 2 CO digital	3VW9011-0AG03
External auxiliary switch ON/OFF AUX	15 CO standard	3VW9011-0AG05
	15 CO digital	3VW9011-0AG06
Tripped signaling switch S24	1 CO standard	3VW9011-0AH14
	1 CO digital	3VW9011-0AH15
Spring charge signaling switch S21	1 CO standard	3VW9011-0AH10
	1 CO digital	3VW9011-0AH08
Position signaling switch PSS (for withdrawable devices)	2 CO | 2 CO | 2 CO (connected | test | disconnected position) standard	3VW9011-0AH11
	2 CO | 2 CO | 2 CO (connected | test | disconnected position) digital	3VW9011-0AH12

Fixing for external auxiliary switches AUX 15 CO

- External auxiliary switches ON/OFF AUX 15 CO must be ordered separately.

Version	Article No.
For fixed-mounted circuit breakers with rear panel or floor mounting (in combination with Z option S56 or S57)	3VW9011-0AG15
For guide frames	3VW9011-0AG17

Undervoltage releases UVR

Voltage	Article No.
24 V AC/DC	3VW9011-0AE01
30 V AC/DC	3VW9011-0AE02
48 V AC/DC	3VW9011-0AE03
60 V AC/DC	3VW9011-0AE04
110 ... 120 V AC/DC	3VW9011-0AE05
120 ... 127 V AC/DC	3VW9011-0AE06
220 ... 240 V AC/DC	3VW9011-0AE07
240 ... 250 V AC/DC	3VW9011-0AE08
380 ... 400 V AC	3VW9011-0AE17
415 ... 440 V AC	3VW9011-0AE18

External time-delay devices for undervoltage release

- With adjustable delay time from 0.5 to 3 s.
- Suitable for mounting onto DIN rail.

Voltage	Article No.
24 ... 30 V AC/DC	3VW9011-0AE10
48 V AC/DC	3VW9011-0AE11
60 V AC/DC	3VW9011-0AE15
110 ... 127 V AC/DC	3VW9011-0AE12
220 ... 250 V AC/DC	3VW9011-0AE13

© Siemens 2025

Accessories and spare parts

Interlocking

Locking provision to prevent movement of the withdrawable circuit breaker

Version	Article No.
RONIS cylinder lock (spare part for R78)	3VW9011-0BA80
Padlock 8 mm (spare part for R65), for no more than 3 padlocks	3VW9011-0BA87

Locking mechanisms to prevent movement of the withdrawable circuit breakers in disconnected position

- Only possible as a supplement in conjunction with R78 (3VW9011-0BA80) and/or R65 (3VW9011-0BA87)

Description	Article No.
Locking mechanism (spare part for R79)	3VW9011-0BA84

Locking provisions in OFF position

- For fixed-mounted and withdrawable versions
- Against unauthorized closing in the operator panel (safe OFF)
- The disconnector unit fulfills the requirements for main circuit breakers according to EN 60204-1

Description	Article No.
Cylinder lock, made by RONIS (spare part for S08)	3VW9011-0BA33

Locking provisions in OFF position

- For fixed-mounted and withdrawable versions
- Against unauthorized closing in the operator panel (safe OFF)
- The disconnector unit fulfills the requirements for main circuit breakers according to EN 60204-1

Description	Version	Article No.
Padlock 4 mm (spare part for S22)	Plastic for no more than 3 locks	3VW9011-0BA41
Padlock 7 mm (spare part for S23)	Metal for no more than 1 lock	3VW9011-0BA42
Padlock 8 mm (spare part for S07)	Metal for no more than 2 locks	3VW9011-0BA44

Interlocking sets for mechanical Open and/or Close on the operator panel

Description	Version	Article No.
Padlock 4 mm (spare part for S42)	Plastic for no more than 3 locks	3VW9011-0BA22
Padlock 7 mm (spare part for S43)	Metal for no more than 1 lock	3VW9011-0BA23
Padlock 8 mm (spare part for S44)	Metal for no more than 2 locks	3VW9011-0BA24

Protective covers for mechanical Open/Close

- Mechanical Open/Close to protect against unintentional actuation on the operator panel.
- Not lockable

Description	Article No.
Not lockable (spare part for S41)	3VW9011-0BA21

Mechanical interlocks

- Mechanical interlock for 3WL10/3VA27 with Bowden cable 2 m
- For fixed-mounted versions, an additional support 3VW9011-0BB52 (option S56) or extension kit 3VW9011-0BB53 (option S57) must be ordered

Mounting	Mounting	Article No.
Fixed-mounted	Rear panel or floor mounting	3VW9011-0BB21
Withdrawable	Mounting onto guide frame	3VW9011-0BB22

Bowden cable, separate

- One required for each circuit breaker

Type	Article No.
1000 mm	3VW9011-0BB23
2000 mm	3WL9111-0BB45-0AA0
3000 mm	3WL9111-0BB46-0AA0

© Siemens 2025

Interlocking

Locking mechanisms for control cabinet door

- To prevent opening of the control cabinet door in ON position
- It additionally prevents the circuit breaker from being closed when the control cabinet door is open.

Mounting	Version	Article No.
Fixed-mounted onto side panel or floor	Direct fixed interlocking	3VW9011-0BB10
	Locking with Bowden cable	3VW9011-0BB16
Withdrawable	Direct fixed interlocking	3VW9011-0BB14
	Locking with Bowden cable	3VW9011-0BB18

Door sealing frame IP30

- For IP4x and higher, you must order the protective cover IP54 3VW9011-0AP03 or 3VW9011-0AP13.

Description	Mounting	Version	Article No.
Spare part for Z option T30.	Fixed-mounted	IP3x	3VW9011-0AP01
	Withdrawable	IP3x	3VW9011-0AP02

Protective covers IP54



- Protective cover/hood IP54 lockable for fixed-mounted breakers and withdrawable breakers
- For implementing degrees of protection IP4x and IP54 when installing in switchboard door.
- Cannot be combined with IP30 door sealing frame and door mounted rotary operator

Description	Version	Article No.
Lock with unique key	IP54	3VW9011-0AP03
Lock with standard key	IP54	3VW9011-0AP13

© Siemens 2025

One system. For all applications.

Requirements for cost- and energy-efficient operation of electrical power distribution are on the increase. Whether in industrial plants, in infrastructure or in buildings: As a modular, highly adaptable system, the 3VA series of molded case circuit breakers ensures fully reliable protection of personnel and plant, and supports every process phase – from planning to operation of electrical power distribution.

Comprehensively certified. Deployable worldwide.

3VA molded case circuit breakers are available in various ranges with IEC approval; other ranges are available that comply with standard IEC 60947 and standard UL 489. The system is therefore ideally suited for mechanical engineering companies and switchgear manufacturers. The full range of functionalities of molded case circuit breakers can be used for plant and equipment operating in Europe and North America, with absolute standards compliance assured.

Note:
Products bearing our Siemens EcoTech label are identified by this clickable symbol in the catalog:

Siemens EcoTech

www.siemens.com/lowvoltage/SiemensEcoTech

© Siemens 2025

Molded Case Circuit Breakers

All the information you need 2/2
Molded case circuit breakers and switch disconnectors for all applications 2/4
Quick selection guide 2/6
- 3VA1 molded case circuit breakers, switch disconnectors up to 1000 A 2/6
- 3VA2 molded case circuit breakers up to 1600 A 2/14
- Online configurator highlights 2/22

3VA10 – 3VA26 2/24
- System overview 2/24
- Structure of the article numbers 2/26
- Internal accessories 2/34
- Manual operators 2/36
- Motor operators 2/42
- Connection technology 2/44
- Plug-in and withdrawable technology 2/58
- Residual current devices RCD 2/62
- Communication 2/64
- Locking, blocking and interlocking 2/70
- Cover frame and mounting 2/72

3VA27 2/74
- System overview 2/74
- Structure of the article numbers 2/76
- Accessory options 2/80
- Guide frame 2/82
- Electronic trip unit ETU and accessories 2/83
- Accessories for connection and insulation 2/86
- Motor operators and manual operators 2/88
- Auxiliary release, closing coil 2/89
- Locking provisions and interlocks 2/91

© Siemens 2025

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about molded case circuit breakers, please visit our website **www.siemens.com/sentron-3va**

Your product in detail

The SiePortal platform (knowledge base) provides comprehensive information
www.siemens.com/lowvoltage/product-support

- Quick Selection Guide
  – 3VA molded case circuit breaker **(109757591)**

The relevant tender specifications can be found at
www.siemens.com/tenderspecifications

Use our conversion tool for quick and easy conversion to Siemens products **www.siemens.com/conversion-tool**

Siemens YouTube channel

- 3VA molded case circuit breakers (general)
  sie.ag/2gSX4K

Electrical Designer

With the Electrical Designer in the TIA Selection Tool, it is possible to design and dimension the electrical equipment of a machine in conformity with the standards – from the suitable switching devices to the correctly dimensioned cables
www.siemens.com/controlpanel/electrical-designer

Everything you need for your order

Refer to SiePortal to find an overview of your products (product catalog)

- Molded case circuit breakers **sie.ag/2mmLcAk**

Direct forwarding to the individual products in SiePortal by clicking on the article number in the catalog or entering this web address incl. article number
www.siemens.com/product_catalog_SIEP?Article No.

You will find order support in SiePortal under
www.siemens.com/lowvoltage/product-support

- Order Support
  – 3VA molded case circuit breakers – One system. Global use **(109765994)**

Configurators

The configurator reduces the time and effort required in the planning and ordering process, and allows for individual adaptations. Configure your 3VA molded case circuit breaker at
www.siemens.com/lowvoltage/3va-configurator
www.siemens.com/lowvoltage/3va27-configurator

The following are additionally available for your 3VA molded case circuit breaker:

- 3D views
- CAD data
- Unit wiring diagrams
- Dimension drawings

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services.
You can find your local contacts at
www.siemens.com/lowvoltage/components/contact

You will find further information on services at
www.siemens.com/service-offers

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at
www.siemens.com/support-request

© Siemens 2025

… can be found in our online services

Commissioning + operation

SENTRON Powerconfig

The combined commissioning and service tool SENTRON Powerconfig for communication-capable measuring devices, circuit protection devices and circuit breakers.

Free download **SENTRON Powerconfig**

Free download SENTRON Powerconfig mobile via **App Store** and **Play Store**

Your product in detail

The SiePortal platform (knowledge base) provides detailed technical information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Characteristic curves
- Certificates

Online Support app available for download from the **App Store** and **Play Store**
You will find further information at
www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)

- SiePortal (product catalog)
  www.siemens.com/lowvoltage/product-catalog
- Image database
  www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAx Download Manager at
www.siemens.com/cax

Manuals

Manuals can be found in SiePortal at
www.siemens.com/lowvoltage/manuals

- Configuration Manual
  - Selectivity for 3VA molded case circuit breakers **(109743975)**
- Communication Manual
  - 3VA molded case circuit breakers with IEC and UL certification **(98746267)**
  - 3WL10 air circuit breakers & 3VA27 molded case circuit breakers **(109760220)**
- Equipment Manual
  - 3VA molded case circuit breakers with IEC certificate **(90318775)**
  - 3VA27 molded case circuit breakers & 3WL10 air circuit breakers **(109753821)**

Face-to-face or online training

Our training courses can be found at
www.siemens.com/sitrain-lowvoltage

- 3VA molded case circuit breaker (WT-LVA3VA)
- Protection systems in low-voltage power distribution (WT-LVAPS)

Technical overview – Molded case circuit breakers

The fast way to get you to our online services

This page provides you with comprehensive information and links on molded case circuit breakers
www.siemens.com/lowvoltage/product-support (109767421)

© Siemens 2025

Molded case circuit breakers and switch disconnectors for all applications

3VA1 molded case circuit breakers
3VA10 ... 3VA15

Setting standards for standard applications

The 3VA1 molded case circuit breaker is ideally suited for your standard applications in infrastructure and industrial facilities. It is equipped with a thermal-magnetic trip unit, and offers reliable protection for plants and generators.

With its compact dimensions and depth of just 70 mm, the 3VA1 molded case circuit breaker can even fit into locations where space is limited. Thanks to its cover size of 45 mm, it is also ideally suited for use in distribution boards up to 250 A.

Special features

- Compact design
- AC/DC applications
- No derating up to +50 °C
- Optimized for distribution boards (45 mm cover size)
- Universal platform of accessories
- 1, 2, 3 or 4-pole versions
- Rated current range of 1 ... 1000 A

© Siemens 2025

3VA2 molded case circuit breakers
3VA20 ... 3VA26

The power to deliver in demanding applications

If you are looking for a solution that lets you handle your most technically demanding projects in industrial and infrastructure applications with ease, the 3VA2 molded case circuit breaker has the special capabilities you need. It combines high breaking capacity, a range of electronic trip units (ETUs), very good selectivity properties, and various additional functionalities.

Special features

- Very good selective protection response
- AC applications
- No derating up to +50 °C
- Integrated metering function
- Connection to a communications system
- Rated current range of 25 ... 1250 A

3VA27 molded case circuit breaker

Depending on the application, the 3VA27 molded case circuit breaker handles line/motor and starter protection for low-voltage electrical power distribution, and supplements the existing IEC portfolio with a rated current of 1600 A.

Special features

- Choice between two ranges of electronic trip units with a number of equipment versions
- Variable and versatile connections
- Connection to a communications system
- Can be used as a platform circuit breaker with the 3WL10 ACB, with an extensive range of common accessories
- Rated current range of 800 ... 1600 A

© Siemens 2025

3VA1 molded case circuit breakers, switch disconnectors up to 1000 A

Protective functions and accessories

Protective functions	3VA10	3VA11	3VA12
Size	100 A	160 A	250 A
Switch disconnectors			
No protection	–	■	■
Thermal-magnetic			
Line protection	■	■	■
Starter protection	–	■	■

Accessories

Size	100 A	160 A	250 A
Accessories			
Auxiliary switches and signaling switches	■	■	■
Auxiliary releases	■	■	■
Connection technology	■	■	■
Plug-in version	–	■	■
Withdrawable version	–	–	■
Front mounted rotary operator	■	■	■
Door mounted rotary operator	■	■	■
Side wall mounted rotary operator	■	■	■
MO310 motor operator (mounted onto the side)	–	■	–
MO320 motor operator (mounted onto the front)	–	■	■
Motor operator with SEO520 stored energy mechanism	–	–	–
Locking, blocking and interlocking	■	■	■
Residual current device (mounted onto the side)	–	■	■
Residual current device (mounted underneath)	–	■	■
Cover frame	■	■	■
DIN-rail adapter	■	■	–
Busbar adapter	■	■	■

■ Available – Not available/not present

System overview, page 2/24

© Siemens 2025

3VA13	3VA14	3VA15
400 A	630 A	1000 A
■	■	–
■	■	■
■	■	■

400 A	630 A	1000 A
■	■	■
■	■	■
■	■	■
■	■	■
■	■	–
■	■	■
■	■	■
■	■	–
–	–	–
■	■	–
■	■	–
■	■	■
–	–	–
–	–	–
■	■	■
–	–	–
■	■	–

System overview, page 2/24

© Siemens 2025

3VA1 molded case circuit breakers, switch disconnectors up to 1000 A

Technical specifications

			3VA10			3VA11			3VA11		
Electrical characteristics according to IEC 60947-2											
Number of poles			3/4-pole			1-pole			2-pole		
Size		A	100			160			160		
Rated current I_n at 50 °C ambient temperature		A	16 ... 100			16 ... 160			16 ... 160		
Rated operational voltage U_e 50/60 Hz AC		V	690			415			415		
Rated insulation voltage U_i		V	800			500			500		
Rated impulse withstand voltage U_{imp}		kV	8			8			8		
Use in IT networks (breaking capacity acc. to IEC 60947-2, annex H)		V	■			■			■		
Frequency		Hz	0 ... 400			0 ... 400			0 ... 400		
Breaking capacity (line protection)			**B**	**N**	**S**	**N**	**S**	**M**	**N**	**S**	**M**
Rated ultimate short-circuit breaking capacity I_{cu}											
50/60 Hz AC	220 ... 240 V	kA	25	36	55	25	36	55	36	55	85
	380 ... 415 V	kA	16	25	36	5	6	6	25	36	55
	440 V	kA	8	16	25	–	–	–	–	–	–
	500 V	kA	5	5	7	–	–	–	–	–	–
	690 V	kA	5	5	7	–	–	–	–	–	–
DC [1]	125 V	kA	16	25	30	16	25	30	16	25	30
	250 V	kA	25	36	55	–	–	–	36	55	85
	500 V	kA	25	36	55	–	–	–	–	–	–
	600 V	kA	8	16	25	–	–	–	–	–	–
	750 V	kA	–	–	–	–	–	–	–	–	–
	1000 V [2]	kA	–	–	–	–	–	–	–	–	–
Rated service short-circuit breaking capacity I_{cs}											
50/60 Hz AC	220 ... 240 V	kA	25	36	55	25	35	55	36	55	85
	380 ... 415 V	kA	16	25	36	5	6	6	25	36	55
	440 V	kA	8	16	25	–	–	–	–	–	–
	500 V	kA	5	5	5	–	–	–	–	–	–
	690 V	kA	5	5	5	–	–	–	–	–	–
DC [1]	125 V	kA	16	25	30	16	25	30	16	25	30
	250 V	kA	25	36	55	–	–	–	36	55	85
	500 V	kA	25	36	55	–	–	–	–	–	–
	600 V	kA	8	16	25	–	–	–	–	–	–
	750 V	kA	–	–	–	–	–	–	–	–	–
	1000 V [2]	kA	–	–	–	–	–	–	–	–	–
Dimensions											
	A	mm	76.2 (3P) | 101.6 (4P)			25.4			50.8		
	B	mm	130			130			130		
	C	mm	70			70			70		
	D	mm	88			88			88		

[1] For detailed data on DC breaking capacity, number of switching poles and circuit diagrams, see FAQ www.siemens.com/lowvoltage/product-support (109779932)
[2] For I_n = 630 A/800 A
[3] I_n 125 A, 160 A: I_{cu}/I_{cs} = 36 kA/36 kA

■ Available – Not available/not present

System overview, page 2/24

© Siemens 2025

3VA11				3VA12			3VA13				3VA14				3VA15		
3/4-pole				3/4-pole			3/4-pole				3/4-pole				3/4-pole		
160				250			400				630				1000		
16 ... 160				160 ... 250			320 ... 400				500 ... 630				630 ... 1000		
690				690			690				690				690		
800				800			800				800				800		
8				8			8				8				8		
■				■			■				■				≤ 500		
0 ... 400				0 ... 400			0 ... 400				0 ... 400				0 ... 400		
N	**S**	**M**	**H**	**S**	**M**	**H**	**S**	**M**	**H**	**C**	**S**	**M**	**H**	**C**	**M**	**H**	**C**
36	55	85	100	55	85	100	55	85	100	200	55	85	100	200	85	100	200
25	36	55	70	36	55	70	36	55	70	110	36	55	70	110	55	70	110
16	25	36	55 [3)]	25	36	36	36	55	70	110	36	55	70	110	55	70	110
7	7	10	10	10	15	15	25	36	55	70	25	36	55	70	36	55	70
7	7	10	10	7	10	10	7	7	10	10	7	7	10	10	25	35	35
16	25	30	30	55	85	100	8	16	25	25	8	16	25	25	–	–	–
36	55	85	100	55	85	100	8	16	25	25	8	16	25	25	35	50	100
36	55	85	100	55	85	100	8	16	25	25	8	16	25	25	35	50	100
16	25	36	55	25	36	55	8	16	25	25	8	16	25	25	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	50	85	100
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	25	35	50
36	55	85	100	55	85	100	55	85	100	200	55	85	100	200	85	100	150
25	36	55	70	36	55	70	36	55	70	110	36	55	70	110	55	70	85
16	25	36	40 [3)]	25	36	36	36	55	70	110	36	55	70	110	55	70	70
5	5	5	5	10	10	10	25	36	55	70	25	36	55	70	36	55	65
5	5	5	5	5	5	5	5	5	6	6	5	5	6	6	19	19	19
16	25	30	30	55	85	100	8	16	25	25	8	16	25	25	–	–	–
36	55	85	100	55	85	100	8	16	25	25	8	16	25	25	35	50	100
36	55	85	100	55	85	100	8	16	25	25	8	16	25	25	35	50	100
16	25	36	55	25	36	55	8	16	25	25	8	16	25	25	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	50	85	100
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	25	35	50
76.2 (3P) | 101.6 (4P)				105 (3P) | 140 (4P)			138 (3P) | 184 (4P)				138 (3P) | 184 (4P)				210 (3P) | 280 (4P)		
130				158			248				248				320		
70				70			110				110				120		
88				88			137				137				253		

System overview, page 2/24

© Siemens 2025

3VA1 molded case circuit breakers, switch disconnectors up to 1000 A

Application

				3VA10	3VA11	3VA11
Electrical characteristics according to IEC 60947-2						
Number of poles				3/4-pole	1-pole	2-pole
Size			A	100	160	160
Rated current I_n at 50 °C ambient temperature			A	16 ... 100	16 ... 160	16 ... 160
3VA1 molded case circuit breakers for line protection, standard applications (IEC 60947-2)						
Service life/endurance (operating cycles)						
Mechanical (CLOSE-OPEN cycles)				20000	20000	20000
Electrical	380 ... 415 V	I_n		9000	9000	9000
		$I_n/2$		15000	15000	15000
	690 V			6300	6300	6300
Trip units						
TM210	FTFM			■	■	■
TM220	ATFM			–	–	–
TM240	ATAM			–	–	–
3VA1 molded case circuit breakers for starter protection (standards and specifications acc. to IEC 60947-2, annex O)						
Rated current I_n at 50 °C ambient temperature			A	–	–	–
Service life/endurance (operating cycles)						
Mechanical (CLOSE-OPEN cycles)				–	–	–
Electrical	380 ... 415 V			–	–	–
Trip units						
TM120M	AM			–	–	–
Switch disconnectors (IEC 60947-3)						
Electrical characteristics according to IEC 60947-3						
Rated uninterrupted current I_u at 50 °C ambient temperature			A	–	–	–
Rated operational voltage U_e 50/60 Hz AC			V	–	–	–
Rated operational voltage U_e DC			V	–	–	–
Rated conditional short-circuit current I_q with upstream 3VA1 circuit breaker			kA	–	–	–
Permissible rated short-time current I_{cw} (1 s)			kA	–	–	–
Utilization category				–	–	–

■ Available – Not available/not present

System overview, page 2/24

© Siemens 2025

3VA11	3VA12	3VA13	3VA14	3VA15
3/4-pole	3/4-pole	3/4-pole	3/4-pole	3/4-pole
160	250	400	630	1000
16 ... 160	160 ... 250	320 ... 400	500 ... 630	630 ... 1000
20000	20000	20000	20000	10000
9000	8000	6000	4000	4600
15000	14000	12000	8000	7000
6300	5400	4200	3000	3200
■	–	–	–	–
■	–	–	–	–
■	■	■	■	■
1 ... 125	160, 200	250	400 ... 500	630 ... 800
20000	20000	20000	20000	10000
9000	8000	6000	4000	4600
■	■	■	■	■
63 ... 160	250	400	630 (3P), 500 (4P)	–
690	690	690	690	–
500 (3P), 600 (4P)	500 (3P), 600 (4P)	500 (3P), 600 (4P)	500 (3P), 600 (4P)	–
70 at 415 V	70 at 415 V	110 at 415 V 10 at 690 V	110 at 415 V 10 at 690 V	–
2	3	6	7.6 (3P), 6 (4P)	–
AC23-A, DC-23A	AC23-A, DC-23A	AC23-A, DC-23A	AC23-A, DC-23A	–

System overview, page 2/24

© Siemens 2025

3VA1 molded case circuit breakers, switch disconnectors up to 1000 A

Trip units

Protection system	Thermal-magnetic
	TM 2-series
Protective function	
Line protection	TM210, TM220, TM240
Starter protection	TM120M
Integrated functions	
Parameterizing	Setting and reading the parameters • Current values

Protective function	TM120M AM	TM210 FTFM	TM220 ATFM	TM240 ATAM
Protection				
Starter protection	■	–	–	–
Line protection	–	■	■	■
Version available with				
1-pole and 2-pole breakers	–	■	–	–
3-pole breaker	■	■	■	■
4-pole breaker	–	■	■	■
Available protection parameters				
I_r adjustable	–	–	■	■
I_i adjustable	■	–	–	■
I_r fixed	–	■	–	–
I_i fixed	–	■	■	–
I_N [1]	–	■	■	■

[1] 3VA10 only without N protection
3VA11, 3VA12, 3VA13, 3VA14 without, 50% or 100% N protection
50% N protection from $I_n \geq 100$ A

System overview, page 2/24

© Siemens 2025

System overview, page 2/24

© Siemens 2025

3VA2 molded case circuit breakers up to 1600 A

Protective functions and accessories

Protective functions	3VA20	3VA21	3VA22
Size	100 A	160 A	250 A
Switch disconnectors			
No protection	–	–	–
Electronic			
Line protection	■	■	■
Line and generator protection	■	■	■
Line and generator protection, with display	■	■	■
Line and generator protection, with display, with metering function	■	■	■
Motor protection	–	■	■
Motor protection, with display	–	■	■
Motor protection, with display, with metering function	–	■	■
Starter protection	–	■	■

Accessories

Size	100 A	160 A	250 A
Accessories			
Auxiliary switches and signaling switches	■	■	■
Auxiliary releases	■	■	■
Connection technology	■	■	■
Plug-in version	■	■	■
Withdrawable version	■	■	■
Front mounted rotary operator	■	■	■
Door mounted rotary operator	■	■	■
Side wall mounted rotary operator	■	■	■
MO320 motor operator (mounted onto the front)	■	■	■
Motor operator with SEO520 stored energy mechanism	■	■	■
Motor operator (MO), integrable	–	–	–
Locking, blocking and interlocking	■	■	■
Residual current device (mounted underneath)	■	■	■
Communications interface	■	■	■
EFB300	■	■	■
Testing and commissioning devices	■	■	■
Cover frame	■	■	■
Busbar adapter	■	■	■

■ Available – Not available/not present

System overview, page 2/24

© Siemens 2025

3VA23	3VA24	3VA25	3VA26	3VA27
400 A	630 A	1000 A	1250 A	1600 A
–	–	–	–	■
■	■	■	■	■
■	■	■	■	■
■	■	■	■	■
■	■	■	■	■
■	■	■	–	■
■	■	■	–	■
■	■	■	–	■
■	■	■	–	■

400 A	630 A	1000 A	1250 A	1600 A
■	■	■	■	■
■	■	■	■	■
■	■	■	■	■
■	■	■	■	–
■	■	–	–	■
■	■	■	■	■
■	■	■	■	■
■	■	–	–	–
■	■	–	–	–
■	■	–	–	–
–	–	–	–	■
■	■	■	■	■
■	■	–	–	–
■	■	■	■	■
■	■	■	■	■
■	■	■	■	■
■	■	■	■	■
■	■	–	–	–

System overview, page 2/24

© Siemens 2025

3VA2 molded case circuit breakers up to 1600 A

Technical specifications

			3VA20				3VA21					3VA22				
Electrical characteristics according to IEC 60947-2																
Number of poles			3/4-pole				3/4-pole					3/4-pole				
Size		A	100				160					250				
Rated current I_n		A	25 ... 100				25 ... 160					160 ... 250				
Rated operational voltage U_e 50/60 Hz AC		V	690				690					690				
Rated insulation voltage U_i		V	800				800					800				
Rated impulse withstand voltage U_{imp}		kV	8				8					8				
Use in IT networks (breaking capacity acc. to IEC 60947-2, annex H)		V	■				■					■				
Frequency		Hz	50/60				50/60					50/60				
Breaking capacity (line protection)			**M**	**H**	**C**	**L**	**M**	**H**	**C**	**L**	**E**	**M**	**H**	**C**	**L**	**E**
Rated ultimate short-circuit breaking capacity I_{cu}																
50/60 Hz AC	220 ... 240 V	kA	85	110	150	200	85	110	150	200	–	85	110	150	200	–
	380 ... 415 V	kA	55	85	110	150	55	85	110	150	200	55	85	110	150	200
	440 V	kA	55	85	110	150	55	85	110	150	–	55	85	110	150	–
	500 V	kA	36	55	85	100	36	55	85	100	–	36	55	85	100	–
	690 V	kA	2	2	2	25	2.5	2.5	2.5	25	85	3	3	3	25	85
DC	125 V (1 switching pole)	kA	–	–	–	–	–	–	–	–	–	–	–	–	–	–
	250 V (2 switching poles)	kA	–	–	–	–	–	–	–	–	–	–	–	–	–	–
	500 V (3 switching poles)	kA	–	–	–	–	–	–	–	–	–	–	–	–	–	–
	600 V (4 switching poles)	kA	–	–	–	–	–	–	–	–	–	–	–	–	–	–
Rated service short-circuit breaking capacity I_{cs}																
50/60 Hz AC	220 ... 240 V	kA	85	110	150	200	85	110	150	200	–	85	110	150	200	–
	380 ... 415 V	kA	55	85	110	150	55	85	110	150	200	55	85	110	150	200
	440 V	kA	55	85	110	150	55	85	110	150	–	55	85	110	150	–
	500 V	kA	36	55	85	100	36	55	85	100	–	36	55	85	100	–
	690 V	kA	2	2	2	18	2.5	2.5	2.5	18	65	3	3	3	18	65
DC	125 V (1 switching pole)	kA	–	–	–	–	–	–	–	–	–	–	–	–	–	–
	250 V (2 switching poles)	kA	–	–	–	–	–	–	–	–	–	–	–	–	–	–
	500 V (3 switching poles)	kA	–	–	–	–	–	–	–	–	–	–	–	–	–	–
	600 V (4 switching poles)	kA	–	–	–	–	–	–	–	–	–	–	–	–	–	–
Dimensions																
	A	mm	105 (3P) | 140 (4P)				105 (3P) | 140 (4P)					105 (3P) | 140 (4P)				
	B	mm	181				181					181				
	C	mm	86				86					86				
	D	mm	107				107					107				

[1] Valid for I_n = 400 A, 500 A; for I_n = 630 A, I_{cs} = 65 kA applies

■ Available – Not available/not present

System overview, page 2/24 and 2/74

© Siemens 2025

3VA23					3VA24					3VA25			3VA26			3VA27		
3/4-pole					3/4-pole					3/4-pole			3/4-pole			3/4-pole		
400					630					1000			1250			1600		
250 ... 400					400 ... 630					630 ... 1000			1250			800 ... 1600		
690					690					690			690			690		
800					800					800			800			1000		
8					8					8			8			8		
■					■					≤ 500			≤ 500			■		
50/60					50/60					50/60			50/60			50/60		
M	**H**	**C**	**L**	**E**	**M**	**H**	**C**	**L**	**E**	**M**	**H**	**C**	**M**	**H**	**C**	**M**	**H**	**C**
85	110	150	200	–	85	110	150	200	–	85	110	200	85	110	200	100	150	200
55	85	110	150	200	55	85	110	150	200	55	85	110	55	85	110	55	85	110
55	85	110	–	–	55	85	110	–	–	55	85	110	55	85	110	55	85	100
36	55	85	–	–	36	55	85	–	–	36	55	85	36	55	85	36	55	85
5	5	5	25	85	6	6	6	25	85	25	35	35	25	35	35	25	36	50
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
85	110	150	200	–	85	110	150	200	–	85	110	150	85	110	150	100	150	200
55	85	110	150	200	55	85	110	150	200	55	85	85	55	85	85	55	85	110
55	85	110	–	–	55	85	110	–	–	55	70	70	55	70	70	55	85	100
36	55	65	–	–	36	55	85 [1)]	–	–	36	55	65	36	55	65	36	55	63
5	5	5	18	65	6	6	6	18	65	19	19	19	19	19	19	25	36	36
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
138 (3P) | 184 (4P)					138 (3P) | 184 (4P)					210 (3P) | 280 (4P)			210 (3P) | 280 (4P)			210 (3P) | 280 (4P)		
248					248					320			320			291		
110					110					120			120			171 (handle operating mechanism) | 183 (stored energy operating mechanism)		
137					137					253			253			225		

System overview, page 2/24 and 2/74

© Siemens 2025

3VA2 molded case circuit breakers up to 1600 A

Application

				3VA20	3VA21	3VA22
Electrical characteristics according to IEC 60947-2						
Number of poles				3/4-pole	3/4-pole	3/4-pole
Size			A	100	160	250
Rated current I_n			A	25 ... 100	25 ... 160	160 ... 250
Service life/endurance (operating cycles)						
Mechanical (CLOSE-OPEN cycles)				25000	25000	25000
Electrical	380 ... 415 V	I_n		15000	14000	12000
		$I_n/2$		20000	20000	17000
	690 V			10500	9800	7200
Trip units						
ETU320	LI			■	■	■
ETU330	LIG			■	■	■
ETU340	ELISA LI			–	■	■
ETU350	LSI			■	■	■
ETU550/ETU850	LSI			■	■	■
ETU560/ETU860	LSIG			■	■	■
ETU650	LSI			–	–	–
ETU360	LSIG			–	–	–
ETU660	LSIG			–	–	–
3VA2 molded case circuit breakers for motor/starter protection (IEC 60947-4-1 standards and specifications)						
Rated current I_n at 50 °C ambient temperature			A	–	25 ... 100	160 ... 200
Service life/endurance (operating cycles)						
Mechanical (CLOSE-OPEN cycles)				–	25000	25000
Electrical	380 ... 415 V			–	14000	12000
Trip units						
ETU310M	I			–	■	■
ETU350M	LSI			–	■	■
ETU550M	LSI			–	■	■
ETU860M	LSIG			–	■	■
ETU320	LI			–	–	–
ETU350	LSI			–	–	–
ETU360	LSIG			–	–	–
ETU650	LSIG			–	–	–
ETU660	LSIG			–	–	–

■ Available – Not available/not present

System overview, page 2/24 and 2/74

© Siemens 2025

3VA23	3VA24	3VA25	3VA26	3VA27
3/4-pole	3/4-pole	3/4-pole	3/4-pole	3/4-pole
400	630	1000	1250	1600
250 ... 400	400 ... 630	630 ... 1000	1250	800 ... 1600
20000	20000	10000	10000	10000
6000	5000	4600	4600	2000
12000	8000	7000	7000	–
4200	3500	3200	3200	–
■	■	■	■	■
■	■	■	■	–
■	■	■	■	–
■	■	■	■	■
■	■	■	■	–
■	■	■	■	–
–	–	–	–	■
–	–	–	–	■
–	–	–	–	■
250	400 ... 500	630 ... 800	–	800 ... 1600
20000	20000	10000	–	10000
6000	5000 (400 A) 3000 (500 A)	4600	–	2000
■	■	–	–	–
■	■	■	–	–
■	■	■	–	–
■	■	■	–	–
–	–	–	–	■
–	–	–	–	■
–	–	–	–	■
–	–	–	–	■
–	–	–	–	■

System overview, page 2/24 and 2/74

© Siemens 2025

3VA2 molded case circuit breakers up to 1000 A

Trip units

Protection System	Electronic	Electronic with display	Electronic with display and metering function
			
	ETU 3-series	**ETU 5-series**	**ETU 8-series**
Protective function			
Line protection	ETU320, ETU330, ETU340, ETU350	ETU550, ETU560	ETU850, ETU860
Starter protection	ETU310M	–	–
Motor protection	ETU350M	ETU550M	ETU860M
Integrated functions			
Parameterizing	Setting and reading the parameters • Current values • Delay times	Setting and reading the parameters • Via display and communication • Fine setting of the parameters • Reading the measured values	Setting and reading the parameters • Via display and communication • Fine setting of the parameters • Reading the measured values
Status display	Indicating the ETU status via LEDs	Indicating the ETU status via LEDs	Indicating the ETU status via LEDs
Interface	Interface for test devices	Interface for test devices	Interface for test devices
Metering function	–	–	Metering function integrated
Optional expansions			
24 V module	–	 24 V module for continuous power supply (also without primary current through the molded case circuit breaker)	 24 V module for continuous power supply (also without primary current through the molded case circuit breaker)
External function box	 EFB300 external function box for connection to the ETU	 EFB300 external function box for connection to the ETU	 EFB300 external function box for connection to the ETU
Communications module	–	 COM060 communications module	 COM060 communications module
Data concentrator	–	 COM800/COM100 data concentrator with interface to • PROFIBUS • PROFINET • Modbus RTU • Ethernet (Modbus TCP)	 COM800/COM100 data concentrator with interface to • PROFIBUS • PROFINET • Modbus RTU • Ethernet (Modbus TCP)
External display	–	 DSP800 external display for installing in the cubicle door	 DSP800 external display for installing in the cubicle door
Test device	 TD300/TD400/TD500 test device	 TD300/TD400/TD500 test device	 TD300/TD400/TD500 test device

System overview, page 2/24 and 2/74

© Siemens 2025

Protective functions	ETU310M	ETU320	ETU330	ETU340	ETU350	ETU350M	ETU550	ETU550M	ETU560	ETU850	ETU860	ETU860M
	I	LI	LIG	ELISA®	LSI	LSI	LSI	LSI	LSIG	LSI	LSIG	LSIG
Protection												
Starter protection	■	–	–	–	–	–	–	–	–	–	–	–
Motor protection	–	–	–	–	–	■	–	■	–	–	–	■
Line protection	–	■	■	■	■	–	■	–	■	■	■	–
Generator protection	–	■	■	–	■	–	■	–	■	■	■	–
Version available with												
3-pole without external neutral conductor transformer	■	■	■	■	■	■	–	■	–	–	–	■
3-pole with external neutral conductor transformer	–	–	–	–	–	–	■	–	■	■	■	–
4-pole with protected neutral conductor transformer	–	■	■	■	■	–	■	–	■	■	■	–
Available protection parameters												
Characteristic in L range	I^2t	I^2t	I^2t	I^4t	I^2t	I^2t	I^2t	I^2t	I^2t	I^2t	I^2t	I^2t
I_r	–	■	■	■	■	■	■	■	■	■	■	■
t_r at 6 × I_r	–	■	■	–	■	–	■	–	■	■	■	–
t_c	–	–	–	–	–	■	–	■	–	–	–	■
t_p	–	–	–	–	–	–	–	■	–	–	–	■
Thermal memory	■	■	■	■	■	■	■	■	■	■	■	■
Thermal memory can be switched on/off	–	–	–	–	–	–	■	–	■	■	■	–
I_{sd}	–	–	–	–	■	■	■	■	■	■	■	■
t_{sd} at 8 × I_r	–	–	–	–	■	■	■	■	■	■	■	■
Characteristic in S range: I^2t_{sd}	–	–	–	–	■	–	■	–	■	■	■	–
Characteristic in S range: selectable I^2t_{sd}/t_{sd}	–	–	–	–	–	–	■	–	■	■	■	–
I_i	■	■	■	■	■	■	■	■	■	■	■	■
I_N [1]	–	■	■	■	■	–	■	–	■	■	■	–
I_g	–	–	■	–	–	–	–	–	■	–	■	■
t_g at 2 × I_g	–	–	■	–	–	–	–	–	■	–	■	■
Characteristic in G range: I^2t_g	–	–	–	–	–	–	–	–	■	–	■	■
Characteristic in G range: selectable I^2t_g/t_g	–	–	–	–	–	–	–	–	■	–	■	■
Ground-fault alarm function	–	–	–	–	–	–	–	–	■	–	■	■
Blocking protection	–	–	–	–	–	–	–	–	–	–	–	■
ZSI in combination with an EFB external function box	–	■	■	■	■	■	■	■	■	■	■	■

[1] Available in a version with external current transformer for N conductor or 4-pole breaker

Available for:
- Circuit breakers with ETU (4-pole)
- Circuit breakers with ETU5/ETU8 3-pole with external neutral conductor transformer or 4-pole

System overview, page 2/24 and 2/74

© Siemens 2025

Online configurator highlights

www.siemens.com/lowvoltage/configurators

Search function with global direct input

Searches for specific terms and jumps to the article number based on input to the correct configurator

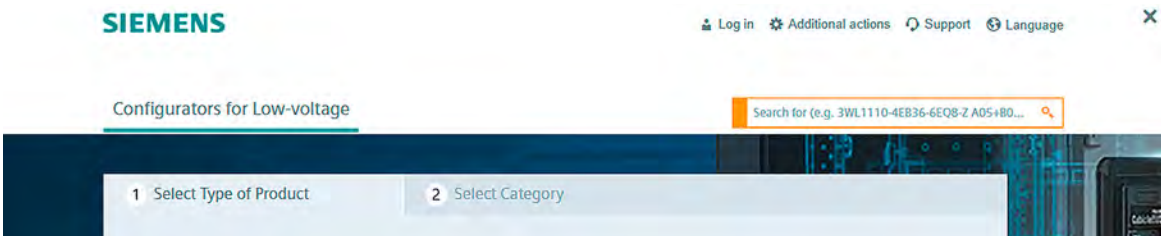

Product list stores multiple configurations and can transfer them collectively to the shopping cart

Recall of completed configurations for modification or additional configuration

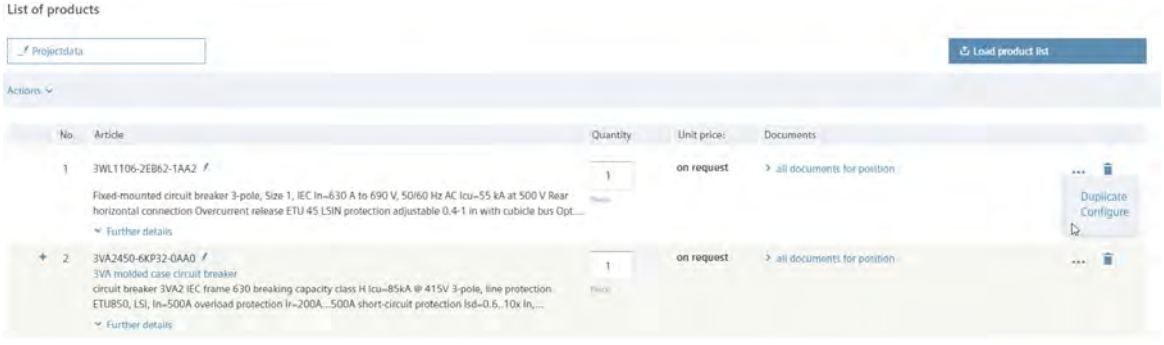

Responsive Design

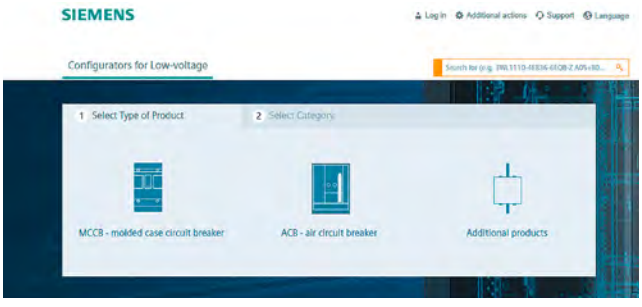

© Siemens 2025

www.siemens.com/lowvoltage/3va-configurator and www.siemens.com/lowvoltage/3va27-configurator

Visualization of the internally mountable accessories (slot assignment)

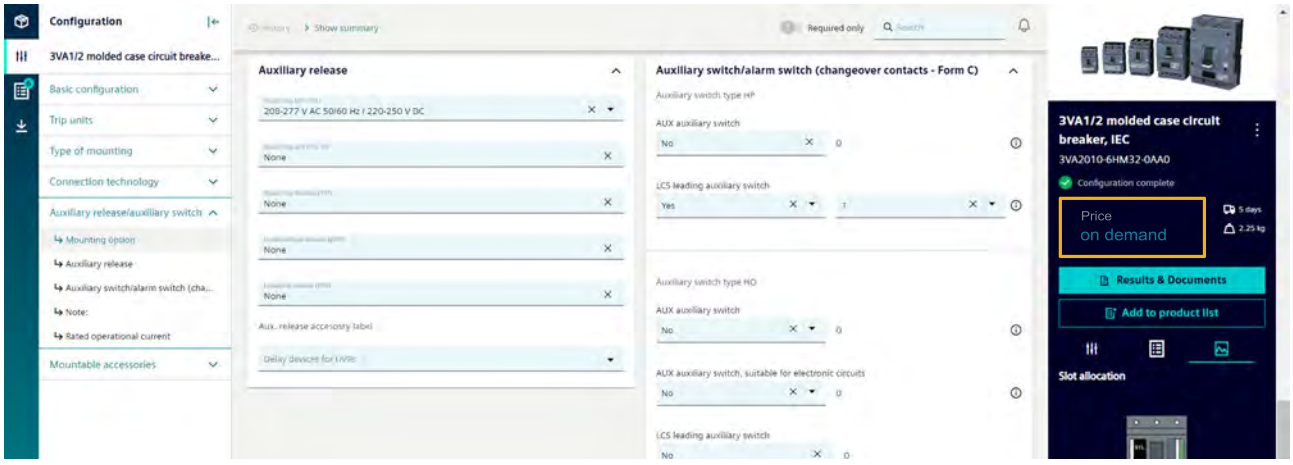

Download of the individual edz files for 3VA

Automatic generation of the 3D model, the 2D dimension drawing and the internal circuit diagram according to IEC

© Siemens 2025

System overview

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

Molded case circuit breakers and switch disconnectors

3VA1

3VA2

3VA1 trip units

Thermal-magnetic trip unit (TMTU)

3VA2 trip units



Electronic trip unit (ETU)

Electronic trip unit (ETU) with display

Electronic trip unit (ETU) with display and metering function

3VA2 trip unit accessories

24 V module

Communica-tions module

Data concentrator

External display

Test device

Trip unit accessories

Fixed-mounted

Withdrawable unit, complete kit

Plug-in unit, complete kit

Supplementary accessories

Auxiliary circuit connector



Door feed-through

Position signaling switch

Cylinder lock adapter

Crank

Note:
You will find a detailed range of accessories in the Accessories and spare parts section.

© Siemens 2025

Main conductor connection

Bus connectors

Bus connectors broadened

Circular conductor terminals

Box terminals

Nut keeper kits, right-angled

Connection accessories

Insulation accessories

Auxiliary releases/auxiliary switches

Shunt trip STF/STL

Universal release UNI

Undervoltage release UVR

Auxiliary switch AUX

Trip alarm switch TAS

Leading changeover switch LCS

Electrical alarm switches EAS

Short circuit alarm switch SAS

Mountable accessories

Manual operator

Motor operator

Residual current device

Additional circuit breaker accessories

Cover frame

DIN-rail adapter

Locking provisions

Cylinder lock

Mechanical interlocking mechanisms

Sliding bar interlock

Interlocking with rod

Handle interlocking module with Bowden cable

Note:
You will find a detailed range of accessories in the Accessories and spare parts section.

© Siemens 2025

Structure of the article numbers

Siemens EcoTech

3VA1 basic configuration for line and generator protection

The structure shown below is intended as an overview of each position and its meaning. For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

			3VA10	3VA11	3VA12	3VA13	3VA14	3VA15	5	6	7
									3VA1		–
Size (SZ)	100 A		■	–	–	–	–	–	0		
	160 A		–	■	–	–	–	–	1		
	250 A		–	–	■	–	–	–	2		
	400 A		–	–	–	■	–	–	3		
	630 A		–	–	–	–	■	–	4		
	1000 A		–	–	–	–	–	■	5		
Max. rated current $I_{n\,max}$	Line protection	16 A	■	■	–	–	–	–		9	6
		20 A	■	■	–	–	–	–		2	0
		25 A	■	■	–	–	–	–		2	5
		32 A	■	■	–	–	–	–		3	2
		40 A	■	■	–	–	–	–		4	0
		50 A	■	■	–	–	–	–		5	0
		63 A	■	■	–	–	–	–		6	3
		80 A	■	■	–	–	–	–		8	0
		100 A	■	■	–	–	–	–		1	0
		125 A	–	■	–	–	–	–		1	2
		160 A	–	■	■		–	–		1	6
		200 A	–	–	■	–	–	–		2	0
		250 A	–	–	■	–	–	–		2	5
		320 A	–	–	–	■	–	–		3	2
		400 A	–	–	–	■	–	–		4	0
		500 A	–	–	–	–	■	–		5	0
		630 A	–	–	–	–	■	■		6	3
		800 A	–	–	–	–	–	■		8	0
		1000 A	–	–	–	–	–	■		1	0
	Switch disconnector	63 A	–	■	–	–	–	–		6	3
		100 A	–	■	–	–	–	–		1	0
		125 A	–	■	–	–	–	–		1	2
		160 A	–	■	–	–	–	–		1	6
		250 A	–	–	■	–	–	–		2	5
		400 A	–	–	–	■	–	–		4	0
		500 A	–	–	–	–	■	–		5	0
		630 A	–	–	–	–	■	–		6	3

Quick selection guide, pages 2/6

© Siemens 2025

3VA1 5 6 7 – 8 9 10 11 12 – **0AA0**

			3VA10	3VA11	3VA12	3VA13	3VA14	3VA15			8	9	10	11	12
Short-circuit breaking capacity $I_{cu} = I_{cs}$ at 415 V	Without overload protection		–	■	–	■	–	■			1				
	Without short-circuit protection		–	■	■	■	■	–			1				
	16 kA		■	–	–	–	–	–			2				
	25 kA		■	■	–	–	–	–			3				
	36 kA		■	■	■	■	■	–			4				
	55 kA		–	■	■	■	■	■			5				
	70 kA		–	■	■	■	■	■			6				
	110 kA		–	–	–	■	■	■			7				
Protective function thermal-magnetic	No protection		–	■	■	■	■	–	SD100	–			A		
	Line protection		■	■	–	–	–	–	TM210	FTFM			D		
			–	■	–	–	–	–	TM220	ATFM			E		
			–	■	■	■	■	■	TM240	ATAM			F		
Protective function thermal-magnetic, neutral conductor protection	No protection											A			
	Line protection	Without neutral conductor protection										E			
		50% neutral conductor protection										F			
		100% neutral conductor protection										G			
Number of poles	1-pole	Line protection	–	■[1]	–	–	–	–						1	
	2-pole	Line protection	–	■[1]	–	–	–	–						2	
	3-pole	Line protection	■	■	■	■	■	■						3	
	4-pole	Line protection	■	■	■	■	■	■						4	
Connection technology	Nut keeper kit	Line protection	■	■	■	■	■	■							2
	Boxterminal	Line protection	■	■	–	–	–	–							6

[1] For TM210 only

Quick selection guide, pages 2/6

© Siemens 2025

Structure of the article numbers

Siemens EcoTech

3VA1 basic configuration for starter and motor protection

**The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator**

			3VA11	3VA12	3VA13	3VA14	3VA15	5	6	7	8
								3VA1			–
Size (SZ)	160 A		■	–	–	–	–	1			
	250 A		–	■	–	–	–	2			
	400 A		–	–	■	–	–	3			
	630 A		–	–	–	■	–	4			
	1000 A		–	–	–	–	■	5			
Max. rated current $I_{n\,max}$	Starter protection	1 A	■	–	–	–	–		8	1	
		2 A	■	–	–	–	–		0	2	
		4 A	■	–	–	–	–		0	4	
		8 A	■	–	–	–	–		0	8	
		12,5 A	■	–	–	–	–		9	2	
		20 A	■	–	–	–	–		2	0	
		32 A	■	–	–	–	–		3	2	
		40 A	■	–	–	–	–		4	0	
		50 A	■	–	–	–	–		5	0	
		63 A	■	–	–	–	–		6	3	
		80 A	■	–	–	–	–		8	0	
		100 A	■	–	–	–	–		1	0	
		125 A	■	–	–	–	–		1	2	
		160 A	–	■	–	–	–		1	6	
		200 A	–	■	–	–	–		2	0	
		250 A	–	–	■	–	–		2	5	
		320 A	–	–	■	–	–		3	2	
		400 A	–	–	–	■	–		4	0	
		500 A	–	–	–	■	–		5	0	
		630 A	–	–	–	–	■		6	3	
		800 A	–	–	–	–	■		8	0	
Short-circuit breaking capacity $I_{cu} = I_{cs}$ at 415 V	55 kA		■	■	■	■	■				5
	70 kA		■	■	■	■	■				6

Quick selection guide, pages 2/6

© Siemens 2025

3VA 1 [5] [6] [7] – [8] [9] [10] [11] [12] **– 0AA0**

			3VA11	3VA12	3VA13	3VA14	3VA15			9	10	11	12
Protective function thermal-magnetic	Starter protection		■	–	–	–	–	TM110M	FM	M	G		
			■	■	■	■	■	TM120M	AM	M	H		
Number of poles	3-pole	Starter protection	■	■	■	■	■					3	
Connection technology	Nut keeper kit Starter	Starter protection	■	■	■	■	■						2
	Box terminals	Starter protection	■	–	–	–	–						6

Quick selection guide, pages 2/6

© Siemens 2025

Structure of the article numbers

Siemens EcoTech

3VA2 basic configuration for line and generator protection

The structure shown below is intended as an overview of each position and its meaning. For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

			3VA20	3VA21	3VA22	3VA23	3VA24	3VA25	3VA26	5	6	7	8	9	10	11	12
										3VA2			–				– 0AA0
Size (SZ)	100 A		■	–	–	–	–	–	–	0							
	160 A		–	■	–	–	–	–	–	1							
	250 A		–	–	■	–	–	–	–	2							
	400 A		–	–	–	■	–	–	–	3							
	630 A		–	–	–	–	■	–	–	4							
	1000 A		–	–	–	–	–	■	–	5							
	1250 A		–	–	–	–	–	–	■	6							
Max. rated current $I_{n\,max}$	Line protection	25 A	■	■	–	–	–	–	–		2	5					
		40 A	■	■	–	–	–	–	–		4	0					
		63 A	■	■	–	–	–	–	–		6	3					
		100 A	■	■	–	–	–	–	–		1	0					
		160 A	–	■[1]	■	–	–	–	–		1	6					
		250 A	–	–	■[1]	■	–	–	–		2	5					
		400 A	–	–	–	■[1]	■[2]	–	–		4	0					
		500 A	–	–	–	–	■[2]	–	–		5	0					
		630 A	–	–	–	–	■	■	–		6	3					
		800 A	–	–	–	–	–	■	–		8	0					
		1000 A	–	–	–	–	–	■	–		1	0					
		1250 A	–	–	–	–	–	–	■		1	2					
	Motor protection	25 A	■	■	–	–	–	–	–		2	5					
		40 A	■	■	–	–	–	–	–		4	0					
		63 A	■	■	–	–	–	–	–		6	3					
		100 A	■	■	–	–	–	–	–		1	0					
		160 A	–	■	■	–	–	–	–		1	6					
		250 A	–	–	■	■	–	–	–		2	5					
		400 A	–	–	–	■	■[2]	–	–		4	0					
		500 A	–	–	–	–	■[2]	–	–		5	0					
		630 A	–	–	–	–	■	■	–		6	3					
		800 A	–	–	–	–	–	■	–		8	0					
		1000 A	–	–	–	–	–	■	–		1	0					
		1250 A	–	–	–	–	–	–	■		1	2					

[1] Rated current not available with ETU340 ELISA LI
[2] With ETU 5-series and 8-series, utilization category B and ETU340 ELISA LI only

Quick selection guide, pages 2/14

© Siemens 2025

3VA2 5 6 7 – 8 9 10 11 12 **– 0AA0**

			3VA20	3VA21	3VA22	3VA23	3VA24	3VA25	3VA26				8	9	10	11	12
Short-circuit Breaking capacity $I_{cu} = I_{cs}$ at 415 V	55 kA		■	■	■	■	■	■	■				5				
	85 kA		■	■	■	■	■	■	■				6				
	110 kA		■	■	■	■	■	■	■				7				
	150 kA		–	■	■	■	■	–	–				8				
	200 kA [1]		–	■	■	■	■	–	–				0				
Protective function electronic	Line protection		■	■	■	■	■	■	■	ETU320	LI	(N) [2]		H	L		
			■	■	■	■	■	■	■	ETU330	LIG	(N) [2]		H	M		
			–	■	■	■	■	■	■	ETU340	ELISA LI	(N) [2]		H	K		
	Line and generator protection		■	■	■	■	■	■	■	ETU350	LSI	(N) [2]		H	N		
	Line and generator protection, with display		■	■	■	■	■	■	■	ETU550	LSI	(N) [3]		J	P		
			■	■	■	■	■	–	–	ETU560	LSIG	(N) [3]		J	Q		
	Line and generator protection, with display, with metering function		■	■	■	■	■	–	–	ETU850	LSI	(N) [3]		K	P		
			■	■	■	■	■	■	■	ETU860	LSIG	(N) [3]		K	Q		
Number of poles	3-pole	Line protection	■	■	■	■	■	■	■							3	
		Generator protection	■	■	■	■	■	■	■							3	
	4-pole	Line protection	■	■	■	■	■	■	■							4	
		Generator protection	■	■	■	■	■	■	■							4	
Connection technology	Nut keeper kit	Line protection	■	■	■	■	■	■	■								2
		Generator protection	■	■	■	■	■	■	■								2
	Box terminal	Line protection	■	■	–	–	–	–	–								6
		Generator protection	■	■	–	–	–	–	–								6
	Connecting bar	Line protection	–	–	–	–	–	–	■								7
		Generator protection	–	–	–	–	–	–	■								7

[2] Neutral conductor protection for 4-pole breakers
[3] Neutral conductor protection for 3-pole breakers with an external neutral conductor transformer or for 4-pole breakers

Quick selection guide, pages 2/14

© Siemens 2025

Structure of the article numbers

Siemens EcoTech

3VA2 basic configuration for starter and motor protection

**The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator**

			3VA21	3VA22	3VA23	3VA24	3VA25	5	6	7	8	9	10	11	12
								3VA2			–				– 0AA0
Size (SZ)	160 A		■	–	–	–	–	1							
	250 A		–	■	–	–	–	2							
	400 A		–	–	■	–	–	3							
	630 A		–	–	–	■	–	4							
	1000 A		–	–	–	–	■	5							
Max. rated current $I_{n\,max}$	Starter protection	25 A	■	–	–	–	–		2	5					
		40 A	■	–	–	–	–		4	0					
		63 A	■	–	–	–	–		6	3					
		100 A	■	–	–	–	–		1	0					
		160 A	–	■	–	–	–		1	6					
		200 A	–	■	–	–	–		2	0					
		250 A	–	–	■	–	–		2	5					
		400 A	–	–	–	■	–		4	0					
		500 A	–	–	–	■	–		5	0					
	Motor protection	25 A	■	–	–	–	–		2	5					
		40 A	■	–	–	–	–		4	0					
		63 A	■	–	–	–	–		6	3					
		100 A	■	–	–	–	–		1	0					
		160 A	–	■	–	–	–		1	6					
		200 A	–	■	–	–	–		2	0					
		250 A	–	–	■	–	–		2	5					
		400 A	–	–	–	■	–		4	0					
		500 A	–	–	–	■	–		5	0					
		630 A	–	–	–	–	■		6	3					
		800 A	–	–	–	–	■		8	0					
Short-circuit Breaking capacity $I_{cu} = I_{cs}$ bei 415 V	110 kA		■	■	■	■	■				7				
	200 kA		■	■	■	■	–				0				

Quick selection guide, pages 2/14

© Siemens 2025

3VA2 5 6 7 – 8 9 10 11 12 **– 0AA0**

			3VA21	3VA22	3VA23	3VA24	3VA25					
Protective function electronic	Motor protection		■	■	■	■	■	ETU350M LSI		M	N	
	Motor protection, with display		■	■	■	■	■	ETU550M LSI		M	P	
	Motor protection, with display, with metering function		■	■	■	■	■	ETU860M LSIG		M	Q	
	Line protection		■	■	■	■	–	ETU310M I		M	S	
Number of poles	3-pole	Line protection	■	■	■	■	–					3
		Motor protection	■	■	■	■	■					3
Connection technology	Nut keeper kit	Line protection	■	■	■	■	–					2
		Motor protection	■	■	■	■	■					2
	Box terminals	Line protection	■	–	–	–	–					6
		Motor protection	■	–	–	–	–					6

Quick selection guide, pages 2/14

© Siemens 2025

Internal accessories

Auxiliary switches and alarm switches

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

Auxiliary switches AUX

- Used to signal the position of the main contacts of the molded case circuit breaker
- The contacts of the auxiliary switch and the molded case circuit breaker close in unison

Type	Width	I_e max (IEC 60947-5-1)	U_e AC/DC (IEC 60947-5-1)	Version	3VA10	3VA11	3VA12 3VA13 3VA14	3VA15	3VA20 3VA21 3VA22 3VA23 3VA24 3VA25 3VA26
HQ	7 mm (1 slot)	6 A	240 V/250 V	Standard			3VA9988-0AA12		
		< 1 A	24 V/24 V	Electronic-compatible			3VA9988-0AA13		
HP	14 mm (2 slots)	10 A	600 V/250 V	Standard	–		3VA9988-0AA11		

Leading changeover switches LCS

- Used for load shedding, for example
- Signal the opening of the main contacts with a lead time of 20 ms in advance of molded case circuit breaker trips

Type	Width	I_e max (IEC 60947-5-1)	U_e AC/DC (IEC 60947-5-1)	Version	3VA10	3VA11	3VA12 3VA13 3VA14	3VA15	3VA20 3VA21 3VA22 3VA23 3VA24 3VA25 3VA26
HQ	7 mm (1 slot)	6 A	240 V/250 V	Standard	–		3VA9988-0AA22		
		< 1 A	24 V/24 V	Electronic-compatible	–		3VA9988-0AA23		
HP	14 mm (2 slots)	10 A	600 V/250 V	Standard	–		3VA9988-0AA21		

Trip alarm switches TAS

- Signal every circuit breaker tripping operation
- Are actuated whenever the molded case circuit breaker switches to the TRIP position

Type	Width	I_e max (IEC 60947-5-1)	U_e AC/DC (IEC 60947-5-1)	Version	3VA10	3VA11	3VA12 3VA13 3VA14	3VA15	3VA20 3VA21 3VA22 3VA23 3VA24 3VA25 3VA26
HQ	7 mm (1 slot)	6 A	240 V/250 V	Standard			3VA9988-0AB12		
		< 1 A	24 V/24 V	Electronic-compatible			3VA9988-0AB13		
HP	14 mm (2 slots)	10 A	600 V/250 V	Standard	–		3VA9988-0AB11		

Short circuit alarm switches SAS

- Signal tripping operations only if they have been initiated by a short circuit
- The tripping operation must be reset by deliberate acknowledgement of the fault before the molded case circuit breaker can be switched to ON again

Type	Width	I_e max (IEC 60947-5-1)	U_e AC/DC (IEC 60947-5-1)	Version	3VA10	3VA11	3VA12 3VA13 3VA14	3VA15	3VA20 3VA21 3VA22 3VA23 3VA24 3VA25 3VA26
HQ	7 mm (1 slot)	6 A	240 V/250 V	Standard	–	3VA9988-0AB32	3VA9988-0AB34	–	–
		< 1 A	24 V/24 V	Electronic-compatible	–	3VA9988-0AB33	3VA9988-0AB35	–	–

Electrical alarm switches EAS

- Are actuated as soon as the main contacts of the molded case circuit breaker open in the event that the breaker is tripped by the ETU

Type	Width	I_e max (IEC 60947-5-1)	U_e AC/DC (IEC 60947-5-1)	Version	3VA10	3VA11	3VA12 3VA13 3VA14	3VA15	3VA20 3VA21 3VA22 3VA23 3VA24 3VA25 3VA26
HQ	7 mm (1 slot)	6 A	240 V/250 V	Standard	–	–	–	–	3VA9988-0AB22
		< 1 A	24 V/24 V	Electronic-compatible	–	–	–	–	3VA9988-0AB23

System overview, page 2/24

© Siemens 2025

Auxiliary releases

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

			3VA10 3VA11 3VA12 3VA13 3VA14 3VA15	3VA20 3VA21 3VA22 3VA23 3VA24	3VA25 3VA26
Shunt trips left STL					
• Used for remote-controlled tripping of the molded case circuit breaker • Have particularly low power consumption • Especially suitable for electrical interlocking in the EI variant [1]					
	Version	**U_e 50/60 Hz AC**	**U_e DC**		
	Standard	–	12 V	3VA9988-0BL10	
		24 V	24 ... 30 V	3VA9988-0BL30	
		48 ... 60 V	48 ... 60 V	3VA9988-0BL31	
		110 ... 127 V	110 ... 127 V	3VA9988-0BL32	
		208 ... 277 V	220 ... 250 V	3VA9988-0BL33	
		380 ... 600 V	–	3VA9988-0BL20	
	Electrical (EI)	–	24 V	3VA9988-0BM10	
Shunt trips flexible STF					
• Used for remote-controlled tripping of the molded case circuit breaker • Flexible installation					
	U_e 50/60 Hz AC	**U_e DC**			
	24 V	–	–	3VA9988-0BA20	–
	48 ... 60 V	–	–	3VA9988-0BA21	–
	110 ... 127 V	–	–	3VA9988-0BA22	–
	208 ... 277 V	–	–	3VA9988-0BA23	–
	380 ... 500 V	–	–	3VA9988-0BA24	–
	600 V	–	–	3VA9988-0BA25	–
Universal releases UNI					
• Combination of shunt trip and undervoltage release					
	U_e 50/60 Hz AC	**U_e DC**			
	–	12 V		3VA9908-0BD11	
		24 V		3VA9908-0BD12	
		48 V		3VA9908-0BD13	
Undervoltage releases UVR					
	• Trip the molded case circuit breaker in the event that the rated operational voltage of a monitored circuit drops below a minimum permissible limit or fails altogether				
	U_e 50/60 Hz AC	**U_e DC**			
	–	12 V		3VA9908-0BB10	
		24 V		3VA9908-0BB11	
		48 V		3VA9908-0BB12	
		60 V		3VA9908-0BB13	
		125 ... 127 V		3VA9908-0BB14	
		220 ... 230 V		3VA9908-0BB15	
		250 V		3VA9908-0BB16	
	24 V	–		3VA9908-0BB20	
	48 V	–		3VA9908-0BB21	
	60 V	–		3VA9908-0BB22	
	110 V	–		3VA9908-0BB23	
	120 ... 127 V	–		3VA9908-0BB24	
	208 ... 230 V	–		3VA9908-0BB25	
	380 ... 400 V	–		3VA9908-0BB26	
	440 ... 480 V	–		3VA9908-0BB27	
Time-delay devices for undervoltage releases					
	U_e 50/60 Hz AC	**U_e DC**			
	110 V	110 V		3VA9988-0BF21	
	230 V	230 V		3VA9988-0BF22	
	–	24 V		3VA9988-0BF23	

[1] In combination with TAS and AUX. For circuit diagrams, see the operating instructions

System overview, page 2/24

© Siemens 2025

Manual operators

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

				3VA10 3VA11	3VA12	3VA20 3VA21 3VA22	3VA13 3VA14 3VA23 3VA24	3VA15 3VA25 3VA26
Front mounted rotary operators								
• Handle • For IEC • Degree of protection IP30 • For 3-pole and 4-pole breakers								
	Version	**Illumination kit**	**Door interlock**					
	Standard (gray)	Without	Without	3VA9157-0EK11	3VA9257-0EK11	3VA9267-0EK11	3VA9467-0EK11	3VA9687-0EK11
			With	3VA9157-0EK21	3VA9257-0EK21	3VA9267-0EK21	3VA9467-0EK21	3VA9687-0EK21
		With	Without	3VA9157-0EK13	3VA9257-0EK13	3VA9267-0EK13	3VA9467-0EK13	–
			With	3VA9157-0EK23	3VA9257-0EK23	3VA9267-0EK23	3VA9467-0EK23	–
	EMERGENCY-OFF (red/yellow)	Without	Without	3VA9157-0EK15	3VA9257-0EK15	3VA9267-0EK15	3VA9467-0EK15	3VA9687-0EK15
			With	3VA9157-0EK25	3VA9257-0EK25	3VA9267-0EK25	3VA9467-0EK25	3VA9687-0EK25
		With	Without	3VA9157-0EK17	3VA9257-0EK17	3VA9267-0EK17	3VA9467-0EK17	–
			With	3VA9157-0EK27	3VA9257-0EK27	3VA9267-0EK27	3VA9467-0EK27	–
Door mounted rotary operators with tolerance compensation								
• Shaft 300 mm (325 mm for 3VA15/3VA25/3VA26) • With mounting tolerance compensation • Handle with masking plate 75 × 75 mm (100 × 100 mm for 3VA15/3VA25/3VA26) • Degree of protection IP65 • For 3-pole and 4-pole breakers								
	Version	**Illumination kit**	**Door interlock**					
	Standard (gray)	Without	With	3VA9157-0FK21	3VA9257-0FK21	3VA9267-0FK21	3VA9467-0FK21	3VA9687-0FK21
		With	With	3VA9157-0FK23	3VA9257-0FK23	3VA9267-0FK23	3VA9467-0FK23	3VA9687-0FK23
	EMERGENCY-OFF (red/yellow)	Without	With	3VA9157-0FK25	3VA9257-0FK25	3VA9267-0FK25	3VA9467-0FK25	3VA9687-0FK25
		With	With	3VA9157-0FK27	3VA9257-0FK27	3VA9267-0FK27	3VA9467-0FK27	3VA9687-0FK27
Door mounted rotary operators without tolerance compensation								
	• Shaft 300 mm (325 mm for 3VA15/3VA25/3VA26) • Handle with masking plate 75 × 75 mm (100 × 100 mm for 3VA15/3VA25/3VA26) • Degree of protection IP65 • For 3-pole and 4-pole breakers							
	Version	**Illumination kit**	**Door interlock**					
	Standard (gray)	Without	With	3VA9157-0FK61	3VA9257-0FK61	3VA9267-0FK61	3VA9467-0FK61	3VA9687-0FK61
Door mounted rotary operators without handle								
	• For IEC • Degree of protection IP30 • For 3-pole and 4-pole breakers							
	Version	**Illumination kit**	**Door interlock**					
	With shaft stub (gray)	–	Without	3VA9157-0GK00	3VA9257-0GK00	3VA9267-0GK00	3VA9467-0GK00	3VA9687-0GK00

System overview, page 2/24

© Siemens 2025

			3VA10 3VA11	3VA12	3VA20 3VA21 3VA22	3VA13 3VA14 3VA23 3VA24	3VA15 3VA25 3VA26
Side wall mounted rotary operators							
• Rotary operator with shaft 300 mm • Handle with masking plate 75 × 75 mm • Degree of protection IP65 • For 3-pole and 4-pole breakers							
Version	**Mounting bracket**	**Illumination kit**					
Standard (gray)	Without	Without	3VA9157-0PK11	3VA9257-0PK11	3VA9267-0PK11	3VA9467-0PK11	–
		With	3VA9157-0PK13	3VA9257-0PK13	3VA9267-0PK13	3VA9467-0PK13	–
EMERGENCY-OFF (red/yellow)	Without	Without	3VA9157-0PK15	3VA9257-0PK15	3VA9267-0PK15	3VA9467-0PK15	–
		With	3VA9157-0PK17	3VA9257-0PK17	3VA9267-0PK17	3VA9467-0PK17	–
Side wall mounted rotary operators with mounting bracket							
• Rotary operator with short shaft and mounting bracket for mounting directly on the side wall • Handle with masking plate 75 × 75 mm • Degree of protection IP65 • For 3-pole and 4-pole breakers							
Version	**Mounting bracket**	**Illumination kit**					
Standard (gray)	With	Without	3VA9157-0PK51	3VA9257-0PK51	3VA9267-0PK51	–	–
		With	3VA9157-0PK53	3VA9257-0PK53	3VA9267-0PK53	–	–
EMERGENCY-OFF (red/yellow)	With	Without	3VA9157-0PK55	3VA9257-0PK55	3VA9267-0PK55	–	–
		With	3VA9157-0PK57	3VA9257-0PK57	3VA9267-0PK57	–	–
Extended DIN rail for N/PE terminals							
Version	**Rated current**						
For mounting bracket	≤ 250 A		3VA9987-0GL30	3VA9987-0GL30	3VA9987-0GL30	–	–
Auxiliary switch modules for rotary operator							
Version							
2 × leading to "ON"			3VA9257-0GX10	3VA9257-0GX10	3VA9467-0GX10	3VA9467-0GX10	–
2 × leading to "ON" and 1 × leading to "OFF"			–	–	3VA9467-0GX20	3VA9467-0GX20	–
Mounting adapters for side wall mounted rotary operators							
Version							
Necessary accessories for 3VA side wall mounted rotary operators, if 3VA9...-0GX.0 auxiliary switch modules are used			3VA9257-0GX01	3VA9257-0GX01	3VA9467-0GX01	–	–

System overview, page 2/24

© Siemens 2025

Manual operators

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

		3VA10 3VA11	3VA12	3VA20 3VA21 3VA22	3VA13 3VA14 3VA23 3VA24	3VA15 3VA25 3VA26
Supplementary handles for door mounted rotary operators						
• For operation when control cabinet door is open						
Version						
Standard (gray)		3VA9287-0GC01	3VA9287-0GC01	3VA9487-0GC01	3VA9487-0GC11	3VA9687-0GC01
EMERGENCY-OFF (red/yellow)		3VA9287-0GC05	3VA9287-0GC05	3VA9487-0GC05	3VA9487-0GC15	3VA9687-0GC05
Handles						
• With masking plate						
Version	**Tolerance compensation**					
Standard (gray)	With		8UD1721-0AB21		8UD1731-0AB21	8UD1741-0AB21
	Without		8UD1721-0AB11		8UD1731-0AB11	8UD1741-0AB11
EMERGENCY-OFF (red/yellow)	With		8UD1721-0AB25		8UD1731-0AB25	8UD1741-0AB25
	Without		8UD1721-0AB15		8UD1731-0AB15	8UD1741-0AB15
Handle lever extensions						
• **Note:** The handle lever extension is already included in the scope of supply of the breakers.						
		–	–	–	3VA9487-0SC10	3VA9987-0SC10
Shafts						
Type	**Length**					
8 × 8 mm	300 mm		8UD1900-2WA00			–
	600 mm		8UD1900-2WB00			–
12 × 12 mm	300 mm	–	–	–	–	8UD1900-4WA00
	600 mm	–	–	–	–	8UD1900-4WB00
Adapters for shafts						
Type	**Use**					
8 × 8 mm	With door mounted rotary operator and side wall mounted rotary operator		8UD1900-2DA00			–
12 × 12 mm	For door mounted rotary operator	–	–	–	–	8UD1900-4DA00
Door couplings						
Type						
8 × 8 mm			8UD1900-2HA00			–
12 × 12 mm		–	–	–	–	8UD1900-4HA00

System overview, page 2/24

© Siemens 2025

	3VA10 3VA11	3VA12	3VA20 3VA21 3VA22	3VA13 3VA14 3VA23 3VA24	3VA15 3VA25 3VA26
Mounting tolerance compensations					
Type					
8 × 8 mm	8UD1900-2GA00				–
12 × 12 mm	–	–	–	–	8UD1900-4GA00
Fixing brackets for shafts					
	3VA9287-0GA80		3VA9487-0GA80		3VA9687-0GA80
Variable depth adapters					
Size					
8 × 8 mm	3VA9487-0GB10				–

System overview, page 2/24

© Siemens 2025

Manual operators

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

		3VA10 3VA11 3VA12	3VA13 3VA14	3VA15	3VA20 3VA21 3VA22 3VA23 3VA24	3VA25 3VA26
Labeling plates for manual operators						
				3VA9087-0SX10		
Illumination kits for manual operators						
	• 24 V DC voltage					
Version	**Rated current**					
Front mounted rotary operator	100 ... 250 A	8UD1900-0KA10	–	–	–	–
	100 ... 630 A	–	8UD1900-0KA20	–	8UD1900-0KA20	–
	630 ... 1000 A	–	–	8UD1900-0KA30	–	8UD1900-0KA30
Door mounted rotary operator and side wall mounted rotary operator	100 ... 630 A	8UD1900-0KA20	8UD1900-0KA20	8UD1900-0KA20	8UD1900-0KA20	–
	630 ... 1000 A	–	–	–	–	8UD1900-0KA30
Cylinder locks (type Kaba), standard masking plates						
	Use	**Key**				
For door mounted rotary operator and side wall mounted rotary operator (in the masking plate), only for locking, not for interlocking	1	8UD1900-0MB01	8UD1900-0MB01	–	8UD1900-0MB01	–
	2	8UD1900-0NB01	8UD1900-0NB01	–	8UD1900-0NB01	–
	3	8UD1900-0PB01	8UD1900-0PB01	–	8UD1900-0PB01	–
	4	8UD1900-0QB01	8UD1900-0QB01	–	8UD1900-0QB01	–
Cylinder locks (type Kaba), EMERGENCY-OFF masking plates						
	Use	**Key**				
For door mounted rotary operator and side wall mounted rotary operator (in the masking plate), only for locking, not for interlocking	1	8UD1900-0MB05	8UD1900-0MB05	–	8UD1900-0MB05	–
	2	8UD1900-0NB05	8UD1900-0NB05	–	8UD1900-0NB05	–
	3	8UD1900-0PB05	8UD1900-0PB05	–	8UD1900-0PB05	–
	4	8UD1900-0QB05	8UD1900-0QB05	–	8UD1900-0QB05	–
Cylinder locks (type RONIS)						
	• Includes a lock with 2 keys • For locking or interlocking • For installation on the circuit breaker side in all rotary operators • For mounting in the adapter kit for the accessories compartment • **Note:** The cylinder lock adapter for rotary operators is also needed for locking or interlocking circuit breakers via rotary operators					
Key						
1				3VA9980-0VL10		
3				3VA9980-0VL30		
4				3VA9980-0VL40		
Cylinder lock adapters for rotary operators						
	• To mount the cylinder lock in the rotary operator (also possible with door mounted rotary operator and side wall mounted rotary operator), on circuit breaker side, NOT in masking plate					
Rated current						
100 ... 630 A		3VA9980-0LF20	3VA9980-0LF20	–	3VA9980-0LF20	–
1000 A		–	–	3VA9680-0LF20	–	3VA9680-0LF20

System overview, page 2/24

© Siemens 2025

System overview, page 2/24

© Siemens 2025

Motor operators

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

2

Side mounted motor operators without stored energy mechanisms (MO310) new

- Cover size 45 mm

Addressable via control signals	Isolating features in accordance with IEC/EN 60947-1	Make time, typically For 3VA1	Make time, typically For 3VA2	Break time, typically For 3VA1	Break time, typically For 3VA2	Rated operational power
■	■	< 300 ms	–	< 300 ms	–	250 W, max. 500 W (60 ms)

Motor operators without stored energy mechanisms (MO320)

Addressable via control signals	Isolating features in accordance with IEC/EN 60947-1	Make time, typically For 3VA1	Make time, typically For 3VA2	Break time, typically For 3VA1	Break time, typically For 3VA2	Rated operational power
■	■	< 800 ms (160 A, 250A)	< 1000 ms (250 A), < 1700 ms (630 A)	< 800 ms (160 A, 250A)	< 1000 ms (250 A), < 1400 ms (630 A)	250 W, max. 500 W (60 ms)

Spare parts kit for MO320

Scope of supply
Mounting plate, plug

Motor operators with stored energy mechanisms (SEO520)

- Synchronizable motor operator with optional communications interface
- Up to 3VA22 (250 A), it has two spring assemblies that are used to switch the 3VA2 molded case circuit breaker on and off quickly. This new principle in the MCCB area ensures fast, reliable and easily controllable switching sequences, especially in load transfer switching applications.
- The connection with the COM060 communications module, via a plug-in connection, integrates the SEO520 into the communication environment of the 3VA molded case circuit breakers and ensures that the molded case circuit breaker can also be switched via the supported communication networks and the SENTRON Powerconfig and SENTRON Powermanager software packages.
- **Note:** On account of the fast switching times, the SEO520 cannot be used with a leading changeover switch LCS.

Addressable via control signals	Isolating features in accordance with IEC/EN 60947-1	Make time, typically For 3VA1	Make time, typically For 3VA2	Break time, typically For 3VA1	Break time, typically For 3VA2	Rated operational power
■	■	< 80 ms (400 A, 630 A)	< 80 ms (100 A ... 630 A)	< 5 s (400 A, 630 A)	< 80 ms (100 A ... 250 A) < 5 s (400 A, 630 A)	300 W, max. 500 W (60 ms)

Spare parts kit for SEO520

Scope of supply
Mounting plate, plug

Spare parts kit for SEO520 with communication

Scope of supply
Mounting plate, plug, SLC adapter

Mechanical operating cycles counters (for installation in the SEO520)

Mounting	Article No.
For installation in the SEO520	3VA9987-0HX10

Cylinder lock adapters for SEO520

Mounting	Article No.
For installation of cylinder locks in the SEO520 up to 250 A	3VA9980-0LF30

Cylinder locks (type RONIS)

- Includes a lock with 2 keys
- To locking the operating mode (Manual/Auto/Lock) for SEOs up to 250 A

Key	Article No.
1	3VA9980-0VL10
3	3VA9980-0VL30
4	3VA9980-0VL40

System overview, page 2/24

© Siemens 2025

		3VA10	3VA11	3VA12	3VA20 3VA21 3VA22	3VA13 3VA14	3VA23 3VA24
Rated control supply voltage	**With communication**						
42 ... 60 V AC 24 ... 60 V DC	–	–	3VA9117-0HB10	–	–	–	–
110 ... 230 V AC 110 ... 250 V DC	–	–	3VA9117-0HB20	–	–	–	–
Rated control supply voltage	**With communication**						
24 ... 60 V DC	–	–	3VA9157-0HA10	3VA9257-0HA10	3VA9267-0HA10	3VA9467-0HA10	3VA9467-0HA10
110 V AC	–	–	–	–	3VA9267-0HA21 [1]	3VA9467-0HA21 [1]	3VA9467-0HA21 [1]
110 ... 230 V AC 110 ... 250 V DC	–	–	3VA9157-0HA20	3VA9257-0HA20	3VA9267-0HA20	3VA9467-0HA20	3VA9467-0HA20
230 V AC	–	–	–	–	3VA9267-0HA22 [1]	3VA9467-0HA22 [1]	3VA9467-0HA22 [1]
		–	3VA9157-0HA00	3VA9257-0HA00	3VA9267-0HA00	3VA9467-0HA00	3VA9467-0HA00
Rated control supply voltage	**With communication**						
24 V DC	–	–	–	–	3VA9267-0HC10	3VA9467-0HC10 [2]	
42 ... 60 V AC/DC	–	–	–	–	3VA9267-0HC20	3VA9467-0HC20 [2]	
110 ... 230 V AC 110 ... 250 V DC	–	–	–	–	3VA9267-0HC30	3VA9467-0HC30 [2]	
24 V DC	Yes	–	–	–	3VA9267-0HC15	–	3VA9467-0HC15 [2]
110 ... 230 V AC 110 ... 250 V DC	Yes	–	–	–	3VA9267-0HC35	–	3VA9467-0HC35 [2]
		–	–	–	3VA9267-0HC00	–	–
		–	–	–	3VA9267-0HC05	–	–

[1] Optimized for long control cable lengths, see FAQ at www.siemens.com/lowvoltage/product-support (109804710)

[2] For 3VA13 and 3VA14 (IEC) with product version < *E04* and for 3VA23 and 3VA24 (IEC) with product version < *E06*, the service life (mechanical operating cycles) of the molded case circuit breaker is reduced when the SEO520 is used. For newer product versions, this is not the case. We recommend upgrading the circuit breaker to a higher product version, if necessary.

Reset mode

All motor operators have the following reset modes:
Reset mode 1: Automatic reset
Reset mode 2: Reset via OFF-signal

The motor operator with SEO520 stored energy operator additionally has:
Reset mode 3: Reset via OFF-signal with additional acknowledge signal

System overview, page 2/24

© Siemens 2025

Connection technology



① For mounting onto the circuit breaker
② For mounting on plug-in and withdrawable units

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

Box terminals

	Connection options		Scope of supply	Cable cross-section, copper stranded	Terminal short designation
	①	②	3 single terminals	1.5 ... 70 mm²	TS1.1
				6 ... 120 mm²	TS1.2
				25 ... 185 mm²	TS1.4
				50 ... 185 mm²	TS1.3
				35 ... 300 mm²	TS1.5
	①	②	4 single terminals	1.5 ... 70 mm²	TS1.1
				6 ... 120 mm²	TS1.2
				25 ... 185 mm²	TS1.4
				50 ... 185 mm²	TS1.3
				35 ... 300 mm²	TS1.5

Nut keeper kits

	Connection options		Scope of supply	Max. tap width	Max. tap thickness
	①	②	3 terminals	17 mm	6.5 mm
				25 mm	8 mm
				35 mm	10 mm
			Nut keeper kit for 3-pole breakers, 1 terminal cover	50 mm	25 mm
	①	②	4 terminals	17 mm	6.5 mm
				25 mm	8 mm
				35 mm	10 mm
			Nut keeper kit for 4-pole breakers, 1 terminal cover	50 mm	28 mm

Circular conductor terminals, 1 cable

	Connection options		Scope of supply	Cable cross-section	Copper/aluminum stranded [1]		Terminal short designation
					Cu	Al [2]	
	①	②	3 single terminals	1.5 ... 10 mm²	■	–	TA1.0
				1.5 ... 50 mm²	■	–	TA1.3
				10 ... 95 mm²	■	■	TA1.1
				16 ... 185 mm²	■	■ [3]	TA1.4
				35 ... 185 mm²	■	■ [3]	TA1.2
				50 ... 300 mm²	■	■	TA1.5
	①	②	4 single terminals	1.5 ... 10 mm²	■	–	TA1.0
				1.5 ... 50 mm²	■	–	TA1.3
				10 ... 95 mm²	■	■	TA1.1
				16 ... 185 mm²	■	■ [3]	TA1.4
				35 ... 185 mm²	■	■ [3]	TA1.2
				50 ... 300 mm²	■	■	TA1.5

[1] All circular conductor terminals tested according to UL 486 A/B for Cu and Al cables
[2] Al cable tested according to IEC 60947-2 annex D
[3] Use antioxidants
[4] Maximum current-carrying capacity of cable connection 400 A
Flexible copper bar: No restrictions
[5] Maximum current-carrying capacity of copper cables 380 A
Maximum current-carrying capacity of aluminum cables 310 A

System overview, page 2/24

© Siemens 2025

3VA10 3VA11	3VA12	3VA20 3VA21	3VA22	3VA13 3VA14 3VA23 3VA24	3VA15 3VA25 3VA26
3VA9153-0JA11	–	–	–	–	–
–	3VA9253-0JA11	3VA9163-0JA12	3VA9163-0JA12	–	–
–	–	3VA9263-0JA12	3VA9263-0JA12	–	–
–	3VA9253-0JA12	–	–	–	–
–	–	–	–	3VA9483-0JA13 [4]	–
3VA9154-0JA11	–	–	–	–	–
–	3VA9254-0JA11	3VA9164-0JA12	3VA9164-0JA12	–	–
–	–	3VA9264-0JA12	3VA9264-0JA12	–	–
–	3VA9254-0JA12	–	–	–	–
–	–	–	–	3VA9484-0JA13 [4]	–
3VA9113-0QA00	–	–	–	–	–
–	3VA9213-0QA00	3VA9203-0QA00	3VA9203-0QA00	–	–
–	–	–	–	3VA9403-0QA00	–
–	–	–	–	–	3VA9603-0QA00
3VA9114-0QA00	–	–	–	–	–
–	3VA9214-0QA00	3VA9204-0QA00	3VA9204-0QA00	–	–
–	–	–	–	3VA9404-0QA00	–
–	–	–	–	–	3VA9604-0QA00
3VA9113-0JB10	–	–	–	–	–
–	–	3VA9103-0JB11	3VA9103-0JB11	–	–
3VA9113-0JB11	–	–	–	–	–
–	–	3VA9263-0JB12	3VA9263-0JB12	–	–
–	3VA9253-0JB12	–	–	–	–
–	–	–	–	3VA9383-0JB13 [5]	–
3VA9114-0JB10	–	–	–	–	–
–	–	3VA9104-0JB11	3VA9104-0JB11	–	–
3VA9114-0JB11	–	–	–	–	–
–	–	3VA9264-0JB12	3VA9264-0JB12	–	–
–	3VA9254-0JB12	–	–	–	–
–	–	–	–	3VA9384-0JB13 [5]	–

System overview, page 2/24

© Siemens 2025

Connection technology



① For mounting onto the circuit breaker
② For mounting on plug-in and withdrawable units

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

2

Circular conductor terminals with control wire taps, 1 cable [3]

Connection options		Scope of supply	Cable cross-section	Copper/aluminum stranded [1]		Terminal short designation
				Cu	Al [2]	
①	②	3 single terminals	1.5 … 10 mm²	■	–	TA1.0
			1.5 … 50 mm²	■	–	TA1.3
			10 … 95 mm²	■	■	TA1.1
			16 … 185 mm²	■	■ [3]	TA1.4
			50 … 185 mm²	■	■ [3]	TA1.2
			50 … 300 mm²	■	■	TA1.5
①	②	4 single terminals	1.5 … 10 mm²	■	–	TA1.0
			1.5 … 50 mm²	■	–	TA1.3
			10 … 95 mm²	■	■	TA1.1
			16 … 185 mm²	■	■ [3]	TA1.4
			50 … 185 mm²	■	■ [3]	TA1.2
			50 … 300 mm²	■	■	TA1.5

Circular conductor terminals, 2 cables

Connection options		Scope of supply	Cable cross-section	Copper/aluminum stranded [1]		Control wire tap [4]	Terminal short designation
				Cu	Al [2]		
①	②	3 single terminals, 1 short terminal cover	120 … 300 mm²	■	■	No	TA3.1
						Yes	TA3.1
①	②	4 single terminals, 1 short terminal cover	120 … 300 mm²	■	■	No	TA3.1
						Yes	TA3.1

Circular conductor terminals, 3 cables

Connection options		Scope of supply	Cable cross-section	Copper/aluminum stranded [1]		Control wire tap [4]	Terminal short designation
				Cu	Al [2]		
①	②	3 single terminals, 1 short terminal cover	120 … 185 mm²	■	■	No	TA3.2
						Yes	TA3.2
①	②	4 single terminals, 1 short terminal cover	120 … 185 mm²	■	■	No	TA3.2
						Yes	TA3.2

Control wire taps for box terminals [3]

Connection options
①
②

Control wire taps for busbars [3]

Connection options
①
②

[1] All circular conductor terminals tested according to UL 486 A/B for Cu and Al cables
[2] Al cable tested according to IEC 60947-2 annex D
[3] Use antioxidants
[4] Maximum current-carrying capacity 15 A
Maximum cable connection up to 2.5 mm²
[5] Maximum current-carrying capacity of copper cables 380 A
Maximum current-carrying capacity of aluminum cables 310 A

System overview, page 2/24

© Siemens 2025

3VA10 3VA11	3VA12	3VA20 3VA21	3VA22	3VA13 3VA14 3VA23 3VA24	3VA15 3VA25
3VA9113-0JG10	–	–	–	–	–
–	–	3VA9103-0JG11	3VA9103-0JG11	–	–
3VA9113-0JG11	–	–	–	–	–
–	–	3VA9263-0JG12	3VA9263-0JG12	–	–
–	3VA9253-0JG12	–	–	–	–
–	–	–	–	3VA9383-0JG13 [5]	–
3VA9114-0JG10	–	–	–	–	–
–	–	3VA9104-0JG11	3VA9104-0JG11	–	–
3VA9114-0JG11	–	–	–	–	–
–	–	3VA9264-0JG12	3VA9264-0JG12	–	–
–	3VA9254-0JG12	–	–	–	–
–	–	–	–	3VA9384-0JG13 [5]	–
–	–	–	–	–	3VA9503-0JB23
–	–	–	–	–	3VA9503-0JG23
–	–	–	–	–	3VA9504-0JB23
–	–	–	–	–	3VA9504-0JG23
–	–	–	–	–	3VA9503-0JB32
–	–	–	–	–	3VA9503-0JG32
–	–	–	–	–	3VA9504-0JB32
–	–	–	–	–	3VA9504-0JG32
3VA9110-0WB00	3VA9200-0WB00	3VA9200-0WB00	3VA9200-0WB00	3VA9480-0WB00	–
3VA9150-0WB00	3VA9280-0WB00	3VA9280-0WB00	3VA9280-0WB00	3VA9480-0WB00	–
3VA9110-0WC00	3VA9200-0WC00	3VA9200-0WC00	3VA9200-0WC00	3VA9480-0WC00	–
3VA9150-0WC00	3VA9280-0WC00	3VA9280-0WC00	3VA9280-0WC00	3VA9480-0WC00	–

System overview, page 2/24

© Siemens 2025

Connection technology



① For mounting onto the circuit breaker
② For mounting on plug-in and withdrawable units

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

Note:
All bus connectors, bus connectors broadened and rear connections are Cu/Sn 6 r plated according to ISO 2093.

Front bus connectors

Number of poles	Connection options		Scope of supply	Max. tap width	Max. tap thickness
1P	①	–	1 terminal	22 mm	8 mm
3P	–	②	3 terminals	6 × 50 mm	8 mm
	①	②		80 mm	30 mm
4P new	①	–	4 terminals	80 mm	30 mm

Front bus connectors, with phase barriers

- 3-pole and 4-pole bus connectors only permitted if used with phase barriers!
- Phase barriers are included in the connection technology scope of supply or can be ordered as a spare part (3VA9...-.WA00).

Number of poles	Connection options		Scope of supply	Max. tap width	Max. tap thickness
3P	①	②	3 terminals, 2 phase barriers	22 mm	8 mm
				32 mm	10 mm
				40 mm	12.5 mm
				50 mm	30 mm
			3 short terminals,[1] 2 phase barriers	50 mm	30 mm
4P	①	②	4 terminals, 3 phase barriers	22 mm	8 mm
				32 mm	10 mm
				40 mm	12.5 mm
				50 mm	30 mm
			4 short terminals,[1] 3 phase barriers	50 mm	30 mm

Bus connectors edgewise, with phase barriers

- 3-pole and 4-pole bus connectors only permitted if used with phase barriers!
- Phase barriers are included in the connection technology scope of supply or can be ordered as a spare part (3VA9...-.WA00).

Number of poles	Connection options		Scope of supply	Max. tap width	Max. tap thickness
3P	①	②	3 terminals, 2 phase barriers	20 mm	6 mm
				25 mm	7 mm
				40 mm	8 mm
4P	①	②	4 terminals, 3 phase barriers	20 mm	6 mm
				25 mm	7 mm
				40 mm	8 mm

Front bus connectors broadened, with phase barriers

- 3-pole and 4-pole bus connectors broadened only permitted if used with phase barriers!
- Phase barriers are included in the connection technology scope of supply or can be ordered as a spare part (3VA9...-.WA00).
- Distance between pole centers:
  – 100/160 A = 35 mm, 250 A = 45 mm, 400/630 A = 70 mm

Number of poles	Connection options		Scope of supply	Max. tap width	Max. tap thickness
3P	①	②	3 terminals, 2 phase barriers	30 mm	8 mm
				35 mm	10 mm
				60 mm	12.5 mm
				80 mm	10 mm
	–	②	3 terminals, 2 phase barriers	80 mm	15 mm
4P	①	②	4 terminals, 3 phase barriers	30 mm	8 mm
				35 mm	10 mm
				60 mm	12.5 mm
				80 mm	10 mm

[1] Bus connectors short for use with terminal covers

System overview, page 2/24

© Siemens 2025

3VA10 3VA11	3VA12	3VA20 3VA21 3VA22	3VA13 3VA14 3VA23 3VA24	3VA15 3VA25	3VA26
3VA9151-0QB00	–	–	–	–	–
–	–	–	–	3VA9603-0QB01	–
–	–	–	–	–	3VA9603-0QB03 new
–	–	–	–	–	3VA9604-0QB03
3VA9153-0QB00	–	–	–	–	–
–	3VA9253-0QB00	3VA9263-0QB00	–	–	–
–	–	–	3VA9483-0QB00	–	–
–	–	–	–	3VA9603-0QB00	–
–	–	–	–	3VA9603-0QB02	–
3VA9154-0QB00	–	–	–	–	–
–	3VA9254-0QB00	3VA9264-0QB00	–	–	–
–	–	–	3VA9484-0QB00	–	–
–	–	–	–	3VA9604-0QB00	–
–	–	–	–	3VA9604-0QB02	–
3VA9153-0QD00	–	–	–	–	–
–	3VA9253-0QD00	3VA9263-0QD00	–	–	–
–	–	–	3VA9483-0QD00	–	–
3VA9154-0QD00	–	–	–	–	–
–	3VA9254-0QD00	3VA9264-0QD00	–	–	–
–	–	–	3VA9484-0QD00	–	–
3VA9153-0QC00	–	–	–	–	–
–	3VA9253-0QC00	3VA9263-0QC00	–	–	–
–	–	–	3VA9483-0QC00	–	–
–	–	–	–	3VA9603-0QC00	–
–	–	–	–	3VA9603-0QC01	
3VA9154-0QC00	–	–	–	–	–
–	3VA9254-0QC00	3VA9264-0QC00	–	–	–
–	–	–	3VA9484-0QC00	–	–
–	–	–	–	3VA9604-0QC00	

System overview, page 2/24

© Siemens 2025

Connection technology



① For mounting onto the circuit breaker
② For mounting on plug-in and withdrawable units

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

Note:
All bus connectors, bus connectors broadened and rear connections are Cu/Sn 6 r plated according to ISO 2093.

Nut keeper kits, right-angled [1)]

Number of poles	Connection options		Scope of supply	Max. tap width	Max. tap thickness
3P	①	②	3 terminals, 2 phase barriers	22 mm	8 mm
				32 mm	10 mm
				40 mm	12.5 mm
4P	①	②	4 terminals, 3 phase barriers	22 mm	8 mm
				32 mm	10 mm
				40 mm	12.5 mm

Rear connection studs flat

Number of poles	Connection options		Scope of supply
1P	①	②	1 short connection stud flat
			1 long connection stud flat
3P	①	②	2 short connection studs flat, 1 long connection stud flat
	–	②	3 short connection studs flat
4P	①	②	2 short connection studs flat, 2 long connection stud flat

Rear connectors vertical

Number of poles	Connection options		Scope of supply
3P	①	–	3 rear connectors
4P	①	–	4 rear connectors

Rear connectors horizontal

Number of poles	Connection options		Scope of supply
3P	①	–	3 rear connectors
4P	①	–	4 rear connectors

Rear connection studs round

Number of poles	Connection options		Scope of supply
1P	①	②	1 short connection stud round
			1 long connection stud round
3P	①	②	1 long connection stud round, 2 short connection studs round
4P	①	②	2 long connection studs round, 2 short connection studs round

[1)] Can only be connected to breaker side N, 1, 3, 5

System overview, page 2/24

© Siemens 2025

3VA10 3VA11	3VA12	3VA20 3VA21 3VA22	3VA13 3VA14 3VA23 3VA24	3VA15	3VA25 3VA26
3VA9113-0QG00	–	–	–	–	–
–	3VA9213-0QG00	3VA9223-0QG00	–	–	–
–	–	–	3VA9403-0QG00	–	–
3VA9114-0QG00	–	–	–	–	–
–	3VA9214-0QG00	3VA9224-0QG00	–	–	–
–	–	–	3VA9404-0QG00	–	–
3VA9111-0QE10	3VA9211-0QE10	3VA9201-0QE10	3VA9401-0QE10	–	–
3VA9111-0QE20	3VA9211-0QE20	3VA9201-0QE20	3VA9401-0QE20	–	–
3VA9113-0QE00	3VA9213-0QE00	3VA9203-0QE00	3VA9403-0QE00	–	–
–	–	–	–	3VA9603-0QE01	
3VA9114-0QE00	3VA9214-0QE00	3VA9204-0QE00	3VA9404-0QE00	–	–
–	–	–	–	–	3VA9603-0QE00
–	–	–	–	–	3VA9604-0QE00
–	–	–	–	–	3VA9603-0QE60
–	–	–	–	–	3VA9604-0QE60
3VA9111-0QF10	3VA9211-0QF10	3VA9201-0QF10	3VA9401-0QF10	–	–
3VA9111-0QF20	3VA9211-0QF20	3VA9201-0QF20	3VA9401-0QF20	–	–
3VA9113-0QF00	3VA9213-0QF00	3VA9203-0QF00	3VA9403-0QF00	–	–
3VA9114-0QF00	3VA9214-0QF00	3VA9204-0QF00	3VA9404-0QF00	–	–

System overview, page 2/24

© Siemens 2025

Connection technology



① For mounting onto the circuit breaker
② For mounting on plug-in and withdrawable units

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

2

Circular conductor terminals, 2P

Connection options		Scope of supply	Number of cables	Cable cross-section	Cu/Al stranded [1] Cu	Cu/Al stranded [1] Al [2]	Control wire tap [3]	Terminal short designation
①	–	2 single terminals, 1 extended terminal cover, 1 insulation plate	1	25 … 150 mm²	■	■ [4]	Yes	TA2.1
							No	TA2.1
			6	1.5 … 35 mm²	■	–	No	TA2.5

Circular conductor terminals, 3P

- **Note on 3VA9603-0JJ25, 3VA9603-0JJ35 and 3VA9603-0JJ45:**
  1 set of front bus connectors 3VA9603-0QB01 is required for installing circular conductor terminals on the load side and/or outgoing side.

Connection options		Scope of supply	Number of cables	Cable cross-section	Cu/Al stranded [1] Cu	Cu/Al stranded [1] Al [2]	Control wire tap [3]	Terminal short designation
①	–	3 single terminals, 1 extended terminal cover, 1 insulation plate	1	25 … 150 mm²	■	■ [4]	Yes	TA2.1
							No	TA2.1
				50 … 240 mm²	■	■	Yes	TA2.2 [5]
							No	TA2.2 [5]
			2	25 … 150 mm²	■	■ [4]	Yes	TA2.3
							No	TA2.3
				70 … 300 mm²	■	■	Yes	TA2.4
							No	TA2.4
			4	120 … 240 mm²	■	–	Yes	TA4.3
							No	TA4.3
				120 … 300 mm²	■	■	Yes	TA4.4
							No	TA4.4
			6	1.5 … 35 mm²	■	–	No	TA2.7
–	②	3 single terminals, 1 extended terminal cover, 1 insulation plate	1	25 … 150 mm²	■	■ [4]	Yes	TA2.1
				50 … 240 mm²	■	■	Yes	TA2.2 [5]
			2	25 … 150 mm²	■	■ [4]	Yes	TA2.3
				70 … 300 mm²	■	■	Yes	TA2.4
				150 … 300 mm²	■	■	Yes	TA5.1
			3	150 … 300 mm²	■	■	Yes	TA5.2
			4	150 … 300 mm²	■	–	Yes	TA5.3
			6	1.5 … 35 mm²	■	–	No	TA2.5
								TA2.6
								TA2.7

[1] All circular conductor terminals tested according to UL 486 A/B for Cu and Al cables
[2] Al cable tested according to IEC 60947-2 annex D
[3] Maximum current-carrying capacity 15 A
Maximum cable connection up to 2.5 mm²
[4] Max. 225 A
[5] Use antioxidants

System overview, page 2/24

© Siemens 2025

3VA10 3VA11	3VA12	3VA20 3VA21 3VA22	3VA13 3VA14 3VA23 3VA24	3VA15 3VA25 3VA26
3VA9112-0JC12	–	–	–	–
3VA9112-0JJ12	–	–	–	–
3VA9112-0JF60	–	–	–	–
3VA9113-0JC12	–	–	–	–
3VA9113-0JJ12	–	–	–	–
–	3VA9213-0JC13	3VA9223-0JC13	–	–
–	3VA9213-0JJ13	3VA9223-0JJ13	–	–
–	3VA9213-0JC22	3VA9223-0JC22	–	–
–	3VA9213-0JJ22	3VA9223-0JJ22	–	–
–	–	–	3VA9403-0JC23	–
–	–	–	3VA9403-0JJ23	–
–	–	–	–	3VA9603-0JC43
–	–	–	–	3VA9603-0JJ43
–	–	–	–	3VA9603-0JC44
–	–	–	–	3VA9603-0JJ44
3VA9113-0JF60	3VA9213-0JF60	3VA9223-0JF60	3VA9303-0JF60	–
3VA9153-0JC12	–	–	–	–
–	3VA9253-0JC13	3VA9263-0JC13	–	–
–	3VA9253-0JC22	3VA9263-0JC22	–	–
–	–	–	3VA9483-0JC23	–
–	–	–	–	3VA9603-0JJ25
–	–	–	–	3VA9603-0JJ35
–	–	–	–	3VA9603-0JJ45
3VA9153-0JF60	–	–	–	–
–	3VA9253-0JF60	3VA9263-0JF60	–	–
–	–	–	3VA9383-0JF60	–

System overview, page 2/24

© Siemens 2025

Connection technology



① For mounting onto the circuit breaker
② For mounting on plug-in and withdrawable units

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

Circular conductor terminals, 4P

Connection options		Scope of supply	Number of cables	Cable cross-section	Cu/Al stranded [1] Cu	Al [2]	Control wire tap [3]	Terminal short designation
①	–	4 single terminals, 1 extended terminal cover, 1 insulation plate	1	25 ... 150 mm²	■	■ [4]	Yes	TA2.1
							No	TA2.1
				50 ... 240 mm²	■	■	Yes	TA2.2 [7]
							No	TA2.2 [7]
			2	25 ... 150 mm²	■	■ [4]	Yes	TA2.3
							No	TA2.3
				70 ... 300 mm²	■	■	Yes	TA2.4
							No	TA2.4
			4	120 ... 240 mm²	■	–	Yes	TA4.3
							No	TA4.3
				120 ... 300 mm²	■	■	Yes	TA4.4
							No	TA4.4
			6	1.5 ... 35 mm²	■	–	No	TA2.5
								TA2.6
								TA2.7
–	②	4 single terminals, 1 extended terminal cover, 1 insulation plate	1	25 ... 150 mm²	■	■ [4]	Yes	TA2.1
				50 ... 240 mm²	■	■	Yes	TA2.2 [7]
			2	25 ... 150 mm²	■	■ [4]	Yes	TA2.3
				70 ... 300 mm²	■	■	Yes	TA2.4
			6	1.5 ... 35 mm²	■	–	No	TA2.5
								TA2.6
								TA2.7

Terminal covers specially for fixed-mounted units



Version	Number of poles	Mounting location	
Short	1P	①	–
	2P	①	–
	3P	①	–
	4P	①	–
Intermediate	3P	①	–
	4P	①	–
Extended [5]	2P	①	–
	3P	①	–
	4P	①	–
Broadened [5]	3P	①	–
	4P	①	–
Extended, transparent new	3P	①	–
	4P	①	–

Terminal covers specially for plug-in and withdrawable units (spare part)



- To provide circuit breaker touch protection
- For mounting to the molded case circuit breaker
- Included in scope of supply: Cover for the infeed and outgoing terminal

Version	Number of poles	Mounting location	
Short	3P	①	–
	4P	①	–

[1] All circular conductor terminals tested according to UL 486 A/B for Cu and Al cables
[2] Al cable tested according to IEC 60947-2 annex D
[3] Maximum current-carrying capacity 15 A
Maximum cable connection up to 2.5 mm²
[4] Max. 225 A
[5] Including insulating plate
[6] Suitable for circular conductor terminals 4 cables
[7] Use antioxidants

System overview, page 2/24

© Siemens 2025

3VA10	3VA11	3VA12	3VA20 3VA21 3VA22	3VA13 3VA14 3VA23 3VA24	3VA15 3VA25	3VA26
3VA9114-0JC12		–	–	–	–	–
3VA9114-0JJ12		–	–	–	–	–
–	–	3VA9214-0JC13	3VA9224-0JC13	–	–	–
–	–	3VA9214-0JJ13	3VA9224-0JJ13	–	–	–
–	–	3VA9214-0JC22	3VA9224-0JC22	–	–	–
–	–	3VA9214-0JJ22	3VA9224-0JJ22	–	–	–
–	–	–	–	3VA9404-0JC23	–	–
–	–	–	–	3VA9404-0JJ23	–	–
–	–	–	–	–	3VA9604-0JC43	–
–	–	–	–	–	3VA9604-0JJ43	–
–	–	–	–	–	3VA9604-0JC44	–
–	–	–	–	–	3VA9604-0JJ44	–
3VA9114-0JF60		–	–	–	–	–
–	–	3VA9214-0JF60	3VA9224-0JF60	–	–	–
–	–	–	–	3VA9304-0JF60	–	–
3VA9154-0JC12		–	–	–	–	–
–	–	3VA9254-0JC13	3VA9264-0JC13	–	–	–
–	–	3VA9254-0JC22	3VA9264-0JC22	–	–	–
–	–	–	–	3VA9484-0JC23	–	–
3VA9154-0JF60		–	–	–	–	–
–	–	3VA9254-0JF60	3VA9264-0JF60	–	–	–
–	–	–	–	3VA9384-0JF60	–	–
–	3VA9111-0WD10	–	–	–	–	–
–	3VA9111-0WD20	–	–	–	–	–
3VA9111-0WD30	3VA9111-0WD30	3VA9211-0WD30	3VA9221-0WD30	3VA9481-0WD30	3VA9601-0WD30	
3VA9111-0WD40	3VA9111-0WD40	3VA9211-0WD40	3VA9221-0WD40	3VA9481-0WD40	3VA9601-0WD40	
–	–	–	–	–	3VA9601-0WE30 [6]	
–	–	–	–	–	3VA9601-0WE40 [6]	
–	3VA9111-0WF20	–	–	–	–	–
3VA9111-0WF30	3VA9111-0WF30	3VA9211-0WF30	3VA9221-0WF30	3VA9481-0WF30	3VA9601-0WF30	–
3VA9111-0WF40	3VA9111-0WF40	3VA9211-0WF40	3VA9221-0WF40	3VA9481-0WF40	3VA9601-0WF40	–
3VA9111-0WG30	3VA9111-0WG30	3VA9211-0WG30	3VA9221-0WG30	3VA9401-0WG30	–	–
3VA9111-0WG40	3VA9111-0WG40	3VA9211-0WG40	3VA9221-0WG40	3VA9401-0WG40	–	–
–	–	–	–	–	3VA9601-0WP31	
–	–	–	–	–	3VA9601-0WP41	
3VA9113-0KB01	3VA9113-0KB01	3VA9213-0KB01	3VA9123-0KB01	3VA9353-0KB01	–	–
3VA9114-0KB01	3VA9114-0KB01	3VA9214-0KB01	3VA9124-0KB01	3VA9354-0KB01	–	–

System overview, page 2/24

© Siemens 2025

Connection technology



① For mounting onto the circuit breaker
② For mounting on plug-in and withdrawable units

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

2

Terminal covers for plug-in or withdrawable sockets

- For touch protection in the termination area
- Of the plug-in or withdrawable socket
- For mounting onto the plug-in or withdrawable socket



Version	Number of poles	Mounting location		3VA10	3VA11
Short	3P	–	②	–	3VA9153-0KB03
	4P	–	②	–	3VA9154-0KB03
Extended [1]	3P	–	②	–	3VA9153-0KB04
		–	②	–	3VA9154-0KB04
Broadened [1]	3P	–	②	–	3VA9153-0KB05
	4P	–	②	–	3VA9154-0KB05

Insulating plates

Version	Number of poles	Mounting location		3VA10	3VA11
Standard	2P	①	–	–	3VA9111-0WJ20
	3P	①	–	3VA9111-0WJ30	3VA9111-0WJ30
	4P	①	–	3VA9111-0WJ40	3VA9111-0WJ40
Broadened	3P	①	–	3VA9111-0WK30	3VA9111-0WK30
	4P	①	–	3VA9111-0WK40	3VA9111-0WK40

Phase barriers

Mounting location		Scope of supply	3VA10 / 3VA11
①	②	2 phase barriers	3VA9152-0WA00
–	②	2 phase barriers	–

Protective sleeve for insulation of rear connections

Mounting location	Scope of supply	3VA10 / 3VA11
②	3 protective sleeves	–

DC insulation plates for 3VA1 for fixed-mounted molded case circuit breakers

Number of poles	3VA10 / 3VA11
3P	3VA9113-0SG10
4P	3VA9114-0SG10

Side plates for 3VA1 for fixed-mounted molded case circuit breakers

Number of poles	Mounting	3VA10	3VA11
2P	On 2-pole molded case circuit breakers	–	3VA9112-0SG20

[1] Including insulating plate

System overview, page 2/24

© Siemens 2025

3VA12	3VA20 3VA21 3VA22	3VA13 3VA14 3VA23 3VA24	3VA15 3VA25	3VA26
3VA9253-0KB03	3VA9163-0KB03	3VA9353-0KB03	3VA9603-0KB03	–
3VA9254-0KB03	3VA9164-0KB03	3VA9354-0KB03	–	–
3VA9253-0KB04	3VA9163-0KB04	3VA9353-0KB04	–	–
3VA9254-0KB04	3VA9164-0KB04	3VA9354-0KB04	–	–
3VA9253-0KB05	3VA9163-0KB05	3VA9353-0KB05	–	–
3VA9254-0KB05	3VA9164-0KB05	3VA9354-0KB05	–	–
–	–	–	–	–
3VA9211-0WJ30	3VA9221-0WJ30	3VA9481-0WJ30	–	–
3VA9211-0WJ40	3VA9221-0WJ40	3VA9481-0WJ40	–	–
3VA9211-0WK30	3VA9221-0WK30	3VA9481-0WK30	–	–
3VA9211-0WK40	3VA9221-0WK40	3VA9481-0WK40	–	–
3VA9252-0WA00	3VA9262-0WA00	3VA9482-0WA00	3VA9602-0WA00	3VA9602-0WA00
–	–	–	3VA9602-0WA05	3VA9602-0WA05
–	–	–	3VA9603-0WH05	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–

System overview, page 2/24

© Siemens 2025

Plug-in and withdrawable technology

Thanks to plug-in and withdrawable technology:

- Molded case circuit breakers can be replaced quickly and easily for overhauls or servicing
- Electrical isolation and clearly visible isolating distance
- The socket can be interlocked to prevent the 3VA molded case circuit breaker from being plugged in or moved in
- Identical connection technology for all molded case circuit breakers, whether they are plug-in, withdrawable or fixed-mounted units

In addition, withdrawable technology offers:

- Transmission of the position of the molded case circuit breaker via communication (CONNECT, TEST, DISCONNECT)
- The ability to test the auxiliary and control circuit connections in the test position of the withdrawable unit, without contacted main current paths
- Transmission of the state of the molded case circuit breaker (ON, OFF, TRIP) via the COM060 communications module

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

		3VA11	3VA12	3VA20 3VA21 3VA22	3VA13 3VA14 3VA23 3VA24	3VA15 3VA25 3VA26
Withdrawable units, complete kits						
	• **Scope of supply:** – Withdrawable socket – Withdrawable unit, conversion kit – Mounting screw kit • **Note:** The crank for the withdrawable unit must be ordered separately.					
	Number of poles					
	3P	–	3VA9213-0KD00	3VA9123-0KD00	3VA9323-0KD00	–
	4P	–	3VA9214-0KD00	3VA9124-0KD00	3VA9324-0KD00	–
Withdrawable units, conversion kits						
	• **Scope of supply:** – Screw-fastened terminal covers for molded case circuit breakers – Side panels – Plug-in contacts – Cable cages – Autotrip plunger • **Note:** The crank for the withdrawable unit must be ordered separately.					
	Number of poles					
	3P	–	3VA9213-0KD10	3VA9123-0KD10	3VA9323-0KD10	–
	4P	–	3VA9214-0KD10	3VA9124-0KD10	3VA9324-0KD10	–

System overview, page 2/24

© Siemens 2025

	3VA11	3VA12	3VA20 3VA21 3VA22	3VA13 3VA14 3VA23 3VA24	3VA15 3VA25 3VA26
Plug-in units, complete kits					
• **Scope of supply:** – Plug-in socket – Plug-in unit, conversion kit – Mounting screw kit • **Note on 3VA9603-0KP00:** – An undervoltage release (UVR) (article number 3VA9908-0BB..) is required in the circuit breaker in order to provide the protection trip specified in the standard for unplugging the circuit breaker under load. The required UVR voltage version must be ordered in addition.					
Number of poles					
3P	3VA9113-0KP00	3VA9213-0KP00	3VA9123-0KP00	3VA9323-0KP00	3VA9603-0KP00
4P	3VA9114-0KP00	3VA9214-0KP00	3VA9124-0KP00	3VA9324-0KP00	–
Plug-in units, conversion kits					
• **Scope of supply:** – Screw-fastened terminal covers for molded case circuit breakers – Plug-in contacts – Cable cages – Autotrip plunger					
Number of poles					
3P	3VA9113-0KP10	3VA9213-0KP10	3VA9123-0KP10	3VA9323-0KP10	–
4P	3VA9114-0KP10	3VA9214-0KP10	3VA9124-0KP10	3VA9324-0KP10	–
Plug-in units, conversion kits with blade contacts					
• **Scope of supply:** – 6 × blade contacts – Guide frame for circuit breaker – 2 × cover for blade contacts – Position signaling switch – Connecting cable for auxiliary circuits					
Number of poles					
3P	–	–	–	–	3VA9603-0KP10
Cable cages for plug-in/withdrawable units (spare part)					
 • For routing of the required cables from the internal accessories on the back of the circuit breaker					
Number of poles					
3P/4P	3VA9157-0KB02	3VA9257-0KB02	3VA9167-0KB02	3VA9367-0KB02	–
Door feedthroughs					
	–	3VA9257-0KT00	3VA9167-0KT00	3VA9367-0KT00	–
Autotrip plungers (spare part)					
Version					
Plug-in unit	3VA9157-0KP81	3VA9257-0KP81	3VA9267-0KP81	3VA9457-0KP81	–
Withdrawable unit	–	3VA9257-0KD81	3VA9267-0KD81	3VA9457-0KD81	–

System overview, page 2/24

© Siemens 2025

Plug-in and withdrawable technology

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

Accessories

		3VA11	3VA12	3VA20 3VA21 3VA22	3VA13 3VA14 3VA23 3VA24	3VA15 3VA25 3VA26
Communications interface for withdrawable unit						
	Scope of supply					
	Set of cables with three special position signaling switches, 3VA9987-0KC10 connecting cables	3VA9987-0KC00	3VA9987-0KC00	3VA9987-0KC00	3VA9987-0KC00	–
Position signaling switches for withdrawable unit and plug-in unit						
	• **Note on 3VA9603-0KB00:** 4 position signaling switches can be installed in the plug-in base.					
		3VA9987-0KB00	3VA9987-0KB00	3VA9987-0KB00	3VA9987-0KB00	3VA9603-0KB00
Connecting cables						
	Use					
	Connection of position signaling switches for communication with COM060	3VA9987-0KC10	3VA9987-0KC10	3VA9987-0KC10	3VA9987-0KC10	–
	For auxiliary circuits	–	–	–	–	3VA9603-0KP80
Cranks for withdrawable units						
	Version / **Scope of supply**					
	Insulated / Including crank holder	3VA9987-0KD81	3VA9987-0KD81	3VA9987-0KD81	3VA9987-0KD81	–
Auxiliary circuit connectors						
	• Each auxiliary circuit connector is designed for 4 cables.					
	Version					
	For all withdrawable units	3VA9987-0KD80	3VA9987-0KD80	3VA9987-0KD80	3VA9987-0KD80	–
	For all plug-in units	3VA9987-0KP80	3VA9987-0KP80	3VA9987-0KP80	3VA9987-0KP80	–
Cylinder locks						
	• **Scope of supply:** – 1 lock with 2 keys • For locking or interlocking • **Note:** Not for 3VA15/3VA25!					
	Key / **Lock number**					
	1 / 1	3VA9980-0VL10	3VA9980-0VL10	3VA9980-0VL10	3VA9980-0VL10	–
	3 / 3	3VA9980-0VL30	3VA9980-0VL30	3VA9980-0VL30	3VA9980-0VL30	–
	4 / 4	3VA9980-0VL40	3VA9980-0VL40	3VA9980-0VL40	3VA9980-0VL40	–
Cylinder lock adapters for withdrawable units						
	• To prevent unauthorized withdrawal or insertion of the circuit breaker into the withdrawable unit • Circuit breaker can be locked in the CONNECT, TEST and DISCONNECT positions					
	Use					
	For fitting a cylinder lock in the right-hand side wall of the withdrawable unit	3VA9980-0LF40	3VA9980-0LF40	3VA9980-0LF40	3VA9980-0LF40	–

System overview, page 2/24

© Siemens 2025

System overview, page 2/24

© Siemens 2025

Residual current devices RCD

According to IEC 60947-2 annex B (Type A, Type B) and according to DIN VDE 0664-400 (Type B+)

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

Residual current devices (RCD) for switch disconnectors and molded case circuit breakers

- Mounted onto the side (left)

Number of poles	Type	Sensitivity [3]	Rated residual response current $I_{\Delta n}$	Limit value of non-tripping time Δt	Rated operational voltage U_e	Fault current frequency	Pre-alarm			Trip alarm		
								NC / NO	COM	TRIP	NC / NO	COM
3-pole	RCD510	Type A	0.03 ... 5 A	0 ... 3 s	127 ... 480 V AC	50/60 Hz	1	–	–	■	■	–
4-pole	RCD310	Type A	0.03 ... 5 A	Instantaneous	127 ... 480 V AC	50/60 Hz	1	–	–	■	■	–
	RCD510	Type A	0.03 ... 5 A	0 ... 3 s	127 ... 480 V AC	50/60 Hz	1	–	–	■	■	–

Residual current devices (RCD) for molded case circuit breakers

- Mounted below (under trip unit)

Number of poles	Type	Sensitivity [3]	Rated residual response current $I_{\Delta n}$	Limit value of non-tripping time Δt	Rated operational voltage U_e	Fault current frequency	Pre-alarm			Trip alarm		
								NC / NO	COM	TRIP	NC / NO	COM
3-pole	RCD520	Type A	0.03 ... 5 A	0 ... 3 s	127 ... 480 V AC	50/60 Hz	1	–	–	■	■	–
	RCD520B [1)4)]	Type B	0.03 ... 5 A	0 ... 10 s	127 ... 690 V AC	0 ... 100 kHz	1	■	–	■	■	–
		Type B+	0.03 ... 0.3 A									
	RCD820 [2)]	Type A	0.03 ... 30 A [5)]	0 ... 10 s	127 ... 690 V AC	50/60 Hz	2	■	■	■	■	■
4-pole	RCD320	Type A	0.03 ... 5 A	Instantaneous	127 ... 480 V AC	50/60 Hz	1	–	–	■	■	–
	RCD520	Type A	0.03 ... 5 A	0 ... 3 s	127 ... 480 V AC	50/60 Hz	1	–	–	■	■	–
	RCD520B [4)]	Type B	0.03 ... 5 A	0 ... 10 s	127 ... 690 V AC	0 ... 100 kHz	1	■	–	■	■	–
		Type B+	0.03 ... 0.3 A									
	RCD820 [2)]	Type A	0.03 ... 30 A [5)]	0 ... 10 s	127 ... 690 V AC	50/60 Hz	2	■	■	■	■	■

Residual current releases (spare part)

Version	Scope of supply
For RCD310 or RCD510	RCR, RCR-RCD cables

RCD820 - 3VA2 ETU connecting cables (spare part)

- Connecting cable between the RCD820 and the electronic trip unit (ETU) of a 3VA2

Version	Scope of supply
For RCD820	1 × RCD-ETU cable

[1)] 3-pole version in 4-pole enclosure
[2)] With energy infeed from below, the required auxiliary switch (AUX) must be ordered separately
[3)] Type A: pulse current sensitive, type B/B+: universal current sensitive
[4)] Sensitivity selectable for type B/B+
[5)] $I_{\Delta n}$ = 30 A: type AC
[6)] If the molded case circuit breaker has no box terminals as connections, a set of box terminals must be ordered additionally for the taps below the thermal-magnetic trip units.
[7)] 1 set of box terminals is included in scope of supply of the RCD510 (3VA921.-0RS20).

Modular residual current devices type A/B (according to IEC 60947-2 annex M), see monitoring devices, from page 11/1 onwards

System overview, page 2/24

© Siemens 2025

			3VA11	3VA12	3VA20 3VA21	3VA22	3VA23	3VA24	3VA10 3VA13 3VA14 3VA15 3VA25 3VA26
Monitoring mode (tripping can be disabled as an option)	**Remote test/ remote reset**	**Communication-capable**							
■	–	–	3VA9113-0RS20 [6]	3VA9213-0RS20 [7]	–	–	–	–	–
■	–	–	3VA9114-0RS10 [6]	–	–	–	–	–	–
■	–	–	3VA9114-0RS20 [6]	3VA9214-0RS20 [7]	–	–	–	–	–
Monitoring mode (tripping can be disabled as an option)	**Remote test/ remote reset**	**Communication-capable**							
–	–	–	3VA9113-0RL20	3VA9213-0RL20	–	–	–	–	–
■	–	–	3VA9113-0RL21	–	–	–	–	–	–
■	■	■	–	–	3VA9123-0RL30	3VA9223-0RL30	3VA9323-0RL30	3VA9423-0RL30	–
–	–	–	3VA9114-0RL10	–	–	–	–	–	–
–	–	–	3VA9114-0RL20	3VA9214-0RL20	–	–	–	–	–
■	–	–	3VA9114-0RL21	–	–	–	–	–	–
■	■	■	–	–	3VA9124-0RL30	3VA9224-0RL30	3VA9324-0RL30	3VA9424-0RL30	–
			3VA9988-0BR10	3VA9988-0BR10	–	–	–	–	–
			–	–	3VA9927-0RC00	3VA9927-0RC00	3VA9927-0RC00	3VA9927-0RC00	–

System overview, page 2/24

© Siemens 2025

Communication

For 3VA2 molded case circuit breakers

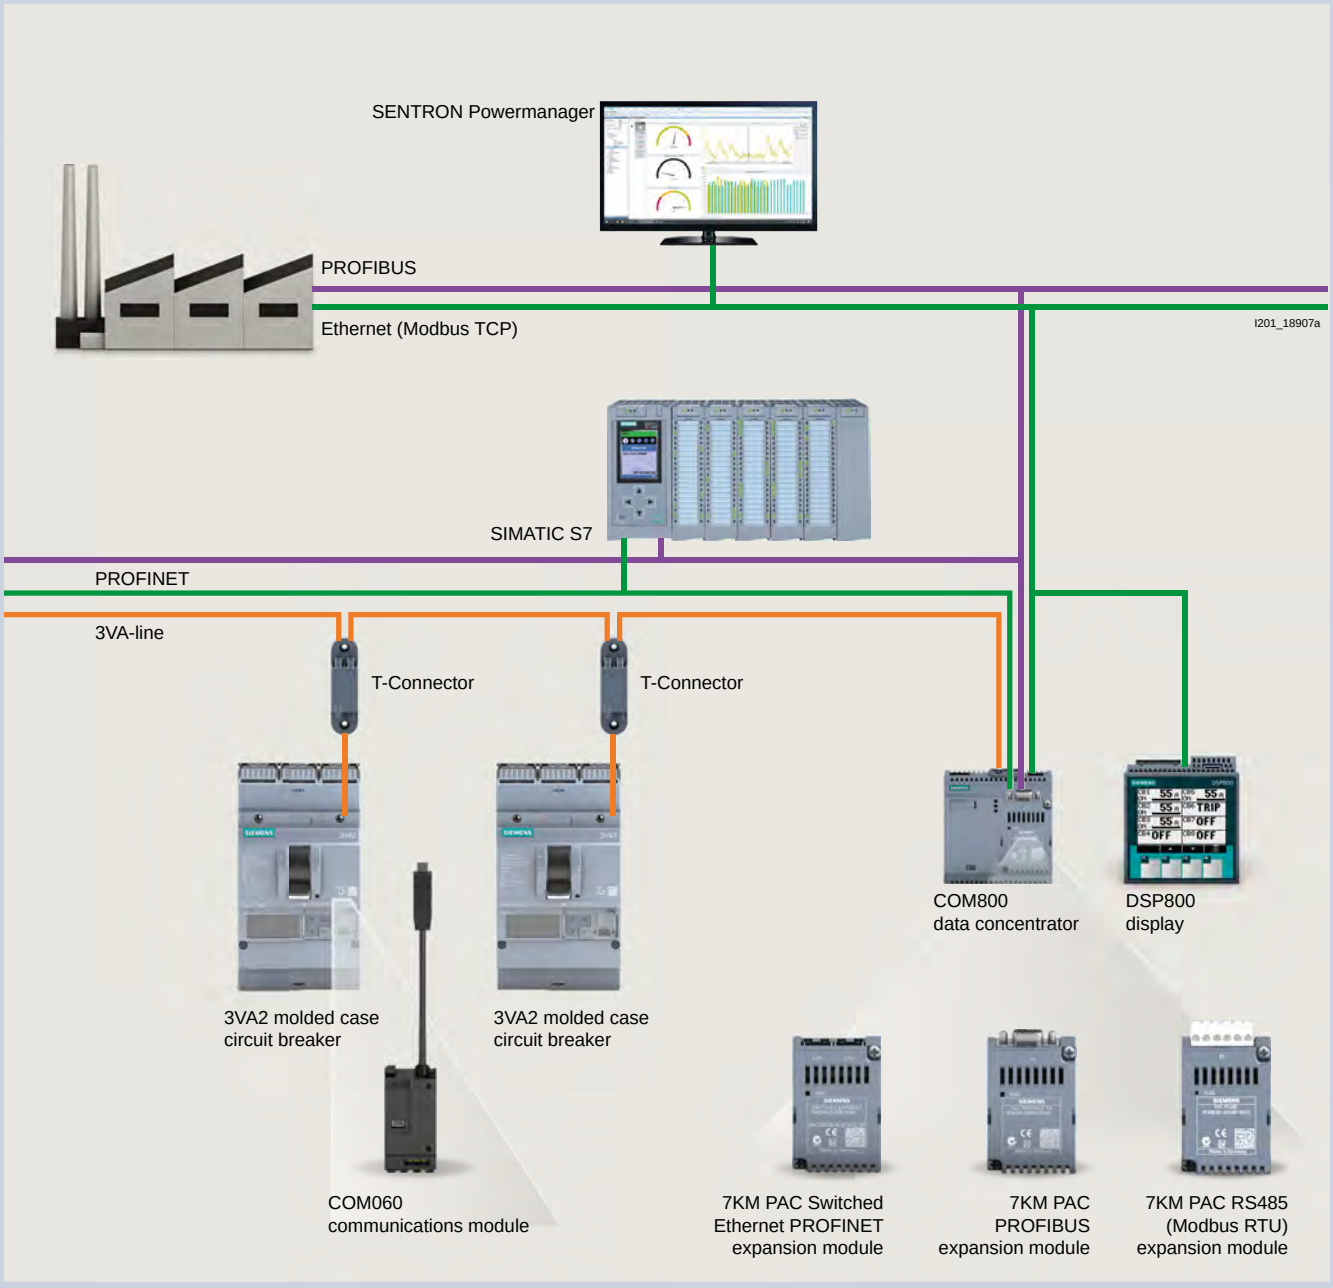

System overview, page 2/24

© Siemens 2025

Metering function [1]			ETU 5-series	ETU 8-series	Display in ETU	Display DSP800	Communication COM800/COM100
Current							
Phase and neutral conductor currents	I_1, I_2, I_3, I_N	A	■	■	□	□	■
Residual current to ground	I_g	A	■	■	□	□	■
Phase with highest load		A	■	■	□	□	■
Average value over the three phase currents	$I_{LAVG} = (I_1 + I_2 + I_3)/3$	A	–	■	–	□	■
Asymmetry of the phase currents	I_{nba}	%	–	■	–	□	■
THD of the 3 phases	$THDI_1$, $THDI_2$, $THDI_3$	%	–	■	–	□	■
Voltage							
Phase voltages incl. average value	U_{12}, U_{23}, U_{31}, U_{phavg}	V	–	■	□	□	■
Voltages to N conductor incl. average value	U_{1N}, U_{2N}, U_{3N}, U_{Navg}	V	–	■	–	□	■
Voltage unbalance		%	–	■	–	□	■
THD phase/phase and phase/N	$THDI_1$, $THDI_2$, $THDI_3$	%	–	■	–	□	■
Power							
Active power, total and per phase	P_1, P_2, P_3, P_{tot}	kW	–	■	□ (P_{tot})	□	■
Apparent power, total and per phase	S_1, S_2, S_3, S_{tot}	kVA	–	■	–	□	■
Reactive power, total and per phase	Q_1, Q_2, Q_3, Q_{tot}	kVAr	–	■	□	□	■
Power factor of the fundamental	P_{F1}, P_{F2}, P_{F3}, P_{Favg}		–	■	□ (PF_{avg})	□	■
Energy							
Active energy, infeed and feedback	E_p	kWh	–	■	□	□	■
Reactive energy, infeed and feedback	E_q	kVArh	–	■	–	□	■
Apparent energy	E_s	kVAh	–	■	–	□	■
Frequency							
Present frequency	f	Hz	–	■	□	□	■
Min/max pointer function							
Min./max. current, voltage, power	With time stamp	–	–	–	–	–	■
Condition Monitoring [2]							
Operating cycles counter	CLOSE-OPEN cycle		■	■	–	–	■
Operating hours		h	■	■	–	–	■
Trip counter	Differentiated by trip causes		■	■	–	–	■
Health indicator [3]	Incl. contact state	%	■	■	■	–	■
Remaining life time [3]		Time	■	■	–	–	■

■ Available □ Displayable – Not available

[1] Depending on ETU version
[2] Only available with continuous external power supply and COM060 and COM800/100 communication interfaces
[3] Firmware 4.4 or higher of ETU, COM060, COM800/100 required

		3VA20 3VA21 3VA22	3VA23 3VA24 3VA25 3VA26
COM060 communications modules			
	• For mounting in the right-hand accessories compartment of the 3VA2 molded case circuit breaker (including ETU power supply) • Including a T-Connector		
	Use		
	Communication to the COM800/COM100 data concentrator via 3VA line	3VA9187-0TB10	3VA9387-0TB10
SLC adapters (spare part)			
	Scope of supply		
	5 units	3VA9187-0TB60	3VA9387-0TB60
24 V modules			
	• 24 V DC • For mounting in the right-hand accessories compartment of the 3VA2		
	Use		
	Optional power supply for the ETU, also includes continuous operation of the ETU display and the metering function of the ETU 8-series	3VA9187-0TB50	3VA9387-0TB50

System overview, page 2/24

© Siemens 2025

Communication

For 3VA2 molded case circuit breakers

Data concentrator

COM800 data concentrators

Version	Article No.
Central communications module for connection of up to eight 3VA2 molded case circuit breakers via the 3VA line, Ethernet 10/100 Mbps interface module socket for inserting an optional PROFIBUS DP or PROFINET module, 2 terminating resistors	3VA9987-0TA10

COM100 data concentrators

Version	Article No.
Central communications module for connection of a 3VA2 molded case circuit breaker via the 3VA line, Ethernet 10/100 Mbps interface module socket for inserting an optional PROFIBUS DP or PROFINET module, 2 terminating resistors	3VA9987-0TA20

7KM PAC PROFIBUS DP expansion modules

Use	Article No.
Used for connecting the COM800/COM100 data concentrator, and the 3VA molded case circuit breakers connected to it, to PROFIBUS DPV1. Supplies the state and measured variables of the 3VA molded case circuit breaker for the PROFIBUS DP master. Receives information (e.g. commands) from the PROFIBUS DP master and transmits them to the 3VA molded case circuit breaker.	7KM9300-0AB01-0AA0

7KM PAC Switched Ethernet PROFINET expansion modules

Use	Article No.
Used for connecting the COM800/COM100 data concentrator, and the connected 3VA molded case circuit breakers, to PROFINET via two Ethernet interfaces. Supplies the state and measured variables of the 3VA molded case circuit breakers to PROFINET via the PROFINET IO, PROFIenergy and Modbus TCP protocols.	7KM9300-0AE02-0AA0

7KM PAC RS485 Modbus RTU expansion modules

Use	Article No.
Used for connecting the COM800/COM100 data concentrator, and the 3VA molded case circuit breakers connected to it, to Modbus RTU. Supplies the state and measured variables of the 3VA molded case circuit breaker for the Modbus RTU master. Receives information (e.g. commands) from the Modbus RTU master and transmits them to the 3VA molded case circuit breaker.	7KM9300-0AM00-0AA0

Interfaces

Interfaces to IEC 61850

- The SICAM A8000 smart data concentrator connects the circuit breakers from the SENTRON portfolio via the Modbus TCP/IP protocol and transmits data via communication protocols (e.g.: IEC 61850, IEC 60870-5-104, IEC 60870-5-101, Modbus and DNP) to higher-level systems.

Type	Processor assembly	Article No.
SICAM CP-8021 [1]	–	6MF2802-1AA00
SICAM CP-8031 [2]	–	6MF2803-1AA00
SICAM CP-8050 [3]	–	6MF2805-0AA00
SICAM PS-8620	24 ... 60 V DC (12 W)	6MF2862-0AA00
SICAM PS-8622	110 ... 220 V DC (12 W)	6MF2862-2AA00

[1] Dimensioned for device quantities of max. 1 × 3WA and 1 × 3VA
[2] Dimensioned for device quantities of 1 × 3WA and 8 × 3VA
[3] Dimensioned for device quantities of 3 × 3WA and 8 × 3VA or 2 × 3WA and 8 × 3VA and 1 × PAC4200

You will find further information at:
www.siemens.com/sicam-a8000
For the SICAM CP-8021, SICAM CP-8031 and SICAM CP-8050, predefined modules were created to reduce commissioning work to a minimum.
The modules can be obtained free of charge via SiePortal www.siemens.com/lowvoltage/product-support (109816057).

System overview, page 2/24

© Siemens 2025

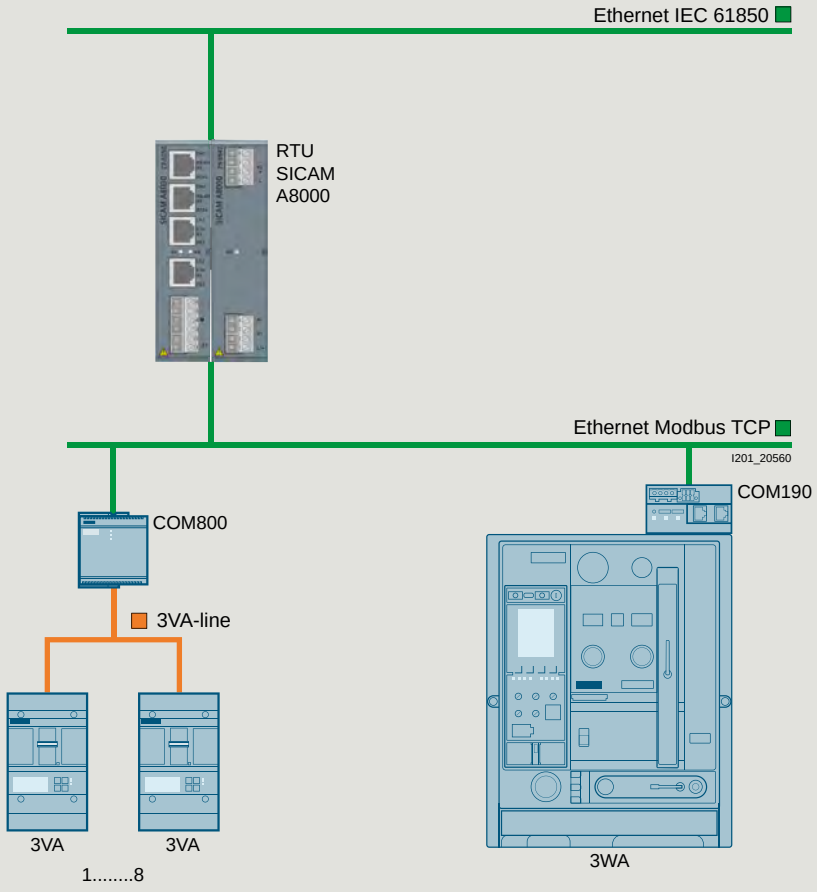

© Siemens 2025

Communication

For 3VA2 molded case circuit breakers

Accessories for communication

T-connectors (spare part)

Use	Article No.
Provides a stub connection to the COM060 and loops through to the next circuit breaker.	3VA9987-0TG10

DIN-rail adapters

Use	Article No.
For snapping the T-Connector onto a DIN rail.	3VA9987-0TG11

Prefabricated connecting cables, T-connector – T-connector or T-connector – COM800/COM100

Length	Article No.
0.4 m	3VA9987-0TC10
1 m	3VA9987-0TC20
2 m	3VA9987-0TC30
4 m	3VA9987-0TC40

Prefabricated connecting cables for extending the COM060 – T-connector stub connection

Length	Article No.
0.4 m	3VA9987-0TF20
0.8 m	3VA9987-0TF10

Additional bus terminating resistors (spare part)

Use	Article No.
For COM800 and COM060	3VA9987-0TE10

Voltage tap to external N conductors (spare part)

Use	Article No.
Cable for connection of the star point for the metering function of the 8-series ETU, length 1.5 m	3VA9987-0UC10

External current transformer for N conductors

Use	Rated current	Article No.
For 3VA2 3-pole molded case circuit breakers, for 5 and 8-series ETUs, including connecting cables	25 ... 150 A	3VA9007-0NA10
	160 ... 350 A	3VA9107-0NA10
	400 ... 630 A	3VA9307-0NA10

External current transformers as straight-through transformers

Rated current	Article No.
25 ... 150 A	3VA9077-0NA10
160 ... 350 A	3VA9177-0NA10
400 ... 630 A	3VA9377-0NA10
600 ... 1250 A	3VA9677-0NA10

Connecting cables for external current transformers for N conductors (spare part)

Article No.
3VA9907-0NB10

Display

DSP800 displays

Use	Article No.
For displaying the status and measured values of up to eight devices • 3VA2 via COM800/100 • 3VA27 • 3WL10 • 3WL11-13 • PAC3200T	3VA9987-0TD10

System overview, page 2/24

© Siemens 2025

External function box

EFB300 external function boxes

- 4 digital outputs for information output
- 1 digital input
- ZSI functionality
- S0 interface
- Including cable 1.5 m in length

Use	Article No.
For connection to the ETU of 3VA2 molded case circuit breakers	3VA9987-0UA10

Connecting cables for EFB300

Length	Use	Article No.
1.5 m	For 3VA2 with EFB	3VA9987-0UB10
3.0 m	For 3VA2 with EFB	3VA9987-0UB20
	For 3VA2 with EFB and RCD820	3VA9987-0UB30

Test devices

TD300 test devices

Use	Connection	Article No.
For activation of the ETU and initiation of a test tripping operation	On the front interface of the ETU	3VA9987-0MA10

TD400 test devices [1)]

- Commissioning/service tool for 3VA and 3WL with ETU Release 2
- Not suitable for 3WL10 and 3VA27
- Power supply via batteries or the USB-C interface
- USB-C interface for connecting a PC with SENTRON Powerconfig
- Bluetooth interface for connection to a PC, smartphone or tablet
- Including adapter, connecting cable and case

Connection	Article No.
On the front interface of the ETU	3VW9011-0AT40

TD400 adapter (spare part)

Version	Article No.
For 3VA	3VW9011-0AT43
For 3WL ETU Release 1	3VW9011-0AT44
For 3WL ETU Release 2	3VW9011-0AT45
For 3WA ETU300	3VW9011-0AT46

TD500 test devices

- USB interface for connecting a PC with SENTRON Powerconfig
- Including external power supply
- Including connecting cable to 3VA2 molded case circuit breaker

Use	Connection	Article No.
Initiation of various test tripping operations (LSING), ETU parameterization	On the front interface of the ETU	3VA9987-0MB10

External power supplies for TD500 (spare part)

Voltage	Article No.
110 ... 240 V	3VA9987-0MX10

Connecting cables for connecting TD500 to 3VA2 molded case circuit breakers (spare part)

Article No.
3VA9987-0MY10

[1)] A country-specific radio license is required to operate the Bluetooth interface. Before activating the Bluetooth function, ensure that the license is available: www.siemens.com/lowvoltage/certificates

System overview, page 2/24

© Siemens 2025

Locking, blocking and interlocking

			3VA11	3VA12	3VA20 3VA21 3VA22
Locking					
• The locking provisions make it possible to lock the 3VA molded case circuit breakers in either the OFF or the ON operating position.					
Version					
Cylinder lock	Key 1 (lock number 1)			3VA9980-0VL10	
	Key 3 (lock number 3)			3VA9980-0VL30	
	Key 4 (lock number 4)			3VA9980-0VL40	
Adapter kit for mounting the cylinder lock (type RONIS) in the accessories compartment of the molded case circuit breaker			3VA9157-0LF10	3VA9257-0LF10	3VA9167-0LF10
 Locking provision for handle operating mechanism			3VA9088-0LB10		3VA9388-0LB10
Interlocking					
• Using interlocking technology, it is possible to mutually interlock two or more molded case circuit breakers. • The interlock system is designed to ensure that no more than one molded case circuit breaker can be operated at a time. • The following methods of interlocking can be used on 3VA molded case circuit breakers: – Front interlock – Rear interlock					
Version					
Cylinder lock	Key 1 (lock number 1)			3VA9980-0VL10	
	Key 3 (lock number 3)			3VA9980-0VL30	
	Key 4 (lock number 4)			3VA9980-0VL40	
 Sliding bar interlock			3VA9158-0VF30	3VA9258-0VF30	3VA9168-0VF30
Handle interlocking module with Bowden cable			3VA9157-0VF10	3VA9257-0VF10	3VA9167-0VF10
Bowden cable		Length 0.6 m		3VA9980-0VC10	
		Length 1.0 m		3VA9980-0VC20	
		Length 1.5 m		3VA9980-0VC30	
Rear interlock with rod		Circuit breaker, fixed-mounted		3VA9088-0VM10	
		Plug-in/withdrawable technology		3VA9088-0VM30	
Mounting frame for rear interlock with rod		Mounting rails		3VA9088-0VK10	
		Mounting plate	3VA9158-0VK20	3VA9258-0VK20	3VA9268-0VK20

[1] With mounting frame for rear interlock.
Can be used with breaker 3VA15 from "E02" and 3VA25 from "E05" (Line protection CB with TMTU, 3-Series ETU and 5-Series ETU)

System overview, page 2/24

© Siemens 2025

3VA13
3VA14 | 3VA15
3VA23 | 3VA25
3VA24 | 3VA26

Locking

		Use in	Locking in OFF position	Locking in ON position	Front mounting	Rear mounting	Interlocked breakers
3VA9980-0VL10 3VA9980-0VL30 3VA9980-0VL40		Breakers, motor operators, manual operators, withdrawable technology	■	■	■	–	–
3VA9367-0LF10	3VA9587-0LF10	Circuit breaker	■	■	■	–	–
3VA9388-0LB10	3VA9588-0LB10	Circuit breaker	■	■	■	–	–

Interlocking

		Use in	Locking in OFF position	Locking in ON position	Front mounting	Rear mounting	Interlocked breakers
3VA9980-0VL10 3VA9980-0VL30 3VA9980-0VL40		Breakers, manual operators	■	■	■	–	Unlimited
3VA9368-0VF30	–	Circuit breaker	–	–	■	–	3
3VA9367-0VF10	3VA9587-0VF10	Circuit breaker	–	–	■	–	3
3VA9980-0VC10 3VA9980-0VC20 3VA9980-0VC30							
3VA9088-0VM10	3VA9588-0VM10 [1]	Circuit breaker, fixed-mounted, plug-in/withdrawable technology	–	–	–	■	2
3VA9088-0VM30	–						
3VA9088-0VK10	–	Fixed-mounted	–	–	–	■	
3VA9468-0VK20	–						

System overview, page 2/24

© Siemens 2025

Cover frame and mounting

		3VA10 3VA11	3VA12
Cover frames for door cut-outs for molded case circuit breakers			
Number of poles	**Door cut-out with trip unit**		
3P	No	3VA9053-0SB10	3VA9253-0SB10
	Yes	3VA9053-0SB20	3VA9253-0SB20
4P	No	3VA9054-0SB10	3VA9254-0SB10
	Yes	3VA9054-0SB20	3VA9254-0SB20
Cover frames for motor operators			
Use			
MO320 motor operator		3VA9053-0SB20	3VA9257-0SB30
Motor operator with SEO520 stored energy mechanism		–	–
Cover frames for RCD320, RCD520 and RCD820 residual current devices			
Number of poles			
3P		3VA9053-0SB10	3VA9253-0SB10
4P		3VA9054-0SB10	3VA9254-0SB10
Cover frames for front mounted rotary operators			
		3VA9053-0SB10	3VA9253-0SB10
Cover frames for door feedthroughs			
		–	3VA9253-0SB20
Labeling plates for cover frame			
			3VA9087-0SX10
DIN-rail adapter for 3VA1 molded case circuit breakers			
Number of poles			
1P		3VA9181-0SH10 [1]	–
2P		3VA9182-0SH10	–
3P and 4P		3VA9187-0SH10	–
3P and 4P in connection with RCD310 or RCD510		3VA9187-0SH20	–
Mounting screw kits			
Use	**Number of poles**		
For fixed-mounted circuit breakers	1P	3VA9111-0SS10	–
	2P and 3P (apart from 125 A/160 A with 55 kA and 70 kA)	3VA9116-0SS10	
	3P (125 A/160 A with 55 kA and 70 kA) and 4P	3VA9114-0SS10	
	3P	–	–
	4P	–	–
	3P and 4P	–	–
For plug-in units	–	3VA9114-0SS10	
For plug-in and withdrawable technology	–	–	3VA9114-0SS10

[1] For 1-pole 3VA11 molded case circuit breakers up to 25 kA

Adapters for 60 mm busbar system (8US), see page 13/26

System overview, page 2/24

© Siemens 2025

3VA20 3VA21 3VA22	3VA13 3VA14 3VA23 3VA24	3VA15 3VA25 3VA26
3VA9163-0SB10	3VA9383-0SB10	3VA9503-0SB10
3VA9163-0SB20	3VA9363-0SB20	3VA9503-0SB20
3VA9164-0SB10	3VA9384-0SB10	3VA9504-0SB10
3VA9164-0SB20	3VA9364-0SB20	3VA9504-0SB20
3VA9257-0SB30	3VA9377-0SB30	–
3VA9167-0SB30	3VA9377-0SB30	–
3VA9253-0SB10	3VA9303-0SB40	–
3VA9254-0SB10	3VA9304-0SB40	–
3VA9163-0SB10	3VA9383-0SB10	3VA9503-0SB50
3VA9253-0SB20	3VA9353-0SB20	–
	3VA9087-0SX10	
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
3VA9126-0SS10	–	–
3VA9124-0SS10	–	–
–	3VA9328-0SS10	3VA9517-0SS10
–	–	3VA9603-0SS10
3VA9124-0SS10	3VA9328-0SS10	–

System overview, page 2/24

© Siemens 2025

System overview

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va27-configurator

Molded case circuit breakers

Handle

Stored energy mechanism

Trip units



Electronic trip unit (ETU)

Accessories

Communications module

Rating plugs

Breaker Connect module

Test devices and breaker data adapters

Main conductor connections

Rear vertical/ horizontal

Rear broadened

Front extended

Front broadened

Cable lug

Accessories

Phase barriers

Terminal cover

Motors

Spring charging motor

Accessories

Mechanical operating cycles counter (MOC)

Auxiliary releases/closing coils

Undervoltage release (UVR)/ Shunt trip (ST)

Closing coil (CC)/ Remote reset magnet (RR)

Note:
You will find a detailed range of accessories in the Accessories and spare parts section.

© Siemens 2025

Auxiliary switches

Trip alarm switch

Ready-to-close signaling switch (RTC)

Auxiliary switch ON/OFF (AUX)

Trip alarm switch (S24)

Trip alarm switch (TAS)

Other accessories

Interlocking sets

Locking provision

Locking mechanism

Door sealing frame

Protective cover

Mechanical interlock

Manual operator

Note:
You will find a detailed range of accessories in the Accessories and spare parts section.

© Siemens 2025

Structure of the article numbers

Basic configuration with handle operating mechanism

The structure shown below is intended as an overview of each position and its meaning. For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va27-configurator

	6	7		8	9	10	11	12		13	14	15	16
3VA27	■	■	–	■	■	■	■	■	–	□	□	□	□

Molded case circuit breakers and ETUs

Max. rated current $I_{n\,max}$	800 A					8	0	
	1000 A					1	0	
	1250 A					1	2	
	1600 A					1	6	
Short-circuit breaking capacity $I_{cu} = I_{cs}$ at 415 V	Handle operating mechanism	55 kA			5			
		85 kA			6			
		110 kA			7			
Molded case switches	Without metering function, without communications interface	Without trip unit				A	A	
Circuit breakers, ETU 3-series	Without metering function, without communications interface	With trip unit	ETU320 LI	(N) [1]		A	B	
			ETU350 LSI	(N) [1]		A	C	
			ETU360 LSIG	(N) [1]		A	D	
Circuit breakers, ETU 6-series		With trip unit	ETU650 LSI	(N) [1]			E	
			ETU660 LSIG	(N) [1]			F	
	Without a communications interface	Without metering function				A		
	With a communications interface	Without metering function				B		
		Metering function Basic	Voltage tap on bottom			C		
			Voltage tap on top			D		
		Metering function Advanced	Voltage tap on bottom			E		
			Voltage tap on top			F		

[1] Neutral conductor protection for 3-pole breakers with an external neutral conductor transformer or 4-pole breakers

Number of poles	Fixed-mounted	3-pole		0
		4-pole	Neutral left	1
			Neutral right	2
	Withdrawable	3-pole		3
		4-pole	Neutral left	4
			Neutral right	5

Connections

Type of mounting	Withdrawable	Withdrawable circuit breaker without guide frame (guide frame must be ordered separately)	0
	Fixed-mounted breaker/ withdrawable breaker	Rear vertical connection	1
		Rear horizontal connection	2
		Front main connection	3
		Front-accessible, extended main connection	5
		Front-accessible, broadened main connection	6
		Rear broadened bus connectors	7

Quick selection guide, page 2/14

© Siemens 2025

3VA27 6 7 – 8 9 10 11 12 – 13 14 15 16

Alarm switch combinations

Alarm switches	Without	0
	With trip alarm switch TAS and trip alarm switch S25	1
	With two leading changeover switches S26	2
	With trip alarm switch TAS and trip alarm switch S25 and two leading changeover switches S26	3

Auxiliary releases, closing coils

Closing coil (CC), remote reset magnet (RR)	Without	A

2nd auxiliary release	Without 2nd auxiliary release		A
	With undervoltage release (UVR)	24 V AC/DC	B
		30 V AC/DC	C
		48 V AC/DC	D
		60 V AC/DC	E
		110 ... 120 V AC/DC	F
		120 ... 127 V AC/DC	G
		220 ... 240 V AC/DC	H
		240 ... 250 V AC/DC	J
		380 ... 400 V AC/DC	K
		415 ... 440 V AC/DC	L
	With undervoltage release (UVR), delayable with external time-delay device Scope of supply: UVR + time-delay device	24 ... 30 V AC/DC	M
		110 ... 127 V AC/DC	N
		220 ... 250 V AC/DC	P
	With 2nd shunt trip (ST2)	24 V AC/DC	Q
		30 V AC/DC	R
		48 V AC/DC	S
		60 V AC/DC	T
		110 ... 120 V AC/DC	U
		120 ... 127 V AC/DC	V
		220 ... 240 V AC/DC	W
		240 ... 250 V AC/DC	X

1st auxiliary release	Without 1st auxiliary release		0
	Shunt trip (ST)	24 V AC/DC	1
		30 V AC/DC	2
		48 V AC/DC	3
		60 V AC/DC	4
		110 ... 120 V AC/DC	5
		120 ... 127 V AC/DC	6
		220 ... 240 V AC/DC	7
		240 ... 250 V AC/DC	8

Quick selection guide, page 2/14

© Siemens 2025

Structure of the article numbers

Basic configuration with stored energy mechanism

The structure shown below is intended as an overview of each position and its meaning. For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va27-configurator

						6	7	8	9	10	11	12	13	14	15	16
3VA27						■	■	–	■	■	■	■	–	□	□	□	□
Molded case circuit breakers and ETUs																
Max. rated current $I_{n\,max}$	800 A					8	0									
	1000 A					1	0									
	1250 A					1	2									
	1600 A					1	6									
Short-circuit breaking capacity $I_{cu} = I_{cs}$ at 415 V	Stored energy mechanism	55 kA						1								
		85 kA						2								
		110 kA						3								
Molded case switches	Without metering function, without communications interface	Without trip unit							A	A						
Circuit breakers, ETU 3-series	Without metering function, without communications interface	With trip unit	ETU320 LI	(N) [1]					A	B						
			ETU350 LSI	(N) [1]					A	C						
			ETU360 LSIG	(N) [1]					A	D						
Circuit breakers, ETU 6-series		With trip unit	ETU650 LSI	(N) [1]						E						
			ETU660 LSIG	(N) [1]						F						
	Without a communications interface	Without metering function							A							
	With a communications interface	Without metering function							B							
		Metering function Basic	Voltage tap on bottom						C							
			Voltage tap on top						D							
		Metering function Advanced	Voltage tap on bottom						E							
			Voltage tap on top						F							
Number of poles	Fixed-mounted	3-pole									0					
		4-pole	Neutral left								1					
			Neutral right								2					
	Withdrawable	3-pole									3					
		4-pole	Neutral left								4					
			Neutral right								5					
Connections																
Type of mounting	Withdrawable	Withdrawable circuit breaker without guide frame (guide frame must be ordered separately)										0				
	Fixed-mounted breaker/ withdrawable breaker	Rear vertical connection										1				
		Rear horizontal connection										2				
		Front main connection										3				
		Front-accessible, extended main connection										5				
		Front-accessible, broadened main connection										6				
		Rear broadened bus connectors										7				

[1] Neutral conductor protection for 3-pole breakers with an external neutral conductor transformer or 4-pole breakers

Quick selection guide, page 2/14

© Siemens 2025

3VA27 6 7 – 8 9 10 11 12 – 13 14 15 16

Motor

			13	14	15	16
Operating mechanisms	Manual operator		0			
	Spring charging motor	24 … 30 V AC/DC	1			
		48 … 60 V AC/DC	2			
		110 V AC/DC	3			
		230 V AC/DC	4			

Auxiliary releases, closing coils, remote reset magnets

			14	15	16
Closing coil (CC), remote reset magnet (RR)	Without		A		
	Closing coil (CC)	24 V AC/DC	B		
		30 V AC/DC	C		
		48 V AC/DC	D		
		60 V AC/DC	E		
		110 … 120 V AC/DC	F		
		120 … 127 V AC/DC	G		
		220 … 240 V AC/DC	H		
		240 … 250 V AC/DC	J		
	Closing coil (CC) and additional remote reset magnet (RR)	24 V AC/DC	K		
		110 V AC/DC	L		
		220 V AC/DC	M		

			15	16
2nd auxiliary release	Without 2nd auxiliary release		A	
	With undervoltage release (UVR)	24 V AC/DC	B	
		30 V AC/DC	C	
		48 V AC/DC	D	
		60 V AC/DC	E	
		110 … 120 V AC/DC	F	
		120 … 127 V AC/DC	G	
		220 … 240 V AC/DC	H	
		240 … 250 V AC/DC	J	
		380 … 400 V AC/DC	K	
		415 … 440 V AC/DC	L	
	With undervoltage release (UVR), delayable with external time-delay device Scope of supply: UVR + time-delay device	24 … 30 V AC/DC	M	
		110 … 127 V AC/DC	N	
		220 … 250 V AC/DC	P	
	With 2nd shunt trip (ST2)	24 V AC/DC	Q	
		30 V AC/DC	R	
		48 V AC/DC	S	
		60 V AC/DC	T	
		110 … 120 V AC/DC	U	
		120 … 127 V AC/DC	V	
		220 … 240 V AC/DC	W	
		240 … 250 V AC/DC	X	

			16
1st auxiliary release	Without 1st auxiliary release		0
	Shunt trip (ST)	24 V AC/DC	1
		30 V AC/DC	2
		48 V AC/DC	3
		60 V AC/DC	4
		110 … 120 V AC/DC	5
		120 … 127 V AC/DC	6
		220 … 240 V AC/DC	7
		240 … 250 V AC/DC	8

Quick selection guide, page 2/14

© Siemens 2025

Accessory options

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va27-configurator

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3VA27..-.....-.... -Z

Accessories for basic configuration

Mounting options for fixed-mounted circuit breakers

- In the basic configuration, the fixed-mounted circuit breaker is mounted onto the rear panel. Floor mounting is possible as an option. The device must additionally be modified if it is to be extended to include functionalities such as external auxiliary switches or mechanical interlocking mechanism.[1)]

				Order code
Mounting options for fixed-mounted circuit breakers[1)]	Floor mounting	Mounting support standard	WL, handle	A07
		Mounting support extended[2)]	WL, handle	S56
	Rear panel mounting onto mounting plate	Side wall extended[2)]	WL, handle	S57

Accessories for electronic trip units ETU

Rating plugs

- As standard, the electronic trip units are equipped with a rating plug for setting the rated current I_n, which is equal to the maximum rated circuit breaker current (< $I_{n\ max}$). The rated current of the selected rating plug must be less than or equal to $I_{n\ max}$.
- To downrate the circuit breaker, a rated current smaller than $I_{n\ max}$ is selected for the rating plug via a Z option.
- Other functions can also be activated using rating plugs (L = OFF or Rc protection).

					Order code
Rating plug	For setting the rated current I_n	For all ETUs	400 A	WL, handle	B04
			630 A	WL, handle	B06
			800 A	WL, handle	B08
			1000 A	WL, handle	B10
			1200 A	WL, handle	B12
	For setting the rated current I_n, with overload protection L = OFF	For 6-series ETUs	400 A	WL, handle	L04
			630 A	WL, handle	L06
			800 A	WL, handle	L08
			1000 A	WL, handle	L10
			1250 A	WL, handle	L12
			1600 A	WL, handle	L16
	For setting the rated current I_n, For enabling the residual current protective function. The residual current function is only possible with the MF Advanced metering function.	For ETU660 only	400 A	WL, handle	G04
			630 A	WL, handle	G06
			800 A	WL, handle	G08
			1250 A	WL, handle	G12

Communications modules

- Up to 2 different communication modules can be used at the same time.
- When using an IOM040 digital I/O module (Z option K56), only 1 communication module can be used.

				Order code
Communications modules	COM040	PROFIBUS	WL, handle	F02
	COM041	PROFINET	WL, handle	F03
	COM043	Modbus TCP	WL, handle	F11
	COM042	Modbus RTU	WL, handle	F12

Breaker Connect modules

- When a circuit breaker with a communications interface is ordered, a Breaker Connect module for external 24 V DC power supply of the electronic components is also supplied ready installed as standard.
- By means of this Z option, the Breaker Connect module for 24 V DC is replaced by a Breaker Connect module for 110 ... 240 V AC/DC.

			Order code
Breaker Connect module	110 ... 240 V AC/DC	WL, handle	F26

I/O modules internal

				Order code
I/O modules internal	IOM040 digital I/O module	2 inputs, 2 outputs	WL, handle	K56

WL For molded case circuit breakers with stored energy mechanism

handle For molded case circuit breakers with handle operating mechanism

[1)] These functionalities can be applied directly to the frame of the withdrawable circuit breaker, without any modification of the side wall.

[2)] Not possible in connection with or as an alternative to the mounting support, standard (A07).

System overview, page 2/74

© Siemens 2025

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3VA27..-.....-.... -Z

Accessories for motors

						Order code
Mechanical operating cycles counter, 5-digit						C01

Auxiliary switches and signaling switches

- Auxiliary and signaling switches for currents > 100 mA and up to 400 V AC are installed as standard.
- For currents < 100 mA for PLC connections, these auxiliary and signaling switches can be replaced.
- The auxiliary/signaling switches for 24 V DC digital signals are designed for
  - a minimum load above 1 mA at 5 V DC, and
  - a maximum breaking capacity of 100 mA at 24 V DC.

						Order code
Position signaling switches for guide frames [1]		2 CO | 2 CO | 2 CO (connected | test | disconnected position)				K55
Signaling switch	Ready-to-close signaling switch		1 CO digital 24 V DC			K50
	Trip alarm switch (S24)		1 CO digital 24 V DC			K53
	Spring charge signaling switch (S21)		1 CO digital 24 V DC			K54
Auxiliary switch	On/Off AUX	4 CO digital 24 V DC				K51
		2 CO 400 V AC, and 2 CO digital 24 V DC				K52

Locking, blocking and interlocking

						Order code
Locking provisions [1]	To prevent movement of the withdrawable circuit breaker	Cylinder lock	Made by RONIS			R78
		For no more than 3 padlocks, 8 mm				R65
Locking mechanism	To prevent movement to disconnected position					R79
Locking provision	Against unauthorized closing in the operator panel (safe OFF)	Cylinder lock, made by RONIS				S08
		For no more than 3 padlocks, plastic 4 mm				S22
		For no more than 1 padlock, metal 7 mm				S23
		For no more than 2 padlocks, metal 8 mm				S07
Interlocking set	For mechanical ON and/or OFF on the operator panel	For no more than 3 padlocks, plastic 4 mm				S42
		For no more than 1 padlock, metal 7 mm				S43
		For no more than 2 padlocks, metal 8 mm				S44
Protective cover	For mechanical ON/OFF, not lockable					S41
Door sealing frame IP30	IP3x					T30

For molded case circuit breakers with stored energy mechanism

For molded case circuit breakers with handle operating mechanism

[1] Can be used both for individual orders of the guide frame and complete orders (circuit breaker + guide frame).

System overview, page 2/74

© Siemens 2025

Guide frames

Guide frames for ordering separately without circuit breakers

- Guide frames without breakers up to 1600 A
- **Note:** All CB bus modules for communication COM04x/IOM300/Breaker Connect module, as well as COMPSS signaling switches are configured without frames in the withdrawable circuit breaker and defined there by means of Z options, and are included with the breaker. PSS Standard is always included in the frame and can be changed to an electronics-capable signal by means of a Z option.

Number of poles	Connection type	3VA27 Article No.
3-pole	Rear vertical	3VW8116-7AA01
	Rear horizontal	3VW8116-7AB01
	Front straight bus connectors extended	3VW8116-7AE01
	Broadened bus connectors	3VW8116-7AF01
	Rear broadened bus connectors	3VW8116-7AG01
4-pole	Rear vertical	3VW8116-7BA01
	Rear horizontal	3VW8116-7BB01
	Front straight bus connectors extended	3VW8116-7BE01
	Broadened bus connectors	3VW8116-7BF01
	Rear broadened bus connectors	3VW8116-7BG01

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3VW8....-.....-.... -Z

Locking, blocking and interlocking

				Order code
Locking provision	To prevent movement of the withdrawable circuit breaker	Cylinder lock, made by RONIS		R78
		For no more than 3 padlocks, 8 mm		R65
Locking mechanism	To prevent movement to disconnected position (only in combination with R78 or R65)			R79

Auxiliary/signaling switches

				Order code
Position signaling switch PSS for guide frame	For 24 V DC digital signals, for minimum currents	2 CO | 2 CO | 2 CO (connected | test | disconnected position)		K55

Auxiliary and signaling switches for currents > 100 mA and up to 400 V AC are installed as standard.
For currents < 100 mA for PLC connections, these auxiliary and signaling switches can be modified.
The auxiliary/signaling switches for 24 V DC digital signals are designed for

- a minimum load above 1 mA at 5 V DC, and
- a maximum breaking capacity of 100 mA at 24 V DC.

For molded case circuit breakers with stored energy mechanism

For molded case circuit breakers with handle operating mechanism

System overview, page 2/74

© Siemens 2025

Electronic trip unit ETU and accessories

Electronic trip units (ETU)

Version	With communications/ metering function, enhanced protective functions	Type	Protective function		3VA27 Article No.
With rotary coding switches	No	ETU320	LIN		3VW9011-5AA00
		ETU350	LSIN		3VW9012-5AA00
		ETU360	LSING		3VW9012-7AA00
With display	Yes	ETU650	LSIN		3VW9017-5AA00
		ETU660	LSING		3VW9017-7AA00

Metering functions for ETU650 or ETU660

Description	Protective function/version	Arrangement		3VA27 Article No.
Metering function	MF Basic	–		3VW9011-0AT01
	MF Advanced	–		3VW9011-0AT04
Set of cables for voltage tap for MF	For 4-pole circuit breakers with N conductor right	Top or bottom		3VW9011-0AT08
	For 4-pole circuit breakers with N conductor left	Top		3VW9011-0AT75
		Bottom		3VW9011-0AT76
	For 3-pole circuit breakers	Top		3VW9011-0AT72
		Bottom		3VW9011-0AT73

External current transformers for N conductors

Accessory for	Use		3VA27 Article No.
ETU320, ETU350, ETU360, ETU650, ETU660	Only for 3-pole circuit breakers		3VW9011-0AA30

External current transformers for grounded transformer neutral points



Accessory for	G_{ret} (Ground return)		3VA27 Article No.
ETU660	100 A		3VW9011-0GF30
	250 A		3VW9011-0GF31

Summation current transformers external Rc-CT for residual current measurement



- Only with MF Advanced metering function and Rc rating plug

Accessory for	Use		3VA27 Article No.
ETU660	For external residual current measurement		3VW9011-0RC30

Remote reset magnets RR for the circuit breakers including tripped signaling

- Remote reset magnet (RR) for resetting the circuit breaker after tripping as a result of overcurrent conditions

Accessory for	Voltage			3VA27 Article No.
ETU320, ETU350, ETU360, ETU650, ETU660	24 V DC		–	3VW9011-0AK03
	110 V AC/DC		–	3VW9011-0AK05
	250 V AC/DC		–	3VW9011-0AK06

Spare part batteries for electronic trip unit ETU



Accessory for			3VA27 Article No.
ETU320, ETU350, ETU360, ETU650, ETU660			3VW9011-0AT38

For molded case circuit breakers with stored energy mechanism

For molded case circuit breakers with handle operating mechanism

System overview, page 2/74

© Siemens 2025

Electronic trip unit ETU and accessories

Rating plugs

- Only one module is possible per circuit breaker.

Accessory for	Version	Rated current I_n			3VA27 Article No.
ETU320, ETU350, ETU360, ETU650, ETU660	Rating plugs for setting (< $I_{n\,max}$) the rated current I_n	400 A	≋	◢	3VW9011-0AA53
		630 A	≋	◢	3VW9011-0AA55
		800 A	≋	◢	3VW9011-0AA56
		1000 A	≋	◢	3VW9011-0AA57
		1250 A	≋	◢	3VW9011-0AA58
		1600 A	≋	◢	3VW9011-0AA61
ETU 6-series	Rating plug without overload protection (L = OFF) and for setting (< $I_{n\,max}$) the rated current I_n	400 A	≋	◢	3VW9011-0LF53
		630 A	≋	◢	3VW9011-0LF55
		800 A	≋	◢	3VW9011-0LF56
		1000 A	≋	◢	3VW9011-0LF57
		1250 A	≋	◢	3VW9011-0LF58
		1600 A	≋	◢	3VW9011-0LF61
ETU660	Rating plug Rc for ETU660 for enabling of the residual current protective function and setting (< $I_{n\,max}$) of the rated current I_n. A residual current function is only possible with the MF advanced metering function.	400 A	≋	◢	3VW9011-0RC53
		630 A	≋	◢	3VW9011-0RC55
		800 A	≋	◢	3VW9011-0RC56
		1250 A	≋	◢	3VW9011-0RC58

CB bus modules - communications modules

- Contains the communications module
- Up to 2 different communications modules can be used at the same time.
- When using a digital I/O module IOM040 (Z option K56), only 1 communications module can be used.
- Can only be used with ETU of the 6-series and require a Breaker Connect module for connection to the circuit breaker. This can also be configured directly on the device by means of a Z option if the communications interface to the ETU 6-series is selected.

Communications module	Protocol			3VA27 Article No.
COM040	PROFIBUS	≋	◢	3VW9011-0AT15
COM041	PROFINET	≋	◢	3VW9011-0AT14
COM043	Modbus TCP	≋	◢	3VW9011-0AT16
COM042	Modbus RTU	≋	◢	3VW9011-0AT17

CB bus modules - I/O modules external IOM300

- For snapping onto DIN rail

Accessory for	Maximum switching current per contact	Inputs	Outputs			3VA27 Article No.
ETU 6-series	• 2 A at ≤ 30 V DC • 0.8 A at 50 V DC • 0.2 A at 150 V DC • 4 A at 250 V AC	11	10	≋	◢	3VW9011-0AT20

CB bus modules - I/O modules internal IOM040

- When using a digital I/O module IOM040, only 1 communication module can be used.

Accessory for	Maximum switching current per contact	Inputs	Outputs			3VA27 Article No.
ETU 6-series	• 2 A at ≤ 30 V DC • 0.8 A at 50 V DC • 0.2 A at 150 V DC • 4 A at 250 V AC	2	2	≋	◢	3VW9011-0AT30

≋ For molded case circuit breakers with stored energy mechanism

◢ For molded case circuit breakers with handle operating mechanism

System overview, page 2/74

© Siemens 2025

Actuator modules COM ACT

- For switching the circuit breaker on/off remotely via communication.
- Actuation of the closing coil (CC) and the 1st shunt trip (ST).
- Can only be used in combination with a communications module, spring charging motor, closing coil and 1st shunt trip.
- Automatically included if the communications interface of the ETU 6-series is selected in the basic circuit breaker configuration.

Accessory for		Article No.
ETU 6-series	–	3VW9011-0AT10

Breaker Connect modules

- For external power supply for the electronics components

Voltage		Article No.
110 ... 240 V AC/DC		3VW9011-0AT06
24 ... 48 V DC		3VW9011-0AT07

Auxiliary contact signals for communications interface

- Auxiliary contacts for signaling the readiness to close or for position signaling switches of the withdrawable positions.
- Can only be used in combination with communications module.
- Can be combined with standard position signaling switches or ready-to-close signaling contacts.
- **Note:** Both signaling switches are automatically included in the basic circuit breaker (COM PSS only with withdrawable versions) if the communications interface of the ETU 6-series is selected.

Function		Article No.
Ready-to-close signaling switch for communication (COM RTC)	–	3VW9011-0AT11
Position signaling switch COM PSS (for withdrawable breaker only)		3VW9011-0AT12

Test devices and breaker data adapters

- Usable for all ETU 3-series and 6-series

Description	Type		Article No.
Test device • For the trip test via ETU and tripping solenoid including release • Activation of the ETU and the tripping solenoid by means of a battery built into the test device • On activation in the ETU 6-series, the parameters can be configured on the display	TD310		3VW9011-0AT32
Breaker data adapter • As gateway for parameterization of the ETU with SENTRON Powerconfig • For generation of a report of the set parameters with powerservice	TD410		3VW9011-0AT34
Test device and breaker data adapter • As gateway for parameterization of the ETU with SENTRON Powerconfig – Testing a tripping operation using SENTRON Powerconfig • For use with the powerservice software – Testing of the basic protective functions LSING – Testing of the enhanced protective functions – Test data storage – Readout of ETU buffer – Generation of a report of the set parameters	TD420		3VW9011-0AT33

For molded case circuit breakers with stored energy mechanism

For molded case circuit breakers with handle operating mechanism

System overview, page 2/74

© Siemens 2025

Accessories for connection and insulation

Front main connections acc. to IEC 60947-2

- Acc. to IEC 60947-2 for 3VA27 up to 1600 A (depending on application conditions)
- To be ordered separately for top and bottom

Mounting	Version	Mounting onto	Number of poles/quantity	Article No.
Fixed-mounted	Front main connections	–	3-pole/3 units	3VW9011-0AL01
			4-pole/4 units	3VW9011-0AL02
	Extended main terminals, including insulation plate and phase barriers, standard	Front main connections	3-pole/3 units	3VW9011-0AL77
			4-pole/4 units	3VW9011-0AL78
	Broadened main terminals, including insulation plate and extended phase barriers	Front main connections, top	3-pole/3 units	3VW9011-0AL73
		Front main connections, bottom	3-pole/3 units	3VW9011-0AL75
		Front main connections, top/bottom	4-pole/4 units	3VW9011-0AL74
Withdrawable	Front-accessible terminals for main circuit connection	Guide frame flange	3-pole/3 units	3VW9011-0AN01
			4-pole/4 units	3VW9011-0AN02
	Broadened main circuit connections	Front-accessible terminals for main circuit connection	3-pole/3 units	3VW9011-0AN73
			4-pole/4 units	3VW9011-0AN74

Rear terminals for main circuit connections acc. to IEC 60947-2

- Acc. to IEC 60947-2 for 3VA27 up to 1600 A (depending on application conditions)
- To be ordered separately for top and bottom

Mounting	Version	Mounting onto	Number of poles/quantity	Article No.
Fixed-mounted	Rear terminals for main circuit connection, rotatable for horizontal/vertical connection, including terminal cover	–	3-pole/3 units	3VW9011-0AL32
			4-pole/4 units	3VW9011-0AL33
Withdrawable	Rear terminals for main circuit connection, rotatable for horizontal/vertical connection, including terminal cover	–	3-pole/3 units	3VW9011-0AN32
			4-pole/4 units	3VW9011-0AN33
	Broadened main terminals	Rear horizontal main connections	3-pole/3 units	3VW9011-0AN75
			4-pole/4 units	3VW9011-0AN76

Cu/Al cable connections acc. to IEC 60947-2

- Acc. to IEC 60947-2 for 3VA27 up to 1600 A (depending on application conditions)
- To be ordered separately for top and bottom

Mounting	Version	Mounting onto	Number of poles/quantity	Article No.
Fixed-mounted	Circular conductor terminals 4 × 240 mm² for front cable connection [1], including insulation plate and high, extended terminal cover	Front main connections	3-pole/3 units	3VW9011-0AL71
			4-pole/4 units	3VW9011-0AL72
Withdrawable	Set of circular conductor connection pieces 4 × 240 mm² for cable lugs for rear cable connection	Rear vertical main connections	3-pole/3 units	3VW9011-0AN71
			4-pole/4 units	3VW9011-0AN72

[1] For connecting Al cables up to 1000 A

For molded case circuit breakers with stored energy mechanism

For molded case circuit breakers with handle operating mechanism

System overview, page 2/74

© Siemens 2025

			3VA27
Auxiliary supply connectors in push-in version			
	• Control wire tap in push-in version for upgrading fixed-mounted circuit breakers and guide frames. • The device is always fitted at the factory with the exact number of control wire taps required.		
Version			**Article No.**
Push-in			3VW9011-0AB11
Terminal covers for fixed-mounted circuit breakers			
	• Finger-proof for front main connections for fixed-mounted versions • Necessary isolation measures are always supplied with the corresponding connection technology and do not need to be ordered separately.		
Version	**Number of poles/quantity**		**Article No.**
Standard	3-pole/2 units		3VW9723-0WD30
	4-pole/2 units		3VW9724-0WD40
Extended	3-pole/2 units		3VW9723-0WF30
	4-pole/2 units		3VW9724-0WF40
Phase barriers for fixed-mounted circuit breakers			
	• Necessary isolation measures are always supplied with the corresponding connection technology and do not need to be ordered separately. • For operational voltages > 440 V AC the use of phase barriers is mandatory; up to 440 V AC their use is optional.		
Height	**Number of poles/quantity**		**Article No.**
100 mm (standard)	3-pole/4 units		3VW9723-0WA00
	4-pole/6 units		3VW9724-0WA10
200 mm (extended)	3-pole/4 units		3VW9723-0WA01
	4-pole/6 units		3VW9724-0WA11
Supports for mounting the fixed-mounted circuit breakers on the floor			
	• For fixed-mounted versions only		
Version	**Use**		**Article No.**
Mounting support standard (circuit breaker feet) (= Z option A07)			3VW9011-0BB51
Mounting support extended (circuit breaker feet) including mechanical transmission of switch position on circuit breaker side panel (= Z option S56)	• Fixation for external auxiliary switches AUX 15 CO (3VW9011-0AG15) • Locking mechanism for control cabinet door, direct (for 3VW9011-0BB10) • Locking mechanism for control cabinet door, Bowden cable (for 3VW9011-0BB16), • Mechanical interlock to 3WA/3WL/3VA (for 3VW9011-0BB21)		3VW9011-0BB52
Extension kits for modification of the side wall of the fixed-mounted circuit breakers			
	• For fixed-mounted versions only • Rear fixation on mounting plate • For modification for mechanical transmission of switch position on circuit breaker side panel (= Z option S57)		
Version	**Use**		**Article No.**
Extension kit for side wall	• Fixation for external auxiliary switches AUX 15 CO (3VW9011-0AG15) • Locking mechanism for control cabinet door, direct (for 3VW9011-0BB10) • Locking mechanism for control cabinet door, Bowden cable (for 3VW9011-0BB16), • Mechanical interlock to 3WA/3WL/3VA (for 3VW9011-0BB21)		3VW9011-0BB53

For molded case circuit breakers with stored energy mechanism

For molded case circuit breakers with handle operating mechanism

System overview, page 2/74

© Siemens 2025

Motor operators and manual operators

Spring charging motor (MO)

Description	Voltage			Article No.
For automatic charging of the stored energy mechanism	24 ... 30 V AC/DC	≋	–	3VW9011-0AF01
	48 ... 60 V AC/DC	≋	–	3VW9011-0AF02
	100 ... 130 V AC/DC	≋	–	3VW9011-0AF03
	220 ... 250 V AC/DC	≋	–	3VW9011-0AF04

Mechanical operating cycles counter MOC

Description	Version			Article No.
Only possible in combination with a spring charging motor.	5 digits	≋	–	3VW9011-0AH07

Manual operators for handle operating mechanism



Description	Version	Color	Degree of protection			Article No.
Front mounted rotary operator incl. door sealing frame	Standard	Gray	IP30	–	◢	3VW9727-0EK11
	EMERGENCY-OFF	Yellow-red	IP30	–	◢	3VW9727-0EK15
Door mounted rotary operator	Standard	Gray	IP30	–	◢	3VW9727-0FK21
	EMERGENCY-OFF	Yellow-red	IP30	–	◢	3VW9727-0FK25
	Basic without handle		IP30	–	◢	3VW9727-0GK00
	Shaft stub		IP30	–	◢	8UD1900-3WD00
	Handle	Gray	IP30	–	◢	8UD1861-0AB11
		Yellow-red	IP30	–	◢	8UD1861-0AB15

≋ For molded case circuit breakers with stored energy mechanism

◢ For molded case circuit breakers with handle operating mechanism

System overview, page 2/74

© Siemens 2025

Auxiliary releases, closing coils

Closing coils CC/shunt trips ST

- **Note:**
  - For molded case circuit breakers with handle operating mechanism, the products can only be used as closing shunt trips ST.
  - For molded case circuit breakers with stored energy mechanism, the products can be used as closing coils CC and shunt trips ST.

Voltage	Article No.
24 V AC/DC	3VW9011-0AD01
30 V AC/DC	3VW9011-0AD02
48 V AC/DC	3VW9011-0AD03
60 V AC/DC	3VW9011-0AD04
110 ... 120 V AC/DC	3VW9011-0AD05
120 ... 127 V AC/DC	3VW9011-0AD06
220 ... 240 V AC/DC	3VW9011-0AD07
240 ... 250 V AC/DC	3VW9011-0AD08
380 ... 400 V AC	3VW9011-0AD17
415 ... 440 V AC	3VW9011-0AD18

TD320 function test units for closing coils/shunt trips

- The TD320 test unit allows the operational availability and functions of the closing coils and shunt trips with a rated operational voltage between 24 V and 250 V (AC and DC) to be tested.
- The operational availability test is performed cyclically at intervals of 30 seconds.
- The unit has visual indicators in the form of LEDs on the front in order to display the following states:
  - LED POWER ON LIT: Correct function of the YO/YC test device
  - LED DEACTIVATION LIT: Power supply failure, wire break
  - LED SHORT-CIRCUIT LIT: Winding short-circuit
  - LED DEACTIVATION and SHORT-CIRCUIT FLASHING: Incorrect power supply
  - LED DEACTIVATION and SHORT-CIRCUIT OFF: Closing coil/shunt trips OK

Description		Article No.
For all closing coils/shunt trips	–	3VW9011-0AT31

Auxiliary/signaling switches

- The auxiliary/signaling switches for 24 V DC digital signals are designed for
  - a minimum load above 1 mA at 5 V DC, and
  - a maximum breaking capacity of 100 mA at 24 V DC
- For external auxiliary switches ON/OFF AUX 15 CO, a 3VW9011-0AG1x fixation must be ordered in addition, and for fixed-mounted circuit breakers a 3VW9011-0BB5x side wall modification

Description	Contacts		Article No.
Ready-to-close signal RTC	1 CO standard	–	3VW9011-0AH01
	1 CO digital	–	3VW9011-0AH02
Auxiliary switch ON/OFF AUX	4 CO standard	✓	3VW9011-0AG01
	4 CO digital	✓	3VW9011-0AG02
	2 CO standard + 2 CO digital	✓	3VW9011-0AG03
External auxiliary switch ON/OFF AUX	15 CO standard	✓	3VW9011-0AG05
	15 CO digital	✓	3VW9011-0AG06
Trip alarm switch S24	1 CO standard	✓	3VW9011-0AH14
	1 CO digital	✓	3VW9011-0AH15
Spring charge signaling switch S21	1 CO standard	–	3VW9011-0AH10
	1 CO digital	–	3VW9011-0AH08
Position signaling switches PSS (only with withdrawable versions)	2 CO | 2 CO | 2 CO (connected | test | disconnected position) standard	✓	3VW9011-0AH11
	2 CO | 2 CO | 2 CO (connected | test | disconnected position) digital	✓	3VW9011-0AH12

For molded case circuit breakers with stored energy mechanism

For molded case circuit breakers with handle operating mechanism

System overview, page 2/74

© Siemens 2025

Auxiliary releases, closing coils

Auxiliary/signaling switches for handle operating mechanism

- Auxiliary and signaling switches are each offered in two versions:
  - Standard version for currents > 100 mA and up to 400/250 V AC, minimum load above 100 mA at 24 V DC, and maximum breaking capacity 5 A at 250 V AC
  - Digital version for currents < 100 mA for PLC connections, minimum load above 1 mA at 5 V DC, and maximum breaking capacity 100 mA at 24 V DC
- For external auxiliary switches ON/OFF AUX 15 CO, a 3VW9011-0AG1x fixation must be ordered in addition, and for fixed-mounted circuit breakers a 3VW9011-0BB5x side wall modification.

Description	Contacts			3VA27 Article No.
Trip alarm switch TAS signals the trip position irrespective of the tripping reason	1 CO standard	–	✓	3VW9727-0AB11
	1 CO digital	–	✓	3VW9727-0AB13
Trip alarm switch via auxiliary release S25 signals tripping operations via auxiliary releases (UVR, ST) in UVR/ST2 pocket	1 CO standard	–	✓	3VW9727-0AB41
	1 CO digital	–	✓	3VW9727-0AB43
Leading changeover switch S26 (2 units)	1 NO standard, 250 V AC	–	✓	3VW9727-0AA21

Fixation for external auxiliary switches AUX 15 CO

- External auxiliary switches ON/OFF AUX 15 CO must be ordered separately.

Version			3VA27 Article No.
For fixed-mounted circuit breakers with rear panel or floor mounting (in combination with Z option S56 or S57)	≋	✓	3VW9011-0AG15
For guide frames	≋	✓	3VW9011-0AG17

Undervoltage releases UVR

Voltage			3VA27 Article No.
24 V AC/DC	≋	✓	3VW9011-0AE01
30 V AC/DC	≋	✓	3VW9011-0AE02
48 V AC/DC	≋	✓	3VW9011-0AE03
60 V AC/DC	≋	✓	3VW9011-0AE04
110 ... 120 V AC/DC	≋	✓	3VW9011-0AE05
120 ... 127 V AC/DC	≋	✓	3VW9011-0AE06
220 ... 240 V AC/DC	≋	✓	3VW9011-0AE07
240 ... 250 V AC/DC	≋	✓	3VW9011-0AE08
380 ... 400 V AC	≋	✓	3VW9011-0AE17
415 ... 440 V AC	≋	✓	3VW9011-0AE18

External time-delay devices for undervoltage releases

- With adjustable delay time from 0.5 to 3 s.
- Suitable for mounting onto DIN rail.

Voltage			3VA27 Article No.
24 ... 30 V AC/DC	≋	✓	3VW9011-0AE10
48 V AC/DC	≋	✓	3VW9011-0AE11
60 V AC/DC	≋	✓	3VW9011-0AE15
110 ... 127 V AC/DC	≋	✓	3VW9011-0AE12
220 ... 250 V AC/DC	≋	✓	3VW9011-0AE13

≋ For molded case circuit breakers with stored energy mechanism

✓ For molded case circuit breakers with handle operating mechanism

System overview, page 2/74

© Siemens 2025

Locking provisions and interlocks

				3VA27
Locking provision to prevent movement of the withdrawable circuit breaker				
	Version			**Article No.**
	RONIS cylinder lock (spare part for R78)	≡	✓	3VW9011-0BA80
	Padlock 8 mm (spare part for R65), for no more than 3 padlocks	≡	✓	3VW9011-0BA87
Locking mechanisms to prevent movement of the withdrawable circuit breakers in disconnected position				
	• Only possible as a supplement in conjunction with R78 (3VW9011-0BA80) and/or R65 (3VW9011-0BA87).			
	Description			**Article No.**
	Locking mechanism (spare part for R79)	≡	✓	3VW9011-0BA84
Locking provisions in OFF position				
	• For fixed-mounted and withdrawable versions • Against unauthorized closing in the operator panel (safe OFF) • The disconnector unit fulfills the requirements for main circuit breakers according to EN 60204-1			
	Description			**Article No.**
	Cylinder lock, made by RONIS (spare part for S08)	≡	–	3VW9011-0BA33
Locking provisions in OFF position				
	• For fixed-mounted and withdrawable versions • Against unauthorized closing in the operator panel (safe OFF) • The disconnector unit fulfills the requirements for main circuit breakers according to EN 60204-1			
	Description	**Version**		**Article No.**
	Padlock 4 mm (spare part for S22)	Plastic for no more than 3 locks	≡ –	3VW9011-0BA41
	Padlock 7 mm (spare part for S23)	Metal for no more than 1 lock	≡ –	3VW9011-0BA42
	Padlock 8 mm (spare part for S07)	Metal for no more than 2 locks	≡ –	3VW9011-0BA44
Locking provision in OFF position for handle operating mechanism with rotary operators				
	• Against unauthorized closing in the case of molded case circuit breakers with rotary operator			
	Description			**Article No.**
	For RONIS		– ✓	3VW9727-0VL10
Locking provision in OFF position for handle operating mechanism without rotary operators				
	• Against unauthorized closing in the operator panel in the case of molded case circuit breakers without rotary operator			
	Description			**Article No.**
	For padlocks		– ✓	3VW9727-0LB10
	For RONIS		– ✓	3VW9727-0LF10
Interlocking sets for mechanical Open and/or Close on the operator panels				
	Description	**Version**		**Article No.**
	Padlock 4 mm (spare part for S42)	Plastic for no more than 3 locks	≡ –	3VW9011-0BA22
	Padlock 7 mm (spare part for S43)	Metal for no more than 1 lock	≡ –	3VW9011-0BA23
	Padlock 8 mm (spare part for S44)	Metal for no more than 2 locks	≡ –	3VW9011-0BA24

≡ For molded case circuit breakers with stored energy mechanism

✓ For molded case circuit breakers with handle operating mechanism

System overview, page 2/74

© Siemens 2025

Locking provisions and interlocks

Protective covers for mechanical ON/OFF

- Mechanical ON/OFF to protect against unintentional actuation on the operator panel.
- Not lockable.

Description			Article No.
Not lockable (spare part for S41)	≋	–	3VW9011-0BA21

Mechanical interlock

- Mechanical interlock with Bowden cable 2 m
- For fixed-mounted versions, an additional support 3VW9011-0BB52 (option S56) or extension kit 3VW9011-0BB53 (option S57) must be ordered

Mounting	Mounting			Article No.
Fixed-mounted	Rear panel or floor mounting	≋	◢	3VW9011-0BB21
Withdrawable	Mounting onto guide frame	≋	◢	3VW9011-0BB22

Bowden cables, separate

- One required for each circuit breaker

Type	Article No.
1000 mm	3VW9011-0BB23
2000 mm	3WL9111-0BB45-0AA0
3000 mm	3WL9111-0BB46-0AA0

Locking mechanisms to prevent opening of the control cabinet doors in ON position

- To prevent opening of the control cabinet door in ON position
- It additionally prevents the circuit breaker from being closed when the control cabinet door is open.

Mounting	Version			Article No.
Fixed mounted on side panel or floor	Direct fixed interlocking	≋	◢	3VW9011-0BB10
	Locking with Bowden cable	≋	◢	3VW9011-0BB16
Withdrawable	Direct fixed interlocking	≋	◢	3VW9011-0BB14
	Locking with Bowden cable	≋	◢	3VW9011-0BB18

Door sealing frames IP30

- For IP4x and higher, you must order the protective cover IP54 3VW9011-0AP03 or 3VW9011-0AP13.

Description	Mounting	Version			Article No.
Spare part for Z option T30	Fixed-mounted	IP3x	≋	◢	3VW9011-0AP01
	Withdrawable	IP3x	≋	–	3VW9011-0AP02
			–	◢	3VW9011-0AP04

Protective covers IP54

- Protective cover/hood IP54 lockable for fixed-mounted circuit breakers and withdrawable breakers
- For implementing degrees of protection IP4x and IP54 when installing in switchboard door.
- Cannot be combined with IP30 door sealing frame and door mounted rotary operator.

Description	Version			Article No.
Lock with unique key	IP54	≋	◢	3VW9011-0AP03
Lock with standard key	IP54	≋	◢	3VW9011-0AP13

≋ For molded case circuit breakers with stored energy mechanism

◢ For molded case circuit breakers with handle operating mechanism

System overview, page 2/74

© Siemens 2025

© Siemens 2025

Protecting electrical installations from damage

The number of electrical loads is constantly increasing, which places an ever greater load on the electrical installation.

In the event of an overload or short-circuit, miniature circuit breakers safely cut off the connected circuit and reliably protect electrical installations and equipment from damage. Miniature circuit breakers with measuring and communication functions create transparency right down to the final circuit and increase system availability.

Miniature circuit breakers from the SENTRON portfolio are also simple to mount and install. The devices have a uniform design and, with the appropriate accessories, can be expanded by many additional functions.

For industry, buildings or infrastructure – with our versatile portfolio, you will find a suitable miniature circuit breaker for any application.

Note:
Products bearing our Siemens EcoTech label are identified by this clickable symbol in the catalog:

Siemens EcoTech

www.siemens.com/lowvoltage/SiemensEcoTech

© Siemens 2025

Miniature Circuit Breakers

All the information you need 3/2
Devices for all applications 3/4
System overview 3/5
Quick selection guide 3/6
- Miniature circuit breakers 3/6
- Circuit breakers for equipment 3/10

Basic units 3/12
- 5SL3 miniature circuit breakers 3/12
- 5SL6 miniature circuit breakers 3/14
- 5SL4 miniature circuit breakers 3/16
- 5SJ6...-.KS miniature circuit breakers 3/18
- 5SL30 miniature circuit breakers 3/20
- 5SL60 miniature circuit breakers 3/22
- 5SL58 miniature circuit breakers new 3/24
- 5SY6 miniature circuit breakers 3/26
- 5SY4 miniature circuit breakers 3/28
- 5SP4 miniature circuit breakers 3/30
- 5SP5 miniature circuit breakers 3/32
- 5SY5 miniature circuit breakers 3/34
- 5SY7 miniature circuit breakers 3/36
- 5SY8 miniature circuit breakers 3/38
- 5SJ4..HG.. miniature circuit breakers 3/40
- 5SL6 COM miniature circuit breakers with measuring and communication function 3/42
- 5SP3 selective main miniature circuit breakers (SHU) 3/46
- 5SY17 circuit breakers for equipment 3/48
- 5SK9 circuit breakers for equipment 3/49

Accessories 3/50
- Overview of the modular system 3/50
- Electrical accessories 3/54
- Mechanical accessories 3/66
- Standard busbars 3/68
- Compact busbars 3/81
- Accessories for busbars 3/86
- Distribution blocks for DIN-rail mounting 3/92
- SIKclip wiring system 3/95

© Siemens 2025

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about miniature circuit breakers, please visit our websites
www.siemens.com/mcb
www.siemens.com/circuit-protection

Your product in detail

The SiePortal platform (knowledge base) provides comprehensive information
www.siemens.com/lowvoltage/product-support

- Technology Primer
  – Miniature circuit breakers **(109482304)**

The relevant tender specifications can be found at
www.siemens.com/tenderspecifications

Use our conversion tool for quick and easy conversion to Siemens products **www.siemens.com/conversion-tool**

Siemens YouTube channel

- Miniature circuit breakers (general) **sie.ag/59PC9j**

Everything you need for your order

Refer to SiePortal to find an overview of your products (product catalog)

- Miniature circuit breakers **sie.ag/41HWeiL**

Direct forwarding to the individual products in SiePortal by clicking on the article number in the catalog or entering this web address incl. article number
www.siemens.com/product_catalog_SIEP?Article No.

Electrical Designer

With the Electrical Designer in the TIA Selection Tool, it is possible to design and dimension the electrical equipment of a machine in conformity with the standards – from the suitable switching devices to the correctly dimensioned cables
www.siemens.com/controlpanel/electrical-designer

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services.
You can find your local contacts at
www.siemens.com/lowvoltage/components/contact

You will find further information on services at
www.siemens.com/service-offers

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at
www.siemens.com/support-request

© Siemens 2025

… can be found in our online services

Commissioning + operation

Your product in detail

The SiePortal platform (knowledge base) provides detailed technical information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Characteristic curves
- Certificates

Online Support app available for download from the **App Store** and **Play Store**
You will find further information at
www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)

- SiePortal (product catalog)
  www.siemens.com/lowvoltage/product-catalog
- Image database
  www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAx Download Manager at
www.siemens.com/cax

Manuals

Manuals can be found in SiePortal at
www.siemens.com/lowvoltage/manuals

- Configuration Manual
  – Miniature circuit breakers **(45302792)**
- Installation Manual
  – Circuit protection devices with communication and measuring function **(109791805)**
- System Manual
  – Circuit protection devices with communication and measuring function **(109791806)**

Face-to-face or online training

Our training courses can be found at
www.siemens.com/sitrain-lowvoltage

- SENTRON circuit protection devices with measuring and communication function (WT-LVBCOM)
- Basic principles of electrical engineering (WT-LVBGET)
- Protection concept (WT-LVBPC)

Technical overview – Miniature circuit breakers

The fast way to get you to our online services

This page provides you with comprehensive information and links on miniature circuit breakers
www.siemens.com/lowvoltage/product-support (109769082)

© Siemens 2025

Devices for all applications

Miniature circuit breakers for basic applications

Ideal for standard applications

The 5SL miniature circuit breakers are the new standard with B and C tripping characteristics for applications up to 63 A. They can be used as main control switches to disconnect or isolate equipment.

The 5SL devices are mainly installed in meter panels and small distribution boards to protect circuits for lamps, cookers and even machines, for example, in residential or commercial buildings.

Miniature circuit breakers for advanced applications

Ideal for industrial applications

For circuits with motors or large lamps, semiconductors or strong pulse-generating equipment such as transformers and solenoid valves – the 5SY and 5SP devices are optimized for industrial applications and are proven in use.

The 5SY devices offer you top quality and functionality for installation in complex buildings and industry. With a rated breaking capacity of up to 25 kA, they are able to handle the most challenging requirements at a rated current of 0.3 to 80 A.

Special features

- Dual-chamber terminals
- Simple to detach without tools using sliding catches
- Separate switching position indication
- A wide range of accessories
- 5SL60 available as communication-capable miniature circuit breaker

Circuit breakers for equipment for advanced applications

Ideal for devices in industry

Circuit breakers for equipment from Siemens offer optimum protection for all applications in AC and DC control circuits in industrial applications and plant engineering.

Thermomagnetic 5SY17 circuit breakers for equipment are used to protect solenoid valves, servo motors, signal lamps or even PLC inputs. Everywhere where loads have to be precisely protected from overloads and short-circuits.

Electronic 5SK9 circuit breakers for equipment are optimally suited to protecting, for example, relays, programmable controllers, motors, sensors, actuators and valves. A current analysis in conjunction with fast tripping in the event of a fault avoid the danger of overloading the switched-mode power supply.

5SL6 COM miniature circuit breakers and 5ST3 COM auxiliary switches/fault signal contacts with measuring and communication functions

The new communication-capable protective devices and auxiliary components record measured values and status information and transmit this data wirelessly to higher-level systems.

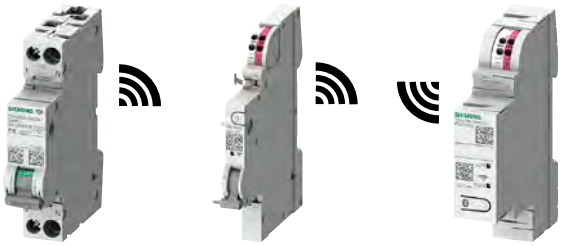

5SL6 COM

see page 3/42

5ST3 COM

see page 3/58

SENTRON Powercenter 1000

see page 10/28

- Recording of energy and active power, current, voltage, line frequency and temperature
- Measurement of residual currents in various frequency ranges
- Integrated status acquisition, operating hours counter and trip counter
- Higher system availability through early response to warning messages
- Convenient integration into new and existing systems thanks to compact mounting widths of 1 MW
- Fast parameterization and commissioning with the SENTRON Powerconfig mobile app or the SENTRON Powerconfig software
- Wireless transmission of measurement data from up to 24 communication-capable devices to the SENTRON Powercenter 1000 data transceiver

© Siemens 2025

System overview

Basic units and accessories

Miniature circuit breakers for basic applications

5SL3

5SL6

5SL4

5SJ6...-.KS

5SL30

5SL60

5SL58 new

5SP3

Miniature circuit breakers for advanced applications

5SY6

5SY4

5SP4

5SP5

5SY5

5SY7

5SY8

5SJ4..HG..

5SL6 COM (EM)

5SL6 COM (RCM/EM)

Circuit breakers for equipment for advanced applications

5SY17

5SK9

Electrical accessories

Auxiliary switches (AS)

Fault signal contacts (FC)

Auxiliary switches and fault signal contacts (AS+FC)/(AS+FC) COM

Shunt trips (ST)

Undervoltage releases (UR)


Remote control auxiliaries (RCA)/(RCA) COM

5SM6 arc fault detection units

Mechanical accessories

Rotary operating mechanisms

Spacers

Terminal covers

Wall enclosures

Molded-plastic enclosures

Holders for front panel installation

Intermediate frames

Busbars and accessories

Compact busbars

Standard busbars

Terminals

Touch protection

End caps

Series connectors

Distribution blocks

Note:
You will find a detailed range of accessories with the basic units and in the Accessories section.

© Siemens 2025

Miniature circuit breakers

For basic applications for buildings and infrastructure

			5SL3	5SL6	5SL4
Standards					
Standards			IEC/EN 60898-1	IEC/EN 60898-1	IEC/EN 60898-1
Basic data					
Breaking capacity I_{cn}	For AC (230/400 V) acc. to IEC/EN 60898-1	kA	4.5	6	10
	For DC (110 V) acc. to IEC 60898-3	kA	–	–	–
Rated current		A	0.3 ... 63	0.3 ... 63	0.3 ... 63
Number of poles			1P | 2P | 3P | 4P | 1P+N | 3P+N	1P | 2P | 3P | 4P | 1P+N | 3P+N	1P | 2P | 3P | 4P | 1P+N | 3P+N
Tripping characteristic			B | C	B | C	B | C | D
Approvals					
General product approvals			VDE, CEBEC, TSE	VDE, CEBEC, TSE	VDE, CEBEC, IMQ
Marine classifications			–	–	–
Voltage/frequency					
Rated voltage AC		V	230/400	230/400	230/400
Max. operational voltage AC		V	250/440	250/440	250/440
Rated voltage DC		V	–	–	–
Rated voltage DC per phase pole		V	60	60	60
Max. operational voltage DC per phase pole		V	62.5 [1) 2)]	62.5 [1) 2)]	62.5 [1) 2)]
Rated impulse voltage U_{imp}		kV	4	4	4
Rated frequency f_n		Hz	50/60	50/60	50/60
Connection					
Dual-chamber terminal			–	–	–
Conductor cross-section 1 wire	Solid/stranded	mm²	0.75 ... 35	0.75 ... 35	0.75 ... 35
	Finely stranded with end sleeve	mm²	0.75 ... 25	0.75 ... 25	0.75 ... 25
	Finely stranded without end sleeve	mm²	1 ... 35	1 ... 35	1 ... 35
Conductor cross-section 2 wires (same cross-section and same conductor type)	Solid/stranded	mm²	0.75 ... 10	0.75 ... 10	0.75 ... 10
	Finely stranded with end sleeve	mm²	0.75 ... 4	0.75 ... 4	0.75 ... 4
	Finely stranded without end sleeve	mm²	1 ... 4	1 ... 4	1 ... 4
Conductor cross-section 1-wire + busbar (pin thickness 1.5 mm)	Solid/stranded	mm²	10 ... 25	10 ... 25	10 ... 25
	Finely stranded with non-insulated end sleeve	mm²	6 ... 25	6 ... 25	6 ... 25
	Finely stranded with insulated end sleeve	mm²	6 ... 16	6 ... 16	6 ... 16
Ambient conditions					
Ambient temperature [3)]		°C	–25 ... +45 [4)]	–25 ... +45 [4)]	–25 ... +55 [5)]
Storage temperature		°C	–40 ... +75 [6)]	–40 ... +75 [6)]	–40 ... +75 [6)]
Shock acc. to IEC 60068-2-27 150 m/s² at 11 ms half-sine			–	–	–
Resistance to vibrations acc. to IEC 60068-2-6: 5 ... 25 Hz (±1 mm) and at 25 ... 150 Hz (50 m/s²)			–	–	–
Resistant to shock and vibrations acc. to EN 61373 and EN 50155 "1B" (railway engineering)			–	–	–
Fire behavior of materials acc. to EN 45545-2 (fire protection on railway vehicles)			–	–	–
Degree of pollution for overvoltage category			2/III	2/III	2/III
Further information					
			See page 3/12	See page 3/14	See page 3/16

1) Except for characteristic C: 0.3 A ... 1 A and characteristic D: 0.3 A ... 2 A
2) The operating voltage of 62.5 V DC per pole takes into account a battery charging voltage with a peak value of 72 V
3) The device properties specified, for example, in the product standards, such as service life, breaking capacity and surface temperature, cannot be guaranteed at the specified ambient temperatures that lie outside the specified product standards.
4) Periodically +55 °C, max. 95% humidity
5) Max. 95% humidity
6) Max. 85% rel. humidity, > 45 °C max. 0.056kg/m³ abs. humidity
7) Disconnection of 7 kA at max. 138 V DC through one pole

System overview, page 3/5

© Siemens 2025

5SJ6...-.KS	5SL30	5SL60	5SL58 new	5SP3
IEC/EN 60898-1	IEC/EN 60898-1	IEC/EN 60898-1	IEC 60898-3	DIN VDE 0641-21
6	4.5	6	–	25
–	–	–	6	–
10 ... 20	2 ... 40	2 ... 40	1 ... 25	16 ... 63
1P | 2P | 3P | 1P+N	1P+N	1P+N	2P	1P | 2P | 3P | 4P
B | C	C	B | C	C	E
VDE	VDE, IMQ, NF, CCC	VDE, IMQ, NF, CCC	–	VDE
–	–	DNV-GL	–	–
230/400	230	230	–	230/400
250/440	250	250	–	250/440
–	–	–	110	–
60	60	60	55	–
60	62.5 [1) 2)]	62.5 [1) 2)]	60 [7)]	–
4	4	4	4	6
50/60	50/60	50/60	–	50/60
Plug-in terminal on outgoing side	–	–	–	–
1.5 ... 4 (top) | 0.75 ... 25 (bottom)	0.75 ... 16	0.75 ... 16	0.75 ... 16	2.5 ... 50 (bottom)
1.5 ... 2.5 (top) | 0.75 ... 25 (bottom)	0.75 ... 10	0.75 ... 10	0.75 ... 10	2.5 ... 50 (bottom)
1.5 ... 4	0.75 ... 16	0.75 ... 16	0.75 ... 16	2.5 ... 16 (top)
–	0.75 ... 4	0.75 ... 4	0.75 ... 4	–
–	0.75 ... 1.5	0.75 ... 1.5	0.75 ... 1,5	–
–	0.75 ... 4	0.75 ... 4	0.75 ... 4	–
–	–	–	–	–
–	6 ... 10	6 ... 10	6 ... 10	–
–	6 ... 10	6 ... 10	6 ... 10	–
–25 ... +45 [4)]	–25 ... +60 [6)]	–25 ... +60 [6)]	–40 ... +70	–25 ... +55
–40 ... +75 [6)]	–40 ... +75	–40 ... +75	–40 ... +75	–40 ... +70
–	–	–	–	–
–	–	–	–	–
–	–	–	■	–
–	–	–	■	–
2/III	2/III	2/III	2/III	3/IV
See page 3/18	See page 3/20	See page 3/22	See page 3/24	See page 3/46

System overview, page 3/5

© Siemens 2025

Miniature circuit breakers

For advanced applications for buildings and infrastructure and for industry and mechanical engineering

				5SL6 COM	5SY6	5SY4
Standards						
Standards				IEC/EN 60898-1	IEC/EN 60898-1 IEC/EN 60947-2 UL 1077	IEC/EN 60898-1 IEC/EN 60947-2 UL 1077
Basic data						
Breaking capacity I_{cn}	For AC (230/400 V) acc. to IEC/EN 60898-1		kA	6	6	10
	For DC (220/440 V) acc. to IEC/EN 60898-2		kA	–	–	–
	Acc. to UL1077 and CSA C22.2 No.235			–	Supplementary protector, OC, FW 0, OL 0, TC 3 at 50 °C	Supplementary protector, OC, FW 0, OL 0, TC 3 at 50 °C
			SC	–	U2: see Certificate of Compliance	U2: see Certificate of Compliance
Rated breaking capacity I_{cu}	Acc. to IEC/EN 60947-2 AC at U_e 230 V | at U_e 400 V (1P, 1P+N) | (2P, 3P, 4P, 3P+N)	I_n 0.3 ... 2 A	kA	–	30 | 30	35 | 35
		I_n 3 ... 6 A	kA	–	30 | 30	35 | 35
		I_n 8 ... 10 A	kA	–	15 | 15	20 | 20
		I_n 13 ... 32 A	kA	–	15 | 15	20 | 20
		I_n 35 ... 40 A	kA	–	10 | 10	15 | 15
		I_n 50 ... 63 A	kA	–	10 | 10	15 | 15
		I_n 80 ... 125 A	kA	–	– | –	10 | 10
	Acc. to IEC/EN 60947-2 DC at U_e 220 V | at U_e 440 V (1P) | (2P, 3P, 4P)		kA	–	–	–
Rated current			A	2 ... 32	0.3 ... 63	0.3 ... 80
Number of poles				1P+N	1P | 2P | 3P | 4P | 1P+N | 3P+N	1P | 2P | 3P | 4P | 1P+N | 3P+N
Tripping characteristic				B | C	B | C	A | B | C | D
Approvals						
General product approvals				VDE, RED	VDE, IMQ, CCC, cULus	VDE, IMQ, CCC, cULus
Marine classifications				–	DNV-GL, LR, BV, RINA, ABS	DNV-GL, LR, BV, RINA, ABS
Voltage/frequency						
Rated voltage AC			V	230	230/400	230/400
	Acc. to UL 489, UL 1077, CSA C22.2 No.235		V	–	277/480	277/480
Max. operational voltage AC			V	250	250/440	250/440
Rated voltage DC per phase pole			V	–	60	60
Max. operational voltage DC per phase pole			V	–	72 [1]	72 [1]
Rated impulse voltage U_{imp}			kV	4	4	4
Rated frequency f_n			Hz	50/60	50/60	50/60
Connection						
Dual-chamber terminal				–	■	■
Conductor cross-section 1 wire	Solid/stranded		mm^2	0.75 ... 16	0.75 ... 35	0.75 ... 35
	Finely stranded with end sleeve		mm^2	0.75 ... 10	0.75 ... 25	0.75 ... 25
	Conductors (Cu 60/75 °C $I_n \leq 40$ A; 60 °C $I_n > 40$ A)			–	AWG 18 ... 4	AWG 18 ... 4
Terminal tightening torque			Nm	1.2 ... 2 max.	2.5 ... 3.5 max.	2.5 ... 3.5 max.
			lb-in	11 ... 18	22 ... 26	22 ... 26
Ambient conditions						
Ambient temperature [7]			°C	–25 ... +60 [5]	–25 ... +55 [4]	–40 ... +70 [3]
Storage temperature			°C	–40 ... +75	–40 ... +75 [3]	–40 ... +75 [3]
Shock acc. to IEC 60068-2-27 150 m/s^2 at 11 ms half-sine				–	■	■
Resistance to vibrations acc. to IEC 60068-2-6: 5 ... 25 Hz (±1mm) and at 25 ... 150 Hz (50 m/s^2)				–	■	■
Resistant to shock and vibrations acc. to EN 61373 and EN 50155 "1B" (railway engineering)				■	–	■
Fire behavior of materials acc. to EN 45545-2 (fire protection on railway vehicles)				■	–	■
Degree of pollution for overvoltage category				2/ III	3/III	3/III
Additional functions						
Measuring and communication function [8]				■	–	–
Further information						
				See page 3/42	See page 3/26	See page 3/28

[1] Exempt: C/D 0.3 A ... 0.5 A
[2] 5SY54.. 4-pole, degree of pollution 2 for overvoltage category II
[3] 95% humidity up to 55 °C, 55% humidity up to 70 °C, 30% humidity up to 75 °C
[4] Max. 95% humidity
[5] Max. 85% rel. humidity, > 45 °C max. 0.056kg/m^3 abs. humidity
[6] When used with a busbar at the front or 2 conductors, the terminal area at the rear is restricted, see notes on the Internet

System overview, page 3/5

© Siemens 2025

5SP4	5SP5	5SY5	5SY7	5SY8	5SJ4..HG..
IEC/EN 60898-1 UL 1077	IEC/EN 60947-2	IEC/EN 60898-2 UL 1077	IEC/EN 60898-1 IEC/EN 60947-2 UL 1077	IEC/EN 60947-2 UL 1077	IEC/EN 60947-2 UL 489
10	–	10	15	–	–
–	–	10	–	–	–
Supplementary protector, OC, FW 0, OL 0, TC 3 at 50 °C	–	Supplementary protector, OC, FW 0, OL 0, TC 3 at 50 °C	Supplementary protector, OC, FW 0, OL 0, TC 3 at 50 °C	Supplementary protector, OC, FW 0, OL 0, TC 3 at 50 °C	–
U2: see Certificate of Compliance	–	U2: see Certificate of Compliance	U2: see Certificate of Compliance	U2: see Certificate of Compliance	–
– | –	– | –	– | –	50 | 50	70 | 70	10
– | –	– | –	– | –	40 | 40	50 | 50	10
– | –	– | –	– | –	30 | 30	40 | 40	10
– | –	– | –	– | –	25 | 25	30 | 30	10
– | –	– | –	– | –	20 | 20	25 | 25	10
– | –	– | –	– | –	15 | 15	20 | 20	10
10 | 10	– | –	– | –	– | –	– | –	–
–	10	15	–	–	–
80 ... 125	80 ... 125	0.3 ... 63	0.3 ... 63	0.3 ... 63	0.3 ... 63
1P | 2P | 3P | 4P	1P | 2P	1P | 2P | 4P	1P | 2P | 3P | 4P | 1P+N | 3P+N	1P | 2P | 3P | 4P | 1P+N | 3P+N	1P | 2P | 3P
B | C | D	–	B | C	B | C | D	C | D	B | C | D
VDE, CCC, cULus	–	VDE, CCC, cULus	VDE, IMQ, CCC, cULus	cULus	VDE, CCC, UL
LR	–	ABS	DNV-GL, LR, BV, RINA, ABS	ABS	–
230/400	–	230/400	230/400	230/400	230/400
277/480	–	–	277/480	277/480	240/415 (5SJ4..HG40/41) 277/480 (5SJ4..HG42)
250/440	–	250/440	250/440	250/440	250/440
60	220	220	60	60	60
72	250	250	72 [1]	72 [1]	60
4	4	4	4	4	4
50/60	50/60	50/60	50/60	50/60	50/60
–	–	■	■	■	■
10 ... 50	10 ... 50	0.75 ... 35	0.75 ... 35	0.75 ... 35	0.75 ... 25 (16) [6]
10 ... 35	10 ... 35	0.75 ... 25	0.75 ... 25	0.75 ... 25	0.75 ... 25 (10)
AWG 3 ... 1	AWG 3 ... 1	AWG 18 ... 4	AWG 18 ... 4	AWG 18 ... 4	AWG 18 ... 4 (5)
2.5 ... 3.5 max.	2.5 ... 3.5 max.	2.5 ... 3.5 max.	2.5 ... 3.5 max.	2.5 ... 3.5 max.	2.5 ... 3.5 max.
22 ... 31	22 ... 31	22 ... 26	22 ... 26	22 ... 26	22 ... 26
–25 ... +55 [4]	–25 ... +55 [4]	–40 ... +70 [3]	–40 ... +70 [3]	–25 ... +55 [4]	–25 ... +55 [4]
–40 ... +75 [3]	–40 ... +75 [3]	–40 ... +75 [3]	–40 ... +75 [3]	–40 ... +75 [3]	–40 ... +75 [3]
–	–	■	■	–	■
■	–	■	■	■	■
–	–	■	■	–	–
■	–	■	■	–	–
3/III	3/III	3/III [4]	3/III	3/III	3/III
–	–	–	–	–	–
See page 3/30	See page 3/32	See page 3/34	See page 3/36	See page 3/38	See page 3/40

[7] The device properties specified, for example, in the product standards, such as service life, breaking capacity and surface temperature, cannot be guaranteed at the specified ambient temperatures that lie outside the specified product standards.

[8] Please note the country-specific radio licenses of the products at www.siemens.com/lowvoltage/certificates (109801197)

System overview, page 3/5

© Siemens 2025

Circuit breakers for equipment

For advanced applications for industry and mechanical engineering

			5SY17
Standards			
Standards			IEC/EN 60934 UL 1077
Basic data			
Breaking capacity I_{cn}	At rated voltage	kA	3
Rated current		A	0.5 ... 16
Number of poles			1P+AS
DC tripping	Magnetic		F1 (2.5 ... 4 × I_n) | F2 (4 ... 7 × I_n)
	Thermal		1.05 × holding current | 1.35 × tripping current | TC3 1.35 × I_n
	Electronic		–
Approvals			
General product approvals			CCC, cULus
Voltage/frequency			
Rated voltage AC	Acc. to IEC/DIN EN 60934	V	230
	Acc. to UL 1077	V	277
Min. operational voltage AC		V	12 [1]
Max. operational voltage AC		V	250
Rated voltage DC per phase pole		V	60
Min. operational voltage DC per phase pole		V	12 [1]
Max. operational voltage DC per phase pole		V	62.5 [2]
Rated impulse voltage U_{imp}		kV	4
Rated frequency f_n		Hz	50/60
Auxiliary switch			
MIn. operational voltage (AC)		V	12
Max. operational voltage (AC)		V	250
MIn. operational voltage (DC)		V	12
Max. operational voltage (DC)		V	60
Utilization category AC-12			6 A at 230 V AC
Utilization category AC-14			6 A at 230 V AC
Utilization category DC-13			1 A at 60 V DC
Connection			
Dual-chamber terminal			–
Conductor cross-section 1 wire	Solid/stranded	mm²	0.75 ... 16
	Finely stranded with end sleeve	mm²	0.75 ... 10
	Finely stranded with insulated end sleeve	mm²	0.75 ... 10
	Finely stranded without end sleeve	mm²	0.75 ... 16
	Conductor cross-section AWG		–
2-wire (same cross-section)	Solid/stranded	mm²	0.75 ... 4
	Finely stranded with end sleeve	mm²	0.75 ... 2.5
	Finely stranded with insulated end sleeve	mm²	0.75 ... 1.5
	Finely stranded without end sleeve	mm²	0.75 ... 4
Terminal tightening torque		Nm	2.0 ... 2.5 max.
		lb-in	17.7 ... 22.1
Ambient conditions			
Ambient temperature		°C	–25 ... +60 [3]
Storage temperature		°C	–40 ... +70
Shock acc. to IEC 60068-2-27 150 m/s² at 11 ms half-sine			–
Resistance to vibrations acc. to IEC 60068-2-6: 5 ... 25 Hz (±1mm) and at 25 ... 150 Hz (50 m/s²)			–
Resistant to shock and vibrations acc. to EN 61373 and EN 50155 "1B" (railway engineering)			■
Fire behavior of materials acc. to EN 45545-2 (fire protection on railway vehicles)			■
Degree of pollution for overvoltage category	Acc. to IEC		2/III
Further information			
			See page 3/48

[1] At a minimum current of 100 mA

[2] The operating voltage of 62.5 V DC per pole takes into account a battery charging voltage with a peak value of 72 V

[3] Max. 85% rel. humidity, > 45 °C max. 0.056kg/m³ abs. humidity

[4] Max. 95% humidity

System overview, page 3/5

© Siemens 2025

5SK9

EN 61000-6-2, EN 61000-6-3, EN 60068-2-78, EN 50178, EN 60068-2-6, EN 60068-2-27, UL 508, UL 2367
–
1 ... 8
1P+AS
–
–
Overload 1.2 × I_n/1s | Short-circuit 2 × I_n/< 10 ms
cULus
–
–
–
–
24
–
30
0.5
–
–
–
–
–
–
–
–
–
0.2 ... 4
0.2 ... 2.5
0.2 ... 2.5
–
AWG 24 ... 12
–
–
–
–
–
–
–25 ... +60 [4]
–40 ... +70
–
–
–
–
–
See page 3/49

System overview, page 3/5

© Siemens 2025

5SL3 miniature circuit breakers

4.5 kA

	1P	1P+N	2P	3P
Rated voltage U_n	230/400 V AC	230 V AC	400 V AC	400 V AC
Mounting width	1 MW	2 MW	2 MW	3 MW
				

Rated current I_n	Characteristic		Characteristic		Characteristic		Characteristic	
	B	C	B	C	B	C	B	C
0.3 A	–	5SL3114-7	–	5SL3514-7	–	5SL3214-7	–	–
0.5 A	–	5SL3105-7	–	5SL3505-7	–	5SL3205-7	–	–
1 A	–	5SL3101-7	–	5SL3501-7	–	5SL3201-7	–	5SL3301-7
1.6 A	–	5SL3115-7	–	5SL3515-7	–	5SL3215-7	–	–
2 A	–	5SL3102-7	–	5SL3502-7	–	5SL3202-7	–	5SL3302-7
3 A	–	5SL3103-7	–	5SL3503-7	–	5SL3203-7	–	5SL3303-7
4 A	–	5SL3104-7	–	5SL3504-7	–	5SL3204-7	–	5SL3304-7
6 A	5SL3106-6	5SL3106-7	5SL3506-6	5SL3506-7	5SL3206-6	5SL3206-7	5SL3306-6	5SL3306-7
8 A	–	5SL3108-7	–	5SL3508-7	–	5SL3208-7	–	–
10 A	5SL3110-6	5SL3110-7	5SL3510-6	5SL3510-7	5SL3210-6	5SL3210-7	5SL3310-6	5SL3310-7
13 A	5SL3113-6	5SL3113-7	5SL3513-6	5SL3513-7	5SL3213-6	5SL3213-7	–	–
16 A	5SL3116-6	5SL3116-7	5SL3516-6	5SL3516-7	5SL3216-6	5SL3216-7	5SL3316-6	5SL3316-7
20 A	5SL3120-6	5SL3120-7	5SL3520-6	5SL3520-7	5SL3220-6	5SL3220-7	5SL3320-6	5SL3320-7
25 A	5SL3125-6	5SL3125-7	5SL3525-6	5SL3525-7	5SL3225-6	5SL3225-7	5SL3325-6	5SL3325-7
32 A	5SL3132-6	5SL3132-7	5SL3532-6	5SL3532-7	5SL3232-6	5SL3232-7	5SL3332-6	5SL3332-7
40 A	5SL3140-6	5SL3140-7	5SL3540-6	5SL3540-7	5SL3240-6	5SL3240-7	5SL3340-6	5SL3340-7
50 A	5SL3150-6	5SL3150-7	5SL3550-6	5SL3550-7	5SL3250-6	5SL3250-7	5SL3350-6	5SL3350-7
63 A	5SL3163-6	5SL3163-7	5SL3563-6	5SL3563-7	5SL3263-6	5SL3263-7	5SL3363-6	5SL3363-7

Mounting concept

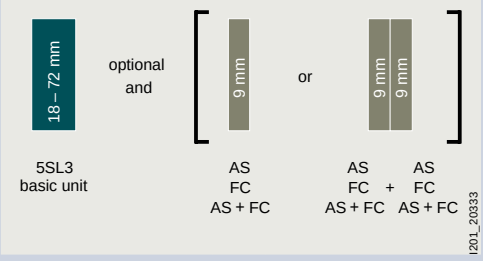

AS	Auxiliary switches	See page 3/54
FC	Fault signal contacts	See page 3/56
AS+FC	Auxiliary switches and fault signal contacts	See page 3/57

Quick selection guide, page 3/6

© Siemens 2025

3P+N		4P	
400 V AC		400 V AC	
4 MW		4 MW	
			
Characteristic		**Characteristic**	
B	**C**	**B**	**C**
–	–	–	–
–	–	–	–
–	5SL3601-7	–	5SL3401-7
–	–	–	–
–	5SL3602-7	–	5SL3402-7
–	5SL3603-7	–	5SL3403-7
–	5SL3604-7	–	5SL3404-7
5SL3606-6	5SL3606-7	–	5SL3406-7
–	5SL3608-7	–	–
5SL3610-6	5SL3610-7	–	5SL3410-7
5SL3613-6	5SL3613-7	–	5SL3413-7
5SL3616-6	5SL3616-7	–	5SL3416-7
5SL3620-6	5SL3620-7	–	5SL3420-7
5SL3625-6	5SL3625-7	–	5SL3425-7
5SL3632-6	5SL3632-7	–	5SL3432-7
5SL3640-6	5SL3640-7	–	5SL3440-7
5SL3650-6	5SL3650-7	–	5SL3450-7
5SL3663-6	5SL3663-7	–	5SL3463-7

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022
Auxiliary switches and fault signal contacts (AS+FC)	**Article No.**
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Quick selection guide, page 3/6

© Siemens 2025

5SL6 miniature circuit breakers

6 kA

	1P	1P+N	2P
Rated voltage U_n	230/400 V AC	230 V AC	400 V AC
Mounting width	1 MW	2 MW	2 MW
			

Rated current I_n	Characteristic		Characteristic		Characteristic	
	B	C	B	C	B	C
0.3 A	–	5SL6114-7	–	5SL6514-7	–	5SL6214-7
0.5 A	–	5SL6105-7	–	5SL6505-7	–	5SL6205-7
1 A	–	5SL6101-7	–	5SL6501-7	–	5SL6201-7
1.6 A	–	5SL6115-7	–	5SL6515-7	–	5SL6215-7
2 A	5SL6102-6	5SL6102-7	–	5SL6502-7	–	5SL6202-7
3 A	–	5SL6103-7	–	5SL6503-7	–	5SL6203-7
4 A	5SL6104-6	5SL6104-7	–	5SL6504-7	–	5SL6204-7
6 A	5SL6106-6	5SL6106-7	5SL6506-6	5SL6506-7	5SL6206-6	5SL6206-7
8 A	–	5SL6108-7	–	5SL6508-7	–	5SL6208-7
10 A	5SL6110-6	5SL6110-7	5SL6510-6	5SL6510-7	5SL6210-6	5SL6210-7
13 A	5SL6113-6	5SL6113-7	5SL6513-6	5SL6513-7	5SL6213-6	5SL6213-7
16 A	5SL6116-6	5SL6116-7	5SL6516-6	5SL6516-7	5SL6216-6	5SL6216-7
20 A	5SL6120-6	5SL6120-7	5SL6520-6	5SL6520-7	5SL6220-6	5SL6220-7
25 A	5SL6125-6	5SL6125-7	5SL6525-6	5SL6525-7	5SL6225-6	5SL6225-7
32 A	5SL6132-6	5SL6132-7	5SL6532-6	5SL6532-7	5SL6232-6	5SL6232-7
40 A	5SL6140-6	5SL6140-7	5SL6540-6	5SL6540-7	5SL6240-6	5SL6240-7
50 A	5SL6150-6	5SL6150-7	5SL6550-6	5SL6550-7	5SL6250-6	5SL6250-7
63 A	5SL6163-6	5SL6163-7	5SL6563-6	5SL6563-7	5SL6263-6	5SL6263-7

Mounting concept

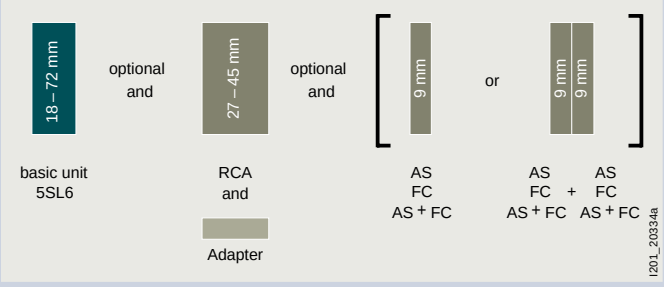

AS	Auxiliary switches	See page 3/54
FC	Fault signal contacts	See page 3/56
AS+FC	Auxiliary switches and fault signal contacts	See page 3/57
RCA	Remote control auxiliaries	See page 3/62

Quick selection guide, page 3/6

© Siemens 2025

3P		3P+N		4P	
400 V AC		400 V AC		400 V AC	
3 MW		4 MW		4 MW	
					
Characteristic		**Characteristic**		**Characteristic**	
B	**C**	**B**	**C**	**B**	**C**
–	5SL6314-7	–	5SL6614-7	–	5SL6414-7
–	5SL6305-7	–	5SL6605-7	–	5SL6405-7
–	5SL6301-7	–	5SL6601-7	–	5SL6401-7
–	5SL6315-7	–	5SL6615-7	–	5SL6415-7
–	5SL6302-7	–	5SL6602-7	–	5SL6402-7
–	5SL6303-7	–	5SL6603-7	–	5SL6403-7
–	5SL6304-7	–	5SL6604-7	–	5SL6404-7
5SL6306-6	5SL6306-7	5SL6606-6	5SL6606-7	5SL6406-6	5SL6406-7
–	5SL6308-7	–	5SL6608-7	–	5SL6408-7
5SL6310-6	5SL6310-7	5SL6610-6	5SL6610-7	5SL6410-6	5SL6410-7
5SL6313-6	5SL6313-7	5SL6613-6	5SL6613-7	5SL6413-6	5SL6413-7
5SL6316-6	5SL6316-7	5SL6616-6	5SL6616-7	5SL6416-6	5SL6416-7
5SL6320-6	5SL6320-7	5SL6620-6	5SL6620-7	5SL6420-6	5SL6420-7
5SL6325-6	5SL6325-7	5SL6625-6	5SL6625-7	5SL6425-6	5SL6425-7
5SL6332-6	5SL6332-7	5SL6632-6	5SL6632-7	5SL6432-6	5SL6432-7
5SL6340-6	5SL6340-7	5SL6640-6	5SL6640-7	5SL6440-6	5SL6440-7
5SL6350-6	5SL6350-7	5SL6650-6	5SL6650-7	5SL6450-6	5SL6450-7
5SL6363-6	5SL6363-7	5SL6663-6	5SL6663-7	5SL6463-6	5SL6463-7

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		**Article No.**
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		**Article No.**
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC

Remote control auxiliaries (RCA)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071
Communication-capable	100 ... 240 V AC	5ST3072-0MC
Communication-capable with RCD/IR test	100 ... 240 V AC	5ST3073-0MC
Adapters for remote control auxiliaries (RCA)		**Article No.**
1 ... 2 MW		5ST3820-6
3 ... 4 MW		5ST3820-7

Quick selection guide, page 3/6

© Siemens 2025

5SL4 miniature circuit breakers

10 kA

	1P	1P+N	2P
Rated voltage U_n	230/400 V AC	230 V AC	400 V AC
Mounting width	1 MW	2 MW	2 MW
			

Rated current I_n	Characteristic B	C	D	Characteristic B	C	D	Characteristic B	C	D
0.3 A	–	5SL4114-7	5SL4114-8	–	5SL4514-7	5SL4514-8	–	5SL4214-7	5SL4214-8
0.5 A	–	5SL4105-7	5SL4105-8	–	5SL4505-7	5SL4505-8	–	5SL4205-7	5SL4205-8
1 A	5SL4101-6	5SL4101-7	5SL4101-8	5SL4501-6	5SL4501-7	5SL4501-8	5SL4201-6	5SL4201-7	5SL4201-8
1.6 A	–	5SL4115-7	5SL4115-8	–	5SL4515-7	5SL4515-8	–	5SL4215-7	5SL4215-8
2 A	5SL4102-6	5SL4102-7	5SL4102-8	5SL4502-6	5SL4502-7	5SL4502-8	5SL4202-6	5SL4202-7	5SL4202-8
3 A	5SL4103-6	5SL4103-7	5SL4103-8	5SL4503-6	5SL4503-7	5SL4503-8	5SL4203-6	5SL4203-7	5SL4203-8
4 A	5SL4104-6	5SL4104-7	5SL4104-8	5SL4504-6	5SL4504-7	5SL4504-8	5SL4204-6	5SL4204-7	5SL4204-8
6 A	5SL4106-6	5SL4106-7	5SL4106-8	5SL4506-6	5SL4506-7	5SL4506-8	5SL4206-6	5SL4206-7	5SL4206-8
8 A	5SL4108-6	5SL4108-7	5SL4108-8	5SL4508-6	5SL4508-7	5SL4508-8	5SL4208-6	5SL4208-7	5SL4208-8
10 A	5SL4110-6	5SL4110-7	5SL4110-8	5SL4510-6	5SL4510-7	5SL4510-8	5SL4210-6	5SL4210-7	5SL4210-8
13 A	5SL4113-6	5SL4113-7	5SL4113-8	5SL4513-6	5SL4513-7	5SL4513-8	5SL4213-6	5SL4213-7	5SL4213-8
16 A	5SL4116-6	5SL4116-7	5SL4116-8	5SL4516-6	5SL4516-7	5SL4516-8	5SL4216-6	5SL4216-7	5SL4216-8
20 A	5SL4120-6	5SL4120-7	5SL4120-8	5SL4520-6	5SL4520-7	5SL4520-8	5SL4220-6	5SL4220-7	5SL4220-8
25 A	5SL4125-6	5SL4125-7	5SL4125-8	5SL4525-6	5SL4525-7	5SL4525-8	5SL4225-6	5SL4225-7	5SL4225-8
32 A	5SL4132-6	5SL4132-7	5SL4132-8	5SL4532-6	5SL4532-7	5SL4532-8	5SL4232-6	5SL4232-7	5SL4232-8
40 A	5SL4140-6	5SL4140-7	5SL4140-8	5SL4540-6	5SL4540-7	5SL4540-8	5SL4240-6	5SL4240-7	5SL4240-8
50 A	5SL4150-6	5SL4150-7	5SL4150-8	5SL4550-6	5SL4550-7	5SL4550-8	5SL4250-6	5SL4250-7	5SL4250-8
63 A	5SL4163-6	5SL4163-7	5SL4163-8	5SL4563-6	5SL4563-7	5SL4563-8	5SL4263-6	5SL4263-7	5SL4263-8

Mounting concept

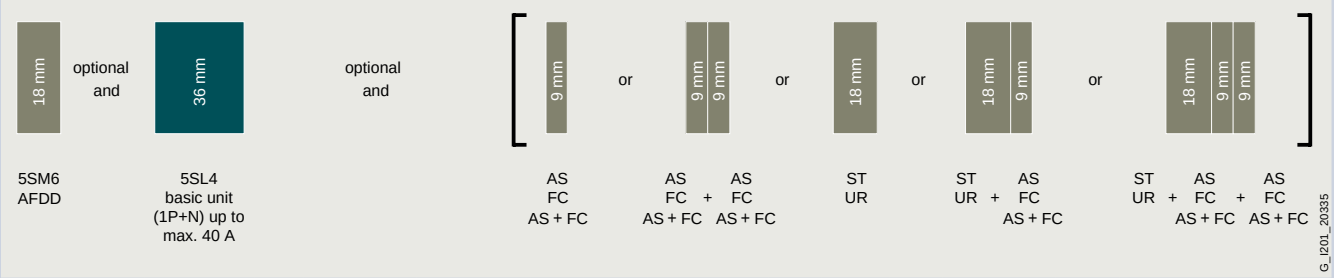

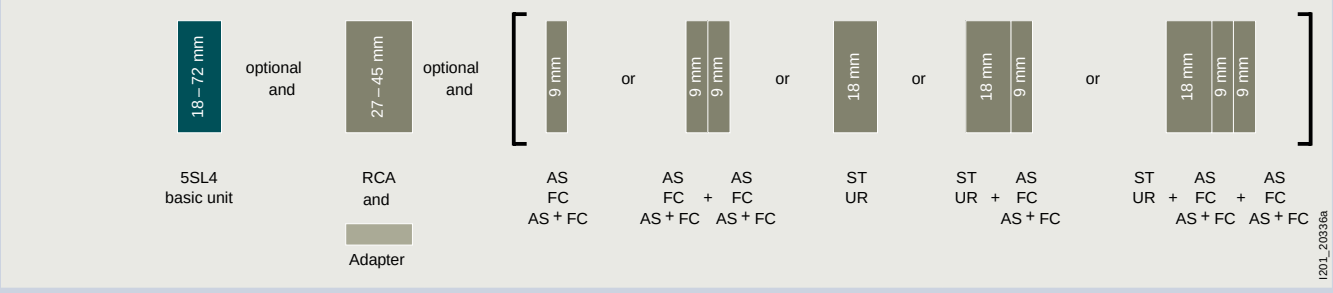

AFDD Arc fault detection units See page 3/65
AS Auxiliary switches See page 3/54
FC Fault signal contacts See page 3/56
AS+FC Auxiliary switches and fault signal contacts See page 3/57
ST Shunt trips See page 3/60
UR Undervoltage releases See page 3/61
RCA Remote control auxiliaries See page 3/62

Quick selection guide, page 3/6

© Siemens 2025

3P			3P+N			4P		
400 V AC			400 V AC			400 V AC		
3 MW			4 MW			4 MW		
								
Characteristic			**Characteristic**			**Characteristic**		
B	**C**	**D**	**B**	**C**	**D**	**B**	**C**	**D**
–	5SL4314-7	5SL4314-8	–	5SL4614-7	5SL4614-8	–	5SL4414-7	5SL4414-8
–	5SL4305-7	5SL4305-8	–	5SL4605-7	5SL4605-8	–	5SL4405-7	5SL4405-8
5SL4301-6	5SL4301-7	5SL4301-8	5SL4601-6	5SL4601-7	5SL4601-8	5SL4401-6	5SL4401-7	5SL4401-8
–	5SL4315-7	5SL4315-8	–	5SL4615-7	5SL4615-8	–	5SL4415-7	5SL4415-8
5SL4302-6	5SL4302-7	5SL4302-8	5SL4602-6	5SL4602-7	5SL4602-8	5SL4402-6	5SL4402-7	5SL4402-8
5SL4303-6	5SL4303-7	5SL4303-8	5SL4603-6	5SL4603-7	5SL4603-8	5SL4403-6	5SL4403-7	5SL4403-8
5SL4304-6	5SL4304-7	5SL4304-8	5SL4604-6	5SL4604-7	5SL4604-8	5SL4404-6	5SL4404-7	5SL4404-8
5SL4306-6	5SL4306-7	5SL4306-8	5SL4606-6	5SL4606-7	5SL4606-8	5SL4406-6	5SL4406-7	5SL4406-8
5SL4308-6	5SL4308-7	5SL4308-8	5SL4608-6	5SL4608-7	5SL4608-8	5SL4408-6	5SL4408-7	5SL4408-8
5SL4310-6	5SL4310-7	5SL4310-8	5SL4610-6	5SL4610-7	5SL4610-8	5SL4410-6	5SL4410-7	5SL4410-8
5SL4313-6	5SL4313-7	5SL4313-8	5SL4613-6	5SL4613-7	5SL4613-8	5SL4413-6	5SL4413-7	5SL4413-8
5SL4316-6	5SL4316-7	5SL4316-8	5SL4616-6	5SL4616-7	5SL4616-8	5SL4416-6	5SL4416-7	5SL4416-8
5SL4320-6	5SL4320-7	5SL4320-8	5SL4620-6	5SL4620-7	5SL4620-8	5SL4420-6	5SL4420-7	5SL4420-8
5SL4325-6	5SL4325-7	5SL4325-8	5SL4625-6	5SL4625-7	5SL4625-8	5SL4425-6	5SL4425-7	5SL4425-8
5SL4332-6	5SL4332-7	5SL4332-8	5SL4632-6	5SL4632-7	5SL4632-8	5SL4432-6	5SL4432-7	5SL4432-8
5SL4340-6	5SL4340-7	5SL4340-8	5SL4640-6	5SL4640-7	5SL4640-8	5SL4440-6	5SL4440-7	5SL4440-8
5SL4350-6	5SL4350-7	5SL4350-8	5SL4650-6	5SL4650-7	5SL4650-8	5SL4450-6	5SL4450-7	5SL4450-8
5SL4363-6	5SL4363-7	5SL4363-8	5SL4663-6	5SL4663-7	5SL4663-8	5SL4463-6	5SL4463-7	5SL4463-8

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		**Article No.**
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		**Article No.**
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC
Shunt trips (ST)		**Article No.**
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote control auxiliaries (RCA)		**Article No.**
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071
Communication-capable	100 ... 240 V AC	5ST3072-0MC
Communication-capable with RCD/IR test	100 ... 240 V AC	5ST3073-0MC
Adapters for remote control auxiliaries (RCA)		**Article No.**
1 ... 2 MW		5ST3820-6
3 ... 4 MW		5ST3820-7
Arc fault detection units (AFDD)		**Article No.**
For basic units 1P+N (2 MW), not in combination with RCA	I_n up to 16 A	5SM6021-2
	I_n up to 40 A	5SM6024-2

Quick selection guide, page 3/6

© Siemens 2025

5SJ6...-.KS miniature circuit breakers

6 kA – plug-in terminal on outgoing side

	1P	1P+N	2P	3P
Rated voltage U_n	230/400 V AC	230/400 V AC	230/400 V AC	230/400 V AC
Mounting width	1 MW	2 MW	2 MW	3 MW
				

Rated current I_n	Characteristic		Characteristic		Characteristic		Characteristic	
	B	C	B	C	B	C	B	C
10 A	5SJ6110-6KS	5SJ6110-7KS	5SJ6510-6KS	5SJ6510-7KS	5SJ6210-6KS	5SJ6210-7KS	5SJ6310-6KS	5SJ6310-7KS
13 A	5SJ6113-6KS	5SJ6113-7KS	5SJ6513-6KS	5SJ6513-7KS	5SJ6213-6KS	5SJ6213-7KS	5SJ6313-6KS	5SJ6313-7KS
16 A	5SJ6116-6KS	5SJ6116-7KS	5SJ6516-6KS	5SJ6516-7KS	5SJ6216-6KS	5SJ6216-7KS	5SJ6316-6KS	5SJ6316-7KS
20 A	5SJ6120-6KS	5SJ6120-7KS	5SJ6520-6KS	5SJ6520-7KS	5SJ6220-6KS	5SJ6220-7KS	5SJ6320-6KS	5SJ6320-7KS

3

Quick selection guide, page 3/6

© Siemens 2025

Quick selection guide, page 3/6

© Siemens 2025

5SL30 miniature circuit breakers

1P+N 4.5 kA compact miniature circuit breakers

	1P+N (N pole right)	1P+N (N pole left)
Rated voltage U_n	230 V AC	230 V AC
Mounting width	2 MW	2 MW

3

Rated current I_n	**Characteristic C**	**Characteristic C**
2 A	5SL3002-7	5SL3002-7KL
4 A	5SL3004-7	5SL3004-7KL
6 A	5SL3006-7	5SL3006-7KL
8 A	5SL3008-7	5SL3008-7KL
10 A	5SL3010-7	5SL3010-7KL
13 A	5SL3013-7	5SL3013-7KL
16 A	5SL3016-7	5SL3016-7KL
20 A	5SL3020-7	5SL3020-7KL
25 A	5SL3025-7	5SL3025-7KL
32 A	5SL3032-7	5SL3032-7KL
40 A	5SL3040-7	5SL3040-7KL

Mounting concept

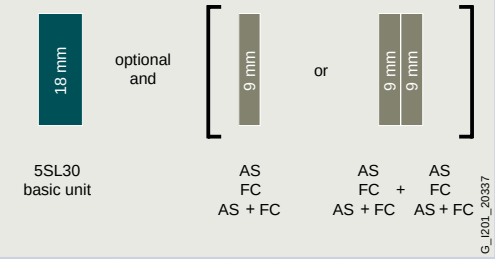

AS	Auxiliary switches	See page 3/54
FC	Fault signal contacts	See page 3/56
AS+FC	Auxiliary switches and fault signal contacts	See page 3/57

Quick selection guide, page 3/6

© Siemens 2025

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022
Auxiliary switches and fault signal contacts (AS+FC)	**Article No.**
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Quick selection guide, page 3/6

© Siemens 2025

5SL60 miniature circuit breakers

1P+N 6 kA compact miniature circuit breakers

	1P+N (N pole right)	1P+N (N pole left)
Rated voltage U_n	230 V AC	230 V AC
Mounting width	1 MW	1 MW
		

Rated current I_n	Characteristic		Characteristic
	B	C	C
2 A	–	5SL6002-7	5SL6002-7KL
4 A	–	5SL6004-7	5SL6004-7KL
6 A	5SL6006-6	5SL6006-7	5SL6006-7KL
8 A	–	5SL6008-7	5SL6008-7KL
10 A	5SL6010-6	5SL6010-7	5SL6010-7KL
13 A	5SL6013-6	5SL6013-7	5SL6013-7KL
16 A	5SL6016-6	5SL6016-7	5SL6016-7KL
20 A	5SL6020-6	5SL6020-7	5SL6020-7KL
25 A	5SL6025-6	5SL6025-7	5SL6025-7KL
32 A	5SL6032-6	5SL6032-7	5SL6032-7KL
40 A	5SL6040-6	5SL6040-7	5SL6040-7KL

Mounting concept

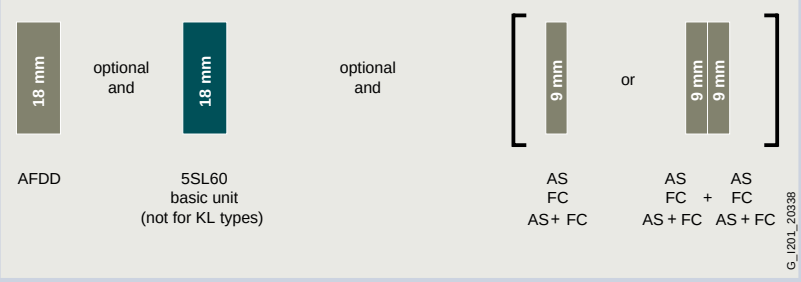

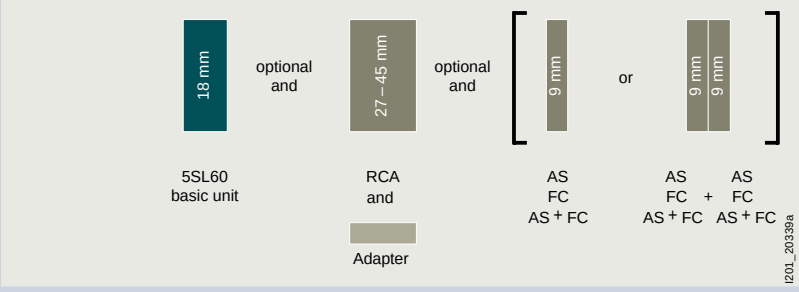

AFDD	Arc fault detection units	See page 3/65
AS	Auxiliary switches	See page 3/54
FC	Fault signal contacts	See page 3/56
AS+FC	Auxiliary switches and fault signal contacts	See page 3/57
RCA	Remote control auxiliaries	See page 3/62

Quick selection guide, page 3/6

© Siemens 2025

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Remote control auxiliaries (RCA)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071
Communication-capable	100 ... 240 V AC	5ST3072-0MC
Communication-capable with RCD/IR test	100 ... 240 V AC	5ST3073-0MC

Adapters for remote control auxiliaries (RCA)	Article No.
1 MW	5ST3820-6

Arc fault detection units (AFDD)		Article No.
For basic units 1P+N (1 MW), not for KL types	I_n up to 16 A	5SM6011-2
	I_n up to 40 A	5SM6014-2

Quick selection guide, page 3/6

© Siemens 2025

5SL58 miniature circuit breakers new

2P 6 kA DC compact miniature circuit breakers

	2P
Rated voltage U_n	DC 110 V
Mounting width	1 MW



Rated current I_n	Characteristic C
1 A	5SL5801-7
2 A	5SL5802-7
3 A	5SL5803-7
4 A	5SL5804-7
6 A	5SL5806-7
8 A	5SL5808-7
10 A	5SL5810-7
13 A	5SL5813-7
15 A	5SL5818-7
16 A	5SL5816-7
20 A	5SL5820-7
25 A	5SL5825-7

Mounting concept

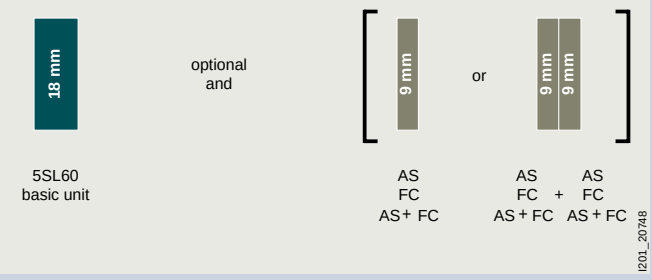

AS	Auxiliary switches	See page 3/54
FC	Fault signal contacts	See page 3/56
AS+FC	Auxiliary switches and fault signal contacts	See page 3/57

Quick selection guide, page 3/6

© Siemens 2025

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		**Article No.**
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		**Article No.**
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC

Quick selection guide, page 3/6

© Siemens 2025

5SY6 miniature circuit breakers

6 kA

	1P	1P+N	2P	3P
Rated voltage U_n	230/400 V AC	230 V AC	400 V AC	400 V AC
Mounting width	1 MW	2 MW	2 MW	3 MW
				

Rated current I_n	Characteristic		Characteristic		Characteristic		Characteristic	
	B	C	B	C	B	C	B	C
0.3 A	–	5SY6114-7	–	5SY6514-7	–	5SY6214-7	–	5SY6314-7
0.5 A	–	5SY6105-7	–	5SY6505-7	–	5SY6205-7	–	5SY6305-7
1 A	–	5SY6101-7	–	5SY6501-7	–	5SY6201-7	–	5SY6301-7
1.6 A	–	5SY6115-7	–	5SY6515-7	–	5SY6215-7	–	5SY6315-7
2 A	5SY6102-6	5SY6102-7	–	5SY6502-7	–	5SY6202-7	–	5SY6302-7
3 A	–	5SY6103-7	–	5SY6503-7	–	5SY6203-7	–	5SY6303-7
4 A	5SY6104-6	5SY6104-7	–	5SY6504-7	–	5SY6204-7	–	5SY6304-7
5 A	–	5SY6111-7	–	–	–	5SY6211-7	–	5SY6311-7
6 A	5SY6106-6	5SY6106-7	5SY6506-6	5SY6506-7	5SY6206-6	5SY6206-7	5SY6306-6	5SY6306-7
8 A	–	5SY6108-7	–	5SY6508-7	–	5SY6208-7	–	5SY6308-7
10 A	5SY6110-6	5SY6110-7	5SY6510-6	5SY6510-7	5SY6210-6	5SY6210-7	5SY6310-6	5SY6310-7
13 A	5SY6113-6	5SY6113-7	5SY6513-6	5SY6513-7	5SY6213-6	5SY6213-7	5SY6313-6	5SY6313-7
15 A	–	5SY6118-7	–	–	–	5SY6218-7	–	5SY6318-7
16 A	5SY6116-6	5SY6116-7	5SY6516-6	5SY6516-7	5SY6216-6	5SY6216-7	5SY6316-6	5SY6316-7
20 A	5SY6120-6	5SY6120-7	5SY6520-6	5SY6520-7	5SY6220-6	5SY6220-7	5SY6320-6	5SY6320-7
25 A	5SY6125-6	5SY6125-7	5SY6525-6	5SY6525-7	5SY6225-6	5SY6225-7	5SY6325-6	5SY6325-7
30 A	–	5SY6130-7	–	–	–	5SY6230-7	–	5SY6330-7
32 A	5SY6132-6	5SY6132-7	5SY6532-6	5SY6532-7	5SY6232-6	5SY6232-7	5SY6332-6	5SY6332-7
40 A	5SY6140-6	5SY6140-7	5SY6540-6	5SY6540-7	5SY6240-6	5SY6240-7	5SY6340-6	5SY6340-7
50 A	5SY6150-6	5SY6150-7	5SY6550-6	5SY6550-7	5SY6250-6	5SY6250-7	5SY6350-6	5SY6350-7
63 A	5SY6163-6	5SY6163-7	5SY6563-6	5SY6563-7	5SY6263-6	5SY6263-7	5SY6363-6	5SY6363-7

Mounting concept

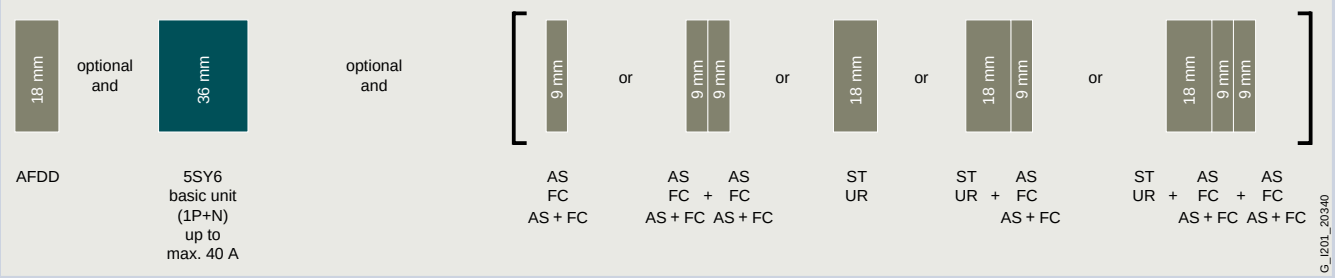

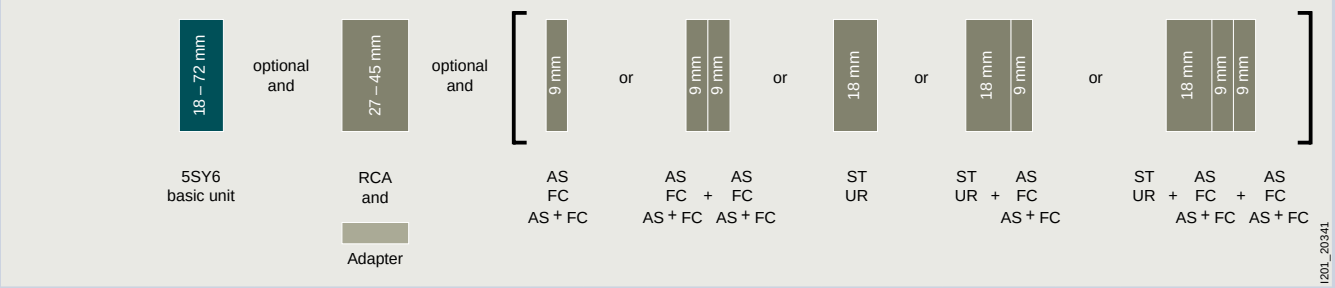

AFDD Arc fault detection units See page 3/65
AS Auxiliary switches See page 3/54
FC Fault signal contacts See page 3/56
AS+FC Auxiliary switches and fault signal contacts See page 3/57
ST Shunt trips See page 3/60
UR Undervoltage releases See page 3/61
RCA Remote control auxiliaries See page 3/62

Quick selection guide, page 3/8

© Siemens 2025

3P+N		4P	
400 V AC		400 V AC	
4 MW		4 MW	
			
Characteristic		**Characteristic**	
B	**C**	**B**	**C**
–	5SY6614-7	–	5SY6414-7
–	5SY6605-7	–	5SY6405-7
–	5SY6601-7	–	5SY6401-7
–	5SY6615-7	–	5SY6415-7
–	5SY6602-7	–	5SY6402-7
–	5SY6603-7	–	5SY6403-7
–	5SY6604-7	–	5SY6404-7
–	–	–	–
5SY6606-6	5SY6606-7	5SY6406-6	5SY6406-7
–	5SY6608-7	–	5SY6408-7
5SY6610-6	5SY6610-7	5SY6410-6	5SY6410-7
5SY6613-6	5SY6613-7	5SY6413-6	5SY6413-7
–	–	–	–
5SY6616-6	5SY6616-7	5SY6416-6	5SY6416-7
5SY6620-6	5SY6620-7	5SY6420-6	5SY6420-7
5SY6625-6	5SY6625-7	5SY6425-6	5SY6425-7
–	–	–	–
5SY6632-6	5SY6632-7	5SY6432-6	5SY6432-7
5SY6640-6	5SY6640-7	5SY6440-6	5SY6440-7
5SY6650-6	5SY6650-7	5SY6450-6	5SY6450-7
5SY6663-6	5SY6663-7	5SY6463-6	5SY6463-7

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		**Article No.**
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		**Article No.**
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC
Shunt trips (ST)		**Article No.**
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote control auxiliaries (RCA)		**Article No.**
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071
Communication-capable	100 ... 240 V AC	5ST3072-0MC
Communication-capable with RCD/IR test	100 ... 240 V AC	5ST3073-0MC
Adapters for remote control auxiliaries (RCA)		**Article No.**
1 ... 2 MW		5ST3820-1
3 ... 4 MW		5ST3820-2
Arc fault detection units (AFDD)		**Article No.**
For basic units 1P+N (2 MW), not in combination with RCA	I_n up to 16 A	5SM6021-2
	I_n up to 40 A	5SM6024-2

Quick selection guide, page 3/8

© Siemens 2025

5SY4 miniature circuit breakers

10 kA

	1P	1P+N	2P
Rated voltage U_n	230/400 V AC	230 V AC	400 V AC
Mounting width	1 MW	2 MW	2 MW
			

Rated current I_n	Characteristic				Characteristic				Characteristic			
	A	B	C	D	A	B	C	D	A	B	C	D
0.3 A	–	–	5SY4114-7	5SY4114-8	–	–	5SY4514-7	5SY4514-8	–	–	5SY4214-7	5SY4214-8
0.5 A	5SY4105-5	–	5SY4105-7	5SY4105-8	–	–	5SY4505-7	5SY4505-8	5SY4205-5	–	5SY4205-7	5SY4205-8
1 A	5SY4101-5	5SY4101-6	5SY4101-7	5SY4101-8	5SY4501-5	–	5SY4501-7	5SY4501-8	5SY4201-5	5SY4201-6	5SY4201-7	5SY4201-8
1.6 A	5SY4115-5	5SY4115-6	5SY4115-7	5SY4115-8	5SY4515-5	5SY4515-6	5SY4515-7	5SY4515-8	5SY4215-5	5SY4215-6	5SY4215-7	5SY4215-8
2 A	5SY4102-5	5SY4102-6	5SY4102-7	5SY4102-8	5SY4502-5	–	5SY4502-7	5SY4502-8	5SY4202-5	5SY4202-6	5SY4202-7	5SY4202-8
3 A	5SY4103-5	5SY4103-6	5SY4103-7	5SY4103-8	5SY4503-5	–	5SY4503-7	5SY4503-8	5SY4203-5	5SY4203-6	5SY4203-7	5SY4203-8
4 A	5SY4104-5	5SY4104-6	5SY4104-7	5SY4104-8	5SY4504-5	5SY4504-6	5SY4504-7	5SY4504-8	5SY4204-5	5SY4204-6	5SY4204-7	5SY4204-8
5 A	–	–	5SY4111-7	–	–	–	–	–	–	–	5SY4211-7	–
6 A	5SY4106-5	5SY4106-6	5SY4106-7	5SY4106-8	5SY4506-5	5SY4506-6	5SY4506-7	5SY4506-8	5SY4206-5	5SY4206-6	5SY4206-7	5SY4206-8
8 A	5SY4108-5	5SY4108-6	5SY4108-7	5SY4108-8	5SY4508-5	–	5SY4508-7	5SY4508-8	5SY4208-5	5SY4208-6	5SY4208-7	5SY4208-8
10 A	5SY4110-5	5SY4110-6	5SY4110-7	5SY4110-8	5SY4510-5	5SY4510-6	5SY4510-7	5SY4510-8	5SY4210-5	5SY4210-6	5SY4210-7	5SY4210-8
13 A	5SY4113-5	5SY4113-6	5SY4113-7	5SY4113-8	5SY4513-5	5SY4513-6	5SY4513-7	5SY4513-8	5SY4213-5	5SY4213-6	5SY4213-7	5SY4213-8
15 A	–	–	5SY4118-7	–	–	–	–	–	–	–	5SY4218-7	–
16 A	5SY4116-5	5SY4116-6	5SY4116-7	5SY4116-8	5SY4516-5	5SY4516-6	5SY4516-7	5SY4516-8	5SY4216-5	5SY4216-6	5SY4216-7	5SY4216-8
20 A	5SY4120-5	5SY4120-6	5SY4120-7	5SY4120-8	5SY4520-5	5SY4520-6	5SY4520-7	5SY4520-8	5SY4220-5	5SY4220-6	5SY4220-7	5SY4220-8
25 A	5SY4125-5	5SY4125-6	5SY4125-7	5SY4125-8	5SY4525-5	5SY4525-6	5SY4525-7	5SY4525-8	5SY4225-5	5SY4225-6	5SY4225-7	5SY4225-8
30 A	–	–	5SY4130-7	–	–	–	–	–	–	–	5SY4230-7	–
32 A	5SY4132-5	5SY4132-6	5SY4132-7	5SY4132-8	5SY4532-5	5SY4532-6	5SY4532-7	5SY4532-8	5SY4232-5	5SY4232-6	5SY4232-7	5SY4232-8
35 A	–	–	5SY4135-7	–	–	–	–	–	–	–	5SY4235-7	–
40 A	5SY4140-5	5SY4140-6	5SY4140-7	5SY4140-8	5SY4540-5	5SY4540-6	5SY4540-7	5SY4540-8	5SY4240-5	5SY4240-6	5SY4240-7	5SY4240-8
45 A	–	–	5SY4145-7	–	–	–	–	–	–	–	5SY4245-7	–
50 A	5SY4150-5	5SY4150-6	5SY4150-7	5SY4150-8	5SY4550-5	5SY4550-6	5SY4550-7	5SY4550-8	5SY4250-5	5SY4250-6	5SY4250-7	5SY4250-8
60 A	–	–	5SY4160-7	–	–	–	–	–	–	–	5SY4260-7	–
63 A	5SY4163-5	5SY4163-6	5SY4163-7	5SY4163-8	5SY4563-5	5SY4563-6	5SY4563-7	5SY4563-8	5SY4263-5	5SY4263-6	5SY4263-7	5SY4263-8
80 A	–	5SY4180-6	5SY4180-7	–	–	–	5SY4580-7	–	–	5SY4280-6	5SY4280-7	–

Mounting concept

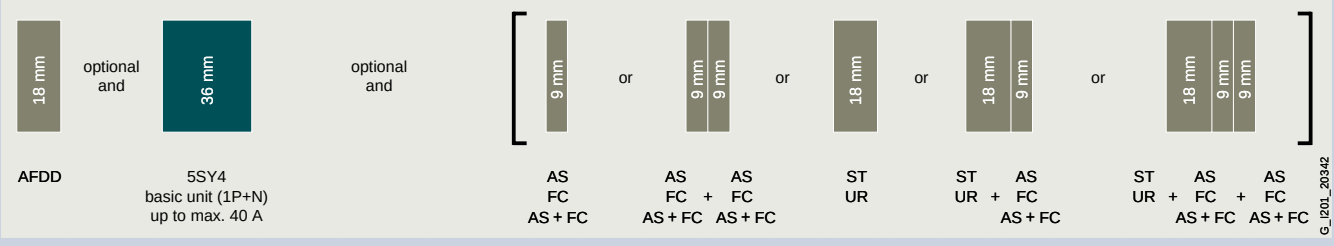

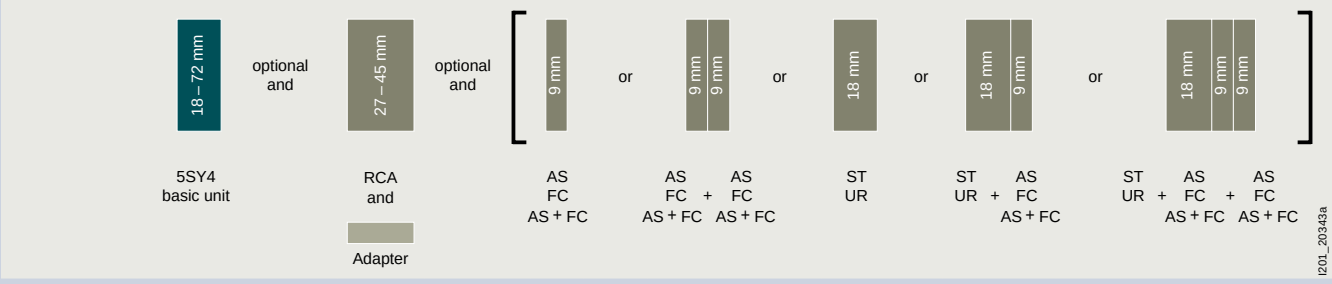

Quick selection guide, page 3/8

© Siemens 2025

3P				3P+N				4P			
400 V AC				400 V AC				400 V AC			
3 MW				4 MW				4 MW			
											
Characteristic				**Characteristic**				**Characteristic**			
A	**B**	**C**	**D**	**A**	**B**	**C**	**D**	**A**	**B**	**C**	**D**
–	–	5SY4314-7	5SY4314-8	–	–	5SY4614-7	5SY4614-8	–	–	5SY4414-7	5SY4414-8
5SY4305-5	–	5SY4305-7	5SY4305-8	–	–	5SY4605-7	5SY4605-8	–	–	5SY4405-7	5SY4405-8
5SY4301-5	5SY4301-6	5SY4301-7	5SY4301-8	5SY4601-5	–	5SY4601-7	5SY4601-8	5SY4401-5	–	5SY4401-7	5SY4401-8
5SY4315-5	5SY4315-6	5SY4315-7	5SY4315-8	5SY4615-5	–	5SY4615-7	5SY4615-8	5SY4415-5	–	5SY4415-7	5SY4415-8
5SY4302-5	5SY4302-6	5SY4302-7	5SY4302-8	5SY4602-5	–	5SY4602-7	5SY4602-8	5SY4402-5	–	5SY4402-7	5SY4402-8
5SY4303-5	5SY4303-6	5SY4303-7	5SY4303-8	5SY4603-5	–	5SY4603-7	5SY4603-8	5SY4403-5	–	5SY4403-7	5SY4403-8
5SY4304-5	5SY4304-6	5SY4304-7	5SY4304-8	5SY4604-5	–	5SY4604-7	5SY4604-8	5SY4404-5	–	5SY4404-7	5SY4404-8
–	–	5SY4311-7	–	–	–	–	–	–	–	–	–
5SY4306-5	5SY4306-6	5SY4306-7	5SY4306-8	5SY4606-5	5SY4606-6	5SY4606-7	5SY4606-8	5SY4406-5	5SY4406-6	5SY4406-7	5SY4406-8
5SY4308-5	5SY4308-6	5SY4308-7	5SY4308-8	5SY4608-5	–	5SY4608-7	5SY4608-8	5SY4408-5	–	5SY4408-7	5SY4408-8
5SY4310-5	5SY4310-6	5SY4310-7	5SY4310-8	5SY4610-5	5SY4610-6	5SY4610-7	5SY4610-8	5SY4410-5	5SY4410-6	5SY4410-7	5SY4410-8
5SY4313-5	5SY4313-6	5SY4313-7	5SY4313-8	5SY4613-5	5SY4613-6	5SY4613-7	5SY4613-8	5SY4413-5	5SY4413-6	5SY4413-7	5SY4413-8
–	–	5SY4318-7	–	–	–	–	–	–	–	–	–
5SY4316-5	5SY4316-6	5SY4316-7	5SY4316-8	5SY4616-5	5SY4616-6	5SY4616-7	5SY4616-8	5SY4416-5	5SY4416-6	5SY4416-7	5SY4416-8
5SY4320-5	5SY4320-6	5SY4320-7	5SY4320-8	5SY4620-5	5SY4620-6	5SY4620-7	5SY4620-8	5SY4420-5	5SY4420-6	5SY4420-7	5SY4420-8
5SY4325-5	5SY4325-6	5SY4325-7	5SY4325-8	5SY4625-5	5SY4625-6	5SY4625-7	5SY4625-8	5SY4425-5	5SY4425-6	5SY4425-7	5SY4425-8
–	–	5SY4330-7	–	–	–	–	–	–	–	–	–
5SY4332-5	5SY4332-6	5SY4332-7	5SY4332-8	5SY4632-5	5SY4632-6	5SY4632-7	5SY4632-8	5SY4432-5	5SY4432-6	5SY4432-7	5SY4432-8
–	–	5SY4335-7	–	–	–	–	–	–	–	–	–
5SY4340-5	5SY4340-6	5SY4340-7	5SY4340-8	5SY4640-5	5SY4640-6	5SY4640-7	5SY4640-8	5SY4440-5	5SY4440-6	5SY4440-7	5SY4440-8
–	–	5SY4345-7	–	–	–	–	–	–	–	–	–
5SY4350-5	5SY4350-6	5SY4350-7	5SY4350-8	5SY4650-5	5SY4650-6	5SY4650-7	5SY4650-8	5SY4450-5	5SY4450-6	5SY4450-7	5SY4450-8
–	–	5SY4360-7	–	–	–	–	–	–	–	–	–
5SY4363-5	5SY4363-6	5SY4363-7	5SY4363-8	5SY4663-5	5SY4663-6	5SY4663-7	5SY4663-8	5SY4463-5	5SY4463-6	5SY4463-7	5SY4463-8
–	5SY4380-6	5SY4380-7	–	–	–	5SY4680-7	–	–	5SY4480-6	5SY4480-7	–

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Shunt trips (ST)	Article No.
110 ... 415 V AC, 110 ... 220 V DC	5ST3030
24 ... 48 V AC/DC	5ST3031
12 V DC	5ST3031-0XX01

Arc fault detection units (AFDD)		Article No.
For basic units 1P+N (2 MW)	I_n up to 16 A	5SM6021-2
	I_n up to 40 A	5SM6024-2

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

Remote control auxiliaries (RCA)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071
Communication-capable	100 ... 240 V AC	5ST3072-0MC
Communication-capable with RCD/IR test	100 ... 240 V AC	5ST3073-0MC

Adapters for remote control auxiliaries (RCA)	Article No.
1 ... 2 MW	5ST3820-1
3 ... 4 MW	5ST3820-2

Quick selection guide, page 3/8

© Siemens 2025

5SP4 miniature circuit breakers

10 kA

	1P	2P
Rated voltage U_n	230/400 V AC	400 V AC
Mounting width	1.5 MW	3 MW

Rated current I_n	Characteristic			Characteristic		
	B	C	D	B	C	D
80 A	5SP4180-6	5SP4180-7	5SP4180-8	5SP4280-6	5SP4280-7	5SP4280-8
100 A	5SP4191-6	5SP4191-7	5SP4191-8	5SP4291-6	5SP4291-7	5SP4291-8
125 A	5SP4192-6	5SP4192-7	–	5SP4292-6	5SP4292-7	–

Mounting concept

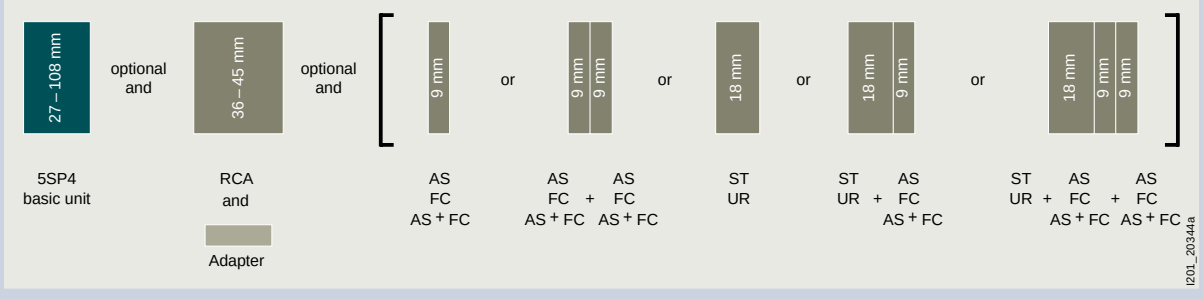

AS	Auxiliary switches	See page 3/54
FC	Fault signal contacts	See page 3/56
AS+FC	Auxiliary switches and fault signal contacts	See page 3/57
ST	Shunt trips	See page 3/60
UR	Undervoltage releases	See page 3/61
RCA	Remote control auxiliaries	See page 3/62

Quick selection guide, page 3/8

© Siemens 2025

3P			4P		
400 V AC			400 V AC		
4.5 MW			6 MW		
					
Characteristic			**Characteristic**		
B	**C**	**D**	**B**	**C**	**D**
5SP4380-6	5SP4380-7	5SP4380-8	5SP4480-6	5SP4480-7	5SP4480-8
5SP4391-6	5SP4391-7	5SP4391-8	5SP4491-6	5SP4491-7	5SP4491-8
5SP4392-6	5SP4392-7	–	5SP4492-6	5SP4492-7	–

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Shunt trips (ST)	Article No.
110 ... 415 V AC, 110 ... 220 V DC	5ST3030
24 ... 48 V AC/DC	5ST3031
12 V DC	5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

Remote control auxiliaries (RCA)		Article No.
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071
Communication-capable	100 ... 240 V AC	5ST3072-0MC
Communication-capable with RCD/IR test	100 ... 240 V AC	5ST3073-0MC

Adapters for remote control auxiliaries (RCA)	Article No.
1.5 MW	5ST3820-1
3 ... 6 MW	5ST3820-2

Quick selection guide, page 3/8

© Siemens 2025

5SP5 miniature circuit breakers

10 kA

	1P	2P
Rated voltage U_n	220 V DC	440 V DC
Mounting width	1.5 MW	3 MW
Rated current I_n		
80 A	5SP5180-7CC	5SP5280-7CC
100 A	5SP5191-7CC	5SP5291-7CC
125 A	5SP5192-7CC	5SP5292-7CC

Mounting concept

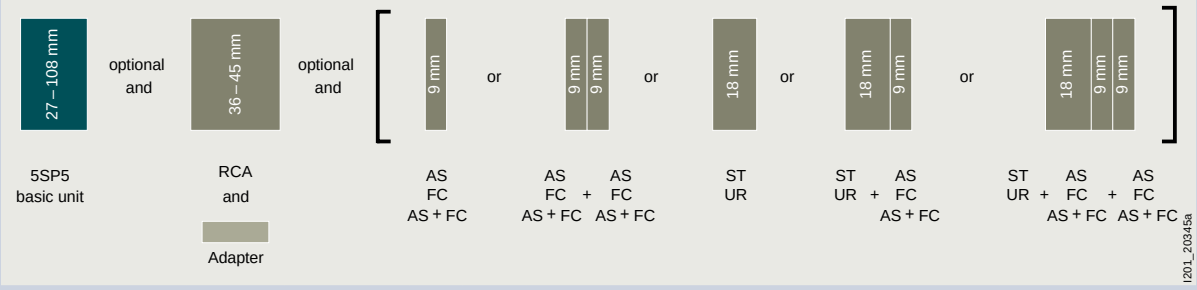

AS	Auxiliary switches	See page 3/54
FC	Fault signal contacts	See page 3/56
AS+FC	Auxiliary switches and fault signal contacts	See page 3/57
ST	Shunt trips	See page 3/60
UR	Undervoltage releases	See page 3/61
RCA	Remote control auxiliaries	See page 3/62

Quick selection guide, page 3/8

© Siemens 2025

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Shunt trips (ST)	Article No.
110 ... 415 V AC, 110 ... 220 V DC	5ST3030
24 ... 48 V AC/DC	5ST3031
12 V DC	5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

Remote control auxiliaries (RCA)		Article No.
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071
Communication-capable	100 ... 240 V AC	5ST3072-0MC
Communication-capable with RCD/IR test	100 ... 240 V AC	5ST3073-0MC

Adapters for remote control auxiliaries (RCA)	Article No.
1.5 MW	5ST3820-1
3 ... 6 MW	5ST3820-2

Quick selection guide, page 3/8

© Siemens 2025

5SY5 miniature circuit breakers

10 kA

	1P	2P	4P
Rated voltage U_n	230/400 V AC, 220 V DC	400 V AC, 440 V DC	400 V AC, 880 V DC
Mounting width	1 MW	2 MW	4 MW

Rated current I_n	Characteristic		Characteristic		Characteristic	
	B	C	B	C	B	C
0.3 A	–	5SY5114-7	–	5SY5214-7	–	5SY5414-7
0.5 A	–	5SY5105-7	–	5SY5205-7	–	5SY5405-7
1 A	–	5SY5101-7	–	5SY5201-7	–	5SY5401-7
1.6 A	–	5SY5115-7	–	5SY5215-7	–	5SY5415-7
2 A	5SY5102-6	5SY5102-7	5SY5202-6	5SY5202-7	–	5SY5402-7
3 A	–	5SY5103-7	–	5SY5203-7	–	5SY5403-7
4 A	5SY5104-6	5SY5104-7	5SY5204-6	5SY5204-7	–	5SY5404-7
6 A	5SY5106-6	5SY5106-7	5SY5206-6	5SY5206-7	5SY5406-6	5SY5406-7
8 A	5SY5108-6	5SY5108-7	5SY5208-6	5SY5208-7	–	5SY5408-7
10 A	5SY5110-6	5SY5110-7	5SY5210-6	5SY5210-7	5SY5410-6	5SY5410-7
13 A	5SY5113-6	5SY5113-7	5SY5213-6	5SY5213-7	5SY5413-6	5SY5413-7
16 A	5SY5116-6	5SY5116-7	5SY5216-6	5SY5216-7	5SY5416-6	5SY5416-7
20 A	5SY5120-6	5SY5120-7	5SY5220-6	5SY5220-7	5SY5420-6	5SY5420-7
25 A	5SY5125-6	5SY5125-7	5SY5225-6	5SY5225-7	5SY5425-6	5SY5425-7
32 A	5SY5132-6	5SY5132-7	5SY5232-6	5SY5232-7	5SY5432-6	5SY5432-7
40 A	5SY5140-6	5SY5140-7	5SY5240-6	5SY5240-7	5SY5440-6	5SY5440-7
50 A	5SY5150-6	5SY5150-7	5SY5250-6	5SY5250-7	5SY5450-6	5SY5450-7
63 A	5SY5163-6	5SY5163-7	5SY5263-6	5SY5263-7	5SY5463-6	5SY5463-7

Mounting concept

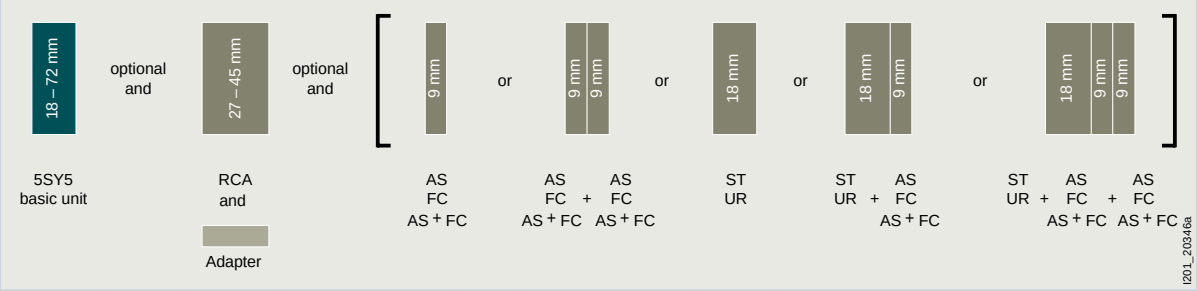

AS	Auxiliary switches	See page 3/54
FC	Fault signal contacts	See page 3/56
AS+FC	Auxiliary switches and fault signal contacts	See page 3/57
ST	Shunt trips	See page 3/60
UR	Undervoltage releases	See page 3/61
RCA	Remote control auxiliaries	See page 3/62

Quick selection guide, page 3/8

© Siemens 2025

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Shunt trips (ST)	Article No.
110 ... 415 V AC, 110 ... 220 V DC	5ST3030
24 ... 48 V AC/DC	5ST3031
12 V DC	5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

Remote control auxiliaries (RCA)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071
Communication-capable	100 ... 240 V AC	5ST3072-0MC
Communication-capable with RCD/IR test	100 ... 240 V AC	5ST3073-0MC

Adapters for remote control auxiliaries (RCA)	Article No.
1 ... 2 MW	5ST3820-1
4 MW	5ST3820-2

Quick selection guide, page 3/8

© Siemens 2025

5SY7 miniature circuit breakers

15 kA

	1P	1P+N	2P
Rated voltage U_n	230/400 V AC	230 V AC	400 V AC
Mounting width	1 MW	2 MW	2 MW
			

Rated current I_n	Main MCB, line side of meter	Characteristic B	C	D	Characteristic B	C	D	Characteristic B	C	D
0.3 A	–	–	5SY7114-7	5SY7114-8	–	5SY7514-7	5SY7514-8	–	5SY7214-7	5SY7214-8
0.5 A	–	–	5SY7105-7	5SY7105-8	–	5SY7505-7	5SY7505-8	–	5SY7205-7	5SY7205-8
1 A	–	–	5SY7101-7	5SY7101-8	–	5SY7501-7	5SY7501-8	–	5SY7201-7	5SY7201-8
1.6 A	–	–	5SY7115-7	5SY7115-8	–	5SY7515-7	5SY7515-8	–	5SY7215-7	5SY7215-8
2 A	–	–	5SY7102-7	5SY7102-8	–	5SY7502-7	5SY7502-8	–	5SY7202-7	5SY7202-8
3 A	–	–	5SY7103-7	5SY7103-8	–	5SY7503-7	5SY7503-8	–	5SY7203-7	5SY7203-8
4 A	–	–	5SY7104-7	5SY7104-8	–	5SY7504-7	5SY7504-8	–	5SY7204-7	5SY7204-8
6 A	–	5SY7106-6	5SY7106-7	5SY7106-8	5SY7506-6	5SY7506-7	5SY7506-8	5SY7206-6	5SY7206-7	5SY7206-8
	■	5SY7106-6KK13	–	–	–	–	–	–	–	–
8 A	–	–	5SY7108-7	5SY7108-8	–	5SY7508-7	5SY7508-8	–	5SY7208-7	5SY7208-8
10 A	–	5SY7110-6	5SY7110-7	5SY7110-8	5SY7510-6	5SY7510-7	5SY7510-8	5SY7210-6	5SY7210-7	5SY7210-8
	■	5SY7110-6KK13	–	–	–	–	–	–	–	–
13 A	–	5SY7113-6	5SY7113-7	5SY7113-8	5SY7513-6	5SY7513-7	5SY7513-8	5SY7213-6	5SY7213-7	5SY7213-8
16 A	–	5SY7116-6	5SY7116-7	5SY7116-8	5SY7516-6	5SY7516-7	5SY7516-8	5SY7216-6	5SY7216-7	5SY7216-8
20 A	–	5SY7120-6	5SY7120-7	5SY7120-8	5SY7520-6	5SY7520-7	5SY7520-8	5SY7220-6	5SY7220-7	5SY7220-8
25 A	–	5SY7125-6	5SY7125-7	5SY7125-8	5SY7525-6	5SY7525-7	5SY7525-8	5SY7225-6	5SY7225-7	5SY7225-8
32 A	–	5SY7132-6	5SY7132-7	5SY7132-8	5SY7532-6	5SY7532-7	5SY7532-8	5SY7232-6	5SY7232-7	5SY7232-8
40 A	–	5SY7140-6	5SY7140-7	5SY7140-8	5SY7540-6	5SY7540-7	5SY7540-8	5SY7240-6	5SY7240-7	5SY7240-8
50 A	–	5SY7150-6	5SY7150-7	5SY7150-8	5SY7550-6	5SY7550-7	5SY7550-8	5SY7250-6	5SY7250-7	5SY7250-8
63 A	–	5SY7163-6	5SY7163-7	5SY7163-8	5SY7563-6	5SY7563-7	5SY7563-8	5SY7263-6	5SY7263-7	5SY7263-8

Mounting concept

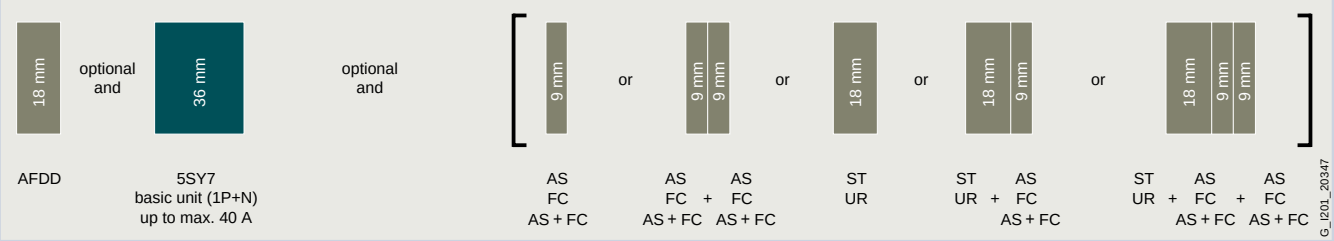

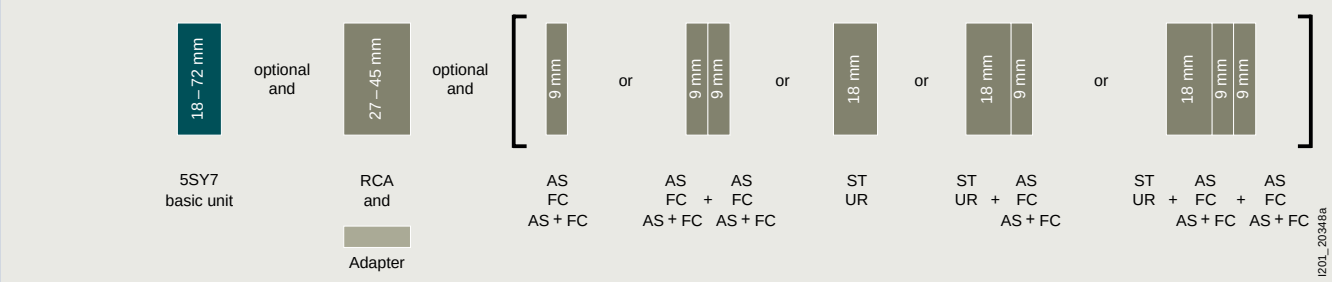

AFDD Arc fault detection units See page 3/65
AS Auxiliary switches See page 3/54
FC Fault signal contacts See page 3/56
AS+FC Auxiliary switches and fault signal contacts See page 3/57
ST Shunt trips See page 3/60
UR Undervoltage releases See page 3/61
RCA Remote control auxiliaries See page 3/62

Quick selection guide, page 3/8

© Siemens 2025

3P			3P+N			4P		
400 V AC			400 V AC			400 V AC		
3 MW			4 MW			4 MW		
								
Characteristic			Characteristic			Characteristic		
B	C	D	B	C	D	B	C	D
–	5SY7314-7	5SY7314-8	–	5SY7614-7	5SY7614-8	–	5SY7414-7	5SY7414-8
–	5SY7305-7	5SY7305-8	–	5SY7605-7	5SY7605-8	–	5SY7405-7	5SY7405-8
–	5SY7301-7	5SY7301-8	–	5SY7601-7	5SY7601-8	–	5SY7401-7	5SY7401-8
–	5SY7315-7	5SY7315-8	–	5SY7615-7	5SY7615-8	–	5SY7415-7	5SY7415-8
–	5SY7302-7	5SY7302-8	–	5SY7602-7	5SY7602-8	–	5SY7402-7	5SY7402-8
–	5SY7303-7	5SY7303-8	–	5SY7603-7	5SY7603-8	–	5SY7403-7	5SY7403-8
–	5SY7304-7	5SY7304-8	–	5SY7604-7	5SY7604-8	–	5SY7404-7	5SY7404-8
5SY7306-6	5SY7306-7	5SY7306-8	5SY7606-6	5SY7606-7	5SY7606-8	5SY7406-6	5SY7406-7	5SY7406-8
–	–	–	–	–	–	–	–	–
–	5SY7308-7	5SY7308-8	–	5SY7608-7	5SY7608-8	–	5SY7408-7	5SY7408-8
5SY7310-6	5SY7310-7	5SY7310-8	5SY7610-6	5SY7610-7	5SY7610-8	5SY7410-6	5SY7410-7	5SY7410-8
–	–	–	–	–	–	–	–	–
5SY7313-6	5SY7313-7	5SY7313-8	5SY7613-6	5SY7613-7	5SY7613-8	5SY7413-6	5SY7413-7	5SY7413-8
5SY7316-6	5SY7316-7	5SY7316-8	5SY7616-6	5SY7616-7	5SY7616-8	5SY7416-6	5SY7416-7	5SY7416-8
5SY7320-6	5SY7320-7	5SY7320-8	5SY7620-6	5SY7620-7	5SY7620-8	5SY7420-6	5SY7420-7	5SY7420-8
5SY7325-6	5SY7325-7	5SY7325-8	5SY7625-6	5SY7625-7	5SY7625-8	5SY7425-6	5SY7425-7	5SY7425-8
5SY7332-6	5SY7332-7	5SY7332-8	5SY7632-6	5SY7632-7	5SY7632-8	5SY7432-6	5SY7432-7	5SY7432-8
5SY7340-6	5SY7340-7	5SY7340-8	5SY7640-6	5SY7640-7	5SY7640-8	5SY7440-6	5SY7440-7	5SY7440-8
5SY7350-6	5SY7350-7	5SY7350-8	5SY7650-6	5SY7650-7	5SY7650-8	5SY7450-6	5SY7450-7	5SY7450-8
5SY7363-6	5SY7363-7	5SY7363-8	5SY7663-6	5SY7663-7	5SY7663-8	5SY7463-6	5SY7463-7	5SY7463-8

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		**Article No.**
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		**Article No.**
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC
Shunt trips (ST)		**Article No.**
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01
Arc fault detection units (AFDD)		**Article No.**
For basic units 1P+N (2 MW)	I_n up to 16 A	5SM6021-2
	I_n up to 40 A	5SM6024-2

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote control auxiliaries (RCA)		**Article No.**
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071
Communication-capable	100 ... 240 V AC	5ST3072-0MC
Communication-capable with RCD/IR test	100 ... 240 V AC	5ST3073-0MC
Adapters for remote control auxiliaries (RCA)		**Article No.**
1 ... 2 MW		5ST3820-1
3 ... 4 MW		5ST3820-2

Quick selection guide, page 3/8

© Siemens 2025

5SY8 miniature circuit breakers

25 kA

	1P	1P+N	2P	3P
Rated voltage U_n	230/400 V AC	230 V AC	400 V AC	400 V AC
Mounting width	1 MW	2 MW	2 MW	3 MW
				

Rated current I_n	Characteristic		Characteristic		Characteristic		Characteristic	
	C	D	C	D	C	D	C	D
0.3 A	5SY8114-7	5SY8114-8	5SY8514-7	5SY8514-8	5SY8214-7	5SY8214-8	5SY8314-7	5SY8314-8
0.5 A	5SY8105-7	5SY8105-8	5SY8505-7	5SY8505-8	5SY8205-7	5SY8205-8	5SY8305-7	5SY8305-8
1 A	5SY8101-7	5SY8101-8	5SY8501-7	5SY8501-8	5SY8201-7	5SY8201-8	5SY8301-7	5SY8301-8
1.6 A	5SY8115-7	5SY8115-8	5SY8515-7	5SY8515-8	5SY8215-7	5SY8215-8	5SY8315-7	5SY8315-8
2 A	5SY8102-7	5SY8102-8	5SY8502-7	5SY8502-8	5SY8202-7	5SY8202-8	5SY8302-7	5SY8302-8
3 A	5SY8103-7	5SY8103-8	5SY8503-7	5SY8503-8	5SY8203-7	5SY8203-8	5SY8303-7	5SY8303-8
4 A	5SY8104-7	5SY8104-8	5SY8504-7	5SY8504-8	5SY8204-7	5SY8204-8	5SY8304-7	5SY8304-8
6 A	5SY8106-7	5SY8106-8	5SY8506-7	5SY8506-8	5SY8206-7	5SY8206-8	5SY8306-7	5SY8306-8
8 A	5SY8108-7	5SY8108-8	5SY8508-7	5SY8508-8	5SY8208-7	5SY8208-8	5SY8308-7	5SY8308-8
10 A	5SY8110-7	5SY8110-8	5SY8510-7	5SY8510-8	5SY8210-7	5SY8210-8	5SY8310-7	5SY8310-8
12.5 A	–	–	–	–	–	–	–	–
13 A	5SY8113-7	5SY8113-8	5SY8513-7	5SY8513-8	5SY8213-7	5SY8213-8	5SY8313-7	5SY8313-8
16 A	5SY8116-7	5SY8116-8	5SY8516-7	5SY8516-8	5SY8216-7	5SY8216-8	5SY8316-7	5SY8316-8
20 A	5SY8120-7	5SY8120-8	5SY8520-7	5SY8520-8	5SY8220-7	5SY8220-8	5SY8320-7	5SY8320-8
25 A	5SY8125-7	5SY8125-8	5SY8525-7	5SY8525-8	5SY8225-7	5SY8225-8	5SY8325-7	5SY8325-8
32 A	5SY8132-7	5SY8132-8	5SY8532-7	5SY8532-8	5SY8232-7	5SY8232-8	5SY8332-7	5SY8332-8
40 A	5SY8140-7	5SY8140-8	5SY8540-7	5SY8540-8	5SY8240-7	5SY8240-8	5SY8340-7	5SY8340-8
50 A	5SY8150-7	5SY8150-8	5SY8550-7	5SY8550-8	5SY8250-7	5SY8250-8	5SY8350-7	5SY8350-8
63 A	5SY8163-7	5SY8163-8	5SY8563-7	5SY8563-8	5SY8263-7	5SY8263-8	5SY8363-7	5SY8363-8

Mounting concept

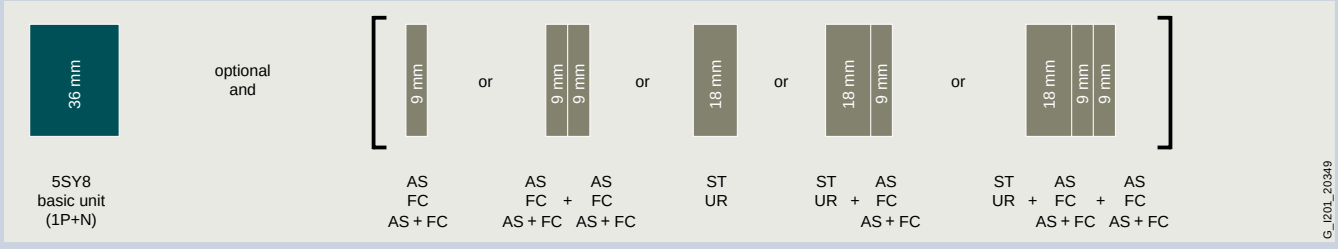

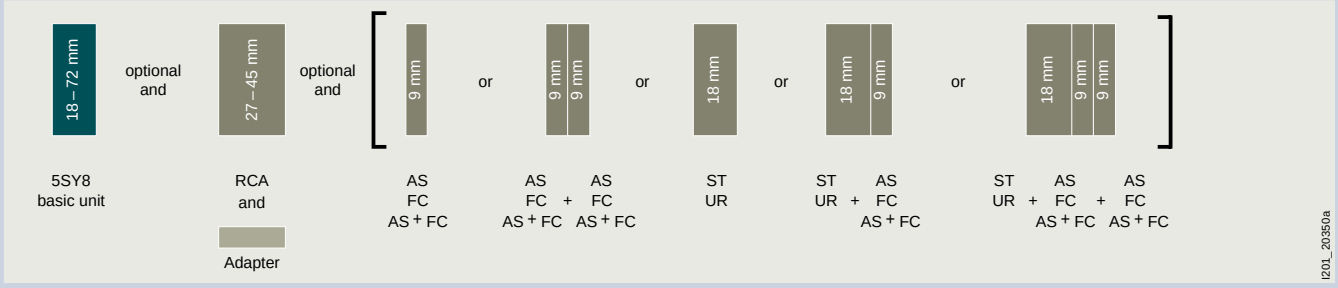

AFDD	Arc fault detection units	See page 3/65	AS+FC	Auxiliary switches and fault signal contacts	See page 3/57	UR	Undervoltage releases	See page 3/61
AS	Auxiliary switches	See page 3/54	ST	Shunt trips	See page 3/60	RCA	Remote control auxiliaries	See page 3/62
FC	Fault signal contacts	See page 3/56						

Quick selection guide, page 3/8

© Siemens 2025

3P+N		4P	
400 V AC		400 V AC	
4 MW		4 MW	
			
Characteristic		**Characteristic**	
C	**D**	**C**	**D**
5SY8614-7	5SY8614-8	5SY8414-7	5SY8414-8
5SY8605-7	5SY8605-8	5SY8405-7	5SY8405-8
5SY8601-7	5SY8601-8	5SY8401-7	5SY8401-8
5SY8615-7	5SY8615-8	5SY8415-7	5SY8415-8
5SY8602-7	5SY8602-8	5SY8402-7	5SY8402-8
5SY8603-7	5SY8603-8	5SY8403-7	5SY8403-8
5SY8604-7	5SY8604-8	5SY8404-7	5SY8404-8
5SY8606-7	5SY8606-8	5SY8406-7	5SY8406-8
5SY8608-7	5SY8608-8	5SY8408-7	5SY8408-8
5SY8610-7	5SY8610-8	5SY8410-7	5SY8410-8
–	–	–	–
5SY8613-7	5SY8613-8	5SY8413-7	5SY8413-8
5SY8616-7	5SY8616-8	5SY8416-7	5SY8416-8
5SY8620-7	5SY8620-8	5SY8420-7	5SY8420-8
5SY8625-7	5SY8625-8	5SY8425-7	5SY8425-8
5SY8632-7	5SY8632-8	5SY8432-7	5SY8432-8
5SY8640-7	5SY8640-8	5SY8440-7	5SY8440-8
5SY8650-7	5SY8650-8	5SY8450-7	5SY8450-8
5SY8663-7	5SY8663-8	5SY8463-7	5SY8463-8

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		**Article No.**
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		**Article No.**
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC
Shunt trips (ST)		**Article No.**
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote control auxiliaries (RCA)		**Article No.**
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071
Communication-capable	100 ... 240 V AC	5ST3072-0MC
Communication-capable with RCD/IR test	100 ... 240 V AC	5ST3073-0MC
Adapters for remote control auxiliaries (RCA)		**Article No.**
1 ... 2 MW		5ST3820-1
3 ... 4 MW		5ST3820-2

Quick selection guide, page 3/8

© Siemens 2025

5SJ4..HG.. miniature circuit breakers

According to UL 489, 14/10 kA

	1P "same polarity only"			1P			
Rated voltage U_n	240 V AC	240 V AC	240 V AC	240 V AC	480Y/277 V AC	240 V AC	480Y/277 V AC
Mounting width	1 MW			1 MW			
Rated current I_n	**Characteristic**			**Characteristic**			
	B	**C**	**D**	**C**	**C**	**D**	**D**
0.3 A	–	5SJ4114-7HG40	5SJ4114-8HG40	5SJ4114-7HG41	5SJ4114-7HG42	5SJ4114-8HG41	5SJ4114-8HG42
0.5 A	–	5SJ4105-7HG40	5SJ4105-8HG40	5SJ4105-7HG41	5SJ4105-7HG42	5SJ4105-8HG41	5SJ4105-8HG42
1 A	–	5SJ4101-7HG40	5SJ4101-8HG40	5SJ4101-7HG41	5SJ4101-7HG42	5SJ4101-8HG41	5SJ4101-8HG42
1.6 A	–	5SJ4115-7HG40	5SJ4115-8HG40	5SJ4115-7HG41	5SJ4115-7HG42	5SJ4115-8HG41	5SJ4115-8HG42
2 A	–	5SJ4102-7HG40	5SJ4102-8HG40	5SJ4102-7HG41	5SJ4102-7HG42	5SJ4102-8HG41	5SJ4102-8HG42
3 A	–	5SJ4103-7HG40	5SJ4103-8HG40	5SJ4103-7HG41	5SJ4103-7HG42	5SJ4103-8HG41	5SJ4103-8HG42
4 A	–	5SJ4104-7HG40	5SJ4104-8HG40	5SJ4104-7HG41	5SJ4104-7HG42	5SJ4104-8HG41	5SJ4104-8HG42
5 A	–	5SJ4111-7HG40	5SJ4111-8HG40	5SJ4111-7HG41	5SJ4111-7HG42	5SJ4111-8HG41	5SJ4111-8HG42
6 A	5SJ4106-6HG40	5SJ4106-7HG40	5SJ4106-8HG40	5SJ4106-7HG41	5SJ4106-7HG42	5SJ4106-8HG41	5SJ4106-8HG42
8 A	–	5SJ4108-7HG40	5SJ4108-8HG40	5SJ4108-7HG41	5SJ4108-7HG42	5SJ4108-8HG41	5SJ4108-8HG42
10 A	5SJ4110-6HG40	5SJ4110-7HG40	5SJ4110-8HG40	5SJ4110-7HG41	5SJ4110-7HG42	5SJ4110-8HG41	5SJ4110-8HG42
13 A	5SJ4113-6HG40	5SJ4113-7HG40	5SJ4113-8HG40	5SJ4113-7HG41	5SJ4113-7HG42	5SJ4113-8HG41	5SJ4113-8HG42
15 A	5SJ4118-6HG40	5SJ4118-7HG40	5SJ4118-8HG40	5SJ4118-7HG41	5SJ4118-7HG42	5SJ4118-8HG41	5SJ4118-8HG42
16 A	5SJ4116-6HG40	5SJ4116-7HG40	5SJ4116-8HG40	5SJ4116-7HG41	5SJ4116-7HG42	5SJ4116-8HG41	5SJ4116-8HG42
20 A	5SJ4120-6HG40	5SJ4120-7HG40	5SJ4120-8HG40	5SJ4120-7HG41	5SJ4120-7HG42	5SJ4120-8HG41	5SJ4120-8HG42
25 A	5SJ4125-6HG40	5SJ4125-7HG40	5SJ4125-8HG40	5SJ4125-7HG41	5SJ4125-7HG42	5SJ4125-8HG41	5SJ4125-8HG42
30 A	5SJ4130-6HG40	5SJ4130-7HG40	5SJ4130-8HG40	5SJ4130-7HG41	5SJ4130-7HG42	5SJ4130-8HG41	5SJ4130-8HG42
32 A	5SJ4132-6HG40	5SJ4132-7HG40	5SJ4132-8HG40	5SJ4132-7HG41	5SJ4132-7HG42	5SJ4132-8HG41	5SJ4132-8HG42
35 A	5SJ4135-6HG40	5SJ4135-7HG40	5SJ4135-8HG40	5SJ4135-7HG41	5SJ4135-7HG42	5SJ4135-8HG41	–
40 A	5SJ4140-6HG40	5SJ4140-7HG40	5SJ4140-8HG40	5SJ4140-7HG41	5SJ4140-7HG42	5SJ4140-8HG41	–
45 A	5SJ4145-6HG40	5SJ4145-7HG40	5SJ4145-8HG40	5SJ4145-7HG41	–	5SJ4145-8HG41	–
50 A	5SJ4150-6HG40	5SJ4150-7HG40	5SJ4150-8HG40	5SJ4150-7HG41	–	5SJ4150-8HG41	–
60 A	5SJ4160-6HG40	5SJ4160-7HG40	5SJ4160-8HG40	5SJ4160-7HG41	–	5SJ4160-8HG41	–
63 A	5SJ4163-6HG40	5SJ4163-7HG40	5SJ4163-8HG40	5SJ4163-7HG41	–	5SJ4163-8HG41	–

Mounting concept

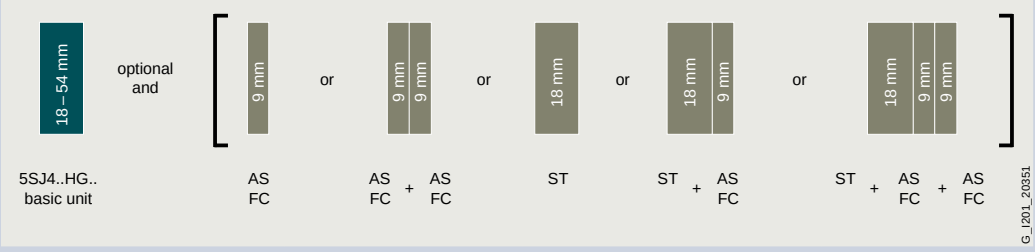

AS Auxiliary switches See page 3/54
FC Fault signal contacts See page 3/56
ST Shunt trips See page 3/60

Quick selection guide, page 3/8

© Siemens 2025

2P				3P			
240 V AC	480Y/277 V AC	240 V AC	480Y/277 V AC	240 V AC	480Y/277 V AC	240 V AC	480Y/277 V AC
2 MW				3 MW			
							
Characteristic				**Characteristic**			
C	**C**	**D**	**D**	**C**	**C**	**D**	**D**
5SJ4214-7HG41	5SJ4214-7HG42	5SJ4214-8HG41	5SJ4214-8HG42	5SJ4314-7HG41	5SJ4314-7HG42	5SJ4314-8HG41	5SJ4314-8HG42
5SJ4205-7HG41	5SJ4205-7HG42	5SJ4205-8HG41	5SJ4205-8HG42	5SJ4305-7HG41	5SJ4305-7HG42	5SJ4305-8HG41	5SJ4305-8HG42
5SJ4201-7HG41	5SJ4201-7HG42	5SJ4201-8HG41	5SJ4201-8HG42	5SJ4301-7HG41	5SJ4301-7HG42	5SJ4301-8HG41	5SJ4301-8HG42
5SJ4215-7HG41	5SJ4215-7HG42	5SJ4215-8HG41	5SJ4215-8HG42	5SJ4315-7HG41	5SJ4315-7HG42	5SJ4315-8HG41	5SJ4315-8HG42
5SJ4202-7HG41	5SJ4202-7HG42	5SJ4202-8HG41	5SJ4202-8HG42	5SJ4302-7HG41	5SJ4302-7HG42	5SJ4302-8HG41	5SJ4302-8HG42
5SJ4203-7HG41	5SJ4203-7HG42	5SJ4203-8HG41	5SJ4203-8HG42	5SJ4303-7HG41	5SJ4303-7HG42	5SJ4303-8HG41	5SJ4303-8HG42
5SJ4204-7HG41	5SJ4204-7HG42	5SJ4204-8HG41	5SJ4204-8HG42	5SJ4304-7HG41	5SJ4304-7HG42	5SJ4304-8HG41	5SJ4304-8HG42
5SJ4211-7HG41	5SJ4211-7HG42	5SJ4211-8HG41	5SJ4211-8HG42	5SJ4311-7HG41	5SJ4311-7HG42	5SJ4311-8HG41	5SJ4311-8HG42
5SJ4206-7HG41	5SJ4206-7HG42	5SJ4206-8HG41	5SJ4206-8HG42	5SJ4306-7HG41	5SJ4306-7HG42	5SJ4306-8HG41	5SJ4306-8HG42
5SJ4208-7HG41	5SJ4208-7HG42	5SJ4208-8HG41	5SJ4208-8HG42	5SJ4308-7HG41	5SJ4308-7HG42	5SJ4308-8HG41	5SJ4308-8HG42
5SJ4210-7HG41	5SJ4210-7HG42	5SJ4210-8HG41	5SJ4210-8HG42	5SJ4310-7HG41	5SJ4310-7HG42	5SJ4310-8HG41	5SJ4310-8HG42
5SJ4213-7HG41	5SJ4213-7HG42	5SJ4213-8HG41	5SJ4213-8HG42	5SJ4313-7HG41	5SJ4313-7HG42	5SJ4313-8HG41	5SJ4313-8HG42
5SJ4218-7HG41	5SJ4218-7HG42	5SJ4218-8HG41	5SJ4218-8HG42	5SJ4318-7HG41	5SJ4318-7HG42	5SJ4318-8HG41	5SJ4318-8HG42
5SJ4216-7HG41	5SJ4216-7HG42	5SJ4216-8HG41	5SJ4216-8HG42	5SJ4316-7HG41	5SJ4316-7HG42	5SJ4316-8HG41	5SJ4316-8HG42
5SJ4220-7HG41	5SJ4220-7HG42	5SJ4220-8HG41	5SJ4220-8HG42	5SJ4320-7HG41	5SJ4320-7HG42	5SJ4320-8HG41	5SJ4320-8HG42
5SJ4225-7HG41	5SJ4225-7HG42	5SJ4225-8HG41	5SJ4225-8HG42	5SJ4325-7HG41	5SJ4325-7HG42	5SJ4325-8HG41	5SJ4325-8HG42
5SJ4230-7HG41	5SJ4230-7HG42	5SJ4230-8HG41	5SJ4230-8HG42	5SJ4330-7HG41	5SJ4330-7HG42	5SJ4330-8HG41	5SJ4330-8HG42
5SJ4232-7HG41	5SJ4232-7HG42	5SJ4232-8HG41	5SJ4232-8HG42	5SJ4332-7HG41	5SJ4332-7HG42	5SJ4332-8HG41	5SJ4332-8HG42
5SJ4235-7HG41	5SJ4235-7HG42	5SJ4235-8HG41	–	5SJ4335-7HG41	5SJ4335-7HG42	5SJ4335-8HG41	–
5SJ4240-7HG41	5SJ4240-7HG42	5SJ4240-8HG41	–	5SJ4340-7HG41	5SJ4340-7HG42	5SJ4340-8HG41	–
5SJ4245-7HG41	–	5SJ4245-8HG41	–	5SJ4345-7HG41	–	5SJ4345-8HG41	–
5SJ4250-7HG41	–	5SJ4250-8HG41	–	5SJ4350-7HG41	–	5SJ4350-8HG41	–
5SJ4260-7HG41	–	5SJ4260-8HG41	–	5SJ4360-7HG41	–	5SJ4360-8HG41	–
5SJ4263-7HG41	–	5SJ4263-8HG41	–	5SJ4363-7HG41	–	5SJ4363-8HG41	–

Accessories

Auxiliary switches (AS) acc. to UL 489	Article No.
1 NO + 1 NC	5ST3010-0HG
2 NO	5ST3011-0HG
2 NC	5ST3012-0HG
Fault signal contacts (FC) acc. to UL 489	**Article No.**
1 NO + 1 NC	5ST3020-0HG
2 NO	5ST3021-0HG
2 NC	5ST3022-0HG
Shunt trips (ST) acc. to UL 489	**Article No.**
110 ... 415 V AC, 110 ... 220 V DC	5ST3030-0HG
24 ... 48 V AC/DC	5ST3031-0HG

Quick selection guide, page 3/8

© Siemens 2025

5SL6 COM miniature circuit breakers with measuring and communication function

With energy monitoring (EM),1P+N 6 kA compact miniature circuit breakers

	1P+N (N pole right)
Rated voltage U_n	230 V AC
Mounting width	1 MW



Rated current I_n	Characteristic B	C
2 A	5SL6002-6MC	5SL6002-7MC
4 A	5SL6004-6MC	5SL6004-7MC
6 A	5SL6006-6MC	5SL6006-7MC
8 A	–	5SL6008-7MC
10 A	5SL6010-6MC	5SL6010-7MC
13 A	5SL6013-6MC	5SL6013-7MC
16 A	5SL6016-6MC	5SL6016-7MC
20 A	5SL6020-6MC	5SL6020-7MC
25 A	5SL6025-6MC	5SL6025-7MC
32 A	5SL6032-6MC	5SL6032-7MC

Note:
Please note the country-specific radio licenses of the products at
www.siemens.com/lowvoltage/certificates (109801197)

Mounting concept

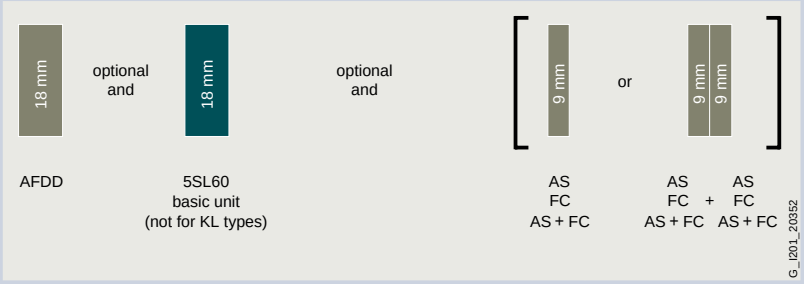

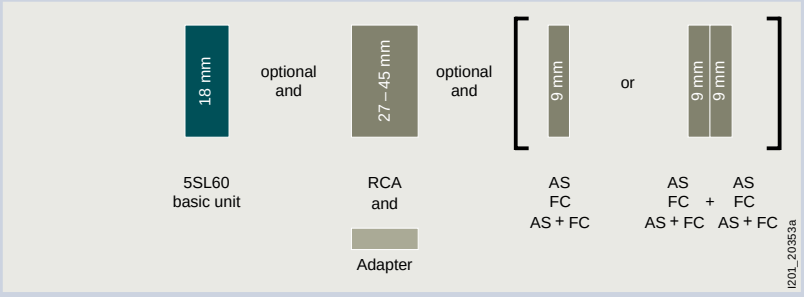

AFDD	Arc fault detection units	See page 3/65
AS	Auxiliary switches	See page 3/54
FC	Fault signal contacts	See page 3/56
AS+FC	Auxiliary switches and fault signal contacts	See page 3/57
RCA	Remote control auxiliaries	See page 3/62

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Remote control auxiliaries (RCA)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071
Communication-capable	100 ... 240 V AC	5ST3072-0MC
Communication-capable with RCD/IR test	100 ... 240 V AC	5ST3073-0MC

Adapters for remote control auxiliaries (RCA)	Article No.
1 MW	5ST3820-6

Arc fault detection units (AFDD)		Article No.
For basic units 1P+N (1 MW), not for KL types	I_n up to 16 A	5SM6011-2
	I_n up to 40 A	5SM6014-2

Data transceiver (essential accessory)	Article No.
SENTRON Powercenter 1000	7KN1110-0MC00

Quick selection guide, page 3/8

© Siemens 2025

SENTRON Powercenter 1100/2000 data transceiver

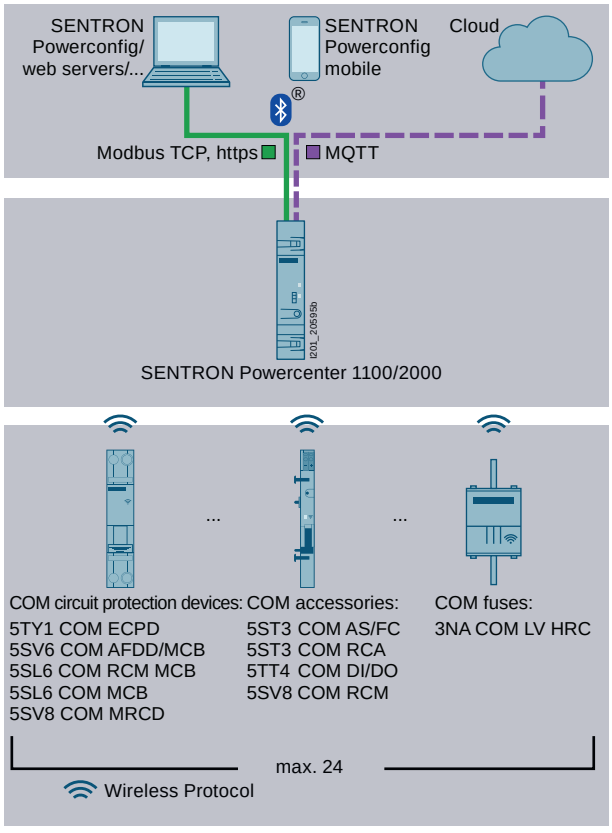

- Wireless radio transmission of measured values to the SENTRON Powercenter 1000/1100/2000 data transceiver
- Commissioning, parameter assignment, firmware updates and further processing of the data via the SENTRON Powercenter 1000/1100/2000 data transceiver

SENTRON Powercenter	Article No.
SENTRON Powercenter 1000	7KN1110-0MC00
SENTRON Powercenter 1100	7KN1111-0MC00
SENTRON Powercenter 2000	7KN1210-0MC00

See page 10/28

You will find further information at **www.siemens.com/lowvoltage/manuals**

Installation Manual – Circuit protection devices with communication and measuring function **(109791805)**

System Manual – Circuit protection devices with communication and measuring function **(109791806)**

Monitoring functions with limit monitoring

- Switching state with trip monitoring: short-circuit, overload
- Counters incl. limit monitoring for:
  - Operating hours
  - Operating hours with load current
  - Operating cycles (ON/OFF)
  - Tripping operations
  - Short circuits
- Limit values for:
  - Overcurrent alarm 1 and alarm 2
  - Undercurrent alarm 1 and alarm 2
  - Temperature

Measured values	Unit	Memory
Temperature	°C	1 hour in 1-minute intervals; 7 days in 15-minute intervals
Average temperature	°C	–
Current	A	Min. and max. values over 10 days; 1 hour in 10-second intervals; 7 days in 15-minute intervals
Average current	A	–
Maximum current	A	–
Voltage	V	Min. and max. values over 10 days
Line frequency	Hz	Min. and max. values over 10 days
Active power	W	Min. and max. values over 10 days
Apparent power	VA	Min. and max. values over 10 days
Reactive power	Var	–
Power factor		–
Active energy imported	Wh	7 days in 15-minute intervals; 30 days in 1-day intervals
Active energy exported	Wh	–
Reactive energy imported	Varh	–
Reactive energy exported	Varh	–

Quick selection guide, page 3/8

© Siemens 2025

5SL6 COM miniature circuit breakers with measuring and communication function

With residual current monitoring (RCM) and energy monitoring (EM), 1P+N 6 kA compact miniature circuit breakers

	1P+N (N pole right)
Rated voltage U_n	230 V AC
Mounting width	1 MW



Rated current I_n	Characteristic B	C
2 A	–	5SL6002-7MF
4 A	–	5SL6004-7MF
6 A	5SL6006-6MF	5SL6006-7MF
8 A	–	5SL6008-7MF
10 A	5SL6010-6MF	5SL6010-7MF
13 A	5SL6013-6MF	5SL6013-7MF
16 A	5SL6016-6MF	5SL6016-7MF
20 A	5SL6020-6MF	5SL6020-7MF
25 A	5SL6025-6MF	5SL6025-7MF
32 A	5SL6032-6MF	5SL6032-7MF

Note:
Please note the country-specific radio licenses of the products at
www.siemens.com/lowvoltage/certificates (109801197)

Mounting concept

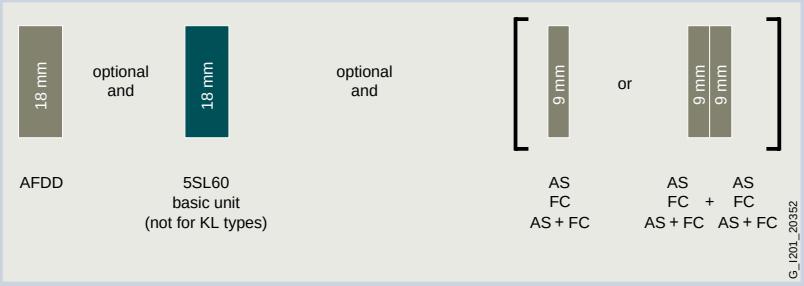

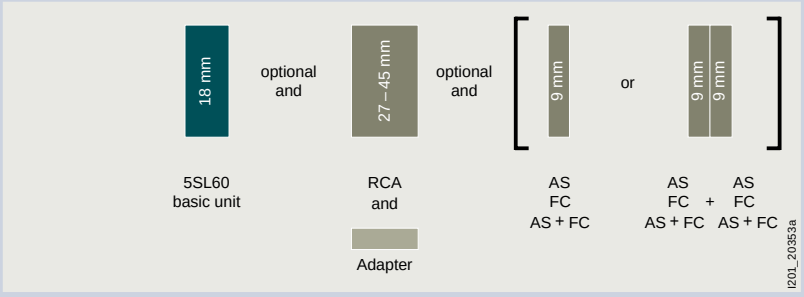

AFDD	Arc fault detection units	See page 3/65
AS	Auxiliary switches	See page 3/54
FC	Fault signal contacts	See page 3/56
AS+FC	Auxiliary switches and fault signal contacts	See page 3/57
RCA	Remote control auxiliaries	See page 3/62

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		**Article No.**
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		**Article No.**
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC

Remote control auxiliaries (RCA)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071
Communication-capable	100 ... 240 V AC	5ST3072-0MC
Communication-capable with RCD/IR test	100 ... 240 V AC	5ST3073-0MC
Adapters for remote control auxiliaries (RCA)		**Article No.**
1 MW		5ST3820-6
Arc fault detection units (AFDD)		**Article No.**
For basic units 1P+N (1 MW), not for KL types	I_n up to 16 A	5SM6011-2
	I_n up to 40 A	5SM6014-2
Data transceiver (essential accessory)		**Article No.**
SENTRON Powercenter 1000		7KN1110-0MC00

Quick selection guide, page 3/8

© Siemens 2025

SENTRON Powercenter 1100/2000 data transceiver

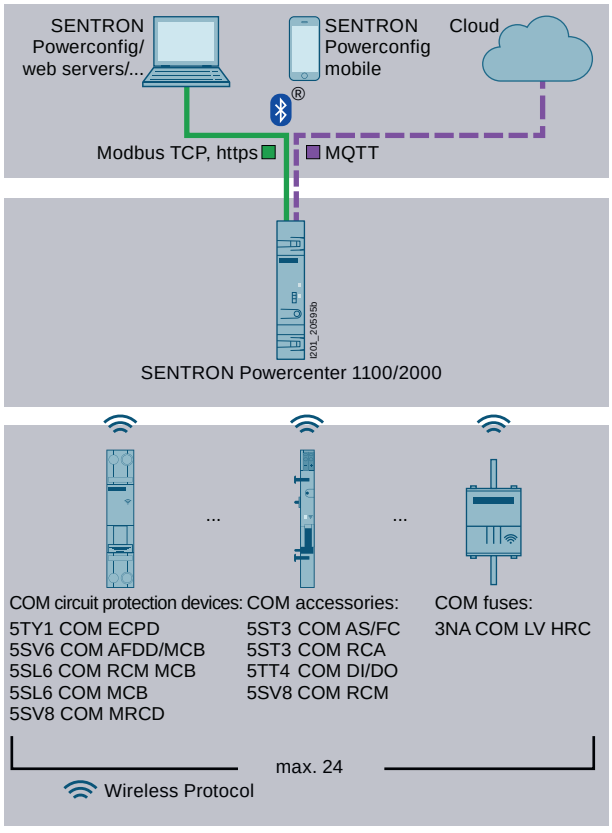

- Wireless radio transmission of measured values to the SENTRON Powercenter 1000/1100/2000 data transceiver
- Commissioning, parameter assignment, firmware updates and further processing of the data via the SENTRON Powercenter 1000/1100/2000 data transceiver

SENTRON Powercenter	Article No.
SENTRON Powercenter 1000	7KN1110-0MC00
SENTRON Powercenter 1100	7KN1111-0MC00
SENTRON Powercenter 2000	7KN1210-0MC00

See page 10/28

You will find further information at **www.siemens.com/lowvoltage/manuals**

Installation Manual – Circuit protection devices with communication and measuring function **(109791805)**

System Manual – Circuit protection devices with communication and measuring function **(109791806)**

Monitoring functions with limit monitoring

- Switching state with trip monitoring: short-circuit, overload
- Counters incl. limit monitoring
  - Operating hours
  - Operating hours with load current
  - Operating cycles (ON/OFF)
  - Tripping operations
  - Short circuits
- Limit alarms
  - Overcurrent alarm 1 and alarm 2
  - Undercurrent alarm 1 and alarm 2
  - Overvoltage alarm 1 and alarm 2
  - Undervoltage alarm 1 and alarm 2
  - Temperature
  - Residual current pre-alarm (low-pass channels)
  - Residual current main alarm (low-pass channels)

Measured values	Unit
Temperature	°C
Average temperature	°C
Current	A
Average current	A
Maximum current	A
Voltage	V
Line frequency	Hz
Active power	W
Apparent power	VA
Reactive power	Var
Power factor	
Active energy imported	Wh
Active energy exported	Wh
Reactive energy imported	Varh
Reactive energy exported	Varh
Residual current measurement channels with adjustable measuring ranges	**Unit**
Line frequency 50 Hz	mA
Harmonic of line frequency	mA
Low-pass filter (AC)	mA
Low-pass filter (AC + pulsating DC)	mA
Band-pass filter	mA
High-pass filter	mA

Quick selection guide, page 3/8

© Siemens 2025

5SP3 selective main miniature circuit breakers (SHU)

25 kA, mounting on a 40 mm busbar

	1P				3 × 1P
Rated voltage U_n	230/400 V AC				230/400 V AC
Mounting width	1.5 MW				4.5 MW
					
Rated current I_n	**Characteristic E**				**Characteristic E**
	L1	**L2**	**L3**	**L1 + L2 + L3**	
16 A	5SP3716-2KK01	5SP3716-2KK02	5SP3716-2KK03	5SP3716-2	5SP3816-2
20 A	5SP3720-2KK01	5SP3720-2KK02	5SP3720-2KK03	5SP3720-2	5SP3820-2
25 A	5SP3725-2KK01	5SP3725-2KK02	5SP3725-2KK03	5SP3725-2	5SP3825-2
35 A	5SP3735-2KK01	5SP3735-2KK02	5SP3735-2KK03	5SP3735-2	5SP3835-2
40 A	5SP3740-2KK01	5SP3740-2KK02	5SP3740-2KK03	5SP3740-2	5SP3840-2
50 A	5SP3750-2KK01	5SP3750-2KK02	5SP3750-2KK03	5SP3750-2	5SP3850-2
63 A	5SP3763-2KK01	5SP3763-2KK02	5SP3763-2KK03	5SP3763-2	5SP3863-2

Quick selection guide, page 3/6

© Siemens 2025

25 kA, mounting on a DIN rail

	1P	3 × 1P	2P	3P	4P
Rated voltage U_n	230/400 V AC	230/400 V AC	230/400 V AC	230/400 V AC	230/400 V AC
Mounting width	1.5 MW	4.5 MW	3 MW	4.5 MW	6 MW
					
Rated current I_n	**Characteristic E**	**Characteristic E**	**Characteristic E**	**Characteristic E**	**Characteristic E**
16 A	5SP3716-3	5SP3816-3	5SP3216-3	5SP3316-3	5SP3416-3
20 A	5SP3720-3	5SP3820-3	5SP3220-3	5SP3320-3	5SP3420-3
25 A	5SP3725-3	5SP3825-3	5SP3225-3	5SP3325-3	5SP3425-3
35 A	5SP3735-3	5SP3835-3	5SP3235-3	5SP3335-3	5SP3435-3
40 A	5SP3740-3	5SP3840-3	5SP3240-3	5SP3340-3	5SP3440-3
50 A	5SP3750-3	5SP3850-3	5SP3250-3	5SP3350-3	5SP3450-3
63 A	5SP3763-3	5SP3863-3	5SP3263-3	5SP3363-3	5SP3463-3

Quick selection guide, page 3/6

© Siemens 2025

5SY17 circuit breakers for equipment

Electromechanical

	1P+AS
Rated voltage U_n	230 V AC/12 ... 62.5 V DC
Mounting width	1 MW (18 mm)



Rated current I_n	Characteristic	
	F1 (quick)	F2 (slow)
0.5 A	5SY1705-2	5SY1705-4
1 A	5SY1701-2	5SY1701-4
2 A	5SY1702-2	5SY1702-4
4 A	5SY1704-2	5SY1704-4
6 A	5SY1706-2	5SY1706-4
8 A	5SY1708-2	5SY1708-4
10 A	5SY1710-2	5SY1710-4
16 A	5SY1716-2	5SY1716-4

Mounting concept

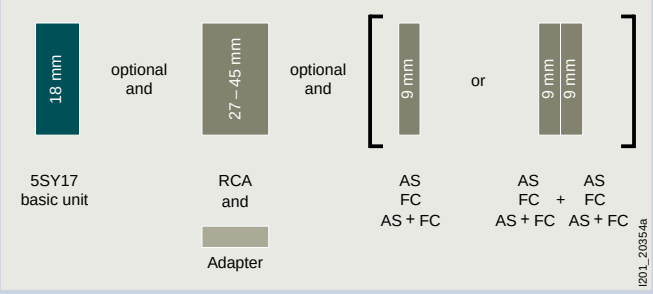

AS	Auxiliary switches	See page 3/54
FC	Fault signal contacts	See page 3/56
AS+FC	Auxiliary switches and fault signal contacts	See page 3/57
RCA	Remote control auxiliaries	See page 3/62

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		**Article No.**
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		**Article No.**
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC

Remote control auxiliaries (RCA)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071
Communication-capable	100 ... 240 V AC	5ST3072-0MC
Communication-capable with RCD/IR test	100 ... 240 V AC	5ST3073-0MC
Adapters for remote control auxiliaries (RCA)		**Article No.**
1 MW		5ST3820-6

Quick selection guide, page 3/10

© Siemens 2025

5SK9 circuit breakers for equipment

Electronic

	1P+AS
Rated voltage U_n	24 V DC
Mounting width	6.2 mm
	

Rated current I_n	
1 A	5SK9101-1
2 A	5SK9102-1
3 A	5SK9103-1
4 A	5SK9104-1
6 A	5SK9106-1
8 A	5SK9108-1

Specific accessories

Connecting combs

Type	Number of poles	Max. load current I_{max}	Article No.
For parallel infeed	2-pole	32 A	8WH9020-6CC10
	5-pole	32 A	8WH9020-6CF10
For remote signal – group signal	2-pole	32 A	8WH9020-6CC10

Reducing combs for terminal blocks of 10 mm²

Type	Number of poles	Max. load current I_{max}	Article No.
For bypassing the power supply	2-pole	40 A	8WH9020-0AC10

See general accessories, from page 3/66 onwards

Quick selection guide, page 3/10

© Siemens 2025

Overview of the modular system

Miniature circuit breakers

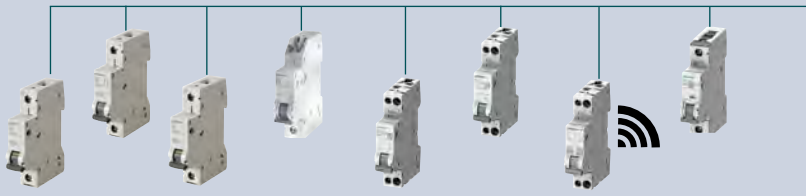

				5SL3	5SL6	5SL4	5SJ6...-.KS	5SL30	5SL58 new	5SL60/ 5SL6 COM	5SY
Auxiliary switches (AS)			**Article No.**								
	1 NO + 1 NC	Standard	5ST3010	■	■	■	–	■	■	■	■
		For low power	5ST3013	■	■	■	–	■	■	■	■
		For low power (with diode)	5ST3013-0XX01	■	■	■	–	■	■	■	■
	2 NO	Standard	5ST3011	■	■	■	–	■	■	■	■
		For low power	5ST3014	■	■	■	–	■	■	■	■
	2 NC	Standard	5ST3012	■	■	■	–	■	■	■	■
		For low power	5ST3015	■	■	■	–	■	■	■	■
	1 CO	Standard	5ST3016	■	■	■	–	■	■	■	■
			5ST1010-0FP	–	–	–	–	–	–	–	–
Fault signal contacts (FC)			**Article No.**								
	1 NO + 1 NC		5ST3020	■	■	■	–	■	■	■	■
	2 NO		5ST3021	■	■	■	–	■	■	■	■
	2 NC		5ST3022	■	■	■	–	■	■	■	■
Auxiliary switches and fault signal contacts (AS+FC)			**Article No.**								
	1 CO (AS) + 1 CO (FC)	Standard	5ST3062	■	■	■	–	■	■	■	■
	5ST3 COM (AS+FC)	With measuring and communication functions	5ST3062-0MC	■	■	■	–	■	■	■	■
Shunt trips (ST)			**Article No.**								
	110 ... 415 V AC, 110 ... 220 V DC		5ST3030	–	–	■	–	–	–	–	■
	24 ... 48 V AC/DC		5ST3031	–	–	■	–	–	–	–	■
	12 V DC		5ST3031-0XX01	–	–	■	–	–	–	–	■
Undervoltage releases (UR)			**Article No.**								
	With integrated auxiliary switch	230 V AC	5ST3040	–	–	■	–	–	–	–	■
		110 V DC	5ST3041	–	–	■	–	–	–	–	■
		24 V DC	5ST3042	–	–	■	–	–	–	–	■
	Without integrated auxiliary switch	230 V AC	5ST3043	–	–	■	–	–	–	–	■
		110 V DC	5ST3044	–	–	■	–	–	–	–	■
		24 V DC	5ST3045	–	–	■	–	–	–	–	■
Remote control auxiliaries (RCA)			**Article No.**								
	Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053	–	■	■	–	–	–	■	■
		177 ... 270 V AC	5ST3054	–	■	■	–	–	–	■	■
	Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055	–	■	■	–	–	–	■	■
		177 ... 270 V AC	5ST3056	–	■	■	–	–	–	■	■
	Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057	–	■	■	–	–	–	■	■
		177 ... 270 V AC	5ST3058	–	■	■	–	–	–	■	■
	Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070	–	■	■	–	–	–	■	■
		170 ... 277 V AC, 77 ... 286 V DC	5ST3071	–	■	■	–	–	–	■	■
	Communication-capable	100 ... 240 V AC	5ST3072-0MC	–	■	■	–	–	–	■	■
	Communication-capable with RCD/IR test	100 ... 240 V AC	5ST3073-0MC	–	■	■	–	–	–	■	■

From page 3/12

■ Suitable for all versions □ Suitable for some versions

System overview, page 3/5

© Siemens 2025

Circuit breakers for equipment

Residual current protective devices

Arc fault detection devices

Switching devices

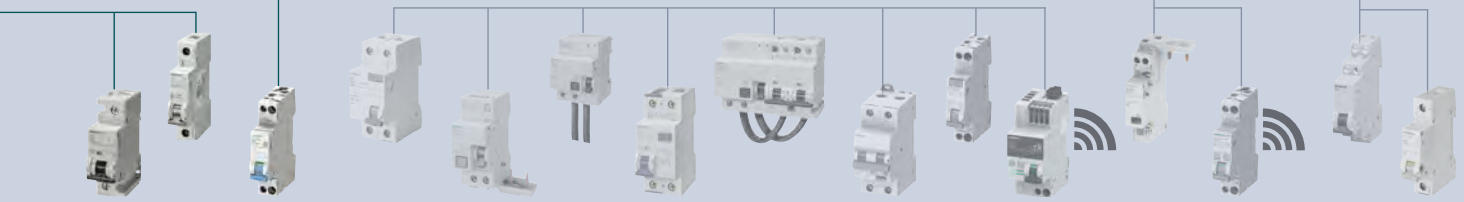

5SP4/ 5SP5	5SJ4.. HG..	5SY17	5SV (16 ... 80 A)	5SM2 + MCB	5SM2 + 5SP4	5SU1	5SU1 (125 A)	5SU1... FP/FR	5SV1	5TY1 COM	5SM6	5SV6/ 5SV6 COM	5TE8	5TL
■	...-0HG	■	■	■	■	■	■	–	■	–	□	■	■	■
■	–	■	■	■	■	■	■	–	■	–	□	■	■	■
■	–	■	■	■	■	■	■	–	■	–	□	■	■	■
■	...-0HG	■	■	■	■	■	■	–	■	–	□	■	■	■
■	–	■	■	■	■	■	■	–	■	–	□	■	■	■
■	...-0HG	■	■	■	■	■	■	–	■	–	□	■	■	■
■	–	■	■	■	■	■	■	–	■	–	□	■	■	■
■	–	■	■	■	■	■	■	–	■	–	□	■	■	■
–	–	–	–	–	–	–	–	■	–	–	–	–	–	–
■	...-0HG	■	■	■	■	■	■	–	■	–	□	■	–	–
■	...-0HG	■	■	■	■	■	■	–	■	–	□	■	–	–
■	...-0HG	■	■	■	■	■	■	–	■	–	□	■	–	–
■	–	■	■	■	■	■	■	–	■	–	□	■	–	–
■	–	■	■	■	■	■	■	–	■	–	□	■	–	–
■	...-0HG	–	■	■	■	■	■	–	–	–	□	–	–	–
■	...-0HG	–	■	■	■	■	■	–	–	–	□	–	–	–
■	–	–	■	■	■	■	■	–	–	–	□	–	–	–
■	–	–	■	■	■	■	■	–	–	–	□	–	–	–
■	–	–	■	■	■	■	■	–	–	–	□	–	–	–
■	–	–	■	■	■	■	■	–	–	–	□	–	–	–
■	–	–	■	■	■	■	■	–	–	–	□	–	–	–
■	–	–	■	■	■	■	■	–	–	–	□	–	–	–
–	–	■	–	–	–	■	–	–	■	–	–	–	–	■
–	–	■	–	–	–	■	–	–	■	–	–	–	–	■
■	–	■	■	■	–	■	–	–	■	–	–	–	–	■
■	–	■	■	■	–	■	–	–	■	–	–	–	–	■
–	–	■	■	■	–	■	–	–	■	–	–	–	–	■
–	–	■	■	■	–	■	–	–	■	–	–	–	–	■
■	–	■	■	■	–	■	–	–	■	–	–	–	–	–
■	–	■	■	–	–	■	–	–	■	–	–	–	–	–
■	–	■	■	■	–	■	–	–	■	–	–	–	–	–
■	–	■	■	■	–	■	–	–	■	–	–	–	–	–
From page 3/12		From page 3/48	From page 4/14								From page 4/56		From page 5/6	

System overview, page 3/5

© Siemens 2025

Overview of the modular system

Miniature circuit breakers

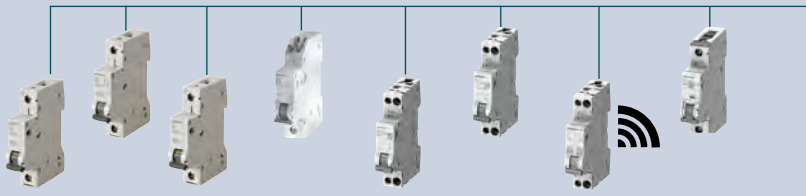

				5SL3	5SL6	5SL4	5SJ6...-.KS	5SL30	5SL58 new	5SL60/ 5SL6 COM	5SY
5SM6 arc fault detection units			**Article No.**								
	Rated current up to 16 A	Standard	5SM6021-2	–	–	□	–	–	–	–	□
		For compact devices 1P+N in 1 MW	5SM6011-2	–	–	–	–	–	–	□	–
	Rated current up to 40 A	Standard	5SM6024-2	–	–	□	–	–	–	–	□
		For compact devices 1P+N in 1 MW	5SM6014-2	–	–	–	–	–	–	□	–
Standard busbars			**Article No.**								
	Cannot be cut		5ST36..	■	■	■	■	■	■	■	■
	Can be cut		5ST37..	■	■	■	■	■	■	■	■
Compact busbars			**Article No.**								
	Cannot be cut		5ST36..	□	□	□	–	■	■	■	–
	Can be cut		5ST37..	□	□	□	–	■	■	■	–

From page 3/12

■ Suitable for all versions □ Suitable for some versions

System overview, page 3/5

© Siemens 2025

Circuit breakers for equipment

Residual current protective devices

Arc fault detection devices

Switching devices

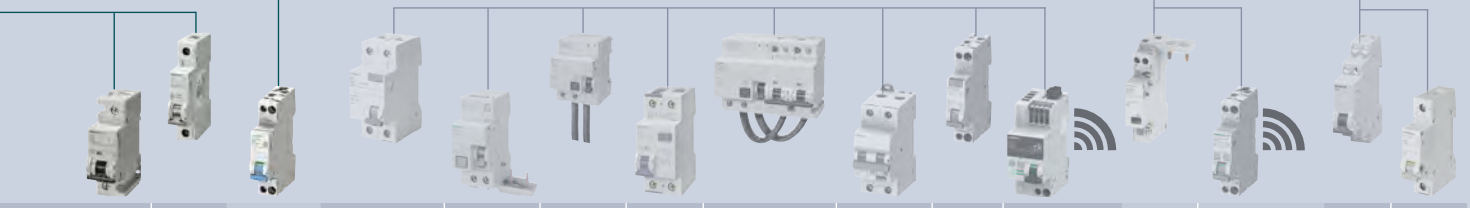

5SP4/ 5SP5	5SJ4.. HG..	5SY17	5SV (16 ... 80 A)	5SM2 + MCB	5SM2 + 5SP4	5SU1	5SU1 (125 A)	5SU1... FP/FR	5SV1	5TY1 COM	5SM6	5SV6/ 5SV6 COM	5TE8	5TL
–	–	–	–	–	–	■	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	■	–	–	–	–	–
–	–	–	–	–	–	■	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	■	–	–	–	–	–
■	■	■	■	■	■	■	■	■	■	■	□	■	□	■
■	■	■	■	■	■	■	■	■	■	■	□	■	□	■
–	–	■	■	–	–	–	–	–	■	■	■	■	–	–
–	–	–	■	–	–	–	–	–	■	■	■	■	–	–
From page 3/12		From page 3/48	From page 4/14								From page 4/56		From page 5/6	

System overview, page 3/5

© Siemens 2025

Electrical accessories

Auxiliary switches (AS)

- Signals the contact position of the mounted device
- Version for the switching of small currents and voltages according to EN 61131-2 for control of programmable control systems (PLCs)
- Test button enables the testing of control circuits without the need to switch the mounted device

For combining with basic units						Contacts	Version	Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	Circuit breakers for equipment	RCCBs	RCBOs	Arc fault detection devices	On-off switches				
Auxiliary switches (AS)									
5SL, 5SY, 5SP4, 5SP5	5SY17	5SV (16 ... 80 A)	5SU1 [1], 5SV1	5SV6	5TL1, 5TE8	1 NO + 1 NC	Standard	0.5 MW	5ST3010
							For low power	0.5 MW	5ST3013
							For low power (with diode)	0.5 MW	5ST3013-0XX01
						2 NO	Standard	0.5 MW	5ST3011
							For low power	0.5 MW	5ST3014
						2 NC	Standard	0.5 MW	5ST3012
							For low power	0.5 MW	5ST3015
						1 CO	Standard	0.5 MW	5ST3016
Auxiliary switches (AS) with TEST button									
5SL, 5SY, 5SP4, 5SP5	5SY17	5SV (16 ... 80 A)	5SU1 [1], 5SV1	5SV6	5TL1, 5TE8	1 NO + 1 NC	Standard	0.5 MW	5ST3010-2
							For low power	0.5 MW	5ST3013-2
						2 NO	Standard	0.5 MW	5ST3011-2
							For low power	0.5 MW	5ST3014-2
						2 NC	Standard	0.5 MW	5ST3012-2
							For low power	0.5 MW	5ST3015-2
Auxiliary switches (AS) acc. to UL 489									
5SJ4...-.HG	–	–	–		–	1 NO + 1 NC	Standard	0.5 MW	5ST3010-0HG
						2 NO	Standard	0.5 MW	5ST3011-0HG
						2 NC	Standard	0.5 MW	5ST3012-0HG

[1] 5ST3805-1 handle coupler required

Quick selection guide, page 3/50

© Siemens 2025

Further technical specifications

		5ST3010, 5ST3011, 5ST3012, 5ST3016	5ST3010-0HG, 5ST3011-0HG, 5ST3012-0HG	5ST3010-2, 5ST3011-2, 5ST3012-2	5ST3013, 5ST3014, 5ST3015, 5ST3013-0XX01 [1]	5ST3013-2, 5ST3014-2, 5ST3015-2
Standards						
Standards	IEC/EN	IEC/EN 62019, IEC/EN 60947-5-1	–	IEC/EN 62019, IEC/EN 60947-5-1		
	UL, CSA	UL 1077, CSA C22.2 No. 235	UL 489, CSA 22.2 No. 5-02	–	UL 1077, CSA C22.2 No. 235	–
Contacts						
Minimum contact load		10 mA, 12 V		50 mA, 24 V	1 mA, 5 V DC	5 mA, 5 V DC
Maximum contact load		–			100 mA, 30 V DC	50 mA, 30 V DC
Contact load acc. to IEC/EN 62019/IEC/EN 60947-5-1	230 V AC, AC-12	–				
	230 V AC, AC-13	6 A/6 A			–	
	400 V AC, AC-13	2 A/2 A			–	
	230 V AC, AC-14	6 A/6 A			–	
	400 V AC, AC-14	2 A/2 A			–	
	24 V DC, DC-13	6 A/3 A			–	
	30 V DC, DC-14	–			0.1 A	
	60 V DC, DC-13	3 A/1.5 A			–	
	110 V DC, DC-13	1 A/0.75 A			–	
	220 V DC, DC-12	–				
	220 V DC, DC-13	1 A/0.5 A			–	
Contact load acc. to UL	120 V AC	–	6 A	–		
	125 V AC	3 A	–			
	240 V AC	4 A		–		
	277 V AC	–	3 A	–		
	480 V AC	1.5 A		–		
	60 V DC	–	3 A	–		
	125 V DC	1.1 A	1 A	–		
	250 V DC	0.55 A	–			
Service life, on average, with rated load	Actuations	20000	12000	20000		
Safety						
Short-circuit protection		5SY... 6A miniature circuit breaker or gG 6 A fuse				
Connections						
Conductor cross-sections		0.5 ... 2.5 mm^2 (AWG 22 ... 14)				
Terminals	Max. tightening torque	0.5 Nm (4.5 lb-in)				
Ambient conditions						
Permissible ambient temperature		–40 ... +70 °C				
Permissible storage temperature		–40 ... +75 °C				
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles				
Mounting position		Any				
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	150 m/s^2				
Resistance to vibrations at 5 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s^2				

[1] No approvals

Quick selection guide, page 3/50

© Siemens 2025

Electrical accessories

Fault signal contacts (FC)

- Signals automatic tripping of the circuit protection device in the event of a fault, such as an overload or a short circuit
- If the fault signal contact is activated, the contact position does not change if the mounted circuit protection device is tripped manually
- Version with TEST and RESET buttons enables the testing of control circuits without operation of the circuit protection device
- Red RESET button in the operating handle indicates automatic tripping of the mounted circuit protection device

For combining with basic units					Contacts	Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	Circuit breakers for equipment	RCCBs	RCBOs	Arc fault detection devices			
Fault signal contacts (FC)							
5SL, 5SY, 5SP4, 5SP5	5SY17	5SV (16 ... 80 A)	5SU1 [1], 5SV1	5SV6	1 NO + 1 NC	0.5 MW	5ST3020
					2 NO	0.5 MW	5ST3021
					2 NC	0.5 MW	5ST3022
Fault signal contacts (FC) with TEST and RESET button							
5SL, 5SY, 5SP4, 5SP5	5SY17	5SV (16 ... 80 A)	5SU1 [1], 5SV1	5SV6	1 NO + 1 NC	0.5 MW	5ST3020-2
					2 NO	0.5 MW	5ST3021-2
					2 NC	0.5 MW	5ST3022-2
Fault signal contacts (FC) acc. to UL 489							
5SJ4...-.HG	–	–	–	–	1 NO + 1 NC	0.5 MW	5ST3020-0HG
					2 NO	0.5 MW	5ST3021-0HG
					2 NC	0.5 MW	5ST3022-0HG

[1] 5ST3805-1 handle coupler required

Further technical specifications

		5ST3020, 5ST3021, 5ST3022	5ST3020-2, 5ST3021-2, 5ST3022-2	5ST3020-0HG, 5ST3021-0HG, 5ST3022-0HG
Standards				
Standards	IEC/EN	IEC/EN 62019, IEC/EN 60947-5-1		
	UL, CSA	UL 1077, CSA C22.2 No. 235	–	UL 489, CSA 22.2 No. 5-02
Contacts				
Minimum contact load		50 mA, 24 V		
Contact load acc. to IEC/EN 62019/IEC/EN 60947-5-1	230 V AC, AC-13	6 A/6 A		
	400 V AC, AC-13	6 A/6 A		
	230 V AC, AC-14	2 A/2 A		
	400 V AC, AC-14	2 A/2 A		
	24 V DC, DC-13	6 A/3 A		
	60 V DC, DC-13	3 A/1.5 A		
	110 V DC, DC-13	1 A/0.75 A		
	220 V DC, DC-13	1 A/0.5 A		
Contact load acc. to UL	120 V AC	–		6 A
	125 V AC	3 A	–	
	240 V AC	4 A	–	
	277 V AC	–		3 A
	480 V AC	1.5 A	–	
	60 V DC	–		3 A
	125 V DC	1.1 A	–	1 A
	250 V DC	0.55 A	–	
Service life, on average, with rated load	Actuations	20000		12000
Safety				
Short-circuit protection		Miniature circuit breaker or gG 6 A fuse		
Connections				
Conductor cross-sections		0.5 ... 2.5 mm² (AWG 22 ... 14)		
Terminals	Max. tightening torque	0.5 Nm (4.5 lb-in)		
Ambient conditions				
Permissible ambient temperature		–25 ... +55 °C		
Permissible storage temperature		–40 ... +75 °C		
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles		
Mounting position		Any		
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	150 m/s²		
Resistance to vibrations at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s²		

Quick selection guide, page 3/50

© Siemens 2025

Auxiliary switches and fault signal contacts (AS+FC)

- Combines the function of both switches in a width of only 0.5 MW (9 mm)
- Signals the contact position of the mounted circuit protection device
- Signals automatic tripping of the circuit protection device in the event of a fault, such as an overload, a short circuit or a fault current
- If the fault signal contact is activated, the contact position does not change if the mounted circuit protection device is tripped manually

For combining with basic units					Contacts	Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	Circuit breakers for equipment	RCCBs	RCBOs	Arc fault detection devices			
Auxiliary switches and fault signal contacts (AS+FC)							
5SL, 5SY, 5SP4, 5SP5	5SY17	5SV (16 ... 80 A)	5SU1 [1], 5SV1	5SV6	1 CO (AS) + 1 CO (FC)	0.5 MW	5ST3062

[1] 5ST3805-1 handle coupler required

Further technical specifications

		5ST3062
Standards		
Standards	IEC/EN	IEC/EN 62019, IEC/EN 60947-5-1
	UL, CSA	UL 1077, CSA C22.2 No. 235
Contacts		
Minimum contact load		50 mA, 24 V
Maximum contact load		–
Contact load acc. to IEC/EN 62019/IEC/EN 60947-5-1	230 V AC, AC-13	6 A/6 A
	400 V AC, AC-14	2 A/2 A
Contact load acc. to IEC/EN 62019/IEC/EN 60947-5-1	24 V DC, DC-13	3 A/3 A
	60 V DC, DC-13	3 A/1 A
	110 V DC, DC-13	0.5 A/0.5 A
	220 V DC, DC-13	0.5 A/0.3 A
Contact load acc. to UL	125 V AC	2 A
	240 V AC	1.5 A
	480 V AC	0.75 A
	125 V DC	0.5 A
	250 V DC	0.3 A
Service life, on average, with rated load	Actuations	20000
Safety		
Short-circuit protection		Miniature circuit breaker or gG 6 A fuse
Connections		
Conductor cross-sections		0.5 ... 2.5 mm² (AWG 22 ... 14)
Terminals	Max. tightening torque	0.5 Nm (4.5 lb-in)
Ambient conditions		
Permissible ambient temperature		–25 ... +55 °C
Permissible storage temperature		–40 ... +75 °C
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles
Mounting position		Any
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	150 m/s²
Resistance to vibrations at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s²

Quick selection guide, page 3/50

© Siemens 2025

Electrical accessories

5ST3 COM auxiliary switches and fault signal contacts (AS+FC) with measuring and communication functions

- Reports the switching state of the mounted standard circuit protection device (ON, tripped, manual OFF, tripped with locked handle)
- Measures the temperature of the device and counts operating cycles, trips and operating hours
- Communication via radio to SENTRON Powercenter 1000 data transceiver
- Plug-in terminals for 24 V DC power supply incl. daisy chain function
- Low space requirements of 0.5 MW (9 mm)

For combining with basic units						Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	Circuit breakers for equipment	RCCBs	RCBOs	Arc fault detection devices	Communication		
5ST3 COM auxiliary switches and fault signal contacts (AS+FC) with measuring and communication functions							
5SL, 5SY, 5SP4, 5SP5	5SY17	5SV (16 ... 80 A)	5SU1 [1], 5SV1	5SV6	Radio link to SENTRON Powercenter 1000	0.5 MW	5ST3062-0MC

[1] 5ST3805-1 handle coupler required

Note:
Please note the country-specific radio licenses of the products at
www.siemens.com/lowvoltage/certificates (109801197)

Further technical specifications

		5ST3062-0MC
Standards		
Standards	IEC/EN	60669-2-5
	RED	2014/53/EU
Power supply		
Power supply		24 V DC ±20%, SELV
Conductor cross-sections		0.2 ... 1.5 mm²
Connection type		Plug-in terminal
Safety		
Degree of pollution for overvoltage category		2/II
Degree of protection		IP40, with front cover
Ambient conditions		
Permissible ambient temperature		–25 ... +60 °C
Permissible storage temperature		–40 ... +85 °C
Humidity		93% at 40 °C
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles
Mounting position		Any
Shock		150 m/s²
Resistance to vibrations at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s²
Service life/endurance		10000
Communication		
Interface	SENTRON Powercenter 1000	Radio link
Temperature		Measuring accuracy of 2 °C with limit monitoring incl. storage (1 hour in 1-minute intervals and 7 days in 15-minute intervals)
Operating cycles counters		Mechanical operation with limit monitoring
Trip counter		Trip of the mounted circuit protection device with limit monitoring
Operating hours counter		Operating hours with limit monitoring

Quick selection guide, page 3/50

© Siemens 2025

SENTRON Powercenter 1100/2000 data transceiver

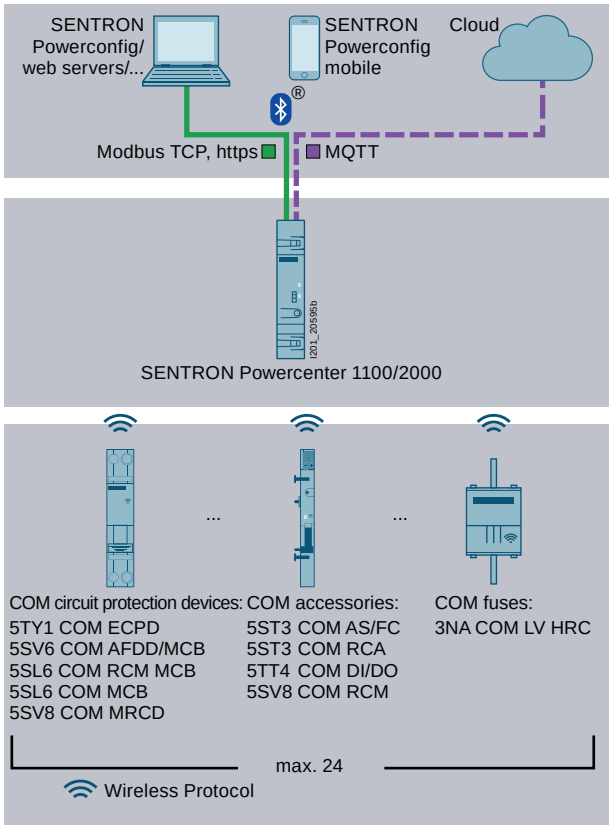

- Wireless radio transmission of measured values to the SENTRON Powercenter 1000/1100/2000 data transceiver
- Commissioning, parameter assignment, firmware updates and further processing of the data via the SENTRON Powercenter 1000/1100/2000 data transceiver

SENTRON Powercenter	Article No.
SENTRON Powercenter 1000	7KN1110-0MC00
SENTRON Powercenter 1100	7KN1111-0MC00
SENTRON Powercenter 2000	7KN1210-0MC00

See page 10/28

You will find further information at **www.siemens.com/lowvoltage/manuals**

Installation Manual – Circuit protection devices with communication and measuring function **(109791805)**

System Manual – Circuit protection devices with communication and measuring function **(109791806)**

Quick selection guide, page 3/50

© Siemens 2025

Electrical accessories

Shunt trips (ST)

- For remote-controlled tripping of the mounted device

For combining with basic units Miniature circuit breakers	RCCBs	RCBOs	Rated operational voltage U_e	Mounting width (1 MW = 18 mm)	Article No.
Shunt trips (ST)					
5SL4, 5SY, 5SP4, 5SP5	5SV (16 ... 80 A)	5SU1 [1]	110 ... 415 V AC, 110 ... 220 V DC	1 MW	5ST3030
			24 ... 48 V AC/DC	1 MW	5ST3031
			12 V DC	1 MW	5ST3031-0XX01
Shunt trips (ST) acc. to UL 489					
5SJ4...-.HG	–	–	110 ... 415 V AC, 110 ... 220 V DC	1 MW	5ST3030-0HG
			24 ... 60 V AC/DC	1 MW	5ST3031-0HG

[1] 5ST3805-1 handle coupler required

Further technical specifications		5ST3030	5ST3031	5ST3031-0XX01	5ST3030-0HG	5ST3031-0HG
Standards						
Standards	IEC/EN	EN 60947-1			IEC/EN 60947-1	
	UL, CSA	–			UL 489, UL-File E321559, CSA 22.2 No. 5-02	
Supply						
Primary operating range		0.7 ... 1.1 × U_n				
Rated frequency f_n		50 ... 60 Hz		–	50 ... 60 Hz	
Contacts						
Minimum contact load		50 mA, 24 V		1 mA, 5 V	50 mA, 24 V	
Tripping operations		Max. 2000				
Service life, on average, with rated load	Actuations	20000			12000	
Safety						
Short-circuit protection		Miniature circuit breaker B/C 6 A or fuse gG 6 A				
Connections						
Conductor cross-sections		0.5 ... 2.5 mm² (AWG 22 ... 14)				
Terminals	Max. tightening torque	0.8 Nm (6.8 lb-in)				
Ambient conditions						
Permissible ambient temperature		–25 ... +55 °C		–40 ... +70 °C	–25 ... +55 °C	
Permissible storage temperature		–40 ... +75 °C				
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles				
Mounting position		Any				
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	150 m/s²				
Resistance to vibrations at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s²				

Quick selection guide, page 3/50

© Siemens 2025

Undervoltage releases (UR)

- Are integrated (e.g. in EMERGENCY-OFF loops), thus ensuring that the MCB trips in the event of an emergency. EMERGENCY-OFF is a function provided to disconnect the electricity supply to all or some parts of the installation in case of emergency, when there is a risk of electric shock or any other hazard caused by electrical power
- In addition, an undervoltage release also trips if the voltage is interrupted or too low, or prevents the MCB from closing
- Suitable for use with all devices that can be mounted for implementing EMERGENCY-OFF circuits
- In conjunction with 5SV residual current operated circuit breakers (RCCBs), not suitable for implementing EMERGENCY-STOP circuits

For combining with basic units Miniature circuit breakers	RCCBs	RCBOs	Rated operational voltage U_e	Mounting width (1 MW = 18 mm)	Article No.
With integrated auxiliary switch					
5SL4, 5SY, 5SP4, 5SP5	5SV (16 ... 80 A)	5SU1 [1]	230 V AC	1 MW	5ST3040
			110 V DC	1 MW	5ST3041
			24 V DC	1 MW	5ST3042
Without integrated auxiliary switch					
5SL4, 5SY, 5SP4, 5SP5	5SV (16 ... 80 A)	5SU1 [1]	230 V AC	1 MW	5ST3043
			110 V DC	1 MW	5ST3044
			24 V DC	1 MW	5ST3045

[1] 5ST3805-1 handle coupler required

Further technical specifications

5ST304.

Standards		
Standards	IEC/EN	EN 60947-1
Supply		
Primary operating range		0.85 ... 1.1 × U_n
Rated frequency f_n		50/60 Hz
Contacts		
Minimum contact load		50 mA, 24 V
Tripping operations		Max. 2000
Service life, on average, with rated load	Actuations	20000
Safety		
Short-circuit protection		Miniature circuit breaker B/C 6 A or fuse gG 6 A
Connections		
Conductor cross-sections		0.5 ... 2.5 mm² (AWG 22 ... 14)
Terminals	Max. tightening torque	0.8 Nm (6.8 lb-in)
Ambient conditions		
Permissible ambient temperature		–25 ... +55 °C
Permissible storage temperature		–40 ... +75 °C
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles
Mounting position		Any
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	150 m/s²
Resistance to vibrations at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s²

Quick selection guide, page 3/50

© Siemens 2025

Electrical accessories

5ST3 remote control auxiliaries (RCA)

- For locations that are spread out over a wide area or not permanently attended
- Permits direct and immediate access to the installation even if it is remote or in a location that is hard to access
- Permits fast reconnection after a fault
- Version with ARD with automatic restart
- Versions with ARD and Power with integrated auxiliary switches and fault signal contacts

Type	Display	Ambient temperature	Vibration and shock requirements	Rated operational voltage U_e	Mounting width (1 MW = 18 mm)	Article No.
Basic	–	–25 °C ... +45 °C	–	12 ... 30 V AC, 12 ... 48 V DC	1.5 MW	5ST3053
				177 ... 270 V AC	2 MW	5ST3054
Power	LED	–25 °C ... +45 °C	–	12 ... 30 V AC, 12 ... 48 V DC	2 MW	5ST3055
				177 ... 270 V AC	2 MW	5ST3056
Power with ARD	LED	–25 °C ... +45 °C	–	12 ... 30 V AC, 12 ... 48 V DC	2 MW	5ST3057
				177 ... 270 V AC	2 MW	5ST3058
Power with extended function	LED	–40 °C ... +70 °C	Acc. to IEC/EN 61373/ IEC/EN 50155 "1B"	12 ... 30 V AC, 12 ... 48 V DC	2 MW	5ST3070
				170 ... 277 V AC, 77 ... 286 V DC	2 MW	5ST3071
With IR test before ARD	LED	–40 °C ... +70 °C	–	100 ... 240 V AC	2.5 MW	5ST3074

Further technical specifications	5ST3053	5ST3054	5ST3055	5ST3056	5ST3057	5ST3058	5ST3070	5ST3071	5ST3074
Standards									
Standards	IEC/EN 63024 (VDE 0640-21)								
Supply									
Rated frequency f_n	50 ... 60 Hz								
Rated power dissipation in standby	≤ 1 VA								≦ 1.5 VA
Contacts									
Service life, on average, with rated load — Actuations	10000								
Number of remote switching operations per minute	2								4
Number of automatic reclose attempts	–				3		–		3
Cable length in the control circuit	≤ 1500 m							≤ 1500 m (DC)/ ≤ 200 m (AC)	≤ 1500 m
Sliding selector with locking device	–	■							
Integrated auxiliary switches	–		1CO; 2 A; 250 V						–
Integrated fault signal contacts	–		1CO; 2 A; 250 V						–
Connections									
Conductor cross-sections	0.5 ... 1.5 mm² (AWG 14 ... 30)								
Terminal tightening torque	0.2 ... 0.25 Nm (2.0 lb-in)								
Ambient conditions									
Permissible storage temperature	–40 ... +55 °C						–40 ... +70 °C		
Permissible ambient temperature	–25 ... +45 °C						–40 ... +70 °C		
Degree of protection	IP20								
Degree of pollution for overvoltage category	3/II								

Suitable adapters for combination with basic units



Basic units	Mounting width 1 ... 2 MW	3 ... 4 MW	3 ... 6 MW	Article No.
5SY4/5/6/7/8	■	–	–	5ST3820-1
	–	■	–	5ST3820-2
5SL3/4/6	■	–	–	5ST3820-6
	–	■	–	5ST3820-7
5SL60/5SY17	■	–	–	5ST3820-6
5SP4, 5SP5	■	–	–	5ST3820-1
	–	–	■	5ST3820-2

Quick selection guide, page 3/50

© Siemens 2025

5ST3 COM remote control auxiliaries (RCA) with communication function

- For locations that are spread out over a wide area or not permanently attended
- Permit access to the installation even if it is remote or in a location that is hard to access
- Remote control via wired contact or communications interface to Powercenter 1000
- Permit fast reconnection after a fault
- With integrated and adjustable reclosing function (ARD)
- Versions with automatic and adjustable RCD/IR test function

Type	Display	Ambient temperature	Vibration and shock requirements	Rated operational voltage U_e	Mounting width (1 MW = 18 mm)	Article No.
Communication-capable	LED	–40 °C ... +70 °C	Acc. to IEC/EN 61373	100 ... 240 V AC	2 MW	5ST3072-0MC
Communication-capable with RCD/IR test	LED	–40 °C ... +70 °C	Acc. to IEC/EN 61373	100 ... 240 V AC	2.5 MW	5ST3073-0MC

Further technical specifications

		5ST3072-0MC	5ST3073-0MC
Standards			
Standards		IEC/EN 63024	
General product approvals		RED2014/53/EU	
Basic data			
Rated frequency f_n		50/60 Hz	
Service life, on average, with rated load	Actuations	10000	
Number of ARD attempts		3 (+3 adjustable)	
Integrated auxiliary switches		1CO; 2 A; 250 V	Via communication
Integrated fault signal contacts		1CO; 2 A; 250 V	Via communication
Contacts			
Conductor cross-sections		0.5 ... 1.5 mm²	
Type of connection		Screw terminals	
Ambient conditions			
Permissible storage temperature		–40 ... +70 °C	
Permissible ambient temperature		–40 ... +70 °C	
Communication function			
Interface	SENTRON Powercenter 1000/1100	Wireless	
Metering values		Circuit breaker status, temperature, operating cycles, trip counter, operating hours	
Switching command		Wired, via communication	
Configuration		Alarms, origin, switching command, ARD times	Alarms, origin, switching command, ARD times, test function
Test function			
RCD test		–	Measurement, tripping current, tripping time
IR measurement	Acc. to IEC/EN 63024	–	Measurement, insulation resistance
Manual test start		–	Wired, via communication
Automatic test start		–	Adjustable time and repeat interval

Suitable adapters for combination with basic units

Basic units	Mounting width			Article No.
	1 ... 2 MW	3 ... 4 MW	3 ... 6 MW	
5SY4/5/6/7/8	■	–	–	5ST3820-1
	–	■	–	5ST3820-2
5SL3/4/6	■	–	–	5ST3820-6
	–	■	–	5ST3820-7
5SL60/5SY17	■	–	–	5ST3820-6
5SP4, 5SP5	■	–	–	5ST3820-1
	–	–	■	5ST3820-2

Quick selection guide, page 3/50

© Siemens 2025

Electrical accessories

5ST3 COM remote control auxiliaries (RCA) with communication function

SENTRON Powercenter 1100/2000 data transceiver

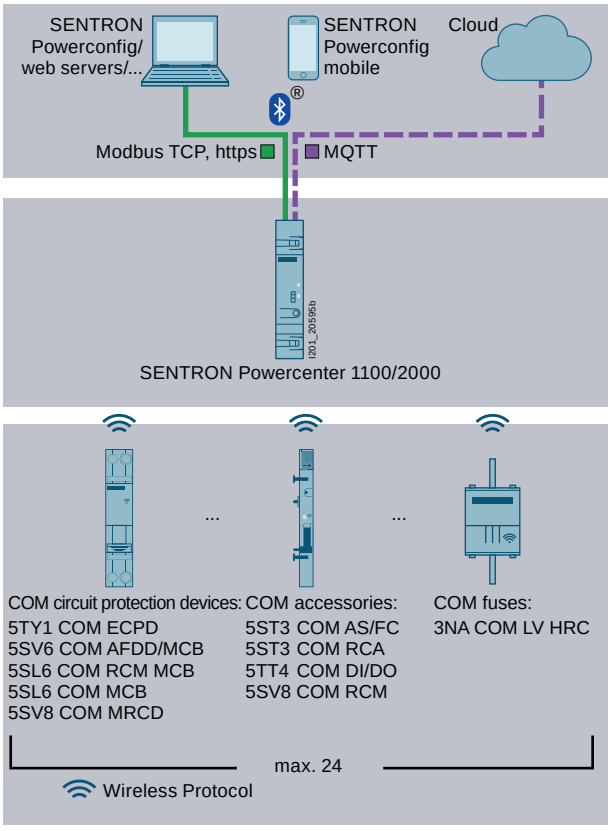

- Wireless radio transmission of measured values to the SENTRON Powercenter 1000/1100/2000 data transceiver
- Commissioning, parameter assignment, firmware updates and further processing of the data via the SENTRON Powercenter 1000/1100/2000 data transceiver

SENTRON Powercenter	Article No.
SENTRON Powercenter 1000	7KN1110-0MC00
SENTRON Powercenter 1100	7KN1111-0MC00
SENTRON Powercenter 2000	7KN1210-0MC00

See page 10/28

You will find further information at **www.siemens.com/lowvoltage/manuals**

Installation Manual – Circuit protection devices with communication and measuring function **(109791805)**

System Manual – Circuit protection devices with communication and measuring function **(109791806)**

Quick selection guide, page 3/50

© Siemens 2025

5SM6 arc fault detection units (AFDD)

- Detects arcing faults
- Offers extremely effective protection against fires started by electrical faults
- Ensures adequate fire protection even in applications without residual current protective device

For combining with basic units			Rated current I_n	Mounting width (1 MW = 18 mm)	Article No.
Width of basic unit	Miniature circuit breakers	RCBOs			
1 MW	5SL60 1P+N (no KL types)	5SV1	Up to 16 A	1 MW	5SM6011-2
			Up to 40 A	1 MW	5SM6014-2
2 MW	5SY [1], 5SL4 (1P+N devices only, not compact)	5SU1.5	Up to 16 A	1 MW	5SM6021-2
			Up to 40 A	1 MW	5SM6024-2

[1] Not suitable for use with 5SY5, 5SY8

Further technical specifications

		5SM6
Standards		
Standards		IEC/EN 62606
Supply		
Rated voltage U_n		230 V
Rated current I_n		Up to 16/40 A
Rated frequency		50 Hz
Power loss		0.6 W
Contacts		
Number of poles		2-pole
Service life	Average number of operating cycles	> 10000
Safety		
Touch protection	Acc. to EN 50274 (VDE 0660-514)	Finger and back-of-hand safe
Degree of protection	Acc. to EN 60529 (VDE 0470-1)	IP20, with connected conductors
Overvoltage category		III
Tripping in the event of overvoltage		> 275 V
Connections		
Terminal/conductor cross-sections	Solid and stranded	0.75 ... 16 mm²
	Finely stranded with end sleeve	0.75 ... 10 mm²
Terminal tightening torque		2.0 ... 2.5 Nm
Mains connection		Bottom
Ambient conditions		
Permissible ambient temperature		–25 ... +40 °C
Permissible storage temperature		–40 ... +75 °C
Resistance to climate at 95% relative humidity	Acc. to IEC 60068-2-30	28 cycles, 55 °C
Degree of pollution		2
CFC and silicone-free		Yes
Mounting position		Any

See suitable busbars, from page 3/68 onwards
See suitable terminals and end caps, from page 3/86 onwards

Quick selection guide, page 3/50

© Siemens 2025

Mechanical accessories

Mechanical rotary operating mechanisms complete with handle

- For 5SY, 5SP4, 5SP5, 5SL, 5TL1, 5TE2 and 5SU1 from 2 modular widths

Types	Article No.
Handle black	5ST3060
Handle red/yellow	5ST3061

Terminal cover

- For miniature circuit breakers, but not for 5SL30, 5SL58, 5SL60
- For additional covering of the screw openings per pole
- Lockable
- In the case of 5SY, also prevents removal of device from the DIN rail

Article No.
5ST3800

Handle locking devices

- To prevent undesired mechanical ON/OFF switching
- Sealable and lockable

For miniature circuit breakers	For padlocks with	Article No.
5SY (but not for 5SY17), 5SP, 5TE8, 5SJ4...-.HG..	Max. 3 mm shackle	5ST3801
5SL, 5TL1, 5SY17	3 ... 6 mm shackle	5ST3806

Padlocks

- For 5ST3801 and 5ST3806 handle locking devices and 5ST3054 ... 58, 5ST3070 remote control auxiliaries, 5TY1 COM electronic circuit protection devices (ECPD)

Article No.
5ST3802

Locking devices

- Comprising 5ST3801 or 5ST3806 handle locking device and 5ST3802 padlock

For miniature circuit breakers	Comprising	Article No.
5SY (but not for 5SY17), 5SP, 5TE8, 5SJ4...-.HG..	5ST3801 handle locking device, 5ST3802 padlock	5ST3803
5SL, 5TL1, 5SY17	5ST3806 handle locking device, 5ST3802 padlock	5ST3807

Spacers

- Can be placed on either side of the DIN rail. Two spacers allow for convenient cable routing

Mounting width	Article No.
0.5 MW	5TG8240

System overview, page 3/5

© Siemens 2025

Device labels

- For adhesive attachment
- For modular installation devices, e.g. 5SY, 5SL, 5TL1

Types	Article No.
15 × 6 mm, white (WIN 098)	8WH8210-0AA35
15 × 6 mm, yellow (WIN 099)	8WH8210-0AA36

Terminal covers, gray

- For surface mounting, degree of protection IP40
- Sealable
- Can be used with 35 mm DIN rail

For width up to	Article No.
2.5 MW	5SW3004
4.5 MW	5SW3005

Wall enclosures, gray

- For flush mounting, degree of protection IP40
- Can be used with 35 mm DIN rail

For width up to	Article No.
2.5 MW	5SW3006
4.5 MW	5SW3007

Covers

- Can be assembled as mini distribution board
- Suitable for all devices
- Cover parts prepared for rail mounting of conventional label caps

Comprising	Article No.
End plate	5ST2134
Angled profile	5ST2135
Flat profile as alternative	5ST2136

Holders for front panel installation

- Universal use for devices from 1 to 6 MW

Cutout height	Cutout width	Article No.
$45^{+0.5}$ mm	23, 41, 59, 77, 95 or 113 mm	7LF9006

Intermediate frames

- For 70 mm devices in 55 mm ALPHA SIMBOX small distribution boards

Types	Article No.
1-tier	8GB4561
2-tier	8GB4562
3-tier	8GB4563
4-tier	8GB4564

System overview, page 3/5

© Siemens 2025

Standard busbars

General information

Infeed

At the start or end of the busbar

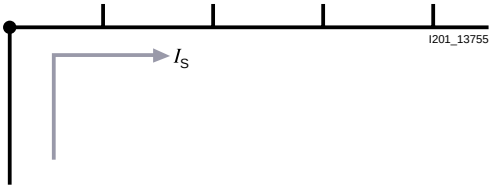

Maximum busbar current I_s/phase
- Cross-section 10 mm²: 63 A
- Cross-section 16 mm²: 80 A

Along the busbar or midpoint infeed

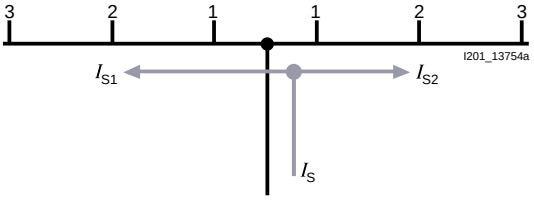

Maximum busbar current I_s/phase
- Cross-section 10 mm²: 100 A
- Cross-section 16 mm²: 130 A

Quick selection guide, page 3/50

© Siemens 2025

Fixed lengths, cannot be cut

For miniature circuit breakers (MCBs)

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	Conductor cross-section 10 mm²	16 mm²
1-phase				Article No.	Article No.
	For 2 MCBs 1P	2 MW	33 mm	5ST3600	5ST3630
	For 6 MCBs 1P	6 MW	105 mm	5ST3601	5ST3631
	For 12 MCBs 1P	12 MW	212 mm	5ST3602	5ST3632
2-phase/1-phase + N				Article No.	Article No.
	For 2 MCBs (2P/1P+N)	4 MW	76 mm	5ST3606	5ST3636
	For 3 MCBs (2P/1P+N)	6 MW	105 mm	5ST3607	5ST3637
	For 6 MCBs (2P/1P+N)	12 MW	210 mm	5ST3608	5ST3638
3-phase				Article No.	Article No.
	For 2 MCBs 3P	6 MW	102 mm	5ST3613	5ST3643
	For 3 MCBs 3P	9 MW	157.5 mm	5ST3614	5ST3644
	For 4 MCBs 3P	12 MW	210 mm	5ST3615	5ST3645
	For 14 MCBs 1P	14 MW	250 mm	5ST3613-4	–
4-phase/3-phase + N				Article No.	Article No.
	For 2 MCBs (4P/3P+N)	8 MW	138 mm/ 140 mm	5ST3621	5ST3651
	For 3 MCBs (4P/3P+N)	12 MW	210 mm	5ST3622	5ST3652
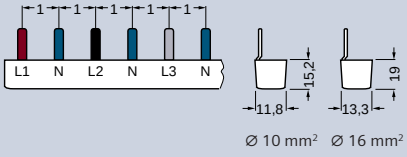	For 6 MCBs 1P+N	12 MW	210 mm	5ST3623	5ST3653
	For 7 MCBs 1P+N	14 MW	248 mm	5ST3623-4	–

Accessories

Terminals for 5ST36 and 5ST37		Article No.
For conductors 6 ... 25 mm²	Cable entry on the left	5ST3768-4
	Cable entry in the center	5ST3768-3
	Cable entry on the right	5ST3768-5
For conductors 6 ... 50 mm²	Cable entry on the left	5ST3760-4
	Cable entry in the center	5ST3760-3
	Cable entry on the right	5ST3760-5

Terminals for infeed at side		Article No.
For conductors 6 ... 25 mm²	Short	5ST3768
	Short, IP20	5ST3771-2
Touch protection		**Article No.**
For free connections, yellow (RAL 1004) 5 × 1 pin		5ST3655

Quick selection guide, page 3/50

© Siemens 2025

Standard busbars

Fixed lengths, cannot be cut

For MCBs equipped with auxiliary switch (AS) or fault signal contact (FC)

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	Conductor cross-section 10 mm²	16 mm²
1-phase				Article No.	Article No.
	For 2 MCBs 1P	2 MW	40 mm	5ST3603	5ST3633
	For 6 MCBs 1P	6 MW	158 mm	5ST3604	5ST3634
	For 9 MCBs 1P	9 MW	237 mm	5ST3605	5ST3635
2-phase/1-phase + N				Article No.	Article No.
	For 2 MCBs (2P/1P+N)	4 MW	76 mm	5ST3610	5ST3640
	For 3 MCBs (2P/1P+N)	6 MW	121 mm	5ST3611	5ST3641
	For 5 MCBs (2P/1P+N)	10 MW	210 mm	5ST3612	5ST3642
3-phase				Article No.	Article No.
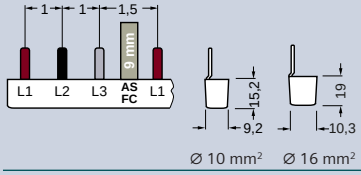	For 2 MCBs 3P	6 MW	115 mm	5ST3616	5ST3646
	For 4 MCBs 3P	12 MW	237 mm	5ST3617	5ST3647
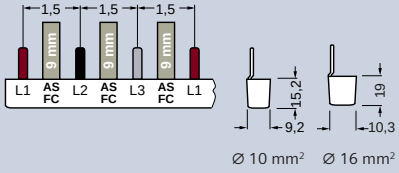	For 6 MCBs 1P	9 MW	156 mm/ 158 mm	5ST3618	5ST3648
	For 9 MCBs 1P	12 MW	227 mm	5ST3620	5ST3650

Accessories

Terminals for 5ST36 and 5ST37		Article No.
For conductors 6 ... 25 mm²	Cable entry on the left	5ST3768-4
	Cable entry in the center	5ST3768-3
	Cable entry on the right	5ST3768-5
For conductors 6 ... 50 mm²	Cable entry on the left	5ST3760-4
	Cable entry in the center	5ST3760-3
	Cable entry on the right	5ST3760-5

Terminals for infeed at side		Article No.
For conductors 6 ... 25 mm²	Short	5ST3768
	Short, IP20	5ST3771-2
Touch protection		**Article No.**
For free connections, yellow (RAL 1004) 5 × 1 pin		5ST3655

Quick selection guide, page 3/50

© Siemens 2025

For MCBs with RCCB

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	Conductor cross-section 10 mm²	16 mm²
3-phase				**Article No.**	**Article No.**
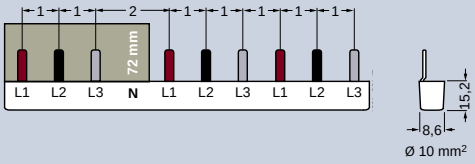	For 6 MCBs 1P with 1 RCCB 3P+N or for 1 RCCB 3P+N, 1 MCB 3P and 3 MCBs 1P	10 MW	176 mm	5ST3624-1	–
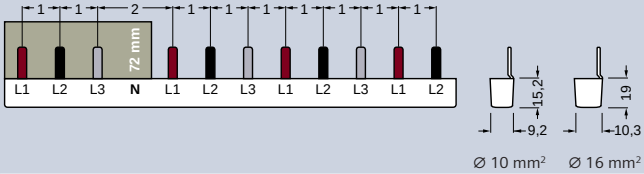	For 8 MCBs 1P with 1 RCCB 3P+N, N right	12 MW	210 mm	5ST3624	5ST3654
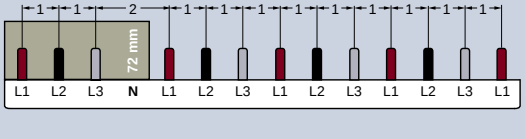	For 10 MCBs 1P with 1 RCCB 3P+N or for 1 RCCB 3P+N, 1 MCB 3P and 7 MCBs 1P	14 MW	249 mm	5ST3624-4	–
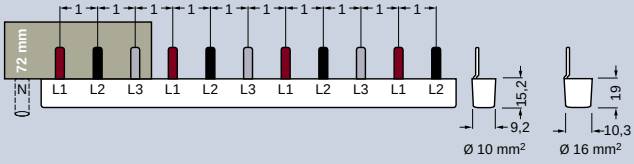	For 8 MCBs 1P with 1 RCCB 3P+N, N left	11 MW	192 mm	5ST3667	5ST3668
4-phase/3-phase + N				**Article No.**	**Article No.**
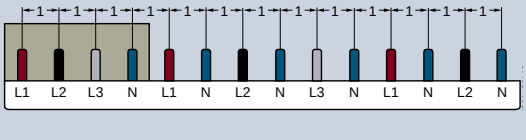	For 1 RCCB 3P+N and 5 MCBs 1P+N (2MW)	14 MW	248 mm	5ST3625-4	–

Accessories

Terminals for 5ST36 and 5ST37		Article No.
For conductors 6 ... 25 mm²	Cable entry on the left	5ST3768-4
	Cable entry in the center	5ST3768-3
	Cable entry on the right	5ST3768-5
For conductors 6 ... 50 mm²	Cable entry on the left	5ST3760-4
	Cable entry in the center	5ST3760-3
	Cable entry on the right	5ST3760-5

Terminals for infeed at side		Article No.
For conductors 6 ... 25 mm²	Short	5ST3768
	Short, IP20	5ST3771-2
Touch protection		**Article No.**
For free connections, yellow (RAL 1004) 5 × 1 pin		5ST3655

Quick selection guide, page 3/50

© Siemens 2025

Standard busbars

Can be cut

For miniature circuit breakers (MCBs)

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps included	Color	Conductor cross-section 10 mm²	16 mm²
1-phase, straight						**Article No.**	**Article No.**
	For MCBs 1P+N compact	12 MW	216 mm	■	Gray	5ST3762	–
					Blue	5ST3687-0	–
		56 MW	1016 mm	–	Gray	5ST3764	–
					Blue	5ST3787-0	–
1-phase, angled 45°						**Article No.**	**Article No.**
	For MCBs 1P+N compact	12 MW	216 mm	■	Blue	5ST3763	–
		56 MW	1016 mm	–	Blue	5ST3765	–
1-phase, angled 90°						**Article No.**	**Article No.**
	For MCBs 1P	12 MW	214 mm	■		5ST3730	5ST3700
		56 MW	1016 mm	–		5ST3731	5ST3701
2-phase/1-phase + N						**Article No.**	**Article No.**
	For 2MW devices (2P/1P+N)	12 MW	214 mm	■		5ST3734	5ST3704
		56 MW	1016 mm	–		5ST3735	5ST3705
3-phase						**Article No.**	**Article No.**
	For MCBs 3P	12 MW	214 mm	■		5ST3738	5ST3708
		56 MW	1016 mm	–		5ST3740	5ST3710
4-phase/3-phase + N						**Article No.**	**Article No.**
	For MCBs 4P or 3P+N	12 MW	214 mm	■		5ST3745	5ST3715
		56 MW	1016 mm	–		5ST3746	5ST3716
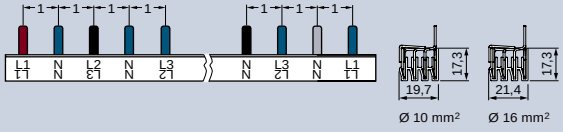	For RCCB/MCBs or MCBs 1P+N	56 MW	1000 mm	–		5ST3770-2	5ST3770-3

Accessories

Terminals for 5ST36 and 5ST37		Article No.
For conductors 6 ... 25 mm²	Cable entry on the left	5ST3768-4
	Cable entry in the center	5ST3768-3
	Cable entry on the right	5ST3768-5
For conductors 6 ... 50 mm²	Cable entry on the left	5ST3760-4
	Cable entry in the center	5ST3760-3
	Cable entry on the right	5ST3760-5
Terminals for Infeed at side		**Article No.**
For conductors 6 ... 25 mm²	Short	5ST3768
	Short, IP20	5ST3771-2

End caps		Article No.
For 1-phase busbars (MCB 1P+N compact)	Gray	5ST3766
	Blue	5ST3767
	White	5ST3748
For 2 and 3-phase busbars		5ST3750
Touch protection		**Article No.**
For free connections, yellow (RAL 1004) 5 × 1 pin		5ST3655

Quick selection guide, page 3/50

© Siemens 2025



For MCBs equipped with auxiliary switch (AS) or fault signal contact (FC)

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps included	Conductor cross-section 10 mm²	16 mm²
1-phase, angled 90°					**Article No.**	**Article No.**
	For MCBs 1P	12 MW	214 mm	■	5ST3732	5ST3702
		56 MW	1016 mm	–	5ST3733	5ST3703
2-phase/1-phase + N					**Article No.**	**Article No.**
	For 2 MW devices (2P/1P+N)	12 MW	214 mm	■	5ST3736	5ST3706
		56 MW	1016 mm	–	5ST3737	5ST3707
3-phase					**Article No.**	**Article No.**
	For MCBs 3P	12 MW	214 mm	■	5ST3741	5ST3711
		56 MW	1016 mm	–	5ST3742	5ST3712
	For MCBs 1P	12 MW	214 mm	■	5ST3743	5ST3713
		56 MW	1016 mm	–	5ST3744	5ST3714
4-phase/3-phase + N					**Article No.**	**Article No.**
	For MCBs 1P+N	56 MW	1016 mm	–	5ST3746-2	–
	For MCBs 3P+N	40 MW	1000 mm	–	–	5ST3725

Accessories

Terminals for 5ST36 and 5ST37		Article No.
For conductors 6 ... 25 mm²	Cable entry on the left	5ST3768-4
	Cable entry in the center	5ST3768-3
	Cable entry on the right	5ST3768-5
For conductors 6 ... 50 mm²	Cable entry on the left	5ST3760-4
	Cable entry in the center	5ST3760-3
	Cable entry on the right	5ST3760-5
Terminals for Infeed at side		**Article No.**
For conductors 6 ... 25 mm²	Short	5ST3768
	Short, IP20	5ST3771-2

End caps		Article No.
For 1-phase busbars (MCB 1P+N compact)	Gray	5ST3766
	Blue	5ST3767
	White	5ST3748
For 2 and 3-phase busbars		5ST3750
Touch protection		**Article No.**
For free connections, yellow (RAL 1004) 5 × 1 pin		5ST3655

Quick selection guide, page 3/50

© Siemens 2025

Standard busbars

Can be cut

For MCBs equipped with undervoltage release (UR) or shunt trips (ST)

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps included	Conductor cross-section 10 mm²	Conductor cross-section 16 mm²
2-phase					Article No.	Article No.
	For MCBs 1P with UR/ ST	56 MW	1016 mm	–	5ST3735-2	–

Accessories

Terminals for 5ST36 and 5ST37		Article No.
For conductors 6 ... 25 mm²	Cable entry on the left	5ST3768-4
	Cable entry in the center	5ST3768-3
	Cable entry on the right	5ST3768-5
For conductors 6 ... 50 mm²	Cable entry on the left	5ST3760-4
	Cable entry in the center	5ST3760-3
	Cable entry on the right	5ST3760-5

Terminals for Infeed at side		Article No.
For conductors 6 ... 25 mm²	Short	5ST3768
	Short, IP20	5ST3771-2
End caps		**Article No.**
For 2 and 3-phase busbars		5ST3750
For 4-phase busbars		5ST3718
Touch protection		**Article No.**
For free connections, yellow (RAL 1004) 5 × 1 pin		5ST3655

Quick selection guide, page 3/50

© Siemens 2025



For MCBs with line-side RCCB or RCCBs equipped with AS/FC devices

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps included	Conductor cross-section 10 mm²	Conductor cross-section 16 mm²
4-phase/3-phase + N					Article No.	Article No.
	For RCCB/MCBs	56 MW	1016 mm	–	5ST3746-2	–
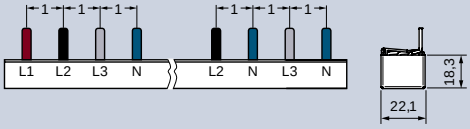	For 6 MCBs 1P+N with 1 RCCB 3P+N, N right	16 MW	292 mm	■	5ST3770-4	5ST3770-5

Accessories

Terminals for 5ST36 and 5ST37		Article No.
For conductors 6 ... 25 mm²	Cable entry on the left	5ST3768-4
	Cable entry in the center	5ST3768-3
	Cable entry on the right	5ST3768-5
For conductors 6 ... 50 mm²	Cable entry on the left	5ST3760-4
	Cable entry in the center	5ST3760-3
	Cable entry on the right	5ST3760-5

Terminals for Infeed at side		Article No.
For conductors 6 ... 25 mm²	Short	5ST3768
	Short, IP20	5ST3771-2
End caps		**Article No.**
For 2 and 3-phase busbars		5ST3750
For 4-phase busbars		5ST3718
Touch protection		**Article No.**
For free connections, yellow (RAL 1004) 5 × 1 pin		5ST3655

Quick selection guide, page 3/50

© Siemens 2025

Standard busbars

5ST37 acc. to UL 508, can be cut

For miniature circuit breakers (MCBs)

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	Conductor cross-section 18 mm²	Conductor cross-section 25 mm²
1-phase				**Article No.**	**Article No.**
	For MCBs 1P or fuse holders 10 × 38 mm/class CC	56 MW	1000 mm	5ST3701-0HG	–
	For MCBs 1P or fuse holders 14 × 51 mm	56 MW	1000 mm	–	5ST3701-2HG
2-phase				**Article No.**	**Article No.**
	For MCBs 2P or fuse holders 10 × 38 mm/class CC	56 MW	1000 mm	5ST3705-0HG	–
	For MCBs 2P or fuse holders 14 × 51 mm	56 MW	1000 mm	–	5ST3705-2HG
3-phase				**Article No.**	**Article No.**
	For MCBs 3P or fuse holders 10 × 38 mm/class CC	56 MW	1000 mm	5ST3710-0HG	–
	For MCBs 3P or fuse holders 14 × 51 mm	56 MW	1000 mm	–	5ST3710-2HG

Accessories

Terminals		Article No.
For infeed at the device	6 ... 35 mm²	5ST3770-0HG
For infeed at the busbar	2.5 ... 50 mm²	5ST3770-1HG
End caps		**Article No.**
For 1-phase busbars		5ST3748-0HG
For 2 and 3-phase busbars		5ST3750-0HG

Touch protection according	Article No.
For open terminals, yellow 5 × 1 pin	5ST3655-0HG

Quick selection guide, page 3/50

© Siemens 2025

For MCBs equipped with auxiliary switch (AS) or fault signal contact (FC)

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	Conductor cross-section 18 mm²	25 mm²
1-phase				**Article No.**	**Article No.**
	For MCBs 1P	56 MW	1000 mm	5ST3703-0HG	–
2-phase				**Article No.**	**Article No.**
	For MCBs 2P	56 MW	1000 mm	5ST3707-0HG	–
3-phase				**Article No.**	**Article No.**
	For MCBs 3P	56 MW	1000 mm	5ST3712-0HG	–
	For MCBs 1P	56 MW	1000 mm	5ST3714-0HG	–

Accessories

Terminals		Article No.
For infeed at the device	6 ... 35 mm²	5ST3770-0HG
For infeed at the busbar	2.5 ... 50 mm²	5ST3770-1HG
End caps		**Article No.**
For 1-phase busbars		5ST3748-0HG
For 2 and 3-phase busbars		5ST3750-0HG

Touch protection	Article No.
For open terminals, yellow 5 × 1 pin	5ST3655-0HG

Quick selection guide, page 3/50

© Siemens 2025

Standard busbars

5ST3.. specially for 5SJ4... -.HG

Fixed lengths, cannot be cut, acc. to UL 489 for miniature circuit breakers (MCBs) [1)]

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	Conductor cross-section 16 mm²
1-phase				**Article No.**
	For 6 MCBs 1P	6 MW	100 mm	5ST3663-0HG
	For 12 MCBs 1P	12 MW	205 mm	5ST3663-1HG
	For 18 MCBs 1P	18 MW	310 mm	5ST3663-2HG
2-phase				**Article No.**
	For 3 MCBs 2P	6 MW	100 mm	5ST3664-0HG
	For 6 MCBs 2P	12 MW	205 mm	5ST3664-1HG
	For 9 MCBs 2P	18 MW	310 mm	5ST3664-2HG
3-phase				**Article No.**
	For 2 MCBs 3P	6 MW	100 mm	5ST3665-0HG
	For 4 MCBs 3P	12 MW	205 mm	5ST3665-1HG
	For 6 MCBs 3P	18 MW	310 mm	5ST3665-2HG

[1)] All unassigned pins of the busbars that cannot be cut must be covered with 5ST3666-1HG touch protection covers.

Accessories

Terminals		Article No.
For infeed at the 5SJ4... -.HG.. miniature circuit breaker	2.5 ... 35 mm²	5ST3666-0HG
	6 ... 35 mm²	5ST3770-3HG
For infeed at the busbar	2.5 ... 50 mm²	5ST3666-2HG

Touch protection		Article No.
For open terminals, yellow 3 × 1 pin	For 5ST37..-.HG busbars that cannot be cut	5ST3666-1HG
	For 5ST37..-3HG busbars that can be cut	5ST3655-3HG

Quick selection guide, page 3/50

© Siemens 2025



Can be cut, acc. to UL 508 for miniature circuit breakers (MCBs) [1)]

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	Conductor cross-section 18 mm²
1-phase				**Article No.**
	For MCBs 1P	56 MW	1016 mm	5ST3701-3HG
2-phase				**Article No.**
	For MCBs 2P	56 MW	1016 mm	5ST3705-3HG
3-phase				**Article No.**
	For MCBs 3P	56 MW	1016 mm	5ST3710-3HG

[1)] All unassigned pins of the busbars that cannot be cut must be covered with 5ST3666-1HG touch protection covers.

3

Accessories

Terminals		Article No.
For infeed at the 5SJ4... -.HG.. miniature circuit breaker	2.5 ... 35 mm²	5ST3666-0HG
	6 ... 35 mm²	5ST3770-3HG
For infeed at the busbar	2.5 ... 50 mm²	5ST3666-2HG
End caps		**Article No.**
For 1, 2 and 3-phase busbars		5ST3750-3HG

Touch protection		Article No.
For open terminals, yellow 3 × 1 pin	For 5ST37..-.HG busbars that cannot be cut	5ST3666-1HG
	For 5ST37..-3HG busbars that can be cut	5ST3655-3HG

Quick selection guide, page 3/50

© Siemens 2025

Standard busbars



5ST3.. specially for 5SJ4... -.HG

Can be cut, acc. to UL 508 for MCBs equipped with auxiliary switch (AS) or fault signal contact (FC)

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	Conductor cross-section 18 mm²
1-phase				**Article No.**
	For MCBs 1P	56 MW	1016 mm	5ST3703-3HG
2-phase				**Article No.**
	For MCBs 2P	56 MW	1016 mm	5ST3707-3HG
3-phase				**Article No.**
	For MCBs 3P	56 MW	1016 mm	5ST3712-3HG
	For MCBs 1P	56 MW	1016 mm	5ST3714-3HG

Accessories

Terminals		Article No.
For infeed at the 5SJ4... -.HG.. miniature circuit breaker	2.5 ... 35 mm²	5ST3666-0HG
	6 ... 35 mm²	5ST3770-3HG
For infeed at the busbar	2.5 ... 50 mm²	5ST3666-2HG
End caps		**Article No.**
For 1, 2 and 3-phase busbars		5ST3750-3HG

Touch protection		Article No.
For open terminals, yellow 3 × 1 pin	For 5ST37..-.HG busbars that cannot be cut	5ST3666-1HG
	For 5ST37..-3HG busbars that can be cut	5ST3655-3HG

Quick selection guide, page 3/50

© Siemens 2025

Compact busbars

General information

Infeed

At the start or end of the busbar

Maximum busbar current I_s/phase
- Cross-section 10 mm²: 63 A
- Cross-section 16 mm²: 80 A

Along the busbar or midpoint infeed

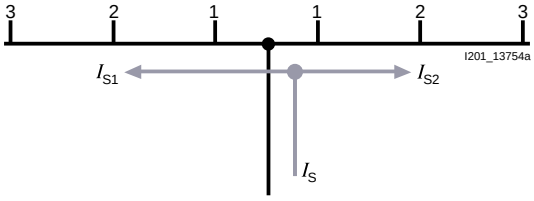

Maximum busbar current I_s/phase
- Cross-section 10 mm²: 100 A
- Cross-section 16 mm²: 130 A

Quick selection guide, page 3/50

© Siemens 2025

Compact busbars

5ST36, fixed lengths, cannot be cut

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps included	Conductor cross-section 10 mm²
2-phase/1-phase + N, for infeed via RCCB					**Article No.**
	For 1 × RCCB 1P+N and 5 × compact devices equipped with 5SM6 arc fault detection unit	12 MW	216 mm	■	5ST3685-0
2-phase/1-phase + N					**Article No.**
	For compact devices	6 MW	113 mm	■	5ST3674-6
		9 MW	166 mm	■	5ST3674-7
		12 MW	218 mm	■	5ST3674-0
	For 12 × 5SY17 CBE (circuit breaker for equipment)	12 MW	218 mm	■	5ST3674-1
	For 6 × compact devices equipped with 5SM6 arc fault detection unit and 5TY1 COM electronic circuit protection devices (ECPD)	12 MW	200 mm	■	5ST3676-0
4-phase/3-phase + N					**Article No.**
	For compact devices	6 MW	113 mm	■	5ST3673-6
		9 MW	116 mm	■	5ST3673-7
		12 MW	218 mm	■	5ST3673-0
		14 MW	254 mm	■	5ST3673-4
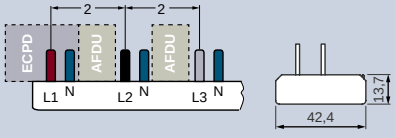	For 6 × compact devices equipped with 5SM6 arc fault detection unit and 5TY1 COM electronic circuit protection devices (ECPD)	11 MW	200 mm	■	5ST3675-0

Accessories

Terminals for infeed at side		Article No.
For conductors 6 ... 25 mm²	Short, IP20	5ST3771-2

Touch protection		Article No.
For free connections, yellow (RAL 1004)	For pins L1, N	5ST3655
	For pins L2, L3	5ST3655-0HG

Quick selection guide, page 3/50

© Siemens 2025



5ST37, can be cut

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps included	Conductor cross-section 10 mm²
2-phase/1-phase + N, for infeed via RCCB					**Article No.**
	For 1 × RCCB 1P+N and 10 × compact devices	12 MW	215 mm	■	5ST3784-0
	For 1 × RCCB 1P+N (RCCB N left only) and 10 × compact devices	12 MW	215 mm	■	5ST3784-0KL
2-phase/1-phase + N					**Article No.**
	For compact devices	60 MW	1060 mm	–	5ST3774-0
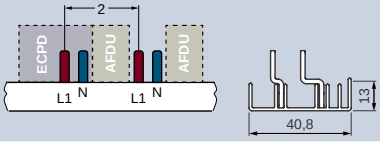	For compact devices equipped with 5SM6 arc fault detection unit and 5TY1 COM electronic circuit protection devices (ECPD)	59 MW	1042 mm	–	5ST3776-0
	For compact devices equipped with auxiliary switch	59.5 MW	1055 mm	–	5ST3778-0
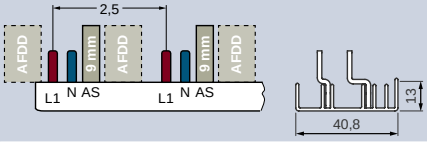	For compact devices equipped with 5SM6 arc fault detection unit and auxiliary switch	58.5 MW	1036 mm	–	5ST3780-0
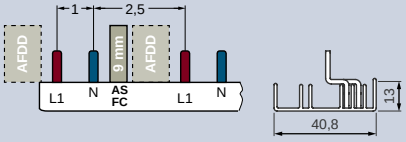	For 2 MW units (MCBs or RCBOs) with mounted 5SM6 arc fault detection unit and auxiliary switch	54 MW	956 mm	–	5ST3786-0

3

Quick selection guide, page 3/50

© Siemens 2025

Compact busbars

5ST37, can be cut

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps included	Conductor cross-section 10 mm²
4-phase/3-phase + N, for infeed via RCCB					**Article No.**
	For 1 × RCCB 3P+N and 6 × compact devices	10 MW	181 mm	■	5ST3783-1
	For 1 × RCCB 3P+N and 8 × compact devices	12 MW	216 mm	■	5ST3783-0
	For 1 × RCCB 3P+N and 10 × compact devices	14 MW	251 mm	■	5ST3783-4
	For 1 × RCCB 3P+N (RCCB N left only) and 6 × compact devices	10 MW	181 mm	■	5ST3783-1KL
	For 1 × RCCB 3P+N (RCCB N left only) and 8 × compact devices	12 MW	216 mm	■	5ST3783-0KL
	For 1 × RCCB 3P+N, 1 × MCBs 3P and 5 × compact devices	14 MW	253 mm	■	5ST3785-0
	For 1 × RCCB 3P+N, 1 × MCBs 3P and 7 × compact devices	14 MW	253 mm	■	5ST3785-4
	For 1 × RCCB 3P+N, 2 × MCBs 3P+N and 12 × compact devices	24 MW	430 mm	■	5ST3790-1
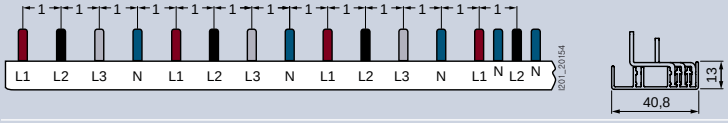	For 1 × RCCB 3P+N, 2 × MCBs 3P+N and 45 × compact devices	57 MW	1009 mm	–	5ST3790-2
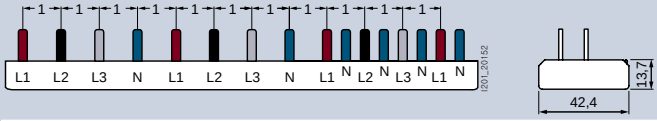	For 1 × RCCB 3P+N, 1 × MCBs 3P+N and 4 × compact devices	12 MW	217 mm	■	5ST3795-0
	For 1 × RCCB 3P+N, 1 × MCBs 3P+N and 6 × compact devices	14 MW	253 mm	■	5ST3795-4

Quick selection guide, page 3/50

© Siemens 2025



Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps included	Conductor cross-section 10 mm²
4-phase/3-phase + N					**Article No.**
	For compact devices	60 MW	1060 mm	–	5ST3773-0
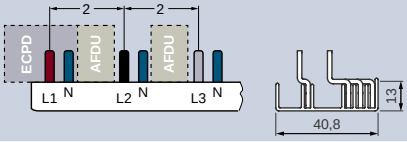	For compact devices equipped with 5SM6 arc fault detection unit and 5TY1 COM electronic circuit protection devices (ECPD)	59 MW	1042 mm	–	5ST3775-0
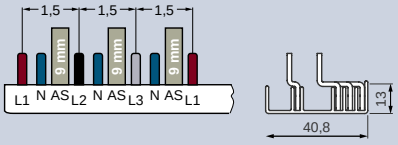	For compact devices equipped with auxiliary switch	59.5 MW	1055 mm	–	5ST3777-0

3

Accessories

Terminals for infeed at side		Article No.
For conductors 6 ... 25 mm²	Short, IP20	5ST3771-2

End caps	Article No.
For 2 and 4-phase compact busbars	5ST3788-0

Touch protection		Article No.
For free connections, yellow (RAL 1004)	For pins L1, N	5ST3655
	For pins L2, L3	5ST3655-0HG

Quick selection guide, page 3/50

© Siemens 2025

Accessories for busbars

General accessories

Terminals

	For conductors	Version	Cable entry	Infeed	Article No.
	6 ... 25 mm²	Short	–	Lateral	5ST3768
		Short, IP20	–	Lateral	5ST3771-2
	6 ... 25 mm²	–	Center	–	5ST3768-3
			Left	–	5ST3768-4
			Right	–	5ST3768-5
	6 ... 50 mm²	–	Center	–	5ST3760-3
			Left	–	5ST3760-4
			Right	–	5ST3760-5
	2.5 ... 50 mm²	–	–	Busbar	5ST3770-1HG
	6 ... 35 mm²	–	–	Device	5ST3770-0HG
	2.5 ... 35 mm²	For 5SJ4... -.HG..	–	Miniature circuit breaker	5ST3666-0HG
	6 ... 35 mm²	For 5ST37..-3HG that can be cut	–	Miniature circuit breaker	5ST3770-3HG
	2.5 ... 50 mm²	–	–	Busbar	5ST3666-2HG

System overview, page 3/5

© Siemens 2025

5ST36	5ST37	5ST37 (acc. to UL 508)	5ST3.. (for 5SJ4...HG)	5ST3 compact
■	■			
■	■			■
■	■			
■	■			
■	■			
■	■			
■	■			
■	■			
		■		
		■		
			■	
			■	
			■	

3

System overview, page 3/5

© Siemens 2025

Accessories for busbars

General accessories

Touch protection

Version	Scope of supply	Article No.
For free connections, yellow (RAL 1004)	5 × 1 pin	5ST3655
		5ST3655-0HG
	3 × 1 pin	5ST3666-1HG
		5ST3655-3HG

End caps

Version	Color	Article No.
For 1-phase busbars, angled	Gray	5ST3748
For 1-phase busbars, straight	Gray	5ST3766
	Blue	5ST3767
For 2 and 3-phase busbars, straight	Gray	5ST3750
For 4-phase busbars, straight	Gray	5ST3718
For 1, 2 and 3-phase busbars, straight	Gray	5ST3750-3HG
For 1-phase busbars, straight	Gray	5ST3748-0HG
For 2 and 3-phase busbars, straight	Gray	5ST3750-0HG
For 2 and 4-phase compact busbars, straight	Gray	5ST3788-0

System overview, page 3/5

© Siemens 2025

5ST36	5ST37	5ST37 (acc. to UL 508)	5ST3.. (for 5SJ4...HG)	5ST3 compact
■	■			■
		■		■
			■	
			■	
	■			
■				
■				
	■			
	■			
			■	
			■	
			■	
				■

3

System overview, page 3/5

© Siemens 2025

Accessories for busbars

General accessories

Series connectors



Conductor cross-section	Length of cable	Color	Number of phases	Article No.
10 mm²	125 mm	N conductor blue	1	5ST3781-0
		Cable black	1	5ST3791-0
			3	5ST3793-0
	150 mm	N conductor blue	1	5ST3781-1
		Cable black	1	5ST3791-1
			3	5ST3793-1
16 mm²	125 mm	N conductor blue	1	5ST3782-0
		Cable black	1	5ST3792-0
			3	5ST3794-0
	150 mm	N conductor blue	1	5ST3782-1
		Cable black	1	5ST3792-1
			3	5ST3794-1
	200 mm	N conductor blue	1	5ST3781-2
		Cable black	1	5ST3791-2
			3	5ST3793-2
		3 × cables black and 1 × N conductor blue	3 + N	5ST3793-3

System overview, page 3/5

© Siemens 2025

5ST36	5ST37	5ST37 (acc. to UL 508)	5ST3.. (for 5SJ4...HG)	5ST3 compact
	■			
	■			
	■			
	■			
	■			
	■			
	■			
	■			
	■			
	■			
	■			
	■			
	■			
	■			
	■			

3

System overview, page 3/5

© Siemens 2025

Distribution blocks for DIN-rail mounting

Acc. to IEC

Distribution blocks acc. to IEC

	Number of poles	Rated operational voltage U_e	Rated current I_n	Mounting width	Article No.
	4-pole	690 V AC	80 A	5 MW	5ST2501
			125 A	5.5 MW	5ST2502
			160 A	9 MW	5ST2503

Further technical specifications			5ST2501	5ST2502	5ST2503
Standards					
Standards			IEC 60947-7-1		
Supply					
Rated operational voltage AC			690 V		
Max. rated current			80 A	125 A	160 A
Conductor cross-section					
Inputs per pole	Solid/stranded		1 × 2.5 ... 16 mm²	1 × 6 ... 35 mm²	1 × 10 ... 50 mm²
	Finely stranded with end sleeve		1 × 1.5 ... 10 mm²	1 × 6 ... 25 mm²	1 × 10 ... 35 mm²
Outputs per pole	Solid/stranded		8 × 1.5 ... 10 mm²	5 × 1.5 ... 6 mm² 2 × 4 ... 16 mm²	8 × 2.5 ... 16 mm² 3 × 10 ... 35 mm²
	Finely stranded with end sleeve		8 × 1.5 ... 10 mm²	5 × 1.5 ... 6 mm² (small) 2 × 4 ... 10 mm² (large)	8 × 1.5 ... 16 mm² (small) 3 × 10 ... 25 mm² (large)
Tightening torque					
Inputs	Screw terminals		13.5 lb-in (1.5 Nm)		3.5 ... 5 lb-in (2 Nm)
	Tools		PZ2		
Outputs	Screw terminals	Large	13.5 lb-in (1.5 Nm)		
		Small	–	7.2 lb-in (0.8 Nm)	13.5 lb-in (1.5 Nm)
	Tools	Large	PZ1	PZ2	
		Small	–	PZ1	PZ2
Safety					
Rated peak withstand current I_{pk}			21.6 kA	24 kA	20 kA
Rated short-time withstand current I_{cw} (1 s)			3 kA	4.2 kA	6.2 kA
Ambient conditions					
Permissible ambient temperature			–25 ... +70 °C		
Degree of protection	Acc. to EN 60529		IP20		
Approved cable			Copper		

System overview, page 3/5

© Siemens 2025

According to IEC and UL

Distribution blocks acc. to IEC and UL

Number of poles	Rated operational voltage U_e	Rated current I_n	Mounting width	Article No.
1-pole	600 V AC	80 A	1.5 MW	5ST2504
		125 A	1.5 MW	5ST2505
		160 A	2 MW	5ST2507
		250 A	2.5 MW	5ST2508
		350 A	2.5 MW	5ST2511

Connector for 5ST2505 distribution board

- Touch protection
- 20 mm²
- 32 mm²

Version	Article No.
1-phase	5ST2506

Terminal lug for ring terminal ends



Types	Article No.
For 5ST2508 distribution block	5ST2510
For 5ST2511 distribution block	5ST2512

System overview, page 3/5

© Siemens 2025

Distribution blocks for DIN-rail mounting

According to IEC and UL (continued)

Further technical specifications			5ST2504	5ST2505	5ST2507	5ST2508	5ST2511
Standards							
Standards			UL 1059/UL 486E/IEC 60947-7-1 UL File No. E80027/XCFR2 C22.2 No. 158 -1987/XCFR8				
Supply							
Rated operational voltage		UL	600 V AC				
		IEC	1000/1500 V AC/DC				
Max. rated current		UL	80 A	115 A	160 A	230 A	310 A
		IEC	80 A	125 A	160 A	250 A	400 A
Conductor cross-section							
Inputs per pole	Solid/stranded	Large	3 × 2.5 … 25 mm²	10 … 35 mm²	10 … 70 mm²	35 … 120 mm²	95 … 185 mm²
			AWG 3 × 14 … 4	AWG 1 × 8 … 2	AWG 1 × 8 … 2/0	AWG 1 × 2 … 4/0	AWG 1 × 3/0 … 350 MCM
		Small	–	2.5 … 25 mm²	–		
			–	AWG 1 × 14 … 6	–		
	Finely stranded with end sleeve	Large	3 × 2.5 … 16 mm²	10 … 35 mm²	10 … 50 mm²	35 … 95 mm²	95 … 150 mm²
			AWG 3 × 14 … 6	AWG 1 × 8 … 2	AWG 1 × 8 … 1	AWG 1 × 2 … 3/0	AWG 3/0 … 300 MCM
		Small	–	2.5 … 25 mm²	–		
			–	AWG 1 × 14 … 6	–		
Outputs per pole	Solid/stranded	Top	2.5 … 6 mm²	2.5 … 16 mm²		2.5 … 10 mm²	2 × 2.5… 35 mm²
			AWG 4 × 14 … 10	AWG 6 × 14 … 4		AWG 4 × 16 … 8	AWG 2 × 14 … 2
		Center	–			2.5 … 16 mm²	5 × 2.5 … 16 mm²
			–			AWG 5 × 14 … 6	
		Bottom	2.5 … 6 mm²	–		2 × 2.5… 35 mm²	4 × 2.5 … 10 mm²
			AWG 4 × 14 … 10	–		AWG 2 × 14 … 2	AWG 4 × 14 … 8
	Finely stranded with end sleeve	Top	2.5 … 6 mm²	2.5 … 16 mm²		2 × 2.5… 25 mm²	
			AWG 4 × 14 … 10	AWG 6 × 14 … 6	AWG 6 × 14 … 4	AWG 2 × 14 … 4	
		Bottom	2.5 … 6 mm²	–		2 × 2.5… 25 mm²	4 × 2.5 … 25 mm²
			AWG 4 × 14 … 10	–		AWG 2 × 14 … 4	AWG 5 × 14 … 4
Tightening torque							
Inputs	Screw terminals		13.2 … 26.5 lb-in (1.5 … 3 Nm)	31 … 44 lb-in (3.5 … 5 Nm)	44 … 53 lb-in (5 … 6 Nm)	170 … 186 lb-in (19 … 21 Nm)	222 lb-in (25 Nm)
	Tools		PZ2	Allen key 4 mm	Allen key 5 mm	Allen key 6 mm	Allen key 8 mm
Outputs	Screw terminals	Large	13.2 … 26.5 lb-in (1.5 … 3 Nm)	17.7 … 26.5 lb-in (2 … 3 Nm)	13.2 … 26.5 lb-in (1.5 … 3 Nm)	31 … 62 lb-in (3.5 … 7 Nm)	
		Small	7 … 13.2 lb-in (0.8 … 1.5 Nm)	–		18 … 27 lb-in (2 … 3 Nm)	
	Tools	Large	PZ2			Standard screwdriver	
		Small	PZ1	PZ2		Standard screwdriver	
Safety							
Rated peak withstand current I_{pk}			2.7 kA	30 kA		51 kA	
Rated short-time withstand current I_{cw} (1 s)			1.9 kA	4.2 kA	11 kA	21 kA	
Overcurrent protection class			J				
Short circuit current rating (SCCR)	RMS Sym A		100 kA				
Electrical isolation	Creepage distances		1/2" (12.7 mm)				
	Clearances		3/8" (9.5 mm)				
Ambient conditions							
Permissible ambient temperature			–25 … +70 °C				
Degree of protection	Acc. to EN 60529		IP20				
Fire class			UL 94V-0				
Approved cable			Copper				

System overview, page 3/5

© Siemens 2025

SIKclip wiring system

SIKclip busbar

Length	Article No.
12 MW	5ST2520
24 MW	5ST2521
36 MW	5ST2522

Connecting cables with plug

Length	Conductor cross-section	Color	Article No.
120 mm	6 mm²	Black	5ST2523
		Blue	5ST2524
	10 mm²	Black	5ST2525
		Blue	5ST2526
200 mm	6 mm²	Black	5ST2527
		Blue	5ST2528
	10 mm²	Black	5ST2530
		Blue	5ST2531

Crimp connector

- For connection to cables 4/6 mm²

Article No.
5ST2532

Mounting brackets

- For mounting on the rear of the DIN rail (pair)

Article No.
5ST2533

Further technical specifications

	5ST25..
Standards	
Test specifications	EN 61439-1
Rated values	
Rated operational voltage U_n	400 V AC
Max. rated current I_n	250 A
Max. rated output current I_n (at 40 °C ambient temperature)	63 A
Rated insulation voltage	660 V AC
Test voltage (50 Hz)	2.5 kV
Rated peak withstand current I_{pk}	60 kA
Rated short-time withstand current I_{cw} (1 s)	10 kA
Ambient conditions	
Degree of protection	IP20
Connecting cables	40 A (6 mm²), 63 A (10 mm²)
Connecting cable type	H07VK
Ambient temperature	+5 ... +70 °C (moving), –40 ... +80 °C (not moving)

System overview, page 3/5

© Siemens 2025

More safety for humans, plants and assets

The number of electrical consumers in residential homes and commercial buildings has increased dramatically in recent decades.

Modern appliances often have quite different characteristics in terms of current consumption than earlier equipment due, for example, to the use of frequency converters in washing machines, or switched-mode power supply units in TVs, PCs or LED lights.

There are also decentralized power generators like photovoltaic systems or charging devices for electric vehicles.

All of this requires new protection strategies for electrical installations. This also includes appropriate residual current protective devices or residual current operated circuit breakers that will cut the current immediately and safely in the event of a fault.

Note:
Products bearing our Siemens EcoTech label are identified by this clickable symbol in the catalog:

Siemens EcoTech

www.siemens.com/lowvoltage/SiemensEcoTech

© Siemens 2025

Residual Current Protective Devices/ Arc Fault Detection Devices (AFDDs)

All the information you need 4/2
System overview 4/4
Introduction 4/5
Quick selection guide 4/6
- RCCBs 4/6
- RC units 4/8
- RCBOs 4/10
- Arc fault detection devices (AFDD) 4/12

Basic units 4/14
- 5SV RCCBs, type A, F and AC 4/14
- 5SV3 RCCBs, type B and B+ (SIQUENCE) 4/28
- 5SM3 RCCBs, type A and AC 4/32
- 5SM2 RC units, type A, F and AC 4/34
- 5SU1 RCBOs, type A, F, AC, B and B+ 4/40
- 5SV1 RCBOs (1 MW), type A, F and AC 4/52
- 5TY1 COM electronic circuit protection devices (ECPD) with measuring and communication function 4/54
- 5SM6 arc fault detection units 4/56
- 5SV6 arc fault detection device 4/57
- 5SV6 COM AFDD/MCB with measuring and communication function 4/58

Accessories 4/60
- Overview of modular system 4/60
- Electrical accessories 4/64
- Mechanical accessories 4/75
- RCCB protective socket outlets 4/76
- Standard busbars 4/78
- Compact busbars 4/83

© Siemens 2025

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about residual current protective devices/arc fault detection devices, please visit our websites
www.siemens.com/rccb
www.siemens.com/circuit-protection

Your product in detail

The SiePortal platform (knowledge base) provides comprehensive information
www.siemens.com/lowvoltage/product-support

- Technology Primer
  – Residual current protective devices **(109482301)**

The relevant tender specifications can be found at
www.siemens.com/tenderspecifications

Use our conversion tool for quick and easy conversion to Siemens products **www.siemens.com/conversion-tool**

Siemens YouTube channel

- Residual current protective devices (general)
  sie.ag/58TyMb

Everything you need for your order

Refer to SiePortal to find an overview of your products (product catalog)

- Residual current protective devices **sie.ag/2m55Y7j**
- Arc fault detection devices **sie.ag/6Chm71**

Direct forwarding to the individual products in SiePortal by clicking on the article number in the catalog or entering this web address incl. article number
www.siemens.com/product_catalog_SIEP?Article No.

Electrical Designer

With the Electrical Designer in the TIA Selection Tool, it is possible to design and dimension the electrical equipment of a machine in conformity with the standards – from the suitable switching devices to the correctly dimensioned cables
www.siemens.com/controlpanel/electrical-designer

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services.
You can find your local contacts at
www.siemens.com/lowvoltage/components/contact

You will find further information on services at
www.siemens.com/service-offers

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at
www.siemens.com/support-request

© Siemens 2025

… can be found in our online services

Commissioning + operation

Your product in detail

The SiePortal platform (knowledge base) provides detailed technical information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Characteristic curves
- Certificates

Online Support app available for download from the **App Store** and **Play Store**
You will find further information at
www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)

- SiePortal (product catalog)
  www.siemens.com/lowvoltage/product-catalog
- Image database
  www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAx Download Manager at
www.siemens.com/cax

Manuals

Manuals can be found in SiePortal at
www.siemens.com/lowvoltage/manuals

- Configuration Manual
  – Residual current protective devices/arc fault detection devices **(45303255)**
- Installation Manual
  – Circuit protection devices with communication and measuring function **(109791805)**
- System Manual
  – Circuit protection devices with communication and measuring function **(109791806)**

Face-to-face or online training

Our training courses can be found at
www.siemens.com/sitrain-lowvoltage

- 5SM6/5SV6 arc fault detection devices (WT-LVBAFDD)
- SENTRON circuit protection devices with measuring and communication function (WT-LVBCOM)
- Basic principles of electrical engineering (WT-LVBGET)
- Protection concept (WT-LVBPC)

Technical overview – Residual current protective devices/arc fault detection devices

The fast way to get you to our online services

This page provides you with comprehensive information and links on residual current protective devices/ arc fault detection devices

www.siemens.com/lowvoltage/product-support (109769082)

© Siemens 2025

System overview

Basic units and accessories

Basic units

5SV3 RCCBs

5SM3 RCCBs

5SM2 RC units

5SU1 RCBOs

5SV1 RCBOs

5TY1 COM electronic circuit protection devices (ECPD)

5SM6 arc fault detection units and 5SV6 AFDD/MCB and 5SV6 COM AFDD/MCB

Electrical accessories

Auxiliary switches (AS)

Fault signal contacts (FC)

Auxiliary switches and fault signal contacts (AS+FC)/(AS+FC) COM

Shunt trips (ST)

Undervoltage releases (UR)

Remote control auxiliaries (RCA)/(RCA) COM

Mechanical accessories

Locking devices

Handle couplers

Touch protection

Wall enclosures

Molded-plastic enclosures

Terminal covers

Busbars and accessories

Compact busbars

Standard busbars

Terminals

Touch protection

End caps

RCCB protective socket outlets

In molded-plastic enclosure

For mounting on device box

Note:
You will find a detailed range of accessories with the basic units and in the Accessories section.

© Siemens 2025

Introduction

Residual current protective devices

Selection criteria

Equipment, power, ambient conditions

Design

RCCBs
RCBOs
Electronic circuit protection devices (ECPD)
FI-Block (RC unit)

Number of pole

1P+N
2P
3P
3P+N
4P

Rated current I_n

0.3 ... 125 A

Types and waveform

					6 mA	10 mA		
Type AC	■	–	–	–	–	–	–
Type A	■	■	■	■	–	–	–
Type F	■	■	■	■	■	■	–
Type B	■	■	■	■	■	■	■
Type B+	■	■	■	■	■	■	■

Version

SIGRES	With active condensation protection for use in severe ambient conditions
[G]/[K]	Super resistant, 10 ms short-term delayed devices with increased immunity to false triggering due to transient disruptions
[S]	As an upstream group switch for selective shutdown against downstream RCCBs
500 V	With their creepage distances and clearances designed for power grids up to 500 V alternating voltage
50 ... 400 Hz	Meet the triggering conditions up to 400 Hz due to low decrease in sensitivity with increasing frequency

Protection objective, equipment directives VDE 0100-410, VDE 0100-530, VDE 0100-7xx, VDS 3501, shutdown conditions according to VDE 0100-410

Rated residual current $I_{\Delta n}$ (protection objective)

Additional protection $I_{\Delta n} \leq 30$ mA
Error protection $I_{\Delta n} > 30$ mA
Fire protection $I_{\Delta n} \leq 300$ mA

Characteristic CB (for residual current operated circuit breakers)

A
B
C
D

© Siemens 2025

RCCBs

Types			5SV		
			Instantaneous	SIGRES, instantaneous	Short-time delayed [G]/[K]
Type AC			■	–	–
Type A			■	■	■
Type F			–	–	–
Type B/B+			–	–	–
Peak withstand current 8/20 µs					
Type A		kA	> 1		> 3
Type F		kA	–	–	> 3
Type B/B+		kA	–	–	–
Minimum operational voltage for operation of test equipment					
30-mA devices		V AC	195		
Non-30-mA devices		V AC	100		
24 V devices		V AC	20		
Terminal conductor cross-sections					
1 conductor	Solid/stranded	mm^2	0.75 ... 35		
	Finely stranded with end sleeve	mm^2	0.75 ... 25		
	Finely stranded without end sleeve	mm^2	1 ... 35		
2 conductors, same cross-section, same conductor type	Solid/stranded	mm^2	0.75 ... 10		
	Finely stranded with end sleeve	mm^2	0.75 ... 4		
	Finely stranded without end sleeve	mm^2	1 ... 4		
1 conductor + busbar (pin thickness 1.5 mm)	Solid/stranded	mm^2	10 ... 25		
	Finely stranded with non-insulated end sleeve	mm^2	6 ... 25		
	Finely stranded with insulated end sleeve	mm^2	6 ... 16		
Terminal tightening torque		Nm	2.5... 3.5		
Poles					
Number of poles			1P+N | 3P+N		
Rated voltage U_n		V AC	24 ... 125 | 230 | 400 | 500		
Operating frequency		Hz	50 | 50 ... 400 | 50/60		
Standards					
			IEC/EN 61008 (VDE 0664-10), IEC/EN 61008-2-1 (VDE 0664-11), IEC/EN 61543 (VDE 0664-30), IEC/EN 62423 (VDE 0664-40), ÖVE EN 61008, ÖVE/ÖNORM E 8601		
Rated residual current $I_{\Delta n}$		mA	10, 30, 100, 300, 500, 1000		
Rated current I_n		A	16 ... 80		
Rated breaking capacity I_{cn}		kA	–		
Connection			N right | N left		
Service life	Average number of operating cycles		> 10000		
Test button test cycles			Half-yearly [1] | SIGRES annually [2] [3]		
Degree of protection	Acc. to EN 60529 (VDE 0470-1)		IP20, if the distribution board is installed, with connected conductors		
Touch protection	Acc. to EN 50274 (VDE 0660-514)		Finger and back-of-hand safe		
Temperature	Storage temperature	°C	–40 ... +75 °C		
	Ambient temperature	°C	–25 ... +45, marked with		
Resistance to climate	Acc. to IEC 60068-2-30		28 cycles (55 °C; 95% rel. humidity)		
CFC and silicone-free			■		
Mains connection			Top | bottom | SIGRES on top only		
Overvoltage category | Degree of pollution			III | 2		
Further information					
			See page 4/14		

[1] Extension to annual test interval under certain conditions, see SiePortal for details
[2] Requirement: no pollution with noxious gases (in particular, phosphorous)
[3] Extension to four-yearly test interval under certain conditions, see SiePortal for details

System overview, page 4/4

© Siemens 2025

5SV			SIQUENCE 5SV3			5SM3
Super resistant [K]	Selective [S]	SIGRES, selective [S]	SIGRES, super resistant [K]	SIGRES, super resistant [K], 6 mA DC	SIGRES, selective [S]	Instantaneous
–	–	–	–	–	–	■
■	■	■	–	■	–	■
■	■	–	–	■	–	–
–	–	–	■	■	■	–
> 3		> 5	–	> 1	–	> 1
> 3	–	–	–	> 3	–	–
–	–	–	> 3	> 3	> 5	–
195			70			195
100			70			195
20			–			–
0.75 ... 35			0.75 ... 35			1.5 ... 50 (2 MW)
0.75 ... 25			0.75 ... 25			–
1 ... 35			1 ... 35			–
0.75 ... 10			0.75 ... 10			–
0.75 ... 4			0.75 ... 4			–
1 ... 4			1 ... 4			–
10 ... 25			0.75 ... 35			–
6 ... 25			0.75 ... 25			–
6 ... 16			1 ... 35			–
2.5... 3.5			2.5 ... 3.0			3.0... 3.5
1P+N | 3P+N			1P+N | 3P+N			1P+N
24 ... 125 | 230 | 400 | 500			230 | 400			230
50/60			50/60			50
IEC/EN 61008 (VDE 0664-10), IEC/EN 61008-2-1 (VDE 0664-11), IEC/EN 61543 (VDE 0664-30), IEC/EN 62423 (VDE 0664-40), ÖVE EN 61008, ÖVE/ÖNORM E 8601			IEC/EN 62423 (VDE 0664-40), IEC/EN 61543 (VDE 0664-30), DIN VDE 0664-400 (Type B+ only)			IEC/EN 61008-1 (VDE 0664-10), IEC/EN 61008-2-1 (VDE 0664-11), IEC/EN 61543 (VDE 0664-30), IEC/EN 62423 (VDE 0664-40)
10, 30, 100, 300, 500, 1000			30, 300, 500			30, 100, 300
16 ... 80			16 ... 80			100 ... 125
–			–			–
N right | N left			N right			N right
> 10000			> 10000			> 10000
Half-yearly [1] | SIGRES annually [2] [3]			Annually [2] [3]			Half-yearly
IP20, if the distribution board is installed, with connected conductors			IP20, if the distribution board is installed, with connected conductors			IP20, if the distribution board is installed, with connected conductors
Finger and back-of-hand safe			Finger and back-of-hand safe			Finger and back-of-hand safe
–40 ... +75 °C			–40 ... +75 °C			–40 ... +75 °C
–25 ... +45, marked with ❄			–25 ... +45, marked with ❄			–25 ... +45, marked with ❄
28 cycles (55 °C; 95% rel. humidity)			28 cycles (55 °C; 95% rel. humidity)			28 cycles (55 °C; 95% rel. humidity)
■			■			■
Top | bottom | SIGRES on top only			Top | bottom | SIGRES on top only			Top | bottom
III | 2			III | 2			III | 2
See page 4/14			See page 4/28			See page 4/32

System overview, page 4/4

© Siemens 2025

RC units

			5SM2 (0.3 ... 63 A)
Types			**Instantaneous**
Type AC			■
Type A			■
Type F			–
Peak withstand current 8/20 µs			
Type A		kA	> 1
Type F		kA	–
Minimum operational voltage for test equipment			
30-mA devices		V AC	195
Non-30-mA devices		V AC	195
Terminal conductor cross-sections			
Solid/stranded		mm^2	1.0 ... 25
Terminal tightening torque		Nm	2.5 ... 3.0
Poles			
Number of poles			2P | 3P | 4P
Rated voltage U_n		V AC	230 | 400
Operating frequency		Hz	50 | 50/60
Standards			
			IEC/EN 61009-1 (VDE 0664-20), IEC/EN 61009-2-1 (VDE 0664-21), IEC/EN 61543 (VDE 0664-30), IEC/EN 62423 (VDE 0664-40)
Rated residual current $I_{\Delta n}$		mA	10, 30, 100, 300, 500, 1000
Rated current I_n		A	0.3 ... 63
Service life	Average number of operating cycles		> 10000
Test button test cycles			Half-yearly [1]
Degree of protection	Acc. to EN 60529 (VDE 0470-1)		IP20, if the distribution board is installed, with connected conductors
Touch protection	Acc. to EN 50274 (VDE 0660-514)		Finger and back-of-hand safe
Temperature	Storage temperature	°C	–40 ... +75 °C
	Ambient temperature	°C	–25 ... +45, marked with
Resistance to climate	Acc. to IEC 60068-2-30		28 cycles (55 °C; 95% rel. humidity)
CFC and silicone-free			■
Mains connection			Top | bottom
Overvoltage category | Degree of pollution			III | 2
Further information			
			See page 4/34

[1] Extension to annual test interval under certain conditions, see SiePortal for details
[2] Requirement: no pollution with noxious gases (in particular, phosphorous)
[3] Extension to four-yearly test interval under certain conditions, see SiePortal for details

System overview, page 4/4

© Siemens 2025

5SM2 (0.3 ... 63 A)			5SM2 (80 ... 100 A)	
Super resistant [K]	**Selective [S]**	**SIGRES, instantaneous**	**Instantaneous**	**Selective [S]**
■	■	–	■	■
■	■	■	■	■
■	–	–	–	–
> 3	> 5	> 1	> 1	> 5
> 3	–	–	–	–
195			195	
195			195	
1.0 ... 25			6.0 ... 50	
2.5 ... 3.0			2.5 ... 3.0	
2P | 3P | 4P		4P	2P | 4P	
230 | 400			230 | 400	
50 | 50/60			50 | 50/60	
IEC/EN 61009-1 (VDE 0664-20), IEC/EN 61009-2-1 (VDE 0664-21), IEC/EN 61543 (VDE 0664-30), IEC/EN 62423 (VDE 0664-40)			IEC/EN 61009-1 (VDE 0664-20), IEC/EN 61009-2-1 (VDE 0664-21), IEC/EN 61543 (VDE 0664-30), IEC/EN 62423 (VDE 0664-40)	
30	300, 500, 1000	30, 300	30, 300	300, 1000
0.3 ... 63			80 ... 100	
> 10000			> 10000	
Half-yearly [1]		Yearly [2] [3]	Half-yearly [1]	
IP20, if the distribution board is installed, with connected conductors			IP20, if the distribution board is installed, with connected conductors	
Finger and back-of-hand safe			Finger and back-of-hand safe	
–40 ... +75 °C			–40 ... +75 °C	
–25 ... +45, marked with			–25 ... +45, marked with	
28 cycles (55 °C; 95% rel. humidity)			28 cycles (55 °C; 95% rel. humidity)	
■			■	
Top | bottom			Top | bottom	
III | 2			III | 2	
See page 4/34			See page 4/34	

System overview, page 4/4

© Siemens 2025

RCBOs

Types			5SU1 (up to 40 A)			5SV1	
			Instantaneous	Short-time delayed/ Super resistant	Selective [S]	Instantaneous	Short-time delayed/ Super resistant
Type AC			■	■	–	■	■
Type A			■	■	■	■	■
Type B			–	–	–	–	–
Type B+			–	–	–	–	–
Type F			–	■	–	–	■
Peak withstand current 8/20 µs							
Type A		kA	> 1	> 3	> 5	> 1	> 3
Type F		kA	–	> 3	–	–	> 3
Minimum voltage for operation of the test equipment							
30-mA devices		V AC	195			195	
Non-30-mA devices		V AC	100			100	
Terminal conductor cross-sections							
1 conductor at front + busbar at rear	Solid/stranded	mm^2	0.75 ... 35			0.75 ... 16	
	Finely stranded with end sleeve	mm^2	0.75 ... 25			0.75 ... 10	
	Finely stranded without end sleeve	mm^2	1 ... 25			0.75 ... 16	
2 conductors at rear	Solid/stranded	mm^2	0.75 ... 6			0.75 ... 4	
	Finely stranded with non-insulated end sleeve	mm^2	0.75 ... 4			0.75 ... 2.5	
	Finely stranded with insulated end sleeve	mm^2	0.75 ... 4			0.75 ... 1.5	
	Finely stranded without end sleeve	mm^2	1 ... 4			0.75 ... 4	
Terminal tightening torque		Nm	2.5 ... 3.0			1.2 ... 2.0	
Poles							
Number of poles			1P+N | 2P			1P+N	
Rated voltage U_n		V AC	110 | 230			230	
Operating frequency		Hz	50 | 50/60			50 | 50/60	
Standards							
			IEC/EN 61009-1 (VDE 0664-20), IEC/EN 61009-2-1 (VDE 0664-21), IEC/EN 61543 (VDE 0664-30), IEC/EN 62423 (VDE 0664-40)			IEC/EN 61009-1 (VDE 0664-20), IEC/EN 61009-2-1 (VDE 0664-21), IEC/EN 61543 (VDE 0664-30), IEC/EN 62423 (VDE 0664-40)	
Rated residual current $I_{\Delta n}$		mA	10, 30, 100, 300			30, 300	
Rated current I_n		A	6 ... 40			2 ... 16	
Rated breaking capacity I_{cn}		kA	4.5 | 6 | 10			4.5 | 6	
Connection			N right | N left			N right	
Service life	Average number of operating cycles		> 10000			> 10 000	
Test button test cycles			Half-yearly [1]			Half-yearly [1]	
Degree of protection	Acc. to EN 60529 (VDE 0470-1)		IP20, if the distribution board is installed, with connected conductors			IP20, if the distribution board is installed, with connected conductors	
Touch protection	Acc. to EN 50274 (VDE 0660-514)		Finger and back-of-hand safe			Finger and back-of-hand safe	
Temperature	Storage temperature	°C	–40 ... +75 °C			–40 ... +75 °C	
	Ambient temperature	°C	–25 ... +45, marked with			–25 ... +45, marked with	
Resistance to climate	Acc. to IEC 60068-2-30		28 cycles (55 °C; 95% rel. humidity)			28 cycles (55 °C; 95% rel. humidity)	
CFC and silicone-free			■			■	
Mains connection			Top | bottom			Top | bottom	
Energy limitation class			3			3	
Overvoltage category | Degree of pollution			III | 2			III | 2	
Further information							
			See page 4/44			See page 4/52	

[1] Extension to annual test interval under certain conditions, see SiePortal for details
[2] RCBO function conforming to IEC/EN 61009-1 (IEC/EN 62423)
[3] Applies only to terminals on the infeed side
[4] Extension to four-yearly test interval under certain conditions, see SiePortal for details

System overview, page 4/4

© Siemens 2025



5SU1 (up to 32 A)		5SU1 (125 A)		5SU1 (100 A, 125 A)		5TY1 COM
Instantaneous	**Short-time delayed/ Super resistant**	**Instantaneous**	**Short-time delayed/ Super resistant**	**Short-time delayed/ Super resistant**	**Selective [S]**	**SIGRES/ Super resistant**
–	–	■	■	–	–	–
■	■	■	■	–	–	–
–	–	–	–	■	■	–
–	–	–	–	■	■	–
–	–	–	–	–	–	■ [2]
> 0.25	> 3	> 1	> 3	> 3	> 5	> 3
–	–	–	–	–	–	> 3
2P, 4P: 195 V | 3P: 340 V		195		195		85
2P, 4P: 195 V | 3P: 340 V		100		100		–
1 ... 35		25 ... 50		20 ... 50		0.75 ... 16 [3]
1 ... 35		25 ... 35		25 ... 35		0.75 ... 10
–		–		–		0.75 ... 16
–		–		–		0.75 ... 4
–		–		–		0.75 ... 2.5
–		–		–		0.75 ... 1.5
–		–		–		0.75 ... 4
2.0		3.0 ... 3.5		3.0 ... 3.5		1.2 ... 2
2P | 3P | 4P		2P | 4P		4P		1P+N
230 | 400		230 | 400		400 | 430		230
50 | 50/60		50 | 50/60		50/60		50
IEC/EN 61009-1 (VDE 0664-20), IEC/EN 61009-2-1 (VDE 0664-21)		IEC/EN 61009-1 (VDE 0664-20), IEC/EN 61009-2-1 (VDE 0664-21), IEC/EN 61543 (VDE 0664-30), IEC/EN 62423 (VDE 0664-40)		IEC/EN 61009-1 (VDE 0664-20), IEC/EN 61009-2-1 (VDE 0664-21), IEC/EN 61543 (VDE 0664-30), IEC/EN 62423 (VDE 0664-40)		CE
30, 300		30, 300, 1000		30, 300		30
6 ... 32		125		100, 125		6 ... 16
6 | 10		10		10		75
–		N right | N left		N right | N left		N right
> 10000		> 10000		> 10000		> 10000
Monthly		Half-yearly [1]		Half-yearly [1]		Half-yearly [4]
IP20, if the distribution board is installed, with connected conductors		IP20, if the distribution board is installed, with connected conductors		IP20, if the distribution board is installed, with connected conductors		IP20, if the distribution board is installed, with connected conductors
Finger and back-of-hand safe		Finger and back-of-hand safe		Finger and back-of-hand safe		Finger and back-of-hand safe
–40 ... +70 °C		–40 ... +75 °C		–40 ... +75 °C		–40 ... +75 °C
–25 ... +40, marked with		–25 ... +45, marked with		–25 ... +45, marked with		–25 ... +45, marked with
28 cycles (55 °C; 95% rel. humidity)		28 cycles (55 °C; 95% rel. humidity)		28 cycles (55 °C; 95% rel. humidity)		28 cycles (55 °C; 95% rel. humidity)
–		■		■		■
Top | bottom		Top | bottom		Top | bottom		Bottom
3 | 1		3		3		3
III | 3		III | 2		III | 2		III | 2
See page 4/46		See page 4/48		See page 4/51		See page 4/54

System overview, page 4/4

© Siemens 2025

Arc fault detection devices (AFDDs)

			5SM6	5SV6	5SV6....KP..
Poles					
Number of poles			2P	1P+N	1P+N
Rated voltage U_n		V AC	230	230	230
Operating frequency		Hz	50	50	50
Terminal conductor cross-sections					
Solid and stranded		mm^2	0.75 ... 16	0.75 ... 16	0.75 ... 16 (top) 0.75 ... 35 (bottom)
Finely stranded with end sleeve		mm^2	0.75 ... 10	0.75 ... 10	0.75 ... 10 (top) 0.75 ... 25 (bottom)
Terminal tightening torque		Nm	2.0 ... 2.5	1.2 ... 2.0	1.2 ... 2.0 (top) 2.5 ... 3.5 (bottom)
Standards					
			IEC/EN 62606	IEC/EN 62606	IEC/EN 62606
Rated current I_n		A	Up to 16/40 A	6 ... 40	6 ... 40
Service life	Average number of operating cycles		> 10000	> 10000	> 10000
Mounting position			Any	Any	Any
Degree of protection	Acc. to EN 60529 (VDE 0470-1)		IP20, with connected conductors	IP20, with connected conductors	IP20, with connected conductors
Touch protection	Acc. to EN 50274 (VDE 0660-514)		Finger and back-of-hand safe	Finger and back-of-hand safe	Finger and back-of-hand safe
Temperature	Storage temperature	°C	–40 ... +75 °C	–40 ... +75 °C	–40 ... +75 °C
	Ambient temperature	°C	–25 ... +45, marked with ⬡	–25 ... +45, marked with ⬡	–25 ... +45, marked with ⬡
Resistance to climate	Acc. to IEC 60068-2-30		28 cycles (55 °C; 95% rel. humidity)	28 cycles (55 °C; 95% rel. humidity)	28 cycles (55 °C; 95% rel. humidity)
CFC and silicone-free			■	■	■
Mains connection			Bottom	Top | bottom	Bottom
Overvoltage category | Degree of pollution			III | 2	III | 2	III | 2
Tripping in the event of overvoltage		V	> 275	> 285	> 285
Additional functions					
Measuring and communication function			–	■	–
Further information					
			See page 4/56	See page 4/57	See page 4/57

System overview, page 4/4

© Siemens 2025

System overview, page 4/4

© Siemens 2025

5SV RCCBs

Siemens EcoTech

Type A, 1P+N

				Instantaneous			Instantaneous (only available in Belgium) [2]
				Rated voltage U_n	24 ... 125 V AC	230 V AC	230 V AC
				N connection	Right	Right / Left	Right
$I_{\Delta n}$	I_n	Thermal overload protection [1]	Bulk packaging (36 units)				
Type A							
10 mA	16 A	–	–	–	5SV3111-6	5SV3111-6KL	–
	25 A	–	–	–	5SV3112-6	–	–
30 mA	16 A	–	–	5SV3311-6KK13	5SV3311-6	5SV3311-6KL	–
		–	■	–	5SV3311-6GV01	–	–
	25 A	–	–	5SV3312-6KK13	5SV3312-6	5SV3312-6KL	5SV3312-6BA
		–	■	–	5SV3312-6GV01	–	–
	40 A	–	–	5SV3314-6KK13	5SV3314-6	5SV3314-6KL	5SV3314-6BA
		–	■	–	5SV3314-6GV01	–	–
		■	–	–	5SV3314-6LA	–	–
	63 A	–	–	5SV3316-6KK13	5SV3316-6	5SV3316-6KL	5SV3316-6BA
	80 A	–	–	–	5SV3317-6	5SV3317-6KL	–
100 mA	25 A	–	–	–	5SV3412-6	5SV3412-6KL	5SV3612-6BA
	40 A	–	–	–	5SV3414-6	5SV3414-6KL	5SV3614-6BA
	63 A	–	–	–	5SV3416-6	5SV3416-6KL	5SV3616-6BA
	80 A	–	–	–	5SV3417-6	5SV3417-6KL	–
300 mA	25 A	–	–	–	5SV3612-6	5SV3612-6KL	–
	40 A	–	–	–	5SV3614-6	5SV3614-6KL	–
	63 A	–	–	–	5SV3616-6	5SV3616-6KL	–
	80 A	–	–	–	5SV3617-6	5SV3617-6KL	–

[1] Thermal overload protection according to OVE E 8101 possible up to rated current of the RCCB (40 A, 63 A).
[2] These products cannot be used in France according to NF C 15-100. Product complies with the specifications of the Belgian market only. (Simultaneous tripping of the 3 poles and the N conductor.) Available for the export market only.

Mounting concept

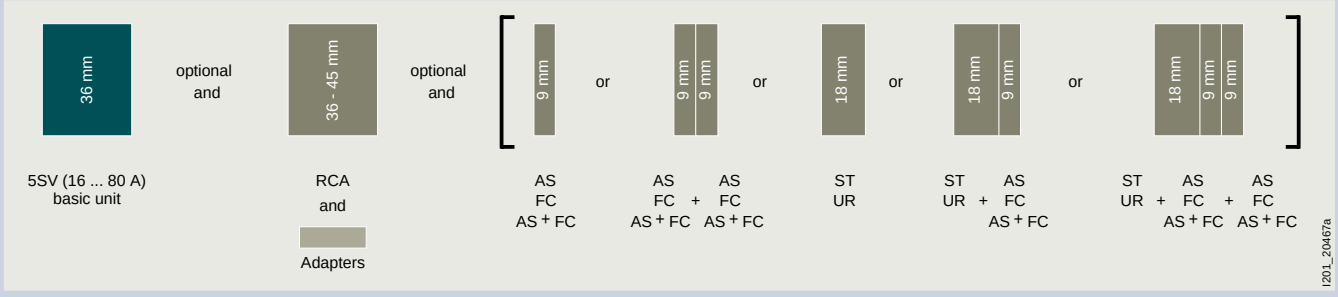

AS	Auxiliary switches	See page 4/64
FC	Fault signal contacts	See page 4/66
AS+FC	Auxiliary switches and fault signal contacts	See page 4/67
ST	Shunt trips	See page 4/70
UR	Undervoltage releases	See page 4/71
RCA	Remote control auxiliaries	See page 4/72

Quick selection guide, page 4/6

© Siemens 2025

SIGRES, instantaneous	Short-time delayed [G]	Super resistant [K]	Selective [S]		SIGRES, super resistant [K], 6 mA DC
230 V AC	230 V AC	230 V AC	230 V AC		230 V AC
Right	Right	Right	Right	Left	Right
–	–	–	–	–	–
–	–	–	–	–	–
5SV3311-6KK12	–	–	–	–	–
–	–	–	–	–	–
5SV3312-6KK12	–	5SV3312-6KK01	–	–	5SV3322-6KK60
–	–	–	–	–	–
5SV3314-6KK12	–	5SV3314-6KK01	–	–	5SV3324-6KK60
–	–	–	–	–	–
–	5SV3314-6LA01	–	–	–	–
5SV3316-6KK12	–	5SV3316-6KK01	–	–	–
–	–	5SV3317-6KK01	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	5SV3416-8	–	–
–	–	–	–	–	–
–	–	5SV3612-6KK01	5SV3612-8	–	–
–	–	5SV3614-6KK01	5SV3614-8	5SV3614-8KL	–
–	–	5SV3616-6KK01	5SV3616-8	5SV3616-8KL	–
–	–	5SV3617-6KK01	5SV3617-8	–	–

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		**Article No.**
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		**Article No.**
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC

Shunt trips (ST)		Article No.
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01
Undervoltage releases (UR)		**Article No.**
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote control auxiliaries (RCA)		**Article No.**
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071
Communication-capable	100 ... 240 V AC	5ST3072-0MC
Communication-capable with RCD/IR test	100 ... 240 V AC	5ST3073-0MC
Adapters for remote control auxiliaries (RCA)		**Article No.**
2 MW		5ST3820-6

Quick selection guide, page 4/6

© Siemens 2025

5SV RCCBs

Type F, 1P+N

		Super resistant [K]	Selective [S]	SIGRES, super resistant [K], 6 mA DC
Rated voltage U_n		230 V AC	230 V AC	230 V AC
N connection		Right	Right	Right
$I_{\Delta n}$	I_n			
Type F				
30 mA	25 A	5SV3312-3	–	5SV3322-3KK60
	40 A	5SV3314-3	–	5SV3324-3KK60
	63 A	5SV3316-3	–	–
	80 A	5SV3317-3	–	–
300 mA	25 A	5SV3612-3	–	–
	40 A	5SV3614-3	5SV3614-7	–
	63 A	5SV3616-3	–	–
	80 A	5SV3617-3	5SV3617-7	–

Mounting concept

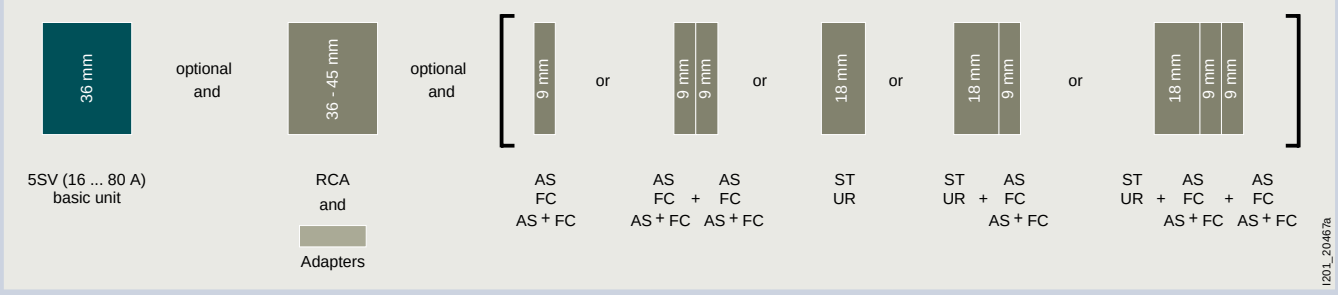

AS	Auxiliary switches	See page 4/64
FC	Fault signal contacts	See page 4/66
AS+FC	Auxiliary switches and fault signal contacts	See page 4/67
ST	Shunt trips	See page 4/70
UR	Undervoltage releases	See page 4/71
RCA	Remote control auxiliaries	See page 4/72

Quick selection guide, page 4/6

© Siemens 2025

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Shunt trips (ST)		Article No.
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

Remote control auxiliaries (RCA)		Article No.
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071
Communication-capable	100 ... 240 V AC	5ST3072-0MC
Communication-capable with RCD/IR test	100 ... 240 V AC	5ST3073-0MC

Adapters for remote control auxiliaries (RCA)	Article No.
2 MW	5ST3820-6

Quick selection guide, page 4/6

© Siemens 2025

5SV RCCBs

Siemens EcoTech

Type AC, 1P+N (2 MW)

			Instantaneous		
		Rated voltage U_n	230 V AC		24 ... 125 V AC
		N connection	Right	Left	Right
$I_{\Delta n}$	I_n	Bulk packaging (36 units)			
Type AC					
10 mA	16 A	–	5SV4111-0	5SV4111-0KL	–
	25 A	–	5SV4112-0	–	–
30 mA	16 A	–	5SV4311-0	5SV4311-0KL	5SV4311-0KK13
	25 A	–	5SV4312-0	5SV4312-0KL	5SV4312-0KK13
		■	5SV4312-0GV01	–	–
	40 A	–	5SV4314-0	5SV4314-0KL	5SV4314-0KK13
		■	5SV4314-0GV01	5SV4314-0GV02	–
	63 A	–	5SV4316-0	5SV4316-0KL	5SV4316-0KK13
	80 A	–	5SV4317-0	5SV4317-0KL	–
100 mA	25 A	–	5SV4412-0	–	–
	40 A	–	5SV4414-0	5SV4414-0KL	–
	63 A	–	5SV4416-0	5SV4416-0KL	–
	80 A	–	5SV4417-0	–	–
300 mA	25 A	–	5SV4612-0	5SV4612-0KL	–
	40 A	–	5SV4614-0	5SV4614-0KL	–
	63 A	–	5SV4616-0	5SV4616-0KL	–
	80 A	–	5SV4617-0	5SV4617-0KL	–

Mounting concept

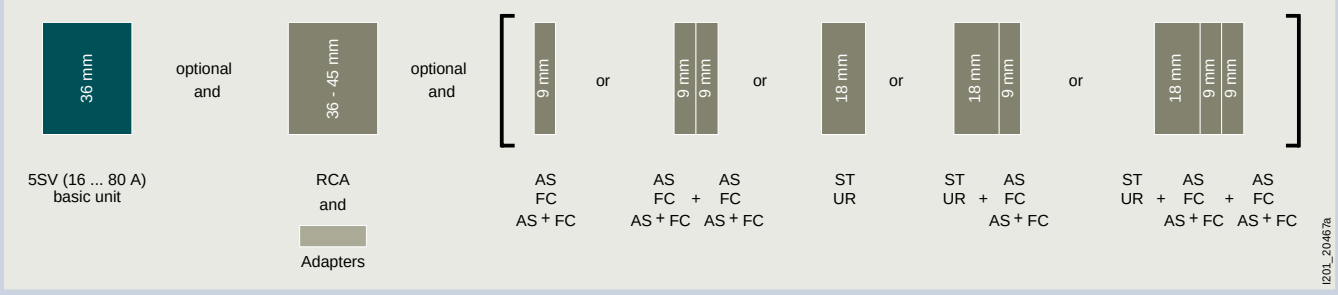

AS	Auxiliary switches	See page 4/64
FC	Fault signal contacts	See page 4/66
AS+FC	Auxiliary switches and fault signal contacts	See page 4/67
ST	Shunt trips	See page 4/70
UR	Undervoltage releases	See page 4/71
RCA	Remote control auxiliaries	See page 4/72

Quick selection guide, page 4/6

© Siemens 2025

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Shunt trips (ST)		Article No.
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

Remote control auxiliaries (RCA)		Article No.
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071
Communication-capable	100 ... 240 V AC	5ST3072-0MC
Communication-capable with RCD/IR test	100 ... 240 V AC	5ST3073-0MC

Adapters for remote control auxiliariess (RCA)	Article No.
2 MW	5ST3820-6

Quick selection guide, page 4/6

© Siemens 2025

5SV RCCBs

Siemens EcoTech

Type A, 3P+N (4 MW)

				Instantaneous			
			Rated voltage U_n	400 V AC		400 V AC/400 Hz	500 V AC
			N connection	Right	Left	Right	Right
$I_{\Delta n}$	I_n	Thermal overload protection [1]	Bulk packaging (18 units)				
Type A							
30 mA	25 A	–	–	5SV3342-6	5SV3342-6KL	5SV3342-6KK03	5SV3352-6
		–	■	5SV3342-6GV01	–	–	–
	40 A	–	–	5SV3344-6	5SV3344-6KL	5SV3344-6KK03	5SV3354-6
		–	■	5SV3344-6GV01	5SV3344-6GV02	–	–
		■	–	5SV3344-6LA	–	–	–
	63 A	–	–	5SV3346-6	5SV3346-6KL	–	5SV3356-6
		–	■	5SV3346-6GV01	–	–	–
		■	–	5SV3346-6LA	–	–	–
	80 A	–	–	5SV3347-6	5SV3347-6KL	–	5SV3357-6
100 mA	25 A	–	–	5SV3442-6	–	–	–
	40 A	–	–	5SV3444-6	–	–	–
		■	–	5SV3444-6LA	–	–	–
	63 A	–	–	5SV3446-6	–	–	–
		■	–	5SV3446-6LA	–	–	–
	80 A	–	–	5SV3447-6	–	–	–
300 mA	25 A	–	–	5SV3642-6	5SV3642-6KL	–	5SV3652-6
	40 A	–	–	5SV3644-6	5SV3644-6KL	–	5SV3654-6
		■	–	–	–	–	–
	63 A	–	–	5SV3646-6	5SV3646-6KL	–	5SV3656-6
		■	–	–	–	–	–
	80 A	–		5SV3647-6	5SV3647-6KL	–	5SV3657-6
500 mA	25 A	–	–	5SV3742-6	–	–	–
	40 A	–	–	5SV3744-6	–	–	–
	63 A	–	–	5SV3746-6	5SV3746-6KL	–	–
		–	■	5SV3746-6GV01	–	–	–
	80 A	–	–	5SV3747-6	–	–	–
1000 mA	63 A	–	–	–	–	–	–

[1] Thermal overload protection according to OVE E 8101 possible up to rated current of the RCCB (40 A, 63 A).
[2] These products cannot be used in France according to NF C 15-100. Product complies with the specifications of the Belgian market only. (Simultaneous tripping of the 3 poles and the N conductor.) Available for the export market only.

Mounting concept

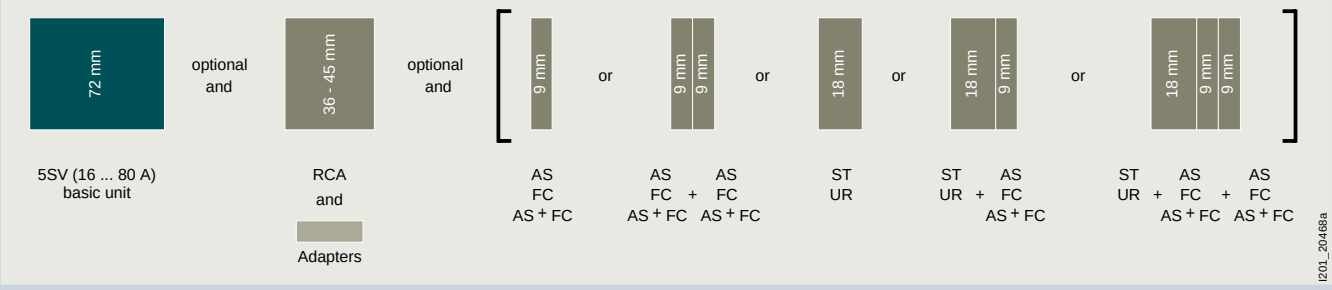

AS	Auxiliary switches	See page 4/64	ST	Shunt trips	See page 4/70
FC	Fault signal contacts	See page 4/66	UR	Undervoltage releases	See page 4/71
AS+FC	Auxiliary switches and fault signal contacts	See page 4/67	RCA	Remote control auxiliaries	See page 4/72

Quick selection guide, page 4/6

© Siemens 2025

Instantaneous (only available in Belgium) [2]	SIGRES, instantaneous	Short-time delayed [G]	Super resistant [K]	Selective [S]		SIGRES, selective [S]	SIGRES, super resistant [K], 6 mA DC
400 V AC	400 V AC	400 V AC	400 V AC	400 V AC		400 V AC	230 V AC
Right	Right	Right	Right	Right	Left	Right	Rechts
5SV3342-6BA	5SV3342-6KK12	–	5SV3342-6KK01	–	–	–	5SV3342-6KK60
–	–	–	–	–	–	–	–
5SV3344-6BA	5SV3344-6KK12	5SV3344-6LB01	5SV3344-6KK01	–	–	–	5SV3344-6KK60
–	–	–	–	–	–	–	–
–	–	5SV3344-6LA01	–	–	–	–	–
5SV3346-6BA	5SV3346-6KK12	5SV3346-6LB01	5SV3346-6KK01	–	–	–	5SV3346-6KK60
–	–	–	–	–	–	–	–
–	–	5SV3346-6LA01	–	–	–	–	–
–	5SV3347-6KK12	5SV3347-6LB01	5SV3347-6KK01	–	–	–	–
–	–	–	–	–	–	–	–
–	–	5SV3444-6LB01	–	5SV3444-8	–	–	–
–	–	5SV3444-6LA01	–	5SV3444-8LA	–	–	–
–	–	5SV3446-6LB01	–	5SV3446-8	–	–	–
–	–	5SV3446-6LA01	–	5SV3446-8LA	–	–	–
–	–	–	–	–	–	–	–
5SV3642-6BA	5SV3642-6KK12	–	5SV3642-6KK01	5SV3642-8	–	–	–
5SV3644-6BA	5SV3644-6KK12	–	5SV3644-6KK01	5SV3644-8	–	–	–
–	–	–	–	5SV3644-8LA	–	–	–
5SV3646-6BA	5SV3646-6KK12	–	5SV3646-6KK01	5SV3646-8	5SV3646-8KL	5SV3646-8KK12	–
–	–	–	–	5SV3646-8LA	–	–	–
–	5SV3647-6KK12	–	5SV3647-6KK01	5SV3647-8	–	–	–
–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–
–	–	–	–	5SV3846-8	–	–	–

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Shunt trips (ST)	Article No.
110 ... 415 V AC, 110 ... 220 V DC	5ST3030
24 ... 48 V AC/DC	5ST3031
12 V DC	5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

Remote control auxiliaries (RCA)		Article No.
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071
Communication-capable	100 ... 240 V AC	5ST3072-0MC
Communication-capable with RCD/IR test	100 ... 240 V AC	5ST3073-0MC

Adapters for remote control auxiliaries (RCA)	Article No.
4 MW	5ST3820-7

Quick selection guide, page 4/6

© Siemens 2025

5SV RCCBs

Type F, 3P+N (4 MW)

		Super resistant [K]	Selective [S]	SIGRES, super resistant [K], 6 mA DC
Rated voltage U_n		400 V AC	400 V AC	230 V AC
N connection		Right	Right	Right
$I_{\Delta n}$	I_n			
Type F				
30 mA	25 A	5SV3342-3	–	5SV3342-3KK60
	40 A	5SV3344-3	–	5SV3344-3KK60
	63 A	5SV3346-3	–	5SV3346-3KK60
	80 A	5SV3347-3	–	–
300 mA	25 A	5SV3642-3	–	–
	40 A	5SV3644-3	5SV3644-7	–
	63 A	5SV3646-3	–	–
	80 A	5SV3647-3	5SV3647-7	–

Mounting concept

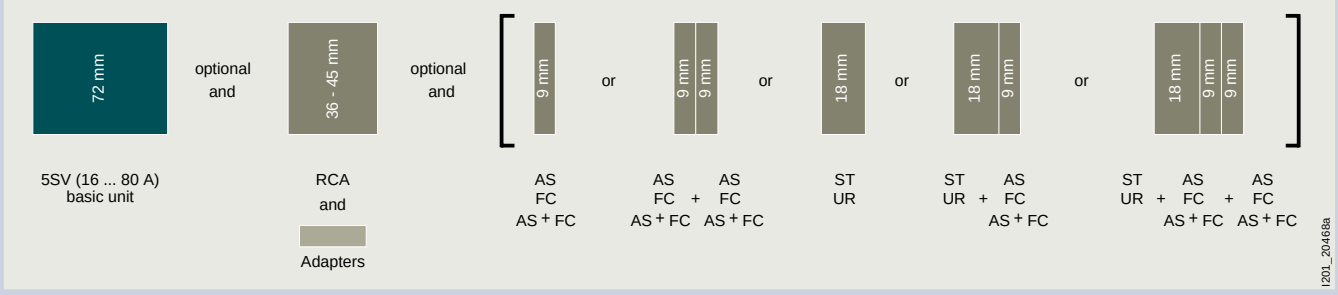

AS	Auxiliary switches	See page 4/64
FC	Fault signal contacts	See page 4/66
AS+FC	Auxiliary switches and fault signal contacts	See page 4/67
ST	Shunt trips	See page 4/70
UR	Undervoltage releases	See page 4/71
RCA	Remote control auxiliaries	See page 4/72

Quick selection guide, page 4/6

© Siemens 2025

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Shunt trips (ST)	Article No.
110 ... 415 V AC, 110 ... 220 V DC	5ST3030
24 ... 48 V AC/DC	5ST3031
12 V DC	5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

Remote control auxiliaries (RCA)		Article No.
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071
Communication-capable	100 ... 240 V AC	5ST3072-0MC
Communication-capable with RCD/IR test	100 ... 240 V AC	5ST3073-0MC

Adapters for remote control auxiliaries (RCA)	Article No.
4 MW	5ST3820-7

Quick selection guide, page 4/6

© Siemens 2025

5SV RCCBs

Type AC, 3P+N (4 MW)

			Instantaneous	
		Rated voltage U_n	400 V AC	
		N connection	Right	Left
$I_{\Delta n}$	I_n	Bulk packaging (18 units)		
Type AC				
30 mA	25 A	–	5SV4342-0	5SV4342-0KL
		■	5SV4342-0GV01	–
	40 A	–	5SV4344-0	5SV4344-0KL
		■	5SV4344-0GV01	–
	63 A	–	5SV4346-0	5SV4346-0KL
	80 A	–	5SV4347-0	5SV4347-0KL
100 mA	25 A	–	5SV4442-0	–
	40 A	–	5SV4444-0	–
	63 A	–	5SV4446-0	–
	80 A	–	5SV4447-0	–
300 mA	25 A	–	5SV4642-0	5SV4642-0KL
	40 A	–	5SV4644-0	5SV4644-0KL
	63 A	–	5SV4646-0	5SV4646-0KL
	80 A	–	5SV4647-0	5SV4647-0KL
500 mA	25 A	–	5SV4742-0	–
	40 A	–	5SV4744-0	–
	63 A	–	5SV4746-0	–
	80 A	–	5SV4747-0	–

Mounting concept

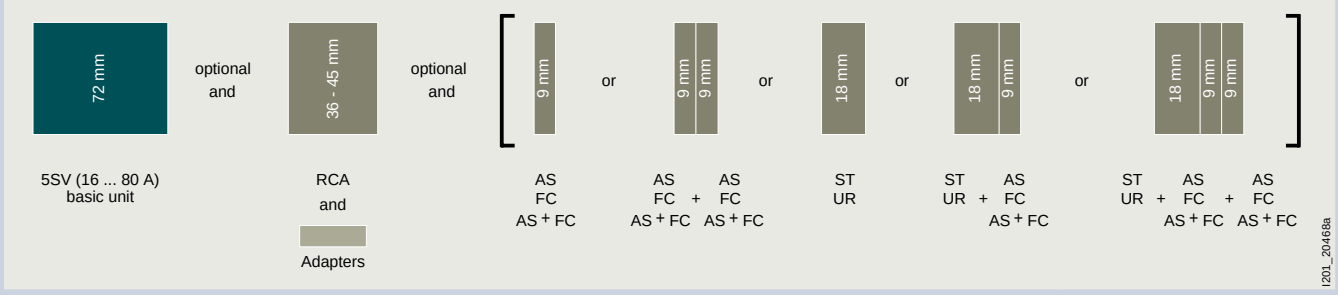

AS	Auxiliary switches	See page 4/64
FC	Fault signal contacts	See page 4/66
AS+FC	Auxiliary switches and fault signal contacts	See page 4/67
ST	Shunt trips	See page 4/70
UR	Undervoltage releases	See page 4/71
RCA	Remote control auxiliaries	See page 4/72

Quick selection guide, page 4/6

© Siemens 2025

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Shunt trips (ST)		Article No.
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

Remote control auxiliaries (RCA)		Article No.
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071
Communication-capable	100 ... 240 V AC	5ST3072-0MC
Communication-capable with RCD/IR test	100 ... 240 V AC	5ST3073-0MC

Adapters for remote control auxiliaries (RCA)	Article No.
4 MW	5ST3820-7

Quick selection guide, page 4/6

© Siemens 2025

5SV RCCBs

Type A and AC, 3P+N (4 MW), high-current

		Instantaneous	Short-time delayed [G], [K]	Selective [S]
	Rated voltage U_n	400 V AC	400 V AC	400 V AC
	N connection	Right	Right	Right
$I_{\Delta n}$	I_n			
Type A				
30 mA	100 A	5SV3348-6	–	–
	125 A	5SV3345-6	5SV3345-6KK01	–
100 mA	100 A	5SV3448-6	–	–
	125 A	5SV3445-6	5SV3445-6KK01	–
300 mA	100 A	5SV3648-6	–	–
	125 A	5SV3645-6	5SV3645-6KK01	5SV3645-8
500 mA	100 A	5SV3748-6	–	–
	125 A	5SV3745-6	5SV3745-6KK01	5SV3745-8
Type AC				
30 mA	100 A	5SV4348-0	–	–
	125 A	5SV4345-0	–	–
100 mA	100 A	5SV4448-0	–	–
	125 A	5SV4445-0	–	–
300 mA	100 A	5SV4648-0	–	–
	125 A	5SV4645-0	–	–
500 mA	100 A	5SV4748-0	–	–
	125 A	5SV4745-0	–	–

4

Quick selection guide, page 4/6

© Siemens 2025

Quick selection guide, page 4/6

© Siemens 2025

5SV3 RCCBs (SIQUENCE)

Type B, 1P+N (4 MW)

	SIGRES, super resistant [K]	SIGRES, super resistant [K], 6 mA DC
Rated voltage U_n	230 V AC	230 V AC
N connection	Right	Right

$I_{\Delta n}$	I_n	Bulk packaging (18 units)		
Type B				
30 mA	16 A	–	5SV3321-4	–
	25 A	–	5SV3322-4	5SV3322-4KK60
	40 A	–	5SV3324-4	5SV3324-4KK60
		■	5SV3324-4GV01	–
	63 A	–	5SV3326-4	5SV3326-4KK60
	80 A	–	–	5SV3327-4KK60
300 mA	16 A	–	5SV3621-4	–
	25 A	–	5SV3622-4	–
	40 A	–	5SV3624-4	–
	63 A	–	5SV3626-4	–

Mounting concept

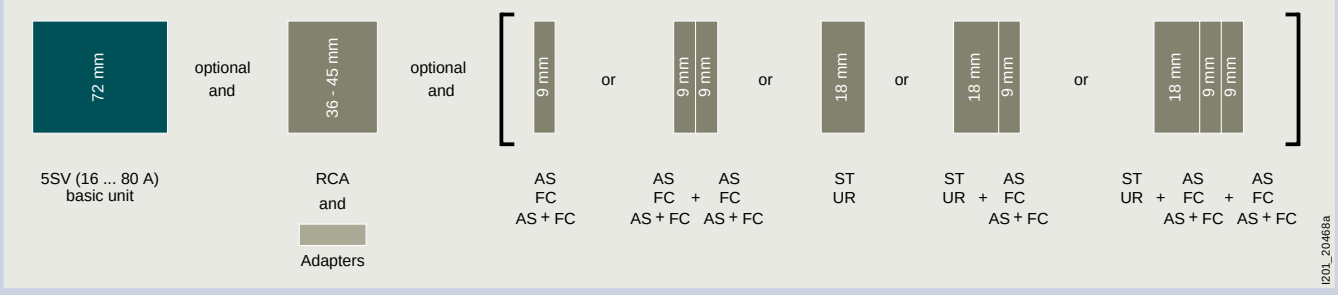

AS	Auxiliary switches	See page 4/64
FC	Fault signal contacts	See page 4/66
AS+FC	Auxiliary switches and fault signal contacts	See page 4/67
ST	Shunt trips	See page 4/70
UR	Undervoltage releases	See page 4/71
RCA	Remote control auxiliaries	See page 4/72

Quick selection guide, page 4/6

© Siemens 2025

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Shunt trips (ST)	Article No.
110 ... 415 V AC, 110 ... 220 V DC	5ST3030
24 ... 48 V AC/DC	5ST3031
12 V DC	5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

Remote control auxiliaries (RCA)		Article No.
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071
Communication-capable	100 ... 240 V AC	5ST3072-0MC
Communication-capable with RCD/IR test	100 ... 240 V AC	5ST3073-0MC

Adapters for remote control auxiliaries (RCA)	Article No.
4 MW	5ST3820-7

Quick selection guide, page 4/6

© Siemens 2025

5SV3 RCCBs (SIQUENCE)

Type B and B +, 3P+N (4 MW)

			SIGRES, super resistant [K]	SIGRES, super resistant [K], 6 mA DC	SIGRES, selective [S]
		Rated voltage U_n	230 ... 400 V AC	230 ... 400 V AC	230 ... 400 V AC
		N connection	Right	Right	Right
$I_{\Delta n}$	I_n	Bulk packaging (18 units)			
Type B					
30 mA	25 A	–	5SV3342-4	5SV3342-4KK60	–
		■	5SV3342-4GV01	–	–
	40 A	–	5SV3344-4	5SV3344-4KK60	–
		■	5SV3344-4GV01	–	–
	63 A	–	5SV3346-4	5SV3346-4KK60	–
		■	5SV3346-4GV01	–	–
	80 A	–	5SV3347-4	5SV3347-4KK60	–
300 mA	25 A	–	5SV3642-4	–	–
		■	5SV3642-4GV01	–	–
	40 A	–	5SV3644-4	–	–
		■	5SV3644-4GV01	–	–
	63 A	–	5SV3646-4	–	5SV3646-5
		■	5SV3646-4GV01	–	–
	80 A	–	5SV3647-4	–	5SV3647-5
500 mA	25 A	–	5SV3742-4	–	–
	40 A	–	5SV3744-4	–	–
	63 A	–	5SV3746-4	–	5SV3746-5
	80 A	–	5SV3747-4	–	5SV3747-5
Type B+					
30 mA	25 A	–	5SV3342-4KK14	–	–
	40 A	–	5SV3344-4KK14	–	–
	63 A	–	5SV3346-4KK14	–	–
	80 A	–	5SV3347-4KK14	–	–
300 mA	25 A	–	5SV3642-4KK14	–	–
	40 A	–	5SV3644-4KK14	–	–
	63 A	–	5SV3646-4KK14	–	5SV3646-5KK14
	80 A	–	5SV3647-4KK14	–	5SV3647-5KK14

Mounting concept

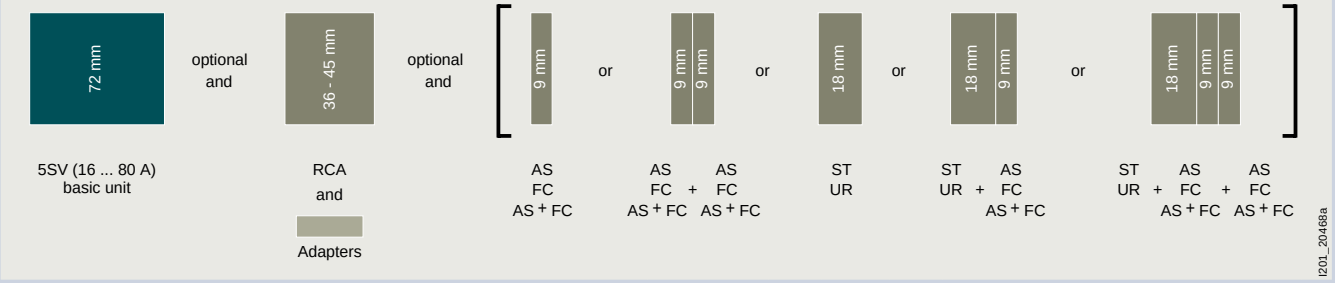

AS	Auxiliary switches	See page 4/64
FC	Fault signal contacts	See page 4/66
AS+FC	Auxiliary switches and fault signal contacts	See page 4/67
ST	Shunt trips	See page 4/70
UR	Undervoltage releases	See page 4/71
RCA	Remote control auxiliaries	See page 4/72

Quick selection guide, page 4/6

© Siemens 2025

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Shunt trips (ST)		Article No.
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

Remote control auxiliaries (RCA)		Article No.
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071
Communication-capable	100 ... 240 V AC	5ST3072-0MC
Communication-capable with RCD/IR test	100 ... 240 V AC	5ST3073-0MC

Adapters for remote control auxiliaries (RCA)	Article No.
4 MW	5ST3820-7

Quick selection guide, page 4/6

© Siemens 2025

5SM3 RCCBs

Type A and AC, 1P+N (2 MW), high-current

	Instantaneous
Rated voltage U_n	230 V AC
N connection	Right

$I_{\Delta n}$	I_n	
Type A		
30 mA	100 A	5SM3318-6KK
	125 A	5SM3315-6KK
100 mA	100 A	5SM3418-6KK
	125 A	5SM3415-6KK
300 mA	100 A	5SM3618-6KK
	125 A	5SM3615-6KK
Type AC		
30 mA	100 A	5SM3318-0KK
	125 A	5SM3315-0KK
100 mA	100 A	5SM3418-0KK
	125 A	5SM3415-0KK
300 mA	100 A	5SM3618-0KK
	125 A	5SM3615-0KK

4

Quick selection guide, page 4/6

© Siemens 2025

Quick selection guide, page 4/6

© Siemens 2025

5SM2 RC units

Type A, F and AC, 2-pole

		For 5SY miniature circuit breakers [1]		
Rated voltage U_n		230 V AC		
Version		Instantaneous	Super resistant [K]	Selective [S]
Mounting width		2 MW	2 MW	2 MW
$I_{\Delta n}$	I_n			
Type A				
10 mA	0.3 ... 16 A	5SM2121-6	–	–
30 mA	0.3 ... 40 A	5SM2322-6	5SM2322-6KK01	–
	0.3 ... 63 A	5SM2325-6	5SM2325-6KK01	–
	80 ... 100 A	–	–	–
100 mA	0.3 ... 63 A	5SM2425-6	–	–
300 mA	0.3 ... 40 A	5SM2622-6	–	5SM2622-8
	0.3 ... 63 A	5SM2625-6	–	5SM2625-8
	80 ... 100 A	–	–	–
500 mA	0.3 ... 63 A	5SM2725-6	–	–
1000 mA	0.3 ... 40 A	–	–	5SM2822-8
	0.3 ... 63 A	–	–	5SM2825-8
	80 ... 100 A	–	–	–
Type F				
30 mA	0.3 ... 40 A	–	5SM2322-3	–
	0.3 ... 63 A	–	5SM2325-3	–
Type AC				
10 mA	0.3 ... 40 A	5SM2121-0	–	–
30 mA	0.3 ... 40 A	5SM2322-0	–	–
	0.3 ... 63 A	5SM2325-0	–	–
	80 ... 100 A	–	–	–
300 mA	0.3 ... 40 A	5SM2622-0	–	5SM2622-2
	0.3 ... 63 A	5SM2625-0	–	5SM2625-2
	80 ... 100 A	–	–	–
500 mA	0.3 ... 63 A	5SM2725-0	–	–

[1] Not suitable for use with 5SY5 and type A + type F not suitable for use with 5SY8

Mounting concept

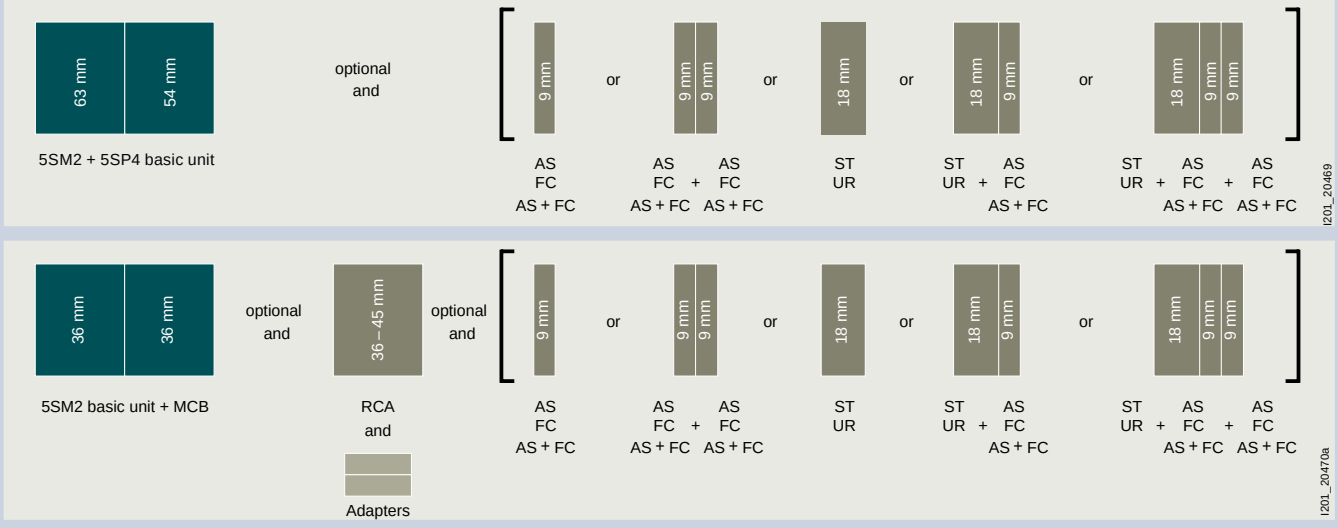

MCB Miniature circuit breaker See page 3/1
AS Auxiliary switches See page 4/64
FC Fault signal contacts See page 4/66
AS+FC Auxiliary switches and fault signal contacts See page 4/67
ST Shunt trips See page 4/70
UR Undervoltage releases See page 4/71
RCA Remote control auxiliaries See page 4/72

Quick selection guide, page 4/8

© Siemens 2025

For 5SL4 miniature circuit breakers		For 5SP4 miniature circuit breakers (B and C characteristics)	
230 V AC		230 V AC	
Instantaneous	Selective [S]	Instantaneous	Selective [S]
2 MW	2 MW	3.5 MW	3.5 MW
–	–	–	–
5SM2323-6	–	–	–
5SM2326-6	–	–	–
–	–	5SM2327-6	–
–	–	–	–
5SM2623-6	5SM2623-8	–	–
5SM2626-6	5SM2626-8	–	–
–	–	5SM2627-6	5SM2627-8
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	5SM2827-8
–	–	–	–
–	–	–	–
–	–	–	–
5SM2323-0	–	–	–
5SM2326-0	–	–	–
–	–	–	–
5SM2623-0	5SM2623-2	5SM2327-0	–
5SM2626-0	5SM2626-2	5SM2627-0	–
–	–	–	–
–	–	–	–

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Shunt trips (ST)	Article No.
110 ... 415 V AC, 110 ... 220 V DC	5ST3030
24 ... 48 V AC/DC	5ST3031
12 V DC	5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

Remote control auxiliaries (RCA)		Article No.
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
Communication-capable	100 ... 240 V AC	5ST3072-0MC
Communication-capable with RCD/IR test	100 ... 240 V AC	5ST3073-0MC

Adapters for remote control auxiliaries (RCA)	Article No.
5SM2 with 5SY (2P)	5ST3820-3 + 5ST3820-1
5SM2 with 5SL (2P)	5ST3820-3 + 5ST3820-6

Quick selection guide, page 4/8

© Siemens 2025

5SM2 RC units

Type A and AC, 3-pole

		For 5SY miniature circuit breakers [1]			For 5SL4 miniature circuit breakers	
Rated voltage U_n		400 V AC			400 V AC	
Version		Instantaneous	Super resistant [K]	Selective [S]	Instantaneous	Selective [S]
Mounting width		3 MW	3 MW	3 MW	3 MW	3 MW
$I_{\Delta n}$	I_n					
Type A						
30 mA	0.3 ... 40 A	5SM2332-6	5SM2332-6KK01	–	5SM2333-6	–
	0.3 ... 63 A	5SM2335-6	5SM2335-6KK01	–	5SM2336-6	–
100 mA	0.3 ... 63 A	5SM2435-6	–	–	–	–
300 mA	0.3 ... 40 A	5SM2632-6	–	–	5SM2633-6	–
	0.3 ... 63 A	5SM2635-6	–	5SM2635-8	5SM2636-6	5SM2636-8
500 mA	0.3 ... 63 A	5SM2735-6	–	5SM2735-8	–	–
1000 mA	0.3 ... 40 A	–	–	5SM2832-8	–	–
	0.3 ... 63 A	–	–	5SM2835-8	–	–
Type AC						
30 mA	0.3 ... 40 A	5SM2332-0	–	–	5SM2333-0	–
	0.3 ... 63 A	5SM2335-0	–	–	5SM2336-0	–
300 mA	0.3 ... 40 A	5SM2632-0	–	–	5SM2633-0	–
	0.3 ... 63 A	5SM2635-0	–	–	5SM2636-0	–
500 mA	0.3 ... 63 A	5SM2735-0	–	–	–	–

[1] Not suitable for use with 5SY5 and type A not suitable for use with 5SY8

Mounting concept

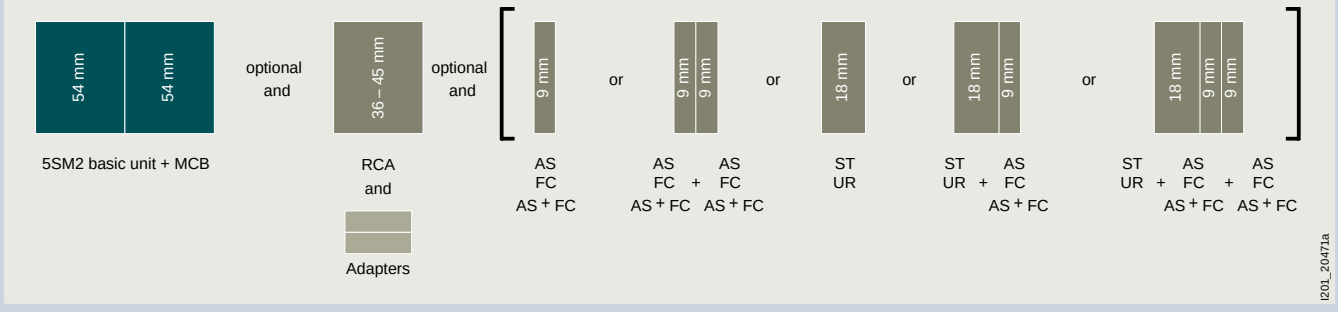

MCB	Miniature circuit breaker	See page 3/1	ST	Shunt trips	See page 4/70
AS	Auxiliary switches	See page 4/64	UR	Undervoltage releases	See page 4/71
FC	Fault signal contacts	See page 4/66	RCA	Remote control auxiliaries	See page 4/72
AS+FC	Auxiliary switches and fault signal contacts	See page 4/67			

Quick selection guide, page 4/8

© Siemens 2025

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Shunt trips (ST)	Article No.
110 ... 415 V AC, 110 ... 220 V DC	5ST3030
24 ... 48 V AC/DC	5ST3031
12 V DC	5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

Remote control auxiliaries (RCA)		Article No.
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
Communication-capable	100 ... 240 V AC	5ST3072-0MC
Communication-capable with RCD/IR test	100 ... 240 V AC	5ST3073-0MC

Adapters for remote control auxiliaries (RCA)	Article No.
5SM2 with 5SY (2P)	5ST3820-3 + 5ST3820-1
5SM2 with 5SL (2P)	5ST3820-3 + 5ST3820-6

Quick selection guide, page 4/8

© Siemens 2025

5SM2 RC units

Type A and AC, 4-pole

		For 5SY miniature circuit breakers [1]			
Rated voltage U_n		400 V AC			
Version		Instantaneous	Super resistant [K]	Selective [S]	SIGRES, instantaneous
Mounting width		3 MW	3 MW	3 MW	3 MW
$I_{\Delta n}$	I_n				
Type A					
30 mA	0.3 ... 40 A	5SM2342-6	5SM2342-6KK01	–	–
	0.3 ... 63 A	5SM2345-6	5SM2345-6KK01	–	5SM2345-6KK12
	80 ... 100 A	–	–	–	–
100 mA	0.3 ... 63 A	5SM2445-6	–	–	–
300 mA	0.3 ... 40 A	5SM2642-6	–	–	–
	0.3 ... 63 A	5SM2645-6	–	5SM2645-8	5SM2645-6KK12
	80 ... 100 A	–	–	–	–
500 mA	0.3 ... 63 A	5SM2745-6	–	5SM2745-8	–
1000 mA	0.3 ... 40 A	–	–	5SM2842-8	–
	0.3 ... 63 A	–	–	5SM2845-8	–
	80 ... 100 A	–	–	–	–
Type AC					
30 mA	0.3 ... 40 A	5SM2342-0	–	–	–
	0.3 ... 63 A	5SM2345-0	–	–	–
	80 ... 100 A	–	–	–	–
300 mA	0.3 ... 40 A	5SM2642-0	–	–	–
	0.3 ... 63 A	5SM2645-0	–	5SM2645-2	–
	80 ... 100 A	–	–	–	–
500 mA	0.3 ... 63 A	5SM2745-0	–	–	–
1000 mA	0.3 ... 63 A	–	–	5SM2845-2	–

[1] Not suitable for use with 5SY5 and type A not suitable for use with 5SY8

Mounting concept

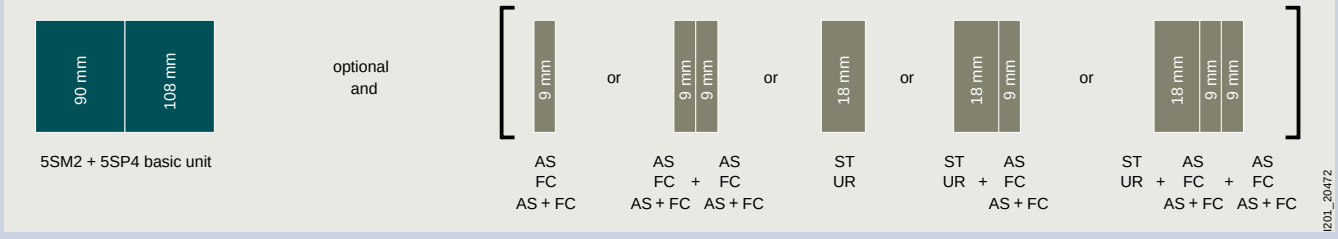

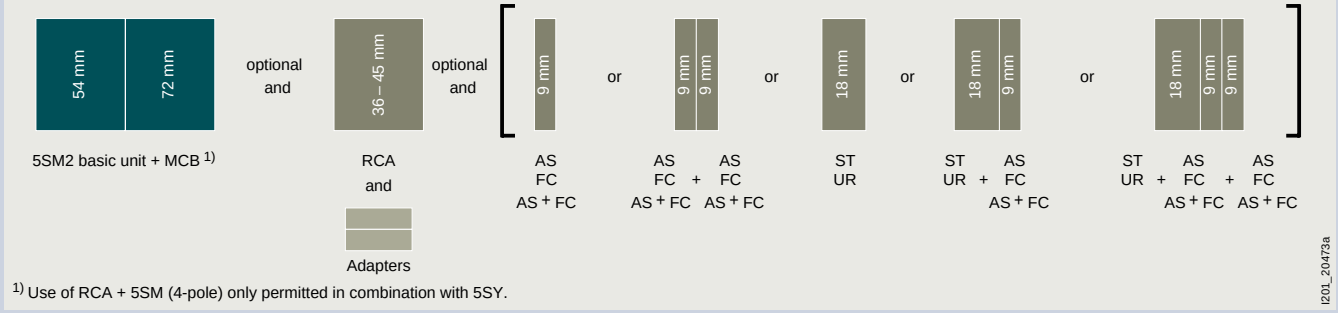

[1] Use of RCA + 5SM (4-pole) only permitted in combination with 5SY.

MCB Miniature circuit breaker See page 3/1
AS Auxiliary switches See page 4/64
FC Fault signal contacts See page 4/66
AS+FC Auxiliary switches and fault signal contacts See page 4/67
ST Shunt trips See page 4/70
UR Undervoltage releases See page 4/71
RCA Remote control auxiliaries See page 4/72

Quick selection guide, page 4/8

© Siemens 2025

For 5SL4 miniature circuit breakers		For 5SP4 miniature circuit breakers (B and C characteristics)	
400 V AC		400 V AC	
Instantaneous	Selective [S]	Instantaneous	Selective [S]
3 MW	3 MW	5 MW	5 MW
5SM2343-6	–	–	–
5SM2346-6	–	–	–
–	–	5SM2347-6	–
–	–	–	–
5SM2643-6	–	–	–
5SM2646-6	5SM2646-8	–	–
–	–	5SM2647-6	5SM2647-8
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	5SM2847-8
5SM2343-0	–	–	–
5SM2346-0	–	–	–
–	–	5SM2347-0	–
5SM2643-0	–	–	–
5SM2646-0	5SM2646-2	–	–
–	–	5SM2647-0	–
–	–	–	–
–	–	–	–

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Shunt trips (ST)	Article No.
110 ... 415 V AC, 110 ... 220 V DC	5ST3030
24 ... 48 V AC/DC	5ST3031
12 V DC	5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

Remote control auxiliaries (RCA)		Article No.
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
Communication-capable	100 ... 240 V AC	5ST3072-0MC
Communication-capable with RCD/IR test	100 ... 240 V AC	5ST3073-0MC

Adapters for remote control auxiliaries (RCA)	Article No.
5SM2 with 5SY (2P)	5ST3820-3 + 5ST3820-1
5SM2 with 5SL (2P)	5ST3820-3 + 5ST3820-6

Quick selection guide, page 4/8

© Siemens 2025

5SU1 RCBOs

Type A, 1P+N

	Instantaneous		
Rated voltage U_n	230 V AC		
Mounting width	2 MW	2 MW	2 MW
Short-circuit breaking capacity	4.5 kA	4.5 kA	6 kA
N connection	Right	Left	Right

4

$I_{\Delta n}$	I_n	Bulk packaging (36 units)	Characteristic C	C	Characteristic B	C
Type A						
10 mA	6 A	–	–	–	–	–
	10 A	–	–	–	–	–
	13 A	–	–	–	–	–
	16 A	–	–	–	–	–
30 mA	6 A	–	5SU1353-7KK06	5SU1353-7KL06	5SU1356-6KK06	5SU1356-7KK06
		■	–	–	5SU1356-6GV06	5SU1356-7GV06
	8 A	–	5SU1353-7KK08	–	–	5SU1356-7KK08
	10 A	–	5SU1353-7KK10	5SU1353-7KL10	5SU1356-6KK10	5SU1356-7KK10
		■	–	–	5SU1356-6GV10	5SU1356-7GV10
	13 A	–	5SU1353-7KK13	–	5SU1356-6KK13	5SU1356-7KK13
	16 A	–	5SU1353-7KK16	5SU1353-7KL16	5SU1356-6KK16	5SU1356-7KK16
		■	–	–	5SU1356-6GV16	5SU1356-7GV16
	20 A	–	5SU1353-7KK20	5SU1353-7KL20	5SU1356-6KK20	5SU1356-7KK20
	25 A	–	5SU1353-7KK25	5SU1353-7KL25	5SU1356-6KK25	5SU1356-7KK25
	32 A	–	5SU1353-7KK32	5SU1353-7KL32	5SU1356-6KK32	5SU1356-7KK32
	40 A	–	5SU1353-7KK40	5SU1353-7KL40	5SU1356-6KK40	5SU1356-7KK40
300 mA	6 A	–	5SU1653-7KK06	–	5SU1656-6KK06	5SU1656-7KK06
	10 A	–	5SU1653-7KK10	–	5SU1656-6KK10	5SU1656-7KK10
	13 A	–	5SU1653-7KK13	–	5SU1656-6KK13	5SU1656-7KK13
	16 A	–	5SU1653-7KK16	–	5SU1656-6KK16	5SU1656-7KK16
	20 A	–	5SU1653-7KK20	–	5SU1656-6KK20	5SU1656-7KK20
	25 A	–	5SU1653-7KK25	–	5SU1656-6KK25	5SU1656-7KK25
	32 A	–	5SU1653-7KK32	–	5SU1656-6KK32	5SU1656-7KK32
	40 A	–	5SU1653-7KK40	–	5SU1656-6KK40	5SU1656-7KK40

Mounting concept

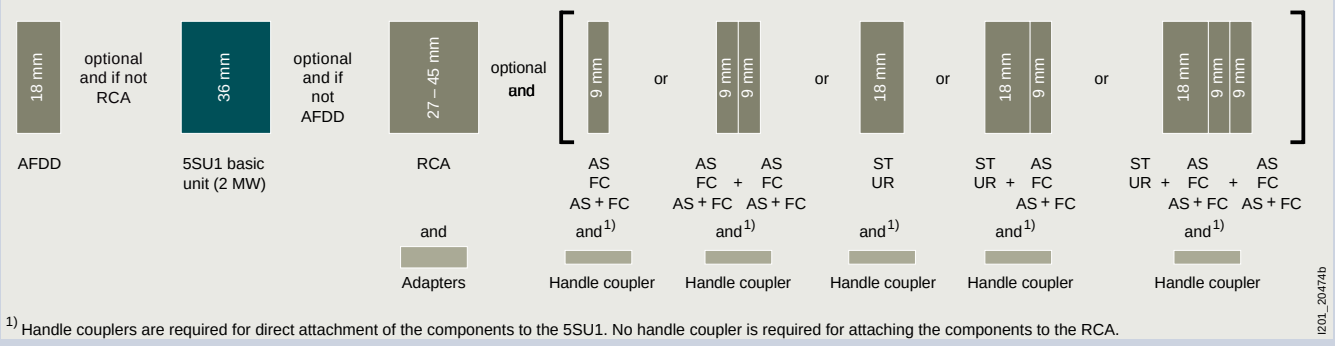

1) Handle couplers are required for direct attachment of the components to the 5SU1. No handle coupler is required for attaching the components to the RCA.

AFDD	Arc fault detection unit	See page 4/56	ST	Shunt trips	See page 4/70
AS	Auxiliary switches	See page 4/64	UR	Undervoltage releases	See page 4/71
FC	Fault signal contacts	See page 4/66	RCA	Remote control auxiliaries	See page 4/72
AS+FC	Auxiliary switches and fault signal contacts	See page 4/67			

Quick selection guide, page 4/10

© Siemens 2025

Instantaneous		Short-time delayed [G], super resistant [K]	
230 V AC		230 V AC	
2 MW		2 MW	
10 kA		10 kA	
Right		Right	
Characteristic		**Characteristic**	
B	**C**	**B**	**C**
5SU1154-6KK06	5SU1154-7KK06	–	–
5SU1154-6KK10	5SU1154-7KK10	–	–
5SU1154-6KK13	5SU1154-7KK13	–	–
5SU1154-6KK16	5SU1154-7KK16	–	–
5SU1354-6KK06	5SU1354-7KK06	–	–
5SU1354-6GV06	5SU1354-7GV06	–	–
–	5SU1354-7KK08	–	–
5SU1354-6KK10	5SU1354-7KK10	5SU1354-6LB10	5SU1354-7LB10
5SU1354-6GV10	5SU1354-7GV10	–	–
5SU1354-6KK13	5SU1354-7KK13	5SU1354-6LB13	5SU1354-7LB13
5SU1354-6KK16	5SU1354-7KK16	5SU1354-6LB16	5SU1354-7LB16
5SU1354-6GV16	5SU1354-7GV16	–	–
5SU1354-6KK20	5SU1354-7KK20	5SU1354-6LB20	5SU1354-7LB20
5SU1354-6KK25	5SU1354-7KK25	5SU1354-6LB25	5SU1354-7LB25
5SU1354-6KK32	5SU1354-7KK32	5SU1354-6LB32	5SU1354-7LB32
5SU1354-6KK40	5SU1354-7KK40	5SU1354-6LB40	5SU1354-7LB40
5SU1654-6KK06	5SU1654-7KK06	–	–
5SU1654-6KK10	5SU1654-7KK10	–	–
5SU1654-6KK13	5SU1654-7KK13	–	–
5SU1654-6KK16	5SU1654-7KK16	–	–
5SU1654-6KK20	5SU1654-7KK20	–	–
5SU1654-6KK25	5SU1654-7KK25	–	–
5SU1654-6KK32	5SU1654-7KK32	–	–
5SU1654-6KK40	5SU1654-7KK40	–	–

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		**Article No.**
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		**Article No.**
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC
Shunt trips (ST)		**Article No.**
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01
Arc fault detection units (AFDD)		**Article No.**
For 5SU1 basic units	I_n up to 16 A	5SM6021-2
	I_n up to 40 A	5SM6024-2

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Handle couplers for AS, FC, AS+FC, ST and UR		**Article No.**
1 set = 5 units		5ST3805-1
Remote control auxiliaries (RCA)		**Article No.**
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071
Communication-capable	100 ... 240 V AC	5ST3072-0MC
Communication-capable with RCD/IR test	100 ... 240 V AC	5ST3073-0MC
Adapters for remote control auxiliaries (RCA)		**Article No.**
2 MW		5ST3820-5

Quick selection guide, page 4/10

© Siemens 2025

5SU1 RCBOs

Type F, 1P+N

	Super resistant [K]
Rated voltage U_n	230 V AC
Mounting width	2 MW
Short-circuit breaking capacity	10 kA
N connection	Right

4

$I_{\Delta n}$	I_n	Characteristic B	Characteristic C
Type F			
30 mA	6 A	5SU1354-3KK06	5SU1354-4KK06
	10 A	5SU1354-3KK10	5SU1354-4KK10
	13 A	5SU1354-3KK13	5SU1354-4KK13
	16 A	5SU1354-3KK16	5SU1354-4KK16
	20 A	5SU1354-3KK20	5SU1354-4KK20
	25 A	5SU1354-3KK25	5SU1354-4KK25
	32 A	5SU1354-3KK32	5SU1354-4KK32
	40 A	5SU1354-3KK40	5SU1354-4KK40

Mounting concept

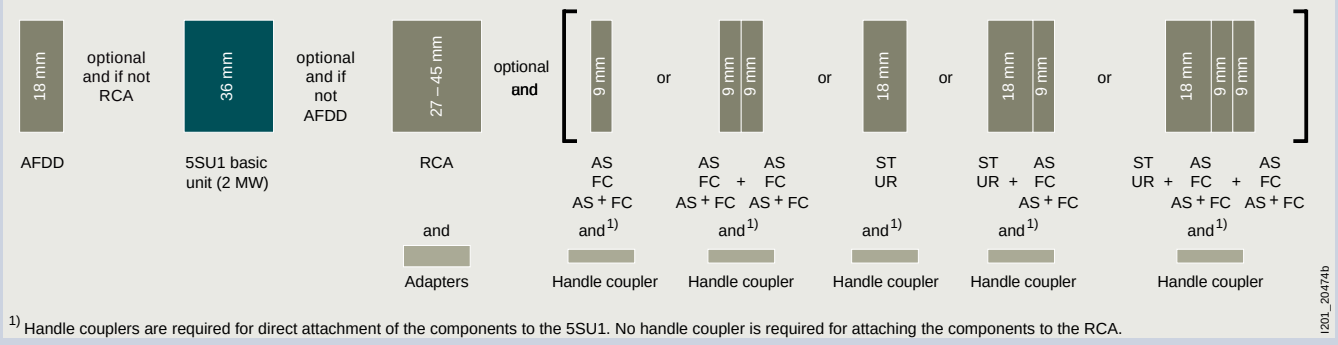

1) Handle couplers are required for direct attachment of the components to the 5SU1. No handle coupler is required for attaching the components to the RCA.

AFDD	Arc fault detection unit	See page 4/56	ST	Shunt trips	See page 4/70
AS	Auxiliary switches	See page 4/64	UR	Undervoltage releases	See page 4/71
FC	Fault signal contacts	See page 4/66	RCA	Remote control auxiliaries	See page 4/72
AS+FC	Auxiliary switches and fault signal contacts	See page 4/67			

Quick selection guide, page 4/10

© Siemens 2025

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Shunt trips (ST)	Article No.
110 ... 415 V AC, 110 ... 220 V DC	5ST3030
24 ... 48 V AC/DC	5ST3031
12 V DC	5ST3031-0XX01

Arc fault detection units (AFDD)		Article No.
For 5SU1 basic units	I_n up to 16 A	5SM6021-2
	I_n up to 40 A	5SM6024-2

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

Handle couplers for AS, FC, AS+FC, ST and UR	Article No.
1 set = 5 units	5ST3805-1

Remote control auxiliaries (RCA)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071
Communication-capable	100 ... 240 V AC	5ST3072-0MC
Communication-capable with RCD/IR test	100 ... 240 V AC	5ST3073-0MC

Adapters for remote control auxiliaries (RCA)	Article No.
2 MW	5ST3820-5

Quick selection guide, page 4/10

© Siemens 2025

5SU1 RCBOs

Type AC, 1P+N

	Instantaneous		
Rated voltage U_n	230 V AC		
Mounting width	2 MW	2 MW	2 MW
Short-circuit breaking capacity	4.5 kA	4.5 kA	6 kA
N connection	Right	Left	Right

$I_{\Delta n}$	I_n	Bulk packaging (36 units)	Characteristic C	C	Characteristic B	C
Type AC						
30 mA	6 A	–	5SU1353-1KK06	5SU1353-1KL06	5SU1356-0KK06	5SU1356-1KK06
	8 A	–	5SU1353-1KK08	–	–	5SU1356-1KK08
	10 A	–	5SU1353-1KK10	5SU1353-1KL10	5SU1356-0KK10	5SU1356-1KK10
		■	5SU1353-1GV10	–	–	–
	13 A	–	5SU1353-1KK13	5SU1353-1KL13	5SU1356-0KK13	5SU1356-1KK13
	16 A	–	5SU1353-1KK16	5SU1353-1KL16	5SU1356-0KK16	5SU1356-1KK16
		■	5SU1353-1GV16	–	–	5SU1356-1GV16
	20 A	–	5SU1353-1KK20	5SU1353-1KL20	5SU1356-0KK20	5SU1356-1KK20
	25 A	–	5SU1353-1KK25	5SU1353-1KL25	5SU1356-0KK25	5SU1356-1KK25
	32 A	–	5SU1353-1KK32	5SU1353-1KL32	5SU1356-0KK32	5SU1356-1KK32
	40 A	–	5SU1353-1KK40	5SU1353-1KL40	5SU1356-0KK40	5SU1356-1KK40
100 mA	6 A	–	–	–	–	–
	10 A	–	–	–	–	–
	13 A	–	–	–	–	–
	16 A	–	–	–	–	–
	20 A	–	–	–	–	–
	25 A	–	–	–	–	–
	32 A	–	–	–	–	–
	40 A	–	–	–	–	–
300 mA	6 A	–	5SU1653-1KK06	5SU1653-1KL06	5SU1656-0KK06	5SU1656-1KK06
	10 A	–	5SU1653-1KK10	5SU1653-1KL10	5SU1656-0KK10	5SU1656-1KK10
	13 A	–	5SU1653-1KK13	5SU1653-1KL16	5SU1656-0KK13	5SU1656-1KK13
	16 A	–	5SU1653-1KK16	–	5SU1656-0KK16	5SU1656-1KK16
		■	5SU1653-1GV16	–	–	–
	20 A	–	5SU1653-1KK20	5SU1653-1KL20	5SU1656-0KK20	5SU1656-1KK20
	25 A	–	5SU1653-1KK25	5SU1653-1KL25	5SU1656-0KK25	5SU1656-1KK25
	32 A	–	5SU1653-1KK32	5SU1653-1KL32	5SU1656-0KK32	5SU1656-1KK32
	40 A	–	5SU1653-1KK40	5SU1653-1KL40	5SU1656-0KK40	5SU1656-1KK40

Mounting concept

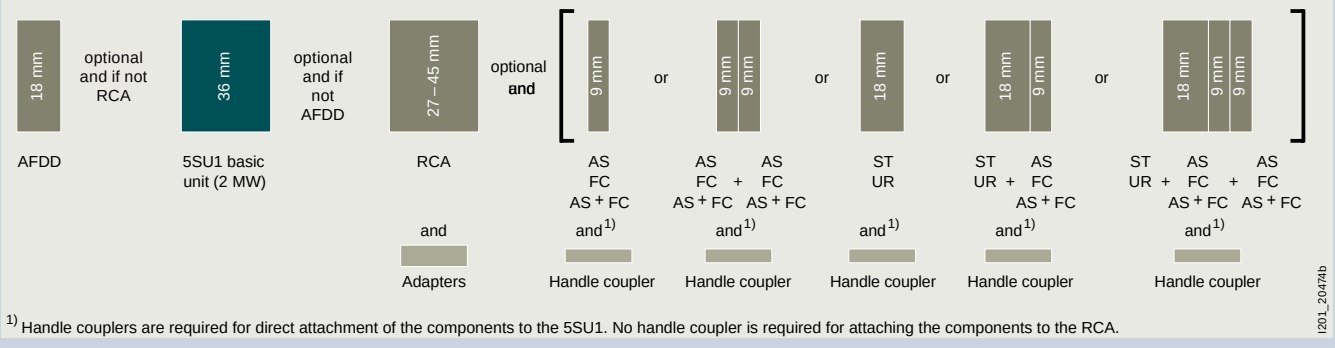

1) Handle couplers are required for direct attachment of the components to the 5SU1. No handle coupler is required for attaching the components to the RCA.

AFDD	Arc fault detection unit	See page 4/56	ST	Shunt trips	See page 4/70
AS	Auxiliary switches	See page 4/64	UR	Undervoltage releases	See page 4/71
FC	Fault signal contacts	See page 4/66	RCA	Remote control auxiliaries	See page 4/72
AS+FC	Auxiliary switches and fault signal contacts	See page 4/67			

Quick selection guide, page 4/10

© Siemens 2025

Instantaneous		Short-time delayed [G], super resistant [K]	
230 V AC		230 V AC	
2 MW		2 MW	
10 kA		10 kA	
Right		Right	
Characteristic		**Characteristic**	
B	**C**	**B**	**C**
5SU1354-0KK06	5SU1354-1KK06	–	–
–	5SU1354-1KK08	–	–
5SU1354-0KK10	5SU1354-1KK10	5SU1354-0LB10	5SU1354-1LB10
–	–	–	–
5SU1354-0KK13	5SU1354-1KK13	5SU1354-0LB13	5SU1354-1LB13
5SU1354-0KK16	5SU1354-1KK16	5SU1354-0LB16	5SU1354-1LB16
–	–	–	–
5SU1354-0KK20	5SU1354-1KK20	5SU1354-0LB20	5SU1354-1LB20
5SU1354-0KK25	5SU1354-1KK25	5SU1354-0LB25	5SU1354-1LB25
5SU1354-0KK32	5SU1354-1KK32	5SU1354-0LB32	5SU1354-1LB32
5SU1354-0KK40	5SU1354-1KK40	5SU1354-0LB40	5SU1354-1LB40
–	5SU1454-1KK06	–	–
–	5SU1454-1KK10	–	–
–	5SU1454-1KK13	–	–
–	5SU1454-1KK16	–	–
–	5SU1454-1KK20	–	–
–	5SU1454-1KK25	–	–
–	5SU1454-1KK32	–	–
–	5SU1454-1KK40	–	–
5SU1654-0KK06	5SU1654-1KK06	–	–
5SU1654-0KK10	5SU1654-1KK10	–	–
5SU1654-0KK13	5SU1654-1KK13	–	–
5SU1654-0KK16	5SU1654-1KK16	–	–
–	–	–	–
5SU1654-0KK20	5SU1654-1KK20	–	–
5SU1654-0KK25	5SU1654-1KK25	–	–
5SU1654-0KK32	5SU1654-1KK32	–	–
5SU1654-0KK40	5SU1654-1KK40	–	–

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Shunt trips (ST)	Article No.
110 ... 415 V AC, 110 ... 220 V DC	5ST3030
24 ... 48 V AC/DC	5ST3031
12 V DC	5ST3031-0XX01

Arc fault detection units (AFDD)		Article No.
For 5SU1 basic units	I_n up to 16 A	5SM6021-2
	I_n up to 40 A	5SM6024-2

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

Handle couplers for AS, FC, AS+FC, ST and UR	Article No.
1 set = 5 units	5ST3805-1

Remote control auxiliaries (RCA)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071
Communication-capable	100 ... 240 V AC	5ST3072-0MC
Communication-capable with RCD/IR test	100 ... 240 V AC	5ST3073-0MC

Adapters for remote control auxiliaries (RCA)	Article No.
2 MW	5ST3820-5

Quick selection guide, page 4/10

© Siemens 2025

5SU1 RCBOs

Type A, 2/3/4-pole with residual current tripped indication

		2-pole Instantaneous			
Rated voltage U_n		230 V AC			
Short-circuit breaking capacity		6 kA		10 kA	
$I_{\Delta n}$	I_n	Characteristic		Characteristic	
		B	C	B	C
30 mA	6 A	5SU1326-6FP06	5SU1326-7FP06	5SU1324-6FP06	5SU1324-7FP06
	10 A	5SU1326-6FP10	5SU1326-7FP10	5SU1324-6FP10	5SU1324-7FP10
	13 A	5SU1326-6FP13	5SU1326-7FP13	5SU1324-6FP13	5SU1324-7FP13
	16 A	5SU1326-6FP16	5SU1326-7FP16	5SU1324-6FP16	5SU1324-7FP16
	20 A	5SU1326-6FP20	5SU1326-7FP20	5SU1324-6FP20	5SU1324-7FP20
	25 A	5SU1326-6FP25	5SU1326-7FP25	5SU1324-6FP25	5SU1324-7FP25
	32 A	5SU1326-6FP32	5SU1326-7FP32	5SU1324-6FP32	5SU1324-7FP32
300 mA	6 A	–	–	–	–
	10 A	–	–	–	–
	16 A	–	–	–	–
	20 A	–	–	–	–
	25 A	–	–	–	–
	32 A	–	–	–	–

Mounting concept

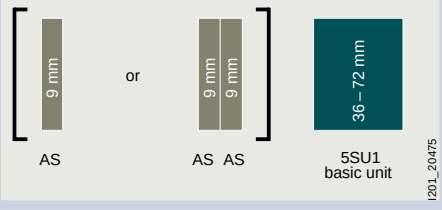

AS Auxiliary switches See page 4/64

Quick selection guide, page 4/10

© Siemens 2025

2-pole Short-time delayed, super resistant [K]		3-pole Instantaneous		4-pole Instantaneous	
230 V AC		400 V AC		400 V AC	
10 kA		6 kA		6 kA	
Characteristic		Characteristic		Characteristic	
B	C	B	C	B	C
–	5SU1324-7FR06	5SU1336-6FP06	5SU1336-7FP06	5SU1346-6FP06	5SU1346-7FP06
–	5SU1324-7FR10	5SU1336-6FP10	5SU1336-7FP10	5SU1346-6FP10	5SU1346-7FP10
–	–	5SU1336-6FP13	5SU1336-7FP13	5SU1346-6FP13	5SU1346-7FP13
5SU1324-6FR16	5SU1324-7FR16	5SU1336-6FP16	5SU1336-7FP16	5SU1346-6FP16	5SU1346-7FP16
5SU1324-6FR20	5SU1324-7FR20	5SU1336-6FP20	5SU1336-7FP20	5SU1346-6FP20	5SU1346-7FP20
5SU1324-6FR25	5SU1324-7FR25	5SU1336-6FP25	5SU1336-7FP25	5SU1346-6FP25	5SU1346-7FP25
–	5SU1324-7FR32	5SU1336-6FP32	5SU1336-7FP32	5SU1346-6FP32	5SU1346-7FP32
–	–	5SU1636-6FP06	5SU1636-7FP06	5SU1646-6FP06	5SU1646-7FP06
–	–	5SU1636-6FP10	5SU1636-7FP10	5SU1646-6FP10	5SU1646-7FP10
–	–	5SU1636-6FP16	5SU1636-7FP16	5SU1646-6FP16	5SU1646-7FP16
–	–	5SU1636-6FP20	5SU1636-7FP20	5SU1646-6FP20	5SU1646-7FP20
–	–	5SU1636-6FP25	5SU1636-7FP25	5SU1646-6FP25	5SU1646-7FP25
–	–	5SU1636-6FP32	5SU1636-7FP32	5SU1646-6FP32	5SU1646-7FP32

Accessories

Auxiliary switches (AS)		Article No.
1 CO	Standard	5ST1010-0FP

Quick selection guide, page 4/10

© Siemens 2025

5SU1 RCBOs

Type A and AC, 2-pole

		Instantaneous		
Rated voltage U_n		110 V AC		230 V AC
Mounting width		3 MW		3 MW
Short-circuit breaking capacity		10 kA		10 kA
$I_{\Delta n}$	I_n	Characteristic B	C	Characteristic B
Type A				
30 mA	6 A	5SU1324-6KX06	5SU1324-7KX06	5SU1324-6FA06
	10 A	5SU1324-6KX10	5SU1324-7KX10	5SU1324-6FA10
	13 A	5SU1324-6KX13	5SU1324-7KX13	5SU1324-6FA13
	16 A	5SU1324-6KX16	5SU1324-7KX16	5SU1324-6FA16
	20 A	5SU1324-6KX20	5SU1324-7KX20	5SU1324-6FA20
	25 A	5SU1324-6KX25	5SU1324-7KX25	5SU1324-6FA25
	32 A	5SU1324-6KX32	5SU1324-7KX32	5SU1324-6FA32
	40 A	5SU1324-6KX40	5SU1324-7KX40	5SU1324-6FA40
	125 A	–	–	–
300 mA	125 A	–	–	–
Type AC				
30 mA	125 A	–	–	–
300 mA	125 A	–	–	–

Mounting concept

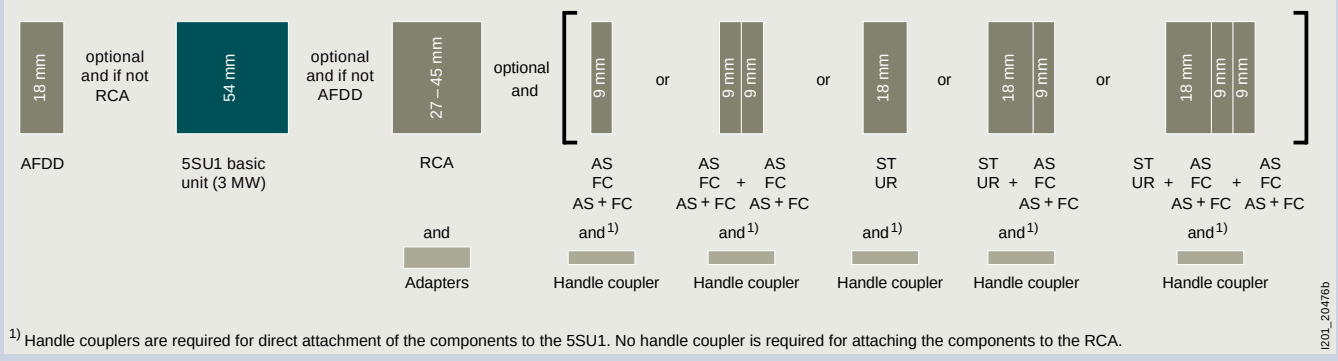

1) Handle couplers are required for direct attachment of the components to the 5SU1. No handle coupler is required for attaching the components to the RCA.

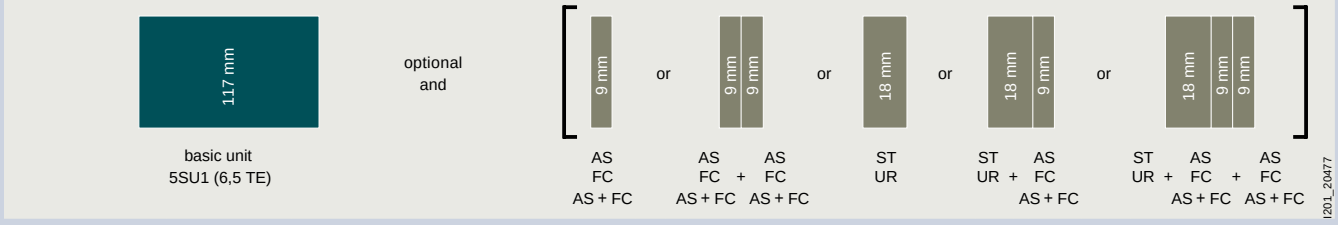

AFDD Arc fault detection units See page 4/56
AS Auxiliary switches See page 4/64
FC Fault signal contacts See page 4/66
AS+FC Auxiliary switches and fault signal contacts See page 4/67
ST Shunt trips See page 4/70
UR Undervoltage releases See page 4/71
RCA Remote control auxiliaries See page 4/72

Quick selection guide, page 4/10

© Siemens 2025

			Selective [S]	
			230 V AC	
	6.5 MW		6.5 MW	
	10 kA		10 kA	
	Characteristic		Characteristic	
C	B	C	B	C
5SU1324-7FA06	–	–	–	–
5SU1324-7FA10	–	–	–	–
5SU1324-7FA13	–	–	–	–
5SU1324-7FA16	–	–	–	–
5SU1324-7FA20	–	–	–	–
5SU1324-7FA25	–	–	–	–
5SU1324-7FA32	–	–	–	–
5SU1324-7FA40	–	–	–	–
–	5SU1324-6KK82	5SU1324-7KK82	–	–
–	5SU1624-6KK82	5SU1624-7KK82	5SU1624-6WK82	5SU1624-7WK82
–	5SU1324-0KK82	5SU1324-1KK82	–	–
–	5SU1624-0KK82	5SU1624-1KK82	–	–

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		**Article No.**
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		**Article No.**
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC
Shunt trips (ST)		**Article No.**
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01
Arc fault detection units (AFDD)		**Article No.**
For 5SU1 basic units	I_n up to 16 A	5SM6021-2
	I_n up to 40 A	5SM6024-2

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Handle couplers for AS, FC, AS+FC, ST and UR		**Article No.**
1 set = 5 units		5ST3805-1
Remote control auxiliaries (RCA)		**Article No.**
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071
Communication-capable	100 ... 240 V AC	5ST3072-0MC
Communication-capable with RCD/IR test	100 ... 240 V AC	5ST3073-0MC
Adapters for remote control auxiliaries (RCA)		**Article No.**
2 MW		5ST3820-5

Quick selection guide, page 4/10

© Siemens 2025

5SU1 RCBOs

Type A and AC, 4-pole

	Instantaneous		Selective [S]	
Rated voltage U_n	400 V AC		400 V AC	
Mounting width	11 MW		11 MW	
Short-circuit breaking capacity	10 kA		10 kA	

$I_{\Delta n}$	I_n	Characteristic B	Characteristic C	Characteristic B	Characteristic C
Type A					
30 mA	125 A	5SU1344-6KK82	5SU1344-7KK82	–	–
300 mA	125 A	5SU1644-6KK82	5SU1644-7KK82	5SU1644-6WK82	5SU1644-7WK82
1000 mA	125 A	–	–	5SU1844-6WK82	5SU1844-7WK82
Type AC					
30 mA	125 A	5SU1344-0KK82	5SU1344-1KK82	–	–
300 mA	125 A	5SU1644-0KK82	5SU1644-1KK82	–	–

Mounting concept

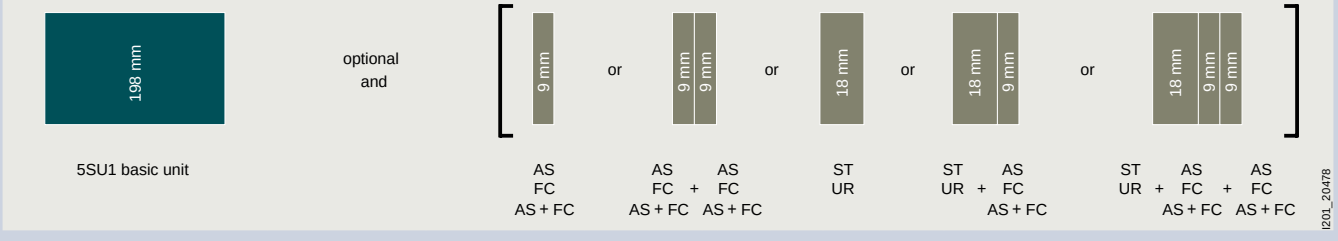

AS Auxiliary switches See page 4/64
FC Fault signal contacts See page 4/66
AS+FC Auxiliary switches and fault signal contacts See page 4/67

ST Shunt trips See page 4/70
UR Undervoltage releases See page 4/71

Quick selection guide, page 4/10

© Siemens 2025

Type B and B+, 4-pole

	Super resistant [K]			Selective [S]	
Rated voltage U_n	400 V AC		480 V AC	400 V AC	
Mounting width	11 MW		11 MW	11 MW	
Short-circuit breaking capacity	10 kA		10 kA	10 kA	

$I_{\Delta n}$	I_n	Characteristic		Characteristic	Characteristic	
		C	D	C	C	D
Type B						
30 mA	100 A	5SU1374-7AK81	5SU1374-8AK81	–	–	–
	125 A	5SU1374-7AK82	–	–	–	–
300 mA	100 A	5SU1674-7AK81	5SU1674-8AK81	5SU1674-7CK81	–	5SU1674-8BK81
	125 A	5SU1674-7AK82	–	5SU1674-7CK82	5SU1674-7BK82	–
Type B+						
30 mA	100 A	5SU1374-7DK81	5SU1374-8DK81	–	–	–
	125 A	5SU1374-7DK82	–	–	–	–
300 mA	100 A	5SU1674-7DK81	5SU1674-8DK81	5SU1674-7FK81	–	5SU1674-8EK81
	125 A	5SU1674-7DK82	–	5SU1674-7FK82	5SU1674-7EK82	–

4

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Shunt trips (ST)	Article No.
110 ... 415 V AC, 110 ... 220 V DC	5ST3030
24 ... 48 V AC/DC	5ST3031
12 V DC	5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

Quick selection guide, page 4/10

© Siemens 2025

5SV1 RCBOs

Type A, 1P+N

			Instantaneous				Short-time delayed [G], Super resistant [K]	
		Rated voltage U_n	230 V AC				230 V AC	
		Mounting width	1 MW		1 MW		1 MW	
		Short-circuit breaking capacity	4.5 kA		6 kA		6 kA	
		N connection	Right		Right		Right	
$I_{\Delta n}$	I_n	Bulk packaging (12 units)	Characteristic B	Characteristic C	Characteristic B	Characteristic C	Characteristic B	Characteristic C
Typ A								
30 mA	2 A	–	–	5SV1313-7KK02	–	5SV1316-7KK02	–	–
	4 A	–	–	5SV1313-7KK04	–	5SV1316-7KK04	–	–
	6 A	–	5SV1313-6KK06	5SV1313-7KK06	5SV1316-6KK06	5SV1316-7KK06	5SV1316-6LK06	5SV1316-7LK06
		■	–	–	5SV1316-6GV06	5SV1316-7GV06	–	–
	10 A	–	5SV1313-6KK10	5SV1313-7KK10	5SV1316-6KK10	5SV1316-7KK10	5SV1316-6LK10	5SV1316-7LK10
		■	–	–	5SV1316-6GV10	5SV1316-7GV10	–	–
	13 A	–	5SV1313-6KK13	5SV1313-7KK13	5SV1316-6KK13	5SV1316-7KK13	5SV1316-6LK13	5SV1316-7LK13
		■	–	–	5SV1316-6GV13	5SV1316-7GV13	–	–
	16 A	–	5SV1313-6KK16	5SV1313-7KK16	5SV1316-6KK16	5SV1316-7KK16	5SV1316-6LK16	5SV1316-7LK16
		■	–	–	5SV1316-6GV16	5SV1316-7GV16	–	–
300 mA	2 A	–	–	5SV1613-7KK02	–	5SV1616-7KK02	–	–
	4 A	–	–	5SV1613-7KK04	–	5SV1616-7KK04	–	–
	6 A	–	5SV1613-6KK06	5SV1613-7KK06	5SV1616-6KK06	5SV1616-7KK06	–	–
	10 A	–	5SV1613-6KK10	5SV1613-7KK10	5SV1616-6KK10	5SV1616-7KK10	–	–
	13 A	–	5SV1613-6KK13	5SV1613-7KK13	5SV1616-6KK13	5SV1616-7KK13	–	–
	16 A	–	5SV1613-6KK16	5SV1613-7KK16	5SV1616-6KK16	5SV1616-7KK16	–	–

Mounting concept

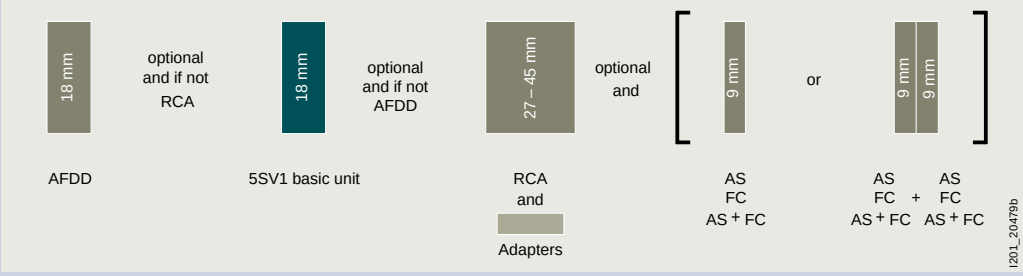

AFDD Arc fault detection units See page 4/56
AS Auxiliary switches See page 4/64
FC Fault signal contacts See page 4/66
AS+FC Auxiliary switches and fault signal contacts See page 4/67
RCA Remote control auxiliaries See page 4/72

Quick selection guide, page 4/10

© Siemens 2025

Type F and AC, 1P+N

			Instantaneous			Super resistant [K]	
		Rated voltage U_n	230 V AC			230 V AC	
		Mounting width	1 MW	1 MW		1 MW	
		Short-circuit breaking capacity	4.5 kA	6 kA		6 kA	
		N connection	Right	Right		Right	
$I_{\Delta n}$	I_n	Bulk packaging (12 units)	Characteristic C	Characteristic B	Characteristic C	Characteristic B	Characteristic C
Type F							
30 mA	6 A	–	–	–	–	5SV1316-3KK06	5SV1316-4KK06
	10 A	–	–	–	–	5SV1316-3KK10	5SV1316-4KK10
	13 A	–	–	–	–	5SV1316-3KK13	5SV1316-4KK13
	16 A	–	–	–	–	5SV1316-3KK16	5SV1316-4KK16
Type AC							
30 mA	2 A	–	5SV1313-1KK02	–	5SV1316-1KK02	–	–
	4 A	–	5SV1313-1KK04	–	5SV1316-1KK04	–	–
	6 A	–	5SV1313-1KK06	5SV1316-0KK06	5SV1316-1KK06	–	–
	10 A	–	5SV1313-1KK10	5SV1316-0KK10	5SV1316-1KK10	–	–
		■	5SV1313-1GV10	–	5SV1316-1GV10	–	–
	13 A	–	5SV1313-1KK13	5SV1316-0KK13	5SV1316-1KK13	–	–
	16 A	–	5SV1313-1KK16	5SV1316-0KK16	5SV1316-1KK16	–	–
		■	5SV1313-1GV16	–	5SV1316-1GV16	–	–
300 mA	2 A	–	5SV1613-1KK02	–	5SV1616-1KK02	–	–
	4 A	–	5SV1613-1KK04	–	5SV1616-1KK04	–	–
	6 A	–	5SV1613-1KK06	5SV1616-0KK06	5SV1616-1KK06	–	–
	10 A	–	5SV1613-1KK10	5SV1616-0KK10	5SV1616-1KK10	–	–
	13 A	–	5SV1613-1KK13	5SV1616-0KK13	5SV1616-1KK13	–	–
	16 A	–	5SV1613-1KK16	5SV1616-0KK16	5SV1616-1KK16	–	–

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Remote control auxiliaries (RCA)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071
Communication-capable	100 ... 240 V AC	5ST3072-0MC
Communication-capable with RCD/IR test	100 ... 240 V AC	5ST3073-0MC

Adapters for remote control auxiliaries (RCA)	Article No.
1 MW	5ST3820-6

Arc fault detection units (AFDD)		Article No.
For 5SV1 basic units	I_n up to 16 A	5SM6011-2

Quick selection guide, page 4/10

© Siemens 2025

5TY1 COM electronic circuit protection devices (ECPD) with measuring and communication function

Siemens EcoTech

Type F [1)]

	SIGRES, super resistant [K]
Rated voltage U_n	230 V AC
Mounting width	2 MW
Short-circuit breaking capacity	75 kA
Magnetic tripping operation (instantaneous tripping)	3 ... 3.6 × I_n
Thermal tripping (delayed tripping)	1.05 ... 1.13 × I_n
N connection	Right

$I_{\Delta n}$	I_n	
Type F		
30 mA	6 A	5TY1350-3MF06
	10 A	5TY1350-3MF10
	16 A	5TY1350-3MF16

[1)] RCBO function conforming to IEC/EN 61009-1 (IEC/EN 62423)

Note:
Please note the country-specific radio licenses of the products at
www.siemens.com/lowvoltage/certificates (109801197)

Accessories

Data transceiver (essential accessory)	Article No.
SENTRON Powercenter 1100	7KN1111-0MC00
SENTRON Powercenter 2000	7KN1211-0MC00

See suitable busbars, from page 4/78 onwards

Quick selection guide, page 4/10

© Siemens 2025

SENTRON Powercenter 1100/2000 data transceiver

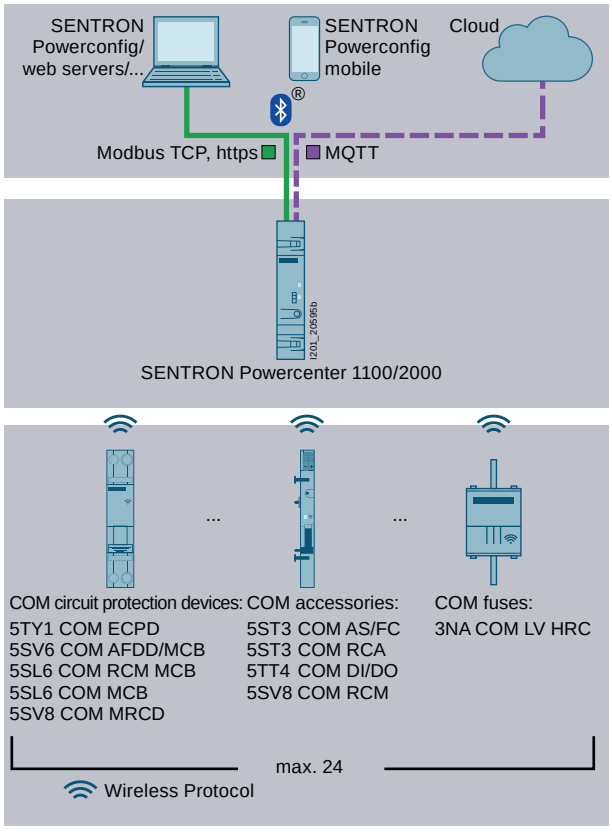

- Wireless radio transmission of measured values to the SENTRON Powercenter 1000/1100/2000 data transceiver
- Commissioning, parameter assignment, firmware updates and further processing of the data via the SENTRON Powercenter 1000/1100/2000 data transceiver

SENTRON Powercenter	Article No.
SENTRON Powercenter 1000	7KN1110-0MC00
SENTRON Powercenter 1100	7KN1111-0MC00
SENTRON Powercenter 2000	7KN1210-0MC00

See page 10/28

You will find further information at **www.siemens.com/lowvoltage/manuals**

Installation Manual – Circuit protection devices with communication and measuring function **(109791805)**

System Manual – Circuit protection devices with communication and measuring function **(109791806)**

Monitoring functions with limit monitoring

- Switching state with trip monitoring: short-circuit, overload, arc fault, residual current, undervoltage, overvoltage
- Counters incl. limit monitoring for:
  - Operating hours
  - Operating hours with load current
  - Operating cycles electrical/mechanical
  - Tripping operations
  - Short circuits
- Limit values for:
  - Overcurrent alarm 1 and alarm 2
  - Undercurrent alarm 1 and alarm 2
  - Overvoltage alarm 1 and alarm 2
  - Undervoltage alarm 1 and alarm 2
  - Temperature

Measured values	Unit
Temperature	°C
Average temperature	°C
Current	A
Average current	A
Maximum current	A
Voltage	V
Line frequency	Hz
Active power	W
Apparent power	VA
Reactive power	Var
Power factor	
Active energy imported	Wh
Active energy exported	Wh
Reactive energy imported	Varh
Reactive energy exported	Varh
Residual current to 1 kHz	mA
Residual current base frequency	mA

Quick selection guide, page 4/10

© Siemens 2025

5SM6 arc fault detection units

For combination with an MCB or RCBO

For combination with basic units			Rated current I_n	
Width of basic unit	Miniature circuit breakers	RCBO		
1 MW	5SL60 (no KL types)	5SV1	Up to 16 A	5SM6011-2
			Up to 40 A	5SM6014-2
2 MW	5SY [1], 5SL4 (only 1+N devices, not compact)	5SU1 (2 MW, 3 MW)	Up to 16 A	5SM6021-2
			Up to 40 A	5SM6024-2

[1] Not suitable for use with 5SY5 or 5SY8

4

Mounting concept

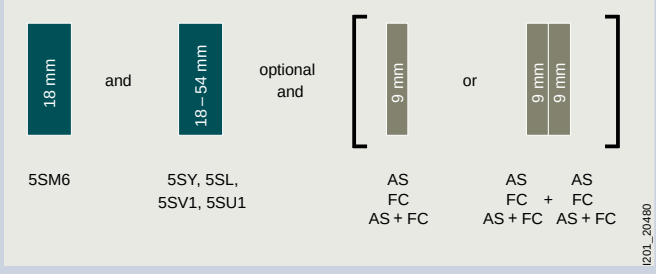

AS	Auxiliary switches	See page 4/64
FC	Fault signal contacts	See page 4/66
AS+FC	Auxiliary switches and fault signal contacts	See page 4/67

The mounting concept shown is only one example of how devices and accessories can be combined.

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		**Article No.**
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		**Article No.**
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC

See suitable busbars, from page 4/78 onwards
See suitable terminals and end caps, from page 4/82 onwards

Quick selection guide, page 4/12

© Siemens 2025

5SV6 AFDD/MCB

Mounting width	1 MW		1 MW pigtail	
Rated current I_n	**Bulk packaging (12 units)**	**Characteristic B**	**Characteristic C**	**Characteristic B**	**Characteristic C**
6 A	–	5SV6016-6KK06	5SV6016-7KK06	5SV6016-6KP06	5SV6016-7KP06
	■	5SV6016-6GV06	5SV6016-7GV06	–	–
10 A	–	5SV6016-6KK10	5SV6016-7KK10	5SV6016-6KP10	5SV6016-7KP10
	■	5SV6016-6GV10	5SV6016-7GV10	–	–
13 A	–	5SV6016-6KK13	5SV6016-7KK13	5SV6016-6KP13	5SV6016-7KP13
	■	5SV6016-6GV13	–	–	–
16 A	–	5SV6016-6KK16	5SV6016-7KK16	5SV6016-6KP16	5SV6016-7KP16
	■	5SV6016-6GV16	5SV6016-7GV16	–	–
20 A	–	5SV6016-6KK20	5SV6016-7KK20	5SV6016-6KP20	5SV6016-7KP20
25 A	–	5SV6016-6KK25	5SV6016-7KK25	5SV6016-6KP25	5SV6016-7KP25
	■	5SV6016-6GV25	–	–	–
32 A	–	5SV6016-6KK32	5SV6016-7KK32	5SV6016-6KP32	5SV6016-7KP32
40 A	–	5SV6016-6KK40	5SV6016-7KK40	5SV6016-6KP40	5SV6016-7KP40

Mounting concept

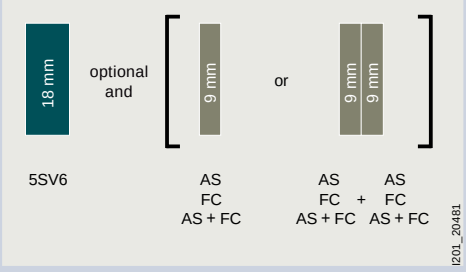

AS	Auxiliary switches	See page 4/64
FC	Fault signal contacts	See page 4/66
AS+FC	Auxiliary switches and fault signal contacts	See page 4/67

Accessories

Auxiliary switches (AS)		**Article No.**
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		**Article No.**
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		**Article No.**
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC

See suitable busbars, from page 4/78 onwards
See suitable terminals and end caps, from page 4/82 onwards

Quick selection guide, page 4/12

© Siemens 2025

5SV6 COM AFDD/MCB with measuring and communication function

Mounting width	1 MW

Rated current I_n	Characteristic B	Characteristic C
6 A	5SV6016-6MC06	5SV6016-7MC06
10 A	5SV6016-6MC10	5SV6016-7MC10
13 A	5SV6016-6MC13	5SV6016-7MC13
16 A	5SV6016-6MC16	5SV6016-7MC16
20 A	5SV6016-6MC20	5SV6016-7MC20
25 A	5SV6016-6MC25	5SV6016-7MC25
32 A	5SV6016-6MC32	5SV6016-7MC32

Note:
Please note the country-specific radio licenses of the products at
www.siemens.com/lowvoltage/certificates (109801197)

Mounting concept

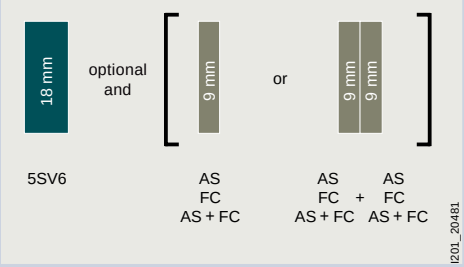

AS	Auxiliary switches	See page 4/64
FC	Fault signal contacts	See page 4/66
AS+FC	Auxiliary switches and fault signal contacts	See page 4/67

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		**Article No.**
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		**Article No.**
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC
Data transceiver (essential accessory)		**Article No.**
SENTRON Powercenter 1000		7KN1110-0MC00
SENTRON Powercenter 1100		7KN1111-0MC00

See suitable busbars, from page 4/78 onwards
See suitable terminals and end caps, from page 4/82 onwards

Quick selection guide, page 4/12

© Siemens 2025

SENTRON Powercenter 1100/2000 data transceiver

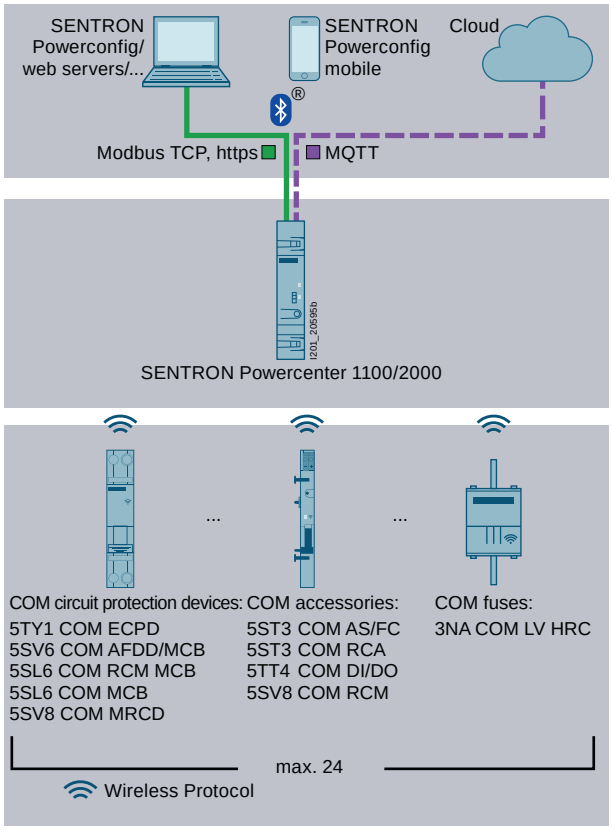

- Wireless radio transmission of measured values to the SENTRON Powercenter 1000/1100/2000 data transceiver
- Commissioning, parameter assignment, firmware updates and further processing of the data via the SENTRON Powercenter 1000/1100/2000 data transceiver

SENTRON Powercenter	Article No.
SENTRON Powercenter 1000	7KN1110-0MC00
SENTRON Powercenter 1100	7KN1111-0MC00
SENTRON Powercenter 2000	7KN1210-0MC00

See page 10/28

You will find further information at **www.siemens.com/lowvoltage/manuals**

Installation Manual – Circuit protection devices with communication and measuring function **(109791805)**

System Manual – Circuit protection devices with communication and measuring function **(109791806)**

Monitoring functions with limit monitoring

- Switching state with trip monitoring: short-circuit, overload, arc fault
- Counters incl. limit monitoring for:
  - Operating hours
  - Operating hours with load current
  - Operating cycles (ON/OFF)
  - Tripping operations
  - Short circuits
- Limit values for:
  - Overcurrent alarm 1 and alarm 2
  - Undercurrent alarm 1 and alarm 2
  - Overvoltage alarm 1 and alarm 2
  - Undervoltage alarm 1 and alarm 2
  - Lower voltage threshold for AFDD tripping
  - Temperature

Measured values	Unit
Temperature	°C
Average temperature	°C
Current	A
Average current	A
Maximum current	A
Voltage	V
Line frequency	Hz
Active power	W
Apparent power	VA
Reactive power	Var
Power factor	
Active energy imported	Wh
Active energy exported	Wh
Reactive energy imported	Varh
Reactive energy exported	Varh

Quick selection guide, page 4/12

© Siemens 2025

Overview of the modular system

Residual current protective devices

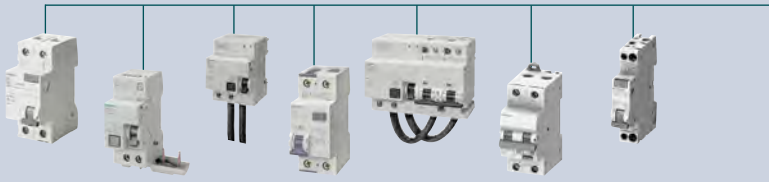

				5SV (16 ... 80 A)	5SM2 + MCB	5SM2 + 5SP4	5SU1	5SU1 (125 A)	5SU1... FP/FR	5SV1
5SM6 arc fault detection units			**Article No.**							
	Rated current up to 16 A	Standard	5SM6021-2	–	–	–	■	–	–	–
		For compact devices 1P+N in 1 MW	5SM6011-2	–	–	–	–	–	–	■
	Rated current up to 40 A	Standard	5SM6024-2	–	–	–	■	–	–	–
		For compact devices 1P+N in 1 MW	5SM6014-2	–	–	–	–	–	–	■
Auxiliary switches (AS)			**Article No.**							
	1 NO + 1 NC	Standard	5ST3010	■	■	■	■	■	–	■
		For low power	5ST3013	■	■	■	■	■	–	■
		For low power (with diode)	5ST3013-0XX01	■	■	■	■	■	–	■
	2 NO	Standard	5ST3011	■	■	■	■	■	–	■
		For low power	5ST3014	■	■	■	■	■	–	■
	2 NC	Standard	5ST3012	■	■	■	■	■	–	■
		For low power	5ST3015	■	■	■	■	■	–	■
	1 CO	Standard	5ST3016	■	■	■	■	■	–	■
			5ST1010-0FP	–	–	–	–	–	■	–
Fault signal contacts (FC)			**Article No.**							
	1 NO + 1 NC		5ST3020	■	■	■	■	■	–	■
	2 NO		5ST3021	■	■	■	■	■	–	■
	2 NC		5ST3022	■	■	■	■	■	–	■
Auxiliary switches and fault signal contacts (AS+FC)			**Article No.**							
	1 CO (AS) + 1 CO (FC)	Standard	5ST3062	■	■	■	■	■	–	■
	5ST3 COM (AS+FC)	With measuring and communication function	5ST3062-0MC	■	■	■	■	■	–	■
Shunt trips (ST)			**Article No.**							
	110 ... 415 V AC, 110 ... 220 V DC		5ST3030	■	■	■	■	■	–	–
	24 ... 48 V AC/DC		5ST3031	■	■	■	■	■	–	–
	12 V DC		5ST3031-0XX01	■	■	■	■	■	–	–
Undervoltage releases (UR)			**Article No.**							
	With integrated auxiliary switch	230 V AC	5ST3040	■	■	■	■	■	–	–
		110 V DC	5ST3041	■	■	■	■	■	–	–
		24 V DC	5ST3042	■	■	■	■	■	–	–
	Without integrated auxiliary switch	230 V AC	5ST3043	■	■	■	■	■	–	–
		110 V DC	5ST3044	■	■	■	■	■	–	–
		24 V DC	5ST3045	■	■	■	■	■	–	–

From page 4/14

■ Suitable for all versions □ Suitable for some versions

System overview, page 4/4

© Siemens 2025

Arc fault detection devices

Miniature circuit breakers

Circuit breakers for equipment

Switching devices

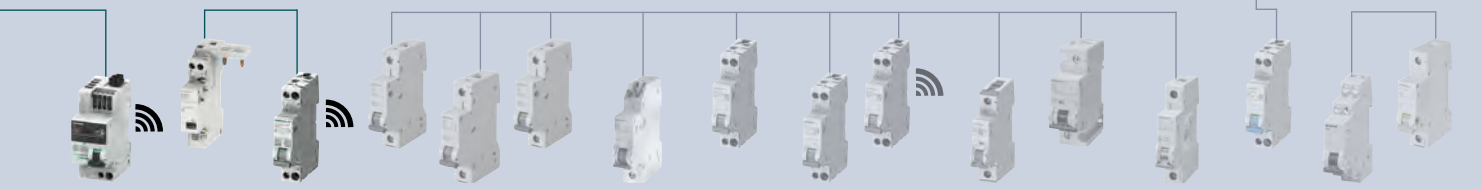

5TY1 COM	5SM6	5SV6/ 5SV6 COM	5SL3	5SL6	5SL4	5SJ6...-.KS	5SL30	5SL58 new	5SL60/ 5SL6 COM	5SY	5SP4/ 5SP5	5SJ4..HG..	5SY17	5TE8	5TL
–	–	–	–	–	□	–	–	–	–	□	–	–	–	–	–
–	–	–	–	–	–	–	–	–	□	–	–	–	–	–	–
–	–	–	–	–	□	–	–	–	–	□	–	–	–	–	–
–	–	–	–	–	–	–	–	–	□	–	–	–	–	–	–
–	□	■	■	■	■	–	■	■	■	■	■	...-0HG	■	■	■
–	□	■	■	■	■	–	■	■	■	■	■	–	■	■	■
–	□	■	■	■	■	–	■	■	■	■	■	–	■	■	■
–	□	■	■	■	■	–	■	■	■	■	■	...-0HG	■	■	■
–	□	■	■	■	■	–	■	■	■	■	■	–	■	■	■
–	□	■	■	■	■	–	■	■	■	■	■	...-0HG	■	■	■
–	□	■	■	■	■	–	■	■	■	■	■	–	■	■	■
–	□	■	■	■	■	–	■	■	■	■	■	–	■	■	■
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
–	□	■	■	■	■	–	■	■	■	■	■	...-0HG	■	–	–
–	□	■	■	■	■	–	■	■	■	■	■	...-0HG	■	–	–
–	□	■	■	■	■	–	■	■	■	■	■	...-0HG	■	–	–
–	□	■	■	■	■	–	■	■	■	■	■	–	■	–	–
–	□	■	■	■	■	–	■	■	■	■	■	–	■	–	–
–	□	–	–	–	■	–	–	–	–	■	■	...-0HG	–	–	–
–	□	–	–	–	■	–	–	–	–	■	■	...-0HG	–	–	–
–	□	–	–	–	■	–	–	–	–	■	■	–	–	–	–
–	□	–	–	–	■	–	–	–	–	■	■	–	–	–	–
–	□	–	–	–	■	–	–	–	–	■	■	–	–	–	–
–	□	–	–	–	■	–	–	–	–	■	■	–	–	–	–
–	□	–	–	–	■	–	–	–	–	■	■	–	–	–	–
–	□	–	–	–	■	–	–	–	–	■	■	–	–	–	–
From page 4/14	From page 4/56		From page 3/12										From page 3/48	From page 5/6	

System overview, page 4/4

© Siemens 2025

Overview of the modular system

Residual current protective devices

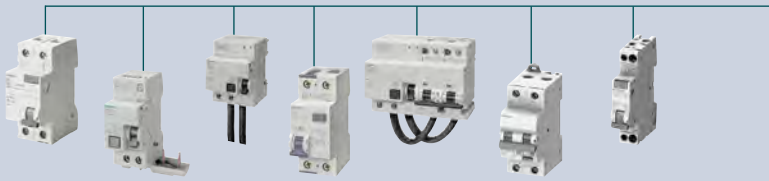

				5SV (16 ... 80 A)	5SM2 + MCB	5SM2 + 5SP4	5SU1	5SU1 (125 A)	5SU1... FP/FR	5SV1
Remote control auxiliaries (RCA)			**Article No.**							
	Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053	–	–	–	■	–	–	■
		177 ... 270 V AC	5ST3054	–	–	–	■	–	–	■
	Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055	■	■	–	■	–	–	■
		177 ... 270 V AC	5ST3056	■	■	–	■	–	–	■
	Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057	■	■	–	■	–	–	■
		177 ... 270 V AC	5ST3058	■	■	–	■	–	–	■
	Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070	■	■	–	■	–	–	■
		170 ... 277 V AC, 77 ... 286 V DC	5ST3071	■	–	–	■	–	–	■
	Communication-capable	100 ... 240 V AC	5ST3072-0MC	■	■	–	■	–	–	■
	Communication-capable with RCD/IR test	100 ... 240 V AC	5ST3073-0MC	■	■	–	■	–	–	■
Standard busbars			**Article No.**							
	Cannot be cut		5ST36..	■	■	■	■	■	■	■
	Can be cut		5ST37..	■	■	■	■	■	■	■
Compact busbars			**Article No.**							
	Cannot be cut		5ST36..	■	–	–	–	–	–	■
	Can be cut		5ST37..	■	–	–	–	–	–	■

From page 4/14

■ Suitable for all versions □ Suitable for some versions

System overview, page 4/4

© Siemens 2025

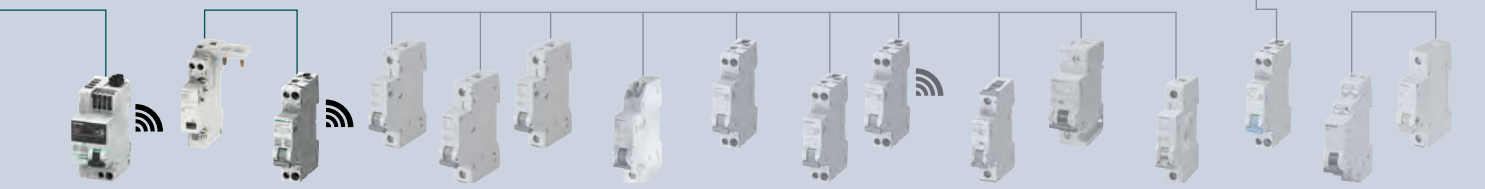

5TY1 COM	5SM6	5SV6/ 5SV6 COM	5SL3	5SL6	5SL4	5SJ6...-.KS	5SL30	5SL58 new	5SL60/ 5SL6 COM	5SY	5SP4/ 5SP5	5SJ4..HG..	5SY17	5TE8	5TL
–	–	–	–	■	■	–	–	–	■	■	–	–	■	–	■
–	–	–	–	■	■	–	–	–	■	■	–	–	■	–	■
–	–	–	–	■	■	–	–	–	■	■	■	–	■	–	■
–	–	–	–	■	■	–	–	–	■	■	■	–	■	–	■
–	–	–	–	■	■	–	–	–	■	■	–	–	■	–	■
–	–	–	–	■	■	–	–	–	■	■	–	–	■	–	■
–	–	–	–	■	■	–	–	–	■	■	■	–	■	–	–
–	–	–	–	■	■	–	–	–	■	■	■	–	■	–	–
–	–	–	–	■	■	–	–	–	■	■	■	–	■	–	–
–	–	–	–	■	■	–	–	–	■	■	■	–	■	–	–
■	□	■	■	■	■	■	■	■	■	■	■	■	■	□	■
■	□	■	■	■	■	■	■	■	■	■	■	■	■	□	■
■	■	■	□	□	□	–	■	■	■	–	–	–	■	–	–
■	■	■	□	□	□	–	■	■	■	–	–	–	–	–	–
From page 4/14	From page 4/56		From page 3/12										From page 3/48	From page 5/6	

System overview, page 4/4

© Siemens 2025

Electrical accessories

Auxiliary switches (AS)

- Signals the contact position of the mounted device
- Version for the switching of small currents and voltages according to EN 61131-2 for control of programmable control systems (PLCs)
- Test button enables the testing of control circuits without the need to switch the mounted device

For combining with basic units						Contacts	Version	Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	Circuit breakers for equipment	RCCBs	RCBOs	Arc fault detection devices	On-off switches				
Auxiliary switches (AS)									
–	–	5SM3 (3P+N, 100/125 A)	–	–	–	1 NO + 1 NC	Standard	0.5 MW	5SW3330
5SL, 5SY, 5SP4, 5SP5	5SY17	5SV (16 ... 80 A)	5SU1 [1], 5SV1	5SV6	5TL1, 5TE8	1 NO + 1 NC	Standard	0.5 MW	5ST3010
							For low power	0.5 MW	5ST3013
							For low power (with diode)	0.5 MW	5ST3013-0XX01
						2 NO	Standard	0.5 MW	5ST3011
							For low power	0.5 MW	5ST3014
						2 NC	Standard	0.5 MW	5ST3012
							For low power	0.5 MW	5ST3015
						1 CO	Standard	0.5 MW	5ST3016
–	–	–	5SU1... FP/FR	–	–	1 CO	Standard	0.5 MW	5ST1010-0FP
Auxiliary switches (AS) with TEST button									
5SL, 5SY, 5SP4, 5SP5	5SY17	5SV (16 ... 80 A)	5SU1 [1], 5SV1	5SV6	5TL1, 5TE8	1 NO + 1 NC	Standard	0.5 MW	5ST3010-2
							For low power	0.5 MW	5ST3013-2
						2 NO	Standard	0.5 MW	5ST3011-2
							For low power	0.5 MW	5ST3014-2
						2 NC	Standard	0.5 MW	5ST3012-2
							For low power	0.5 MW	5ST3015-2

[1] 5ST3805-1 handle coupler required

Quick selection guide, page 4/60

© Siemens 2025

Further technical specifications

		5ST3010, 5ST3011, 5ST3012, 5ST3016	5ST3010-2, 5ST3011-2, 5ST3012-2	5ST3013, 5ST3014, 5ST3015, 5ST3013-0XX01[1]	5ST3013-2, 5ST3014-2, 5ST3015-2	5SW3330	5ST1010-0FP
Standards							
Standards	IEC/EN	IEC/EN 62019, IEC/EN 60947-5-1				IEC/EN 62019	
	UL, CSA	UL 1077, CSA C22.2 No. 235	–	UL 1077, CSA C22.2 No. 235	–		
Contacts							
Minimum contact load		50 mA, 24 V		1 mA, 5 V DC	5 mA, 5 V DC	50 mA, 24 V	5 mA, 24 V DC
Maximum contact load		–		100 mA, 30 V DC	50 mA, 30 V DC	–	
Contact load acc. to IEC/EN 62019 and IEC/EN 60947-5-1	230 V AC, AC-12	–				5/–	6 A/–
	230 V AC, AC-13	6 A/6 A		–			
	400 V AC, AC-13	2 A/2 A		–			
	230 V AC, AC-14	6 A/6 A		–			
	400 V AC, AC-14	2 A/2 A		–			
	24 V DC, DC-13	6 A/3 A		–			
	30 V DC, DC-14	–		0.1 A		–	
	60 V DC, DC-13	3 A/1.5 A		–			
	110 V DC, DC-13	1 A/0.75 A		–			
	220 V DC, DC-12	–				0.5/–	1 A/–
	220 V DC, DC-13	1 A/0.5 A		–			
Contact load acc. to UL	120 V AC	–					
	125 V AC	3 A	–				
	240 V AC	4 A	–				
	277 V AC	–					
	480 V AC	–					
	60 V DC	–					
	125 V DC	1.1 A	–				
	250 V DC	0.55 A	–				
Service life, on average, with rated load	Actuations	20000				–	8000
Safety							
Short-circuit protection		Miniature circuit breakers 5SY... 6 A or gG 6 A fuse				B6 or C6 or gL/gG 6 A fuse	
Connections							
Conductor cross-sections		0.5 ... 2.5 mm² (AWG 22 ... 14)				0.75 ... 2.5 mm²	
Terminals	Max. tightening torque	0.5 Nm (4.5 lb-in)				–	0.6 Nm
Ambient conditions							
Permissible ambient temperature		–40 ... +70 °C					–25 ... +60 °C
Permissible storage temperature		–40 ... +75 °C					–40 ... +70 °C
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles					
Mounting position		Any					
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	150 m/s²					–
Resistance to vibrations at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s²					–

[1] No approvals

Quick selection guide, page 4/60

© Siemens 2025

Electrical accessories

Fault signal contacts (FC)

- Signals automatic tripping of the circuit protection device in the event of a fault, such as an overload or a short circuit
- If the fault signal contact is activated, the contact position does not change if the mounted circuit protection device is tripped manually
- Version with TEST and RESET buttons enables the testing of control circuits without operation of the circuit protection device
- Red RESET button in the operating handle indicates automatic tripping of the mounted circuit protection device

For combining with basic units					Contacts	Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	Circuit breakers for equipment	RCCBs	RCBOs	Arc fault detection devices			
Fault signal contacts (FC)							
5SL, 5SY, 5SP4, 5SP5	5SY17	5SV (16 ... 80 A)	5SU1 [1], 5SV1	5SV6	1 NO + 1 NC	0.5 MW	5ST3020
					2 NO	0.5 MW	5ST3021
					2 NC	0.5 MW	5ST3022
Fault signal contacts (FC) with TEST and RESET buttons							
5SL, 5SY, 5SP4, 5SP5	5SY17	5SV (16 ... 80 A)	5SU1 [1], 5SV1	5SV6	1 NO + 1 NC	0.5 MW	5ST3020-2
					2 NO	0.5 MW	5ST3021-2
					2 NC	0.5 MW	5ST3022-2

[1] 5ST3805-1 handle coupler required

Further technical specifications

		5ST3020, 5ST3021, 5ST3022	5ST3020-2, 5ST3021-2, 5ST3022-2
Standards			
Standards	IEC/EN	IEC/EN 62019, IEC/EN 60947-5-1	
	UL, CSA	UL 1077, CSA C22.2 No. 235	–
Contacts			
Minimum contact load		50 mA, 24 V	
Contact load acc. to IEC/EN 62019/IEC/EN 60947-5-1	230 V AC, AC-13	6 A/6 A	
	400 V AC, AC-13	6 A/6 A	
	230 V AC, AC-14	2 A/2 A	
	400 V AC, AC-14	2 A/2 A	
	24 V DC, DC-13	6 A/3 A	
	60 V DC, DC-13	3 A/1.5 A	
	110 V DC, DC-13	1 A/0.75 A	
	220 V DC, DC-13	1 A/0.5 A	
Contact load acc. to UL	120 V AC	–	
	125 V AC	3 A	–
	240 V AC	4 A	–
	277 V AC	–	
	480 V AC	1.5 A	–
	60 V DC	–	
	125 V DC	1.1 A	–
	250 V DC	0.55 A	–
Service life, on average, with rated load	Actuations	20000	
Safety			
Short-circuit protection		Miniature circuit breaker or gG 6 A fuse	
Connections			
Conductor cross-sections		0.5 ... 2.5 mm² (AWG 22 ... 14)	
Terminals	Max. tightening torque	0.5 Nm (4.5 lb-in)	
Ambient conditions			
Permissible ambient temperature		–25 ... +55 °C	
Permissible storage temperature		–40 ... +75 °C	
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles	
Mounting position		Any	
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	150 m/s²	
Resistance to vibration at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s²	

Quick selection guide, page 4/60

© Siemens 2025

Auxiliary switches and fault signal contacts (AS+FC)

- Combines the function of both switches in a width of only 0.5 MW (9 mm)
- Signals the contact position of the mounted circuit protection device
- Signals automatic tripping of the circuit protection device in the event of a fault, such as an overload, a short circuit or a fault current
- If the fault signal contact is activated, the contact position does not change if the mounted circuit protection device is tripped manually

For combining with basic units					Contacts	Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	Circuit breakers for equipment	RCCBs	RCBOs	Arc fault detection devices			
Auxiliary switches and fault signal contacts (AS+FC)							
5SL, 5SY, 5SP4, 5SP5	5SY17	5SV (16 ... 80 A)	5SU1 [1], 5SV1	5SV6	1 CO (AS) + 1 CO (FC)	0.5 MW	5ST3062

[1] 5ST3805-1 handle coupler required

4

Further technical specifications

		5ST3062
Standards		
Standards	IEC/EN	IEC/EN 62019, IEC/EN 60947-5-1
	UL, CSA	UL 1077, CSA C22.2 No. 235
Contacts		
Minimum contact load		50 mA, 24 V
Maximum contact load		–
Contact load according to IEC/EN 62019/ IEC/EN 60947-5-1	230 V AC, AC-13	6 A/6 A
	400 V AC, AC-14	2 A/2 A
Contact load according to IEC/EN 62019/ IEC/EN 60947-5-1	24 V DC, DC-13	3 A/3 A
	60 V DC, DC-13	3 A/1 A
	110 V DC, DC-13	0.5 A/0.5 A
	220 V DC, DC-13	0.5 A/0.3 A
Contact load acc. to UL	125 V AC	2 A
	240 V AC	1.5 A
	480 V AC	0.75 A
	125 V DC	0.5 A
	250 V DC	0.3 A
Service life, on average, with rated load	Actuations	20000
Safety		
Short-circuit protection		Miniature circuit breaker or gG 6 A fuse
Connections		
Conductor cross-sections		0.5 ... 2.5 mm^2 (AWG 22 ... 14)
Terminals	Max. tightening torque	0.5 Nm (4.5 lb-in)
Ambient conditions		
Permissible ambient temperature		–25 ... +55 °C
Permissible storage temperature		–40 ... +75 °C
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles
Mounting position		Any
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	150 m/s^2
Resistance to vibrations at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s^2

Quick selection guide, page 4/60

© Siemens 2025

Electrical accessories

5ST3 COM auxiliary switches and fault signal contacts (AS+FC) with measuring and communication function

- Reports the switching state of the mounted standard circuit protection device (ON, tripped, manual OFF, tripped with locked handle)
- Measures the temperature of the device and counts operating cycles, trips and operating hours
- Communication via radio to SENTRON Powercenter 1000 data transceiver
- Plug-in terminals for 24 V DC power supply incl. daisy chain function
- Low space requirements of 0.5 MW (9 mm)

For combining with basic units						Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	Circuit breakers for equipment	RCCBs	RCBOs	Arc fault detection devices	Communication		
5ST3 COM auxiliary switches and fault signal contacts (AS+FC) with measuring and communication function							
5SL, 5SY, 5SP4, 5SP5	5SY17	5SV (16 ... 80 A)	5SU1 [1], 5SV1	5SV6	Radio link to SENTRON Powercenter 1000	0.5 MW	5ST3062-0MC

[1] 5ST3805-1 handle coupler required

Note:
Please note the country-specific radio licenses of the products at
www.siemens.com/lowvoltage/certificates (109801197)

Further technical specifications

		5ST3062-0MC
Standards		
Standards	IEC/EN; UL, CSA	60669-2-5
	RED	2014/53/EU
Power supply		
Power supply		24 V DC ±20%, SELV
Conductor cross-sections		0.2 ... 1.5 mm²
Connection type		Plug-in terminal
Safety		
Degree of pollution for overvoltage category		2/II
Degree of protection		IP40, with front cover
Ambient conditions		
Permissible ambient temperature		–25 ... +60 °C
Permissible storage temperature		–40 ... +85 °C
Humidity		93% at 40 °C
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles
Mounting position		Any
Shock		150 m/s²
Resistance to vibrations at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s²
Service life/endurance		10000
Communication		
Interface	SENTRON Powercenter 1000	Radio link
Temperature		Measuring accuracy of 2 °C with limit monitoring incl. storage (1 hour in 1-minute intervals and 7 days in 15-minute intervals)
Operating cycles counters		Mechanical operation with limit monitoring
Trip counter		Trip of the mounted circuit protection device with limit monitoring
Operating hours counter		Operating hours with limit monitoring

4

Quick selection guide, page 4/60

© Siemens 2025

SENTRON Powercenter 1100/2000 data transceiver

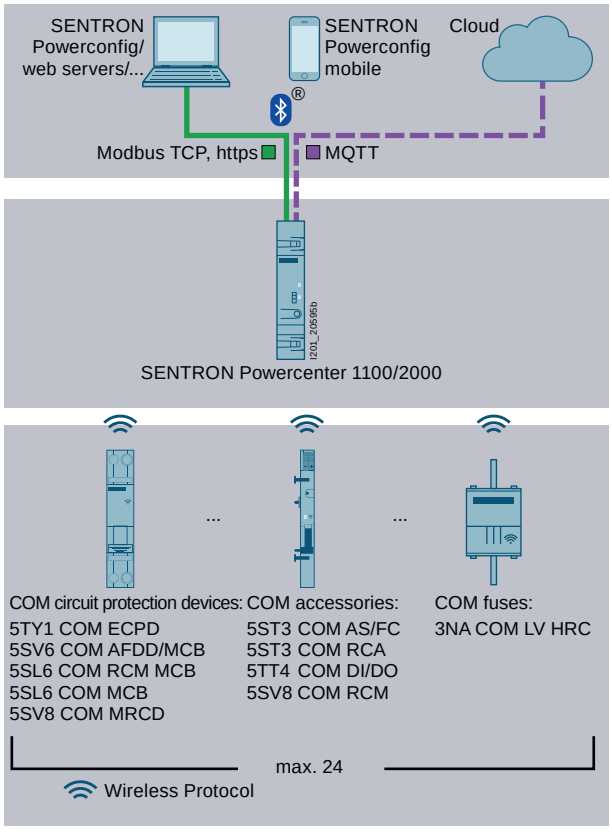

- Wireless radio transmission of measured values to the SENTRON Powercenter 1000/1100/2000 data transceiver
- Commissioning, parameter assignment, firmware updates and further processing of the data via the SENTRON Powercenter 1000/1100/2000 data transceiver

SENTRON Powercenter	Article No.
SENTRON Powercenter 1000	7KN1110-0MC00
SENTRON Powercenter 1100	7KN1111-0MC00
SENTRON Powercenter 2000	7KN1210-0MC00

See page 10/28

You will find further information at **www.siemens.com/lowvoltage/manuals**

Installation Manual – Circuit protection devices with communication and measuring function **(109791805)**

System Manual – Circuit protection devices with communication and measuring function **(109791806)**

Quick selection guide, page 4/60

© Siemens 2025

Electrical accessories

Shunt trips (ST)

- For remote-controlled tripping of the mounted device

For combining with basic units Miniature circuit breakers	RCCBs	RCBOs	Rated operational voltage U_e	Mounting width (1 MW = 18 mm)	Article No.
Shunt trips (ST)					
5SL4, 5SY, 5SP4, 5SP5	5SV (16 ... 80 A)	5SU1 [1]	110 ... 415 V AC, 110 ... 220 V DC	1 MW	5ST3030
			24 ... 48 V AC/DC	1 MW	5ST3031
			12 V DC	1 MW	5ST3031-0XX01

[1] 5ST3805-1 handle coupler required

4

Further technical specifications		5ST3030	5ST3031	5ST3031-0XX01
Standards				
Standards	IEC/EN	EN 60947-1		
Supply				
Primary operating range		0.7 ... 1.1 × U_n		
Rated frequency f_n		50 ... 60 Hz		–
Contacts				
Minimum contact load		50 mA, 24 V		1 mA, 5 V
Tripping operations		Max. 2000		
Service life, on average, with rated load	Actuations	20000		
Safety				
Short-circuit protection		Miniature circuit breaker B/C 6 A or fuse gG 6 A		
Connections				
Conductor cross-sections		0.5 ... 2.5 mm² (AWG 22 ... 14)		
Terminals	Max. tightening torque	0.8 Nm (6.8 lb-in)		
Ambient conditions				
Permissible ambient temperature		–25 ... +55 °C		–40 ... +70 °C
Permissible storage temperature		–40 ... +75 °C		
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles		
Mounting position		Any		
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	150 m/s²		
Resistance to vibrations at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s²		

Quick selection guide, page 4/60

© Siemens 2025

Undervoltage releases (UR)

- Are integrated (e.g. in EMERGENCY-OFF loops), thus ensuring that the MCB trips in the event of an emergency. EMERGENCY-OFF is a function provided to disconnect the electricity supply to all or some parts of the installation in case of emergency, when there is a risk of electric shock or any other hazard caused by electrical power
- In addition, an undervoltage release also trips if the voltage is interrupted or too low, or prevents the MCB from closing
- Suitable for use with all devices that can be mounted for implementing EMERGENCY-OFF circuits
- In conjunction with 5SV residual current operated circuit breakers (RCCBs), not suitable for implementing EMERGENCY-STOP circuits

For combining with basic units Miniature circuit breakers	RCCBs	RCBOs	Rated operational voltage U_e	Mounting width (1 MW = 18 mm)	Article No.
With integrated auxiliary switch					
5SL4, 5SY, 5SP4, 5SP5	5SV (16 ... 80 A)	5SU1 [1]	230 V AC	1 MW	5ST3040
			110 V DC	1 MW	5ST3041
			24 V DC	1 MW	5ST3042
Without integrated auxiliary switch					
5SL4, 5SY, 5SP4, 5SP5	5SV (16 ... 80 A)	5SU1 [1]	230 V AC	1 MW	5ST3043
			110 V DC	1 MW	5ST3044
			24 V DC	1 MW	5ST3045

[1] 5ST3805-1 handle coupler required

Further technical specifications		5ST304.
Standards		
Standards	IEC/EN	EN 60947-1
Supply		
Primary operating range		0.85 ... 1.1 × U_n
Rated frequency f_n		50/60 Hz
Contacts		
Minimum contact load		50 mA, 24 V
Tripping operations		Max. 2000
Service life, on average, with rated load	Actuations	20000
Safety		
Short-circuit protection		Miniature circuit breaker B/C 6 A or fuse gG 6 A
Connections		
Conductor cross-sections		0.5 ... 2.5 mm² (AWG 22 ... 14)
Terminals	Max. tightening torque	0.8 Nm (6.8 lb-in)
Ambient conditions		
Permissible ambient temperature		–25 ... +55 °C
Permissible storage temperature		–40 ... +75 °C
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles
Mounting position		Any
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	150 m/s²
Resistance to vibrations at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s²

Quick selection guide, page 4/60

© Siemens 2025

Electrical accessories

5ST3 remote control auxiliaries (RCA)

- For locations that are spread out over a wide area or not permanently attended
- Permits direct and immediate access to the installation even if it is remote or in a location that is hard to access
- Permits fast reconnection after a fault
- Version with ARD with automatic restart
- Versions with ARD and Power with integrated auxiliary switches and fault signal contacts

Type	Display	Ambient temperature	Vibration and shock requirements	Rated operational voltage U_e	Mounting width (1 MW = 18 mm)	Article No.
Basic	–	–25 °C ... +45 °C	–	12 ... 30 V AC, 12 ... 48 V DC	1.5 MW	5ST3053
				177 ... 270 V AC	2 MW	5ST3054
Power	LED	–25 °C ... +45 °C	–	12 ... 30 V AC, 12 ... 48 V DC	2 MW	5ST3055
				177 ... 270 V AC	2 MW	5ST3056
Power with ARD	LED	–25 °C ... +45 °C	–	12 ... 30 V AC, 12 ... 48 V DC	2 MW	5ST3057
				177 ... 270 V AC	2 MW	5ST3058
Power with extended function	LED	–40 °C ... +70 °C	Acc. to IEC/EN 61373/ IEC/EN 50155 "1B"	12 ... 30 V AC, 12 ... 48 V DC	2 MW	5ST3070
				170 ... 277 V AC, 77 ... 286 V DC	2 MW	5ST3071
With IR test before ARD	LED	–40 °C ... +70 °C	–	100 ... 240 V AC	2.5 MW	5ST3074

Further technical specifications	5ST3053	5ST3054	5ST3055	5ST3056	5ST3057	5ST3058	5ST3070	5ST3071	5ST3074
Standards									
Standards	IEC/EN 63024 (VDE 0640-21)								
Supply									
Rated frequency f_n	50 ... 60 Hz								
Rated power dissipation on standby	≤ 1 VA								≦ 1.5 VA
Contacts									
Service life, on average, with rated load Actuations	10000								
Number of remote switching operations per minute	2								4
Number of automatic reclose attempts	–				3		–		3
Cable length in the control circuit	≤ 1500 m							≤ 1500 m (DC)/ ≤ 200 m (AC)	≤ 1500 m
Sliding selector with locking device	–	■							
Integrated auxiliary switches	–		1CO; 2 A; 250 V						–
Integrated fault signal contacts	–		1CO; 2 A; 250 V						–
Connections									
Conductor cross-sections	0.5 ... 1.5 mm² (AWG 14 ... 30)								
Terminal tightening torque	0.2 ... 0.25 Nm (2.0 lb-in)								
Ambient conditions									
Permissible storage temperature	–40 ... +55 °C						–40 ... +70 °C		
Degree of protection	IP20								
Degree of pollution for overvoltage category	3/II								

Suitable adapters for combination with basic units

Basic units	Mounting width							Article No.
	1 MW	2 MW	3 MW	4 MW	2-pole	3-pole	4-pole	
5SU1	–	■	■	–	–	–	–	5ST3820-5
5SV1	■	–	–	–	–	–	–	5ST3820-6
5SV (16 ... 80 A)	–	■	–	■	–	–	–	5ST3820-6
5SM2 with 5SY	–	–	–	–	■	–	–	5ST3820-3 + 5ST3820-1
	–	–	–	–	–	■	■	5ST3820-3 + 5ST3820-2
5SM2 with 5SL	–	–	–	–	■	–	–	5ST3820-3 + 5ST3820-6
	–	–	–	–	–	■	■	5ST3820-3 + 5ST3820-7

Quick selection guide, page 4/60

© Siemens 2025

5ST3 COM remote control auxiliaries (RCA) with communication function

- For locations that are spread out over a wide area or not permanently attended
- Permit access to the installation even if it is remote or in a location that is hard to access
- Remote control via wired contact or communications interface to Powercenter 1000
- Permit fast reconnection after a fault
- With integrated and adjustable reclosing function (ARD)
- Versions with automatic and adjustable RCD/IR test function

Type	Display	Ambient temperature	Vibration and shock requirements	Rated operational voltage U_e	Mounting width (1 MW = 18 mm)	Article No.
Communication-capable	LED	–40 °C ... +70 °C	Acc. to IEC/EN 61373	100 ... 240 V AC	2 MW	5ST3072-0MC
Communication-capable with RCD/IR test	LED	–40 °C ... +70 °C	Acc. to IEC/EN 61373	100 ... 240 V AC	2.5 MW	5ST3073-0MC

Further technical specifications

		5ST3072-0MC, 5ST3073-0MC
Standards		
Standards		IEC/EN 63024
General product approvals		RED2014/53/EU
Basic data		
Rated frequency f_n		50/60 Hz
Service life, on average, with rated load	Actuations	10000
Number of ARD attempts		3 (+3 adjustable)
Contacts		
Conductor cross-sections		0.5 ... 1.5 mm²
Type of connection		Screw terminals
Ambient conditions		
Permissible storage temperature		–40 ... +70 °C
Communication function		
Interface	SENTRON Powercenter 1000	Wireless
Metering values		Circuit breaker status, temperature, operating cycles, trip counter, operating hours
Switching command		Wired, via communication
Configuration	5ST3072-0MC	Alarms, Origin, Switching command, ARD times
	5ST3073-0MC	Alarms, Origin, Switching command, ARD times, test function
Test function		
RCD test		Measurement, tripping current, tripping time
IR measurement	Acc. to IEC/EN 63024	Measurement, insulation resistance
Manual test start		Wired, via communication
Automatic test start		Adjustable time and repeat interval

Suitable adapters for combination with basic units

Basic units	Mounting width							Article No.
	1 MW	2 MW	3 MW	4 MW	2-pole	3-pole	4-pole	
5SU1	–	■	■	–	–	–	–	5ST3820-5
5SV1	■	–	–	–	–	–	–	5ST3820-6
5SV (16 ... 80 A)	–	■	–	■	–	–	–	5ST3820-6
5SM2 with 5SY	–	–	–	–	■	–	–	5ST3820-3 + 5ST3820-1
	–	–	–	–	–	■	■	5ST3820-3 + 5ST3820-2
5SM2 with 5SL	–	–	–	–	■	–	–	5ST3820-3 + 5ST3820-6
	–	–	–	–	–	■	■	5ST3820-3 + 5ST3820-7

Quick selection guide, page 4/60

© Siemens 2025

Electrical accessories

5ST3 COM remote control auxiliaries (RCA) with communication function

SENTRON Powercenter 1100/2000 data transceiver

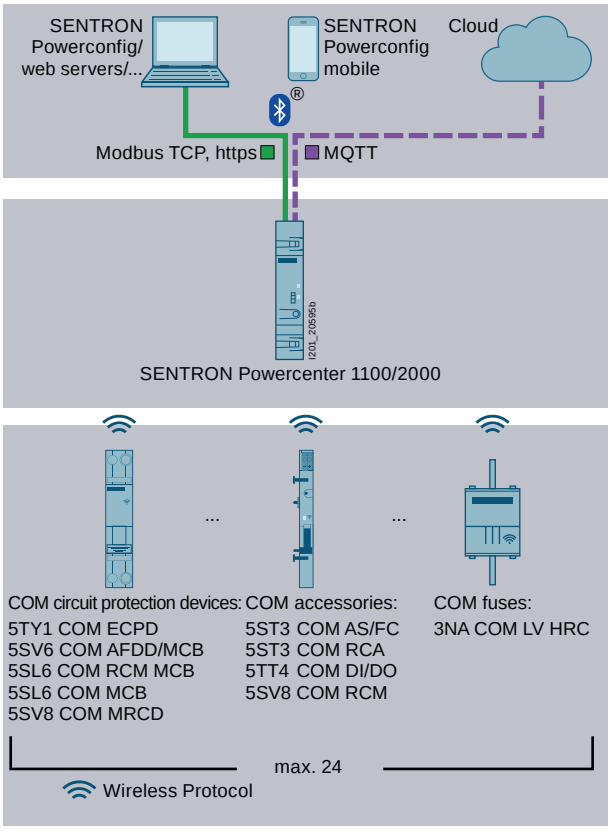

- Wireless radio transmission of measured values to the SENTRON Powercenter 1000/1100/2000 data transceiver
- Commissioning, parameter assignment, firmware updates and further processing of the data via the SENTRON Powercenter 1000/1100/2000 data transceiver

SENTRON Powercenter	Article No.
SENTRON Powercenter 1000	7KN1110-0MC00
SENTRON Powercenter 1100	7KN1111-0MC00
SENTRON Powercenter 2000	7KN1210-0MC00

See page 10/28

You will find further information at www.siemens.com/lowvoltage/manuals

Installation Manual – Circuit protection devices with communication and measuring function (109791805)

System Manual – Circuit protection devices with communication and measuring function (109791806)

Quick selection guide, page 4/60

© Siemens 2025

Mechanical accessories

Handle couplers for additional components

- Necessary for mounting the additional components auxiliary switches, fault signal contacts, shunt trips and undervoltage releases onto the 5SU1 RCBO
- 1 set = 5 units

	Article No.
	5ST3805-1

Handle locking devices

- To prevent undesired mechanical ON/OFF switching
- Sealable and lockable
- For padlock with 3 ... 6 mm shackle

Version	Article No.
For 5SV (16 ... 80 A) RCCBs, 5SV1 RCBOs, 5SV6 AFDD/MCB, 5TY1 COM electronic circuit protection devices (ECPD)	5ST3806
For 5SU1 RCBOs	5ST3801-1

Locking device

- For 5SV (16 ... 80 A) RCCBs, 5SV1 RCBOs, 5SV6 AFDD/MCB, 5TY1 COM electronic circuit protection devices (ECPD)

Comprising	Article No.
5ST3806 handle locking device and 5ST3802 padlock	5ST3807

Padlock

- For 5ST3801-1 and 5ST3806 handle locking devices and 5ST3054 ... 58, 5ST3070 remote control auxiliaries, 5TY1 COM electronic circuit protection devices (ECPD)

	Article No.
	5ST3802

Device labels

- For adhesive attachment
- For modular installation devices, e.g. 5SY, 5SL, 5TL1

Types	Article No.
15 mm × 6 mm, white (WIN 098)	8WH8210-0AA35
15 mm × 6 mm, yellow (WIN 099)	8WH8210-0AA36

Covers for connection terminals



- For 5SV3 (16 ... 80 A) and 5SV4 (16 ... 80 A) residual current operated circuit breakers, sealable (2 units in plastic bag)

Mounting width	Article No.
2 MW	5SW3010
4 MW	5SW3008

Terminal covers, gray

- For surface mounting, degree of protection IP40
- Sealable
- Can be used with 35 mm DIN rail

For width up to	Article No.
2.5 MW	5SW3004
4.5 MW	5SW3005

Wall enclosures, gray

- For flush mounting, degree of protection IP40
- Can be used with 35 mm DIN rail

For width up to	Article No.
2.5 MW	5SW3006
4.5 MW	5SW3007

System overview, page 4/4

© Siemens 2025

RCCB protective socket outlets

Acc. to VDE 0664

Covers

- Can be assembled as mini-distribution board
- Suitable for all devices
- Cover parts prepared for rail mounting of conventional label caps

Comprising	Article No.
End plates	5ST2134
Angled profile	5ST2135
Flat profile as alternative	5ST2136

RCCB protective socket outlets in molded-plastic enclosures

- Equipped with RCCB and flush-mounted SCHUKO® socket outlet
- Degree of protection IP54

Rated residual current $I_{\Delta n}$	Rated current I_n	Article No.
10 mA	16 A	5SZ9206
30 mA	16 A	5SZ9216

4

System overview, page 4/4

© Siemens 2025

System overview, page 4/4

© Siemens 2025

Standard busbars

General information

Infeed

At the start or end of the busbar

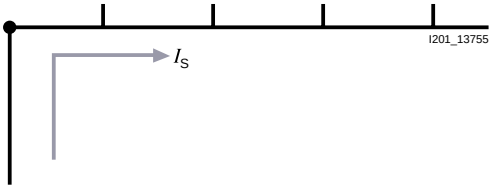

Maximum busbar current I_s/phase
- Cross-section 10 mm²: 63 A
- Cross-section 16 mm²: 80 A

Along the busbar or midpoint infeed

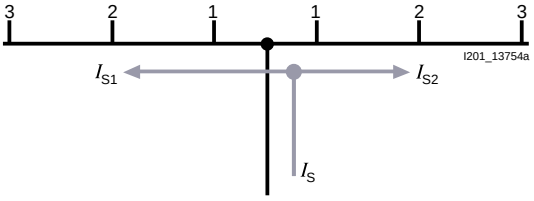

Maximum busbar current I_s/phase
- Cross-section 10 mm²: 100 A
- Cross-section 16 mm²: 130 A

Quick selection guide, page 4/62

© Siemens 2025

Fixed lengths, cannot be cut

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	Conductor cross-section 10 mm²	16 mm²
2-phase/1-phase + N				Article No.	Article No.
 Ø 10 mm² Ø 16 mm²	For 6 × 2 MW devices (2P)	12 MW	210 mm	5ST3608	5ST3638
3-phase, for MCBs with RCCB				Article No.	Article No.
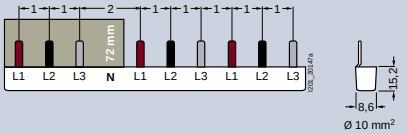 Ø 10 mm²	For 6 MCBs 1P with 1 RCCB 3P+N or for 1 RCCB 3P+N, 1 MCB 3P and 3 MCBs 1P	10 MW	176 mm	5ST3624-1	–
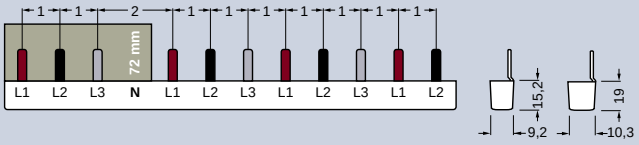 Ø 10 mm² Ø 16 mm²	For 8 MCBs 1P with 1 RCCB 3P+N, N right	12 MW	210 mm	5ST3624	5ST3654
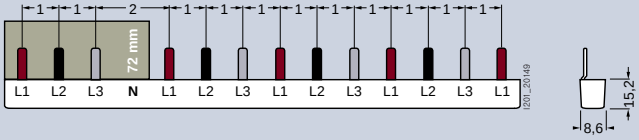	For 10 MCBs 1P with 1 RCCB 3P+N or for 1 RCCB 3P+N, 1 MCB 3P and 7 MCBs 1P	14 MW	249 mm	5ST3624-4	–
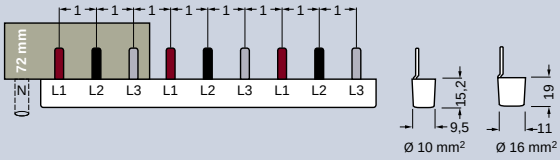 Ø 10 mm² Ø 16 mm²	For 6 MCBs 1P with 1 RCCB 3P+N, N left	9 MW	157.5 mm	5ST3614	5ST3644
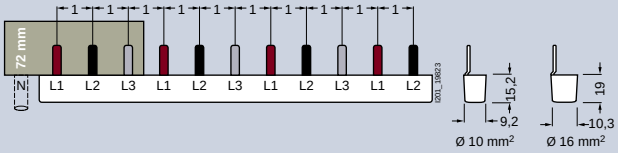 Ø 10 mm² Ø 16 mm²	For 8 MCBs 1P with 1 RCCB 3P+N, N left	11 MW	192 mm	5ST3667	5ST3668
4-phase/3-phase + N				Article No.	Article No.
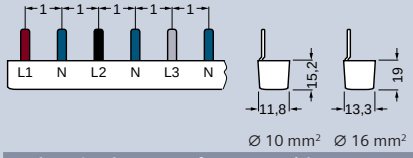 Ø 10 mm² Ø 16 mm²	For 6 × 2 MW devices (1P+N)	12 MW	215 mm	5ST3623	5ST3653
4-phase/3-phase + N, for MCBs with RCCB				Article No.	Article No.
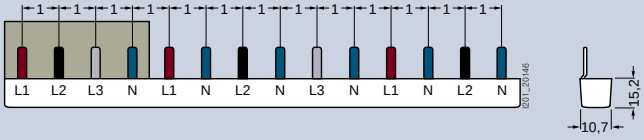	For 1 RCCB 3P+N and 5 MCBs 1P+N (2 MW)	14 MW	248 mm	5ST3625-4	–

Accessories

Terminals for 5ST36 and 5ST37		Article No.
For conductors 6 ... 25 mm²	Cable entry on the left	5ST3768-4
	Cable entry in the center	5ST3768-3
	Cable entry on the right	5ST3768-5
For conductors 6 ... 50 mm²	Cable entry on the left	5ST3760-4
	Cable entry in the center	5ST3760-3
	Cable entry on the right	5ST3760-5

Terminals for infeed at side		Article No.
For conductors 6 ... 25 mm²	Short	5ST3768
	Short, IP20	5ST3771-2
Touch protection		**Article No.**
For free connections, yellow (RAL 1004) 5 × 1 pin		5ST3655

Quick selection guide, page 4/62

© Siemens 2025

Standard busbars

Can be cut

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps included	Conductor cross-section 10 mm²	16 mm²
2-phase/1-phase + N					Article No.	Article No.
	For 2 MW units (2P/1+N)	12 MW	214 mm	■	5ST3734	5ST3704
		56 MW	1016 mm	–	5ST3735	5ST3705
2-phase/1-phase + N, for MCBs with mounted AS or FC					Article No.	Article No.
	For 2 MW devices (2P/1P+N)	12 MW	214 mm	■	5ST3736	5ST3706
		56 MW	1016 mm	–	5ST3737	5ST3707
4-phase/3-phase + N, for MCBs with RCCB					Article No.	Article No.
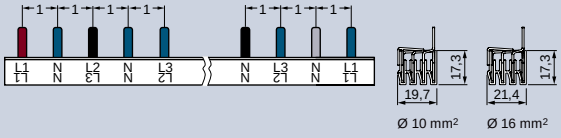	For RCBOs or MCBs 1P+N	56 MW	1000 mm	–	5ST3770-2	5ST3770-3
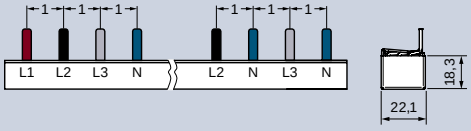	For 6 MCBs 1P+N with 1 RCCB 3P+N, N right	16 MW	292 mm	■	5ST3770-4	5ST3770-5
4-phase/3-phase + N, for RCCB/MCBs with mounted AS or FC					Article No.	Article No.
	For MCBs 1P+N	56 MW	1016 mm	–	5ST3746-2	–
	For MCBs 3P+N	40 MW	1000 mm	–		5ST3725

Accessories

Terminals for infeed at side		Article No.
For conductors 6 ... 25 mm²	Short	5ST3768
	Short, IP20	5ST3771-2
	Long	5ST3771-1

End caps	Article No.
For 2 and 3-phase busbars	5ST3750
For 4-phase busbars	5ST3718

Touch protection	Article No.
For free connections, yellow (RAL 1004) 5 × 1 pin	5ST3655

Quick selection guide, page 4/62

© Siemens 2025



For devices with add-on 5SM6 arc fault detection units and 5TY1 COM electronic circuit protection devices (ECPD)

Fixed lengths, cannot be cut

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps included	Color	Conductor cross-section 10 mm²
3-phase						Article No.
	For 5SM601. and 5TY1 COM	12 MW	210 mm	–	Gray	5ST3615-1

4

Accessories

Terminals for infeed at side		Article No.
For conductors 6 ... 25 mm²	Short	5ST3768
	Short, IP20	5ST3771-2
	Long	5ST3771-1

Touch protection	Article No.
For free connections, yellow (RAL 1004) 5 × 1 pin	5ST3655

Quick selection guide, page 4/62

© Siemens 2025

Standard busbars



For devices with add-on 5SM6 arc fault detection units and 5TY1 COM electronic circuit protection devices (ECPD)

Can be cut

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps included	Color	Conductor cross-section 10 mm²
1-phase, straight						**Article No.**
	For 5SM601. and 5TY1 COM	56 MW	1000 mm	–	Gray	5ST3764-1
					Blue	5ST3765-2
1-phase, angled 45°						**Article No.**
	For 5SM601. and 5TY1 COM	56 MW	1000 mm	–	Blue	5ST3765-1
2-phase/1-phase + N						**Article No.**
	For 5SM602. (1P+N)	56 MW	1000 mm	–	Gray	5ST3735-1
3-phase						**Article No.**
	For 5SM601. and 5TY1 COM	60 MW	1050 mm	–	Gray	5ST3740-1
4-phase/3-phase + N						**Article No.**
	For 5SM602.	52 MW	950 mm	–	Gray	5ST3746-1

Accessories

Terminals for infeed at side		Article No.
For conductors 6 ... 25 mm²	Short	5ST3768
	Short, IP20	5ST3771-2
	Long	5ST3771-1

End caps		Article No.
For 1-phase busbars	Gray	5ST3766
	Blue	5ST3767
For 2 and 3-phase busbars		5ST3750
For 4-phase busbars		5ST3718

Touch protection	Article No.
For free connections, yellow (RAL 1004) 5 × 1 pin	5ST3655

Quick selection guide, page 4/62

© Siemens 2025

Compact busbars

General information

Infeed

At the start or end of the busbar

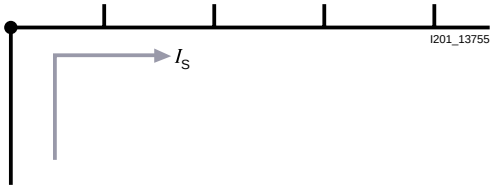

Maximum busbar current I_S/phase
- Cross-section 10 mm²: 63 A
- Cross-section 16 mm²: 80 A

Along the busbar or midpoint infeed

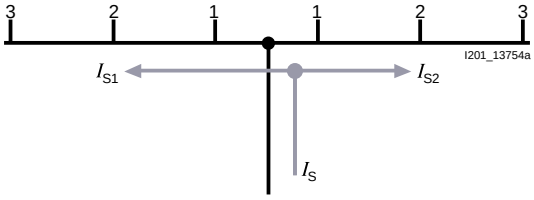

Maximum busbar current I_S/phase
- Cross-section 10 mm²: 100 A
- Cross-section 16 mm²: 130 A

4

Quick selection guide, page 4/62

© Siemens 2025

Compact busbars

5ST36, fixed lengths, cannot be cut

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps included	Conductor cross-section 10 mm²
2-phase/1-phase + N, for infeed via RCCB					**Article No.**
	For 1 × RCCB 1P+N and 5 × compact devices equipped with 5SM6 arc fault detection unit	12 MW	216 mm	■	5ST3685-0
2-phase/1-phase + N					**Article No.**
	For compact devices	6 MW	113 mm	■	5ST3674-6
		9 MW	166 mm	■	5ST3674-7
		12 MW	218 mm	■	5ST3674-0
	For 6 × compact devices equipped with 5SM6 arc fault detection unit and 5TY1 COM electronic circuit protection devices (ECPD)	12 MW	200 mm	■	5ST3676-0
4-phase/3-phase + N					**Article No.**
	For compact devices	6 MW	113 mm	■	5ST3673-6
		9 MW	166 mm	■	5ST3673-7
		12 MW	218 mm	■	5ST3673-0
		14 MW	254 mm	■	5ST3673-4
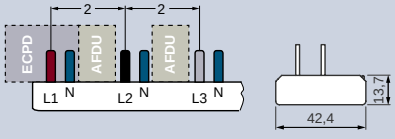	For 6 × compact devices equipped with 5SM6 arc fault detection unit and 5TY1 COM electronic circuit protection devices (ECPD)	11 MW	200 mm	■	5ST3675-0

Accessories

Terminals for infeed at side		Article No.
For conductors 6 ... 25 mm²	Short, IP20	5ST3771-2

Touch protection		Article No.
For free connections, yellow (RAL 1004)	For pins L1, N	5ST3655
	For pins L2, L3	5ST3655-0HG

Quick selection guide, page 4/62

© Siemens 2025



5ST37, can be cut

Pin spacing in MW (1 MW = 18 mm)		Application	No. of MW	Length	End caps included	Conductor cross-section 10 mm²	16 mm²
2-phase/1-phase + N, for infeed via RCCB						Article No.	Article No.
1 1 1 1 L1 N L1 N L1 N L1 N	13,7 42,4	For 1 × RCCB 1P+N and 10 × compact devices	12 MW	215 mm	■	5ST3784-0	–
1 1 1 1 N L1 L1 N L1 N L1 N	13,7 42,4	For 1 × RCCB 1P+N (RCCB N left only) and 10 × compact devices	12 MW	215 mm	■	5ST3784-0KL	–
2-phase/1-phase + N						Article No.	Article No.
1 1 L1 N L1 N L1 N	13 40,8	For compact devices	60 MW	1060 mm	–	5ST3774-0	–
2 ECPD AFDU AFDU L1 N L1 N	13 40,8	For compact devices equipped with 5SM6 arc fault detection unit and 5TY1 COM electronic circuit protection devices (ECPD)	59 MW	1042 mm	–	5ST3776-0	–
1,5 1,5 9 mm 9 mm 9 mm L1 N AS L1 N AS L1 N AS	13 40,8	For compact devices equipped with auxiliary switch	59.5 MW	1055 mm	–	5ST3778-0	–
2,5 AFDD AFDD AFDD 9 mm 9 mm L1 N AS L1 N AS	13 40,8	For compact devices equipped with 5SM6 arc fault detection unit and auxiliary switch	58.5 MW	1036 mm	–	5ST3780-0	–
1 2,5 AFDD AFDD 9 mm L1 N AS FC L1 N	13 40,8	For 2 MW units (MCBs or RCBOs) with mounted 5SM6 arc fault detection unit and auxiliary switch	54 MW	956 mm	–	5ST3786-0	–
1 2 2 AFDD AFDD AFDD L1 N L1 N L1 N	18,3 18	For RCCB 2P N-right and 5 AFDD (5SM601.) + compact device	12 MW	214 mm	■	–	5ST3772

4

Quick selection guide, page 4/62

© Siemens 2025

Compact busbars

5ST37, can be cut

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps included	Conductor cross-section 10 mm²
4-phase/3-phase + N, for infeed via RCCB					**Article No.**
	For 1 × RCCB 3P+N and 6 × compact devices	10 MW	181 mm	■	5ST3783-1
	For 1 × RCCB 3P+N and 8 × compact devices	12 MW	216 mm	■	5ST3783-0
	For 1 × RCCB 3P+N and 10 × compact devices	14 MW	251 mm	■	5ST3783-4
	For 1 × RCCB 3P+N (RCCB N left only) and 6 × compact devices	10 MW	181 mm	■	5ST3783-1KL
	For 1 × RCCB 3P+N (RCCB N left only) and 8 × compact devices	12 MW	216 mm	■	5ST3783-0KL
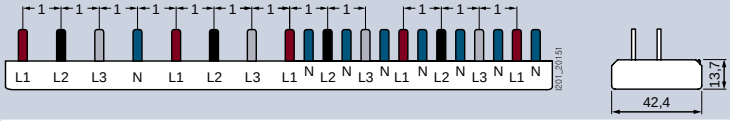	For 1 × RCCB 3P+N, 1 × MCB 3P and 5 × compact devices	14 MW	253 mm	■	5ST3785-0
	For 1 × RCCB 3P+N, 1 × MCB 3P and 7 × compact devices	14 MW	253 mm	■	5ST3785-4
	For 1 × RCCB 3P+N, 2 × MCBs 3P+N and 12 × compact devices	24 MW	430 mm	■	5ST3790-1
	For 1 × RCCB 3P+N, 2 × MCBs 3P+N and 45 × compact devices	57 MW	1009 mm	–	5ST3790-2
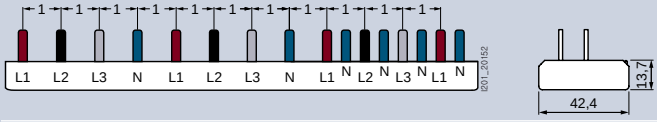	For 1 × RCCB 3P+N, 1 × MCB 3P+N and 4 × compact devices	12 MW	217 mm	■	5ST3795-0
	For 1 × RCCB 3P+N, 1 × MCB 3P+N and 6 × compact devices	14 MW	253 mm	■	5ST3795-4

4

Quick selection guide, page 4/62

© Siemens 2025



Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps included	Conductor cross-section 10 mm²
4-phase/3-phase + N					**Article No.**
	For compact devices	60 MW	1060 mm	–	5ST3773-0
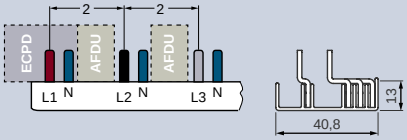	For compact devices equipped with 5SM6 arc fault detection unit and 5TY1 COM electronic circuit protection devices (ECPD)	59 MW	1042 mm	–	5ST3775-0
	For compact devices equipped with auxiliary switch	59.5 MW	1055 mm	–	5ST3777-0

4

Accessories

Terminals for infeed at side		Article No.
For conductors 6 ... 25 mm²	Short, IP20	5ST3771-2
End caps for 5ST3		**Article No.**
For 2 and 4-phase compcat busbars	Gray	5ST3788-0

Touch protection		Article No.
For free connections, yellow (RAL 1004)	For pins L1, N	5ST3655
	For pins L2, L3	5ST3655-0HG

Quick selection guide, page 4/62

© Siemens 2025

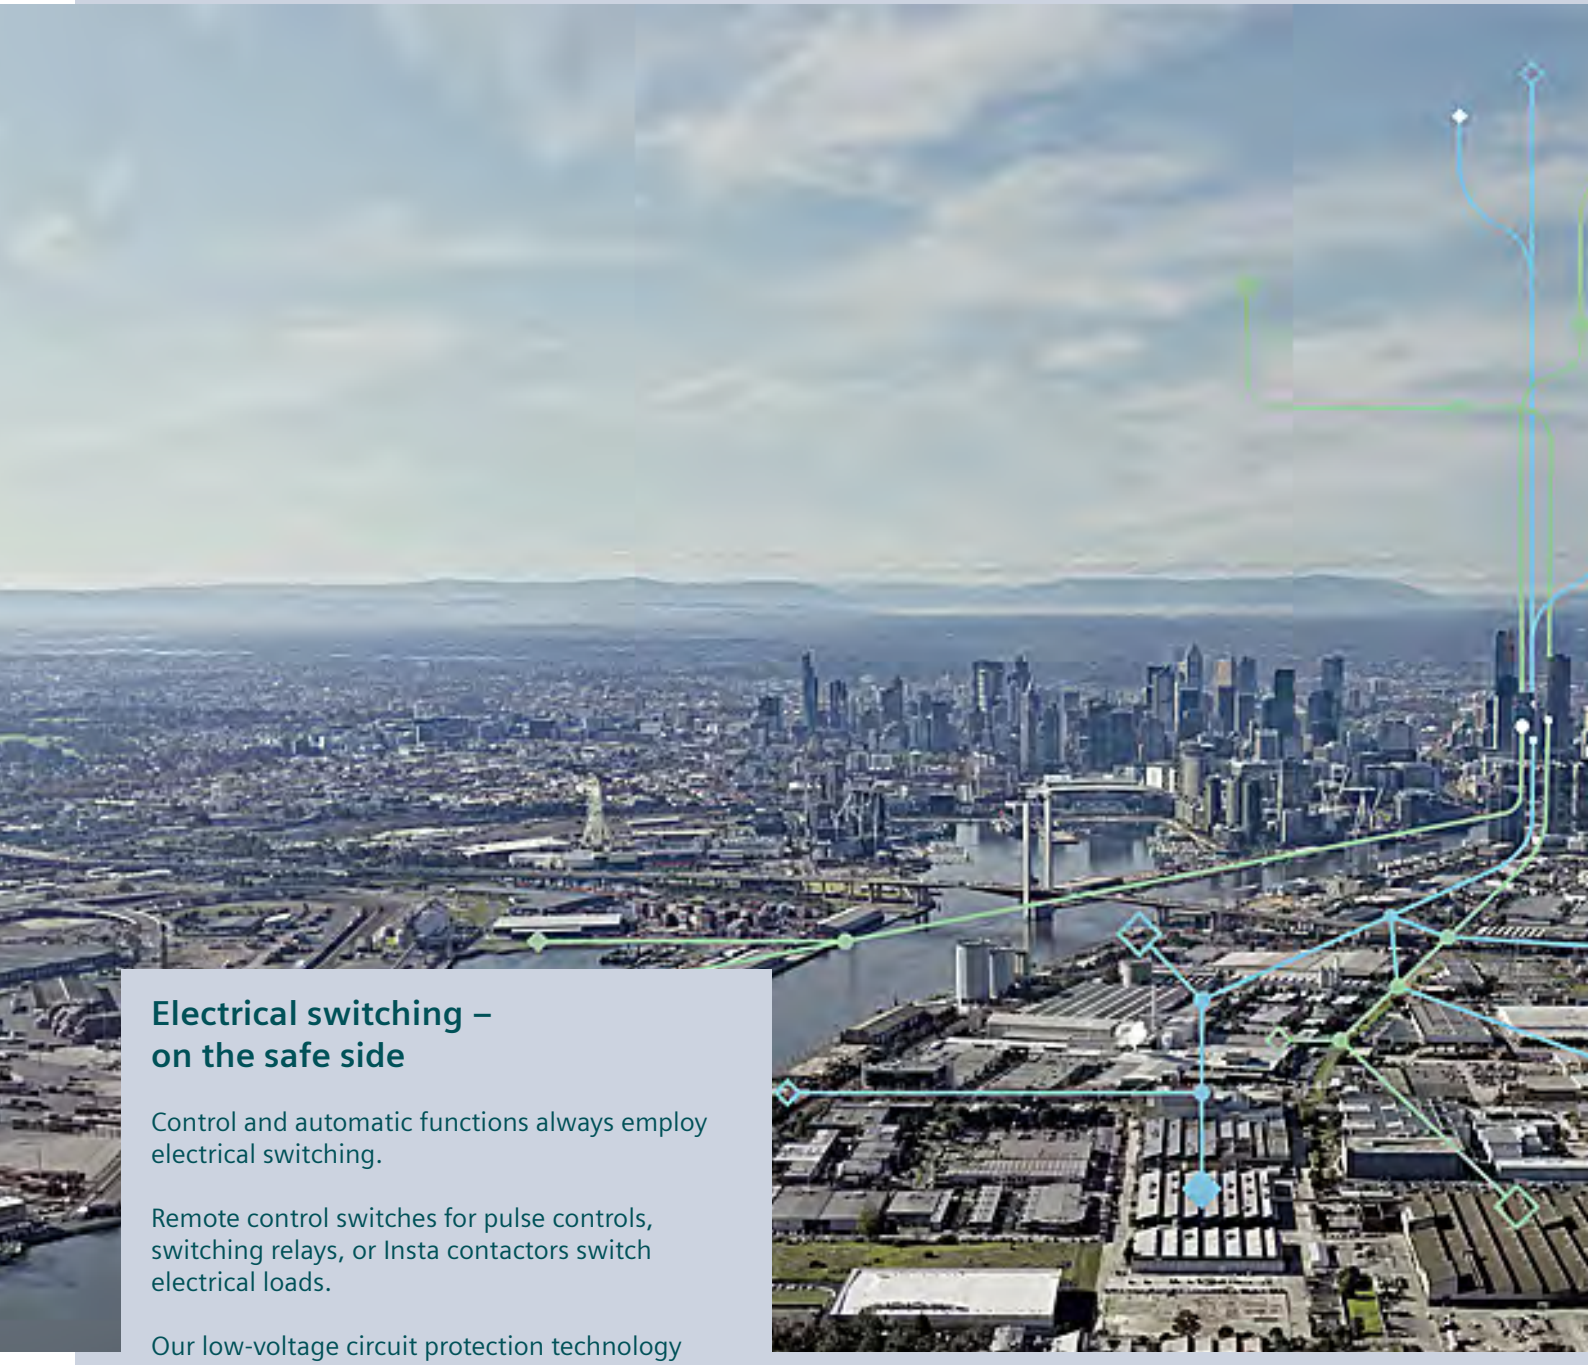

Electrical switching – on the safe side

Control and automatic functions always employ electrical switching.

Remote control switches for pulse controls, switching relays, or Insta contactors switch electrical loads.

Our low-voltage circuit protection technology offers a wide variety of contact versions and rated currents for the different requirements of these devices.

Safety, convenience and energy savings – these characterize automatic switching.

© Siemens 2025

Switching Devices

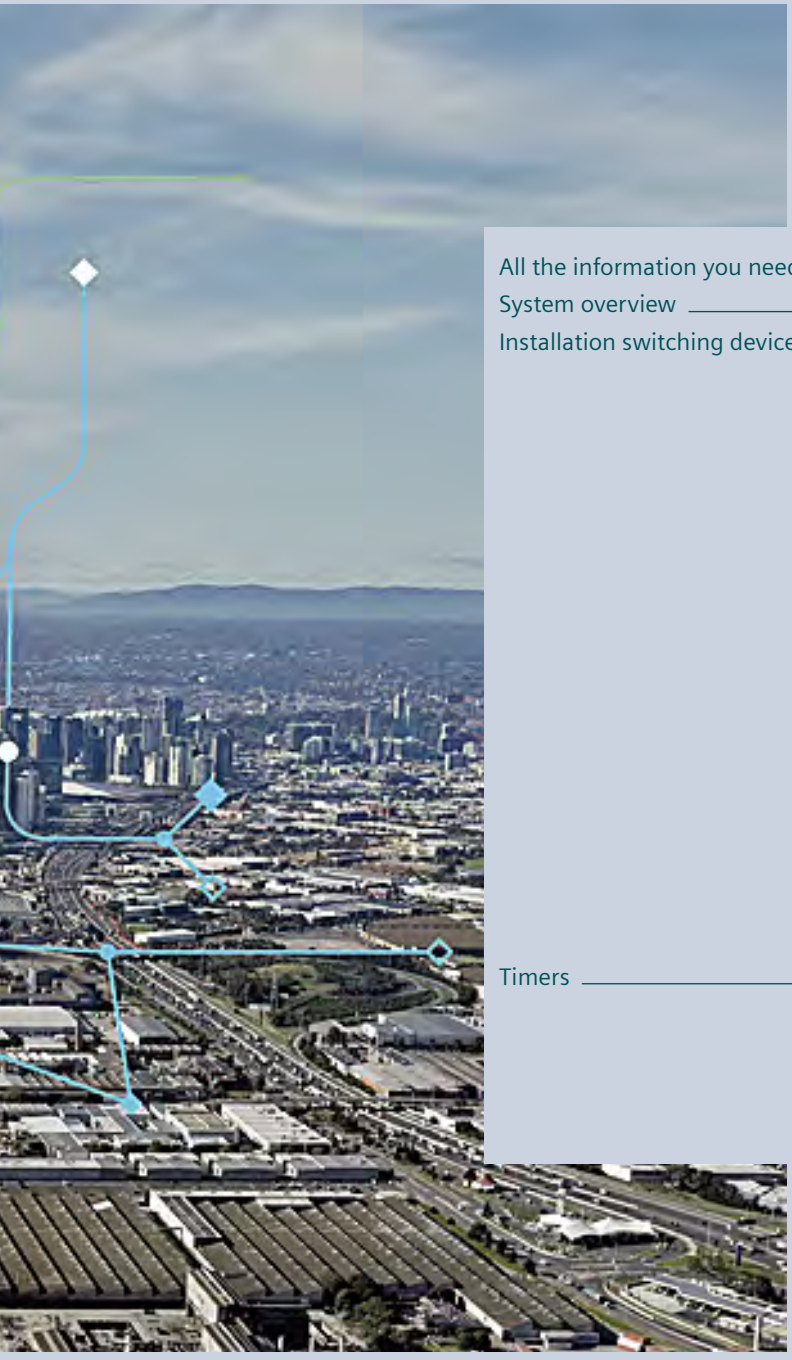

All the information you need 5/2
System overview 5/4
Installation switching devices 5/6
5TE8 control switches 5/6
5TE48 pushbuttons 5/8
5TE58 light indicators 5/10
5TE81/82 on-off switches 5/12
5TL1 on-off switches 5/14
5TE DC isolator 5/16
5TT41 remote control switches 5/18
5TT44 remote control switches 5/22
5TT4 auxiliary switches 5/24
5TT4 COM digital input/output module new 5/26
5TT42 switching relays 5/28
5TT50 Insta contactors 5/30
5TT58 Insta contactors 5/32
5TT5 auxiliary switches 5/35
5TT3 soft-starting devices 5/36
5TE busbars 5/37
Timers 5/38
7LF4 digital time switches 5/38
7LF5 mechanical time switches 5/44
7LF6 timers for buildings 5/48
5TT3 timers for industrial applications 5/49

© Siemens 2025

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about transfer switching equipment and load transfer switches, please visit our website
www.siemens.com/switching-devices

Your product in detail

The relevant tender specifications can be found at
www.siemens.com/tenderspecifications

Use our conversion tool for quick and easy conversion to Siemens products **www.siemens.com/conversion-tool**

Everything you need for your order

Refer to SiePortal to find an overview of your products (product catalog)

- **sie.ag/2m4eG5M**

Direct forwarding to the individual products in SiePortal by clicking on the article number in the catalog or entering this web address incl. article number
www.siemens.com/product_catalog_SIEP?Article No.

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services.
You can find your local contacts at
www.siemens.com/lowvoltage/components/contact

You will find further information on services at
www.siemens.com/service-offers

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at
www.siemens.com/support-request

© Siemens 2025

… can be found in our online services

Commissioning + operation

Your product in detail

The SiePortal platform (knowledge base) provides detailed technical information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Certificates

Online Support app available for download from the **App Store** and **Play Store**
You will find further information at
www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)

- SiePortal (product catalog)
  www.siemens.com/lowvoltage/product-catalog
- Image database
  www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAx Download Manager at
www.siemens.com/cax

Manuals

Manuals can be found in SiePortal at
www.siemens.com/lowvoltage/manuals

- Configuration Manual
  – Switching devices **(45315361)**

Face-to-face or online training

Our training courses can be found at
www.siemens.com/sitrain-lowvoltage

- Basic principles of electrical engineering (WT-LVBGET)

Technical overview – Switching devices

The fast way to get you to our online services

This page provides you with comprehensive information and links on switching devices
www.siemens.com/lowvoltage/product-support (109769083)

© Siemens 2025

System overview

Basic units and accessories

Installation switching devices

5TE8
control switches

5TE48
pushbuttons

5TE58
light indicators

5TE81/82, 5TL1
on-off switches

5TE
DC isolators

5TT41, 5TT44
remote control switches

5TT4 COM digital input/output module
new

5TT42
switching relays

5TT50, 5TT58
Insta contactors

5TT3
soft-starting devices

Accessories

Auxiliary switches (AS)

Auxiliary switches 5TT4

Shunt trips (ST)

Undervoltage releases (UR)

Remote control auxiliaries (RCA)

Handle locking devices

LEDs

Caps/covers

Connectors

5TE
busbars

Timers

7LF4 digital time switches

7LF5 mechanical time switches

7LF6 timers for buildings

5TT3 timers for industrial applications

Accessories

Holders

Note:
You will find a detailed range of accessories with the basic units.

© Siemens 2025

© Siemens 2025

5TE8 control switches

	Control switches	Two-way switches	Group switches with center position
Rated operational current I_e per conducting path	20 A	20 A	20 A
Rigid conductor cross-section	1 … 6 mm²	1 … 6 mm²	1 … 6 mm²
Flexible conductor cross-section, with end sleeve	1 … 6 mm²	1 … 6 mm²	1 … 6 mm²

Contacts	U_e AC	Mounting width	Auxiliary switches Cannot be retrofitted	Mounted	Auxiliary switches Cannot be retrofitted	Mounted	Auxiliary switches Cannot be retrofitted
1 NO	48 V	1 MW	5TE8101-3	–	–	–	–
	230 V	1 MW	5TE8101	–	–	–	–
2 NO	400 V	1 MW	5TE8102	–	–	–	–
3 NO	400 V	1 MW	5TE8103	–	–	–	–
		1.5 MW	–	5TE8108	–	–	–
1 NO + 1 NC	400 V	1 MW	–	–	–	5TE8151	–
2 NO + 2 NC	400 V	1 MW	–	–	5TE8152	–	–
3 NO + 1 NC	400 V	1 MW	–	–	5TE8153	–	–
1 CO	230 V	1 MW	–	–	5TE8161	–	–
2 CO	400 V	1 MW	–	–	5TE8162	–	–
1 toggle switch	230 V	1 MW	–	–	–	–	5TE8141
2 toggle switches	400 V	1 MW	–	–	–	–	5TE8142

Further technical specifications

		5TE8
Standards		
Standards		IEC/EN 60947-3 (VDE 0660-107), IEC/EN 60669-1 (VDE 0632-1)
Approvals		IEC/EN 60947-3 (VDE 0660-107), GB14048.3-2008 CCC
Supply		
Rated power dissipation P_v	Per pole	0.7 VA
Contacts		
Minimum contact load		10 V; 300 mA
Rated making/rated breaking capacity	At p.f. = 0.65	60 A/60 A
Rated short-time withstand current I_{cw} per conducting path at p.f. = 0.7	Up to 0.2 s	650 A
	Up to 0.5 s	400 A
	Up to 1 s	290 A
	Up to 3 s	170 A
Thermal rated current I_{th}		20 A
Electrical endurance/mechanical service life	Actuations	10000/25000
Safety		
Clearances	Open contacts	2 × > 2 mm
	Between the poles	> 7 mm
Creepage distances		> 7 mm
Sealable switch position		Yes
Separate handle locking device		Yes
Rated short-circuit making capacity I_{cm}		10 kA
Rated impulse voltage U_{imp}		> 5 kV
Connections		
Terminals	± Screw (Pozidriv)	PZ1
	Max. tightening torque	0.8 … 1.0 Nm
Ambient conditions		
Permissible ambient temperature		–5 … +40 °C
Resistance to climate at 95% relative humidity	Acc. to DIN 50015	45 °C

System overview, page 5/4

© Siemens 2025

Accessories

Handle locking device

- To prevent undesired mechanical On/Off switching
- Sealable
- For padlock with max. 3 mm shackle

Article No.
5ST3801

Spacer

- Contour for modular devices with a mounting depth of 70 mm
- Can be snapped onto either side of the busbar for convenient cable routing
- Spacer is recommended for better heat dissipation

Article No.
5TG8240

Set of mixed caps

- For manual changing of the luminous plates for the control switches

Article No.
5TG8068

5

System overview, page 5/4

© Siemens 2025

5TE48 pushbuttons

With/without LED

	Pushbuttons without maintained-contact function		Pushbuttons with maintained-contact function		Control pushbuttons with maintained-contact function or momentary-contact function	
	Without LED		Without LED		With LED	
Rated operational current I_e per conducting path	20 A		20 A		20 A	
Rigid/flexible conductor cross-section	1 ... 6 mm²		1 ... 6 mm²		1 ... 6 mm²	
Max. cable length	Standard		Standard		Standard	
Contacts	**U_e AC**	**Mounting width**				
1 NO	230 V	1 MW		–		–	1 × red	5TE4821
				–		–		–
2 × 1 NO	400 V	1 MW	1 × green, 1 × blue	5TE4804		–		–
2 NO	400 V	1 MW		–	1 × gray	5TE4811	1 × red	5TE4823
1 NO + 1 NC	400 V	1 MW	1 × gray	5TE4800	1 × gray	5TE4810		–
			1 × red	5TE4805		–	1 × red	5TE4820
			1 × green	5TE4806		–		–
			1 × yellow	5TE4807		–		–
			1 × blue	5TE4808		–		–
2 × (1 NO + 1 NC)	400 V	1 MW		–		–		–
2 NO + 2 NC	400 V	1 MW	1 × gray	5TE4801-2	1 × gray	5TE4811-2		–
3 NO + 1 NC	400 V	1 MW	1 × gray	5TE4802	1 × gray	5TE4812-1		–
3 NO + N	400 V	1 MW		–	1 × gray	5TE4812		–
2 NC	400 V	1 MW		–		–	1 × red	5TE4824
4 NC	400 V	1 MW		–	1 × gray	5TE4813		–
2 CO	400 V	1 MW		–	1 × gray	5TE4814		–

Further technical specifications

		5TE48
Standards		
Standards		IEC/EN 60947-3 (VDE 0660-107), IEC/EN 60669-1 (VDE 0632-1)
Approvals		IEC/EN 60947-3 (VDE 0660-107)
Supply		
Rated power dissipation P_v	Per pole	0.6 VA
Contacts		
Minimum contact load		10 V; 300 mA
Rated making/rated breaking capacity	At p.f. = 0.65	60 A/60 A
Rated short-time withstand current I_{cw} per conducting path at p.f. = 0.7	Up to 0.2 s	650 A
	Up to 0.5 s	400 A
	Up to 1 s	290 A
	Up to 3 s	170 A
Thermal rated current I_{th}		20 A
Mechanical service life	Actuations	25000
Safety		
Clearances	Open contacts	2 × > 2 mm
	Between the poles	> 7 mm
Creepage distances		> 7 mm
Rated impulse voltage U_{imp}		> 5 kV
Connections		
Terminals	± Screw (Pozidriv)	PZ1
	Max. tightening torque	0.8 ... 1.0 Nm
Ambient conditions		
Permissible ambient temperature		–5 ... +40 °C
Resistance to climate at 95% relative humidity	Acc. to DIN 50015	45 °C

System overview, page 5/4

© Siemens 2025

		Double pushbuttons with maintained-contact function and/or momentary-contact function			
With LED		**Without LED**		**With LED**	
20 A		20 A		20 A	
1 ... 6 mm²		1 ... 6 mm²		1 ... 6 mm²	
150 m		Standard		Standard	
1 × red	5TE4822	–		–	
1 × blue	5TE4822-1	–		–	
	–	–		1 × green, 1 × red	5TE4840
	–	–		–	
	–	–		–	
	–	–		–	
	–	1 × green, 1 × red	5TE4830	1 × green, 1 × red	5TE4841
	–	–		–	
	–	–		–	
	–	1 × green, 1 × red	5TE4831	–	
	–	–		–	
	–	–		–	
	–	–		–	
	–	–		–	
	–	–		–	
	–	–		–	

Accessories

LEDs for manual spare part

I_e	U_e	Color	Article No.
0.4 A	12 ... 60 V AC/DC	White	5TG8056-0
		Red	5TG8056-1
		Yellow	5TG8056-2
		Green	5TG8056-3
		Blue	5TG8056-4
	115 V AC/DC	White	5TG8057-0
		Red	5TG8057-1
		Yellow	5TG8057-2
		Green	5TG8057-3
		Blue	5TG8057-4
	230 V AC	White	5TG8058-0
		Red	5TG8058-1
		Yellow	5TG8058-2
		Green	5TG8058-3
		Blue	5TG8058-4

Cap sets

- For manual changing of colored caps with or without lamps
- 1 set = 5 units

Color	Article No.
Red, transparent	5TG8061
Green, transparent	5TG8062
Yellow, transparent	5TG8063
Blue, transparent	5TG8064
Black, non-transparent	5TG8065
White, transparent	5TG8066
Gray, non-transparent	5TG8060

Sets of mixed caps

- For manual changing of colored caps with or without lamps

Color	Article No.
10 × each of red/green + 5 × each of yellow/blue/white	5TG8067
1 × each of red/green/yellow	5TG8070

Color coding according to IEC 60073

Color	Safety of people/ environment	Process state	System state
Red	Danger	Emergency	Faulty
Green	Safety	Normal	Normal
Yellow	Warning/Caution	Abnormal	Abnormal
Blue	Stipulation		
Black, white, gray	No special significance assigned		

System overview, page 5/4

© Siemens 2025

5TE58 light indicators

With LED

	5TE58 light indicators			
Rigid conductor cross-section	1.5 ... 6 mm²		1.5 ... 6 mm²	
Flexible conductor cross-section, with end sleeve	1 ... 6 mm²		1 ... 6 mm²	
Max. cable length	Standard		250 m	
U_e AC	**Mounting width**			
230 V	1 MW	1 × red	5TE5800	1 × red	5TE5804
		1 × green, 1 × red	5TE5801		–
		3 × green	5TE5802		–
		1 × red, 1 × yellow, 1 × green	5TE5803		–
12 ... 60 V	1 MW	1 × red	5TE5810		–
		1 × green	5TE5810-1		–
		1 × green, 1 × red	5TE5811		–
		3 × green	5TE5812		–
		1 × red, 1 × yellow, 1 × green	5TE5812-1		–

5

Further technical specifications

		5TE58
Standards		
Standards		DIN VDE 62094-1/A11
Supply		
Rated power dissipation P_v	LED	0.4 VA
Safety		
Clearances	Between the terminals	> 7 mm
Connections		
Terminals	± Screw (Pozidriv)	PZ1
	Max. tightening torque	0.8 ... 1.0 Nm
Ambient conditions		
Permissible ambient temperature		–5 ... +40 °C
Resistance to climate at 95% relative humidity	Acc. to DIN 50015	45 °C

System overview, page 5/4

© Siemens 2025

Accessories

LEDs for manual spare part

I_e	U_e	Color	Article No.
0.4 A	12 ... 60 V AC/DC	White	5TG8056-0
		Red	5TG8056-1
		Yellow	5TG8056-2
		Green	5TG8056-3
		Blue	5TG8056-4
	115 V AC/DC	White	5TG8057-0
		Red	5TG8057-1
		Yellow	5TG8057-2
		Green	5TG8057-3
		Blue	5TG8057-4
	230 V AC	White	5TG8058-0
		Red	5TG8058-1
		Yellow	5TG8058-2
		Green	5TG8058-3
		Blue	5TG8058-4

Cap sets

- For manual changing of colored caps
- 1 set = 5 units



Color	Article No.
Red, transparent	5TG8061
Green, transparent	5TG8062
Yellow, transparent	5TG8063
Blue, transparent	5TG8064
White, transparent	5TG8066

Sets of mixed caps

- For manual changing of colored caps

Color	Article No.
10 × each of red/green + 5 × each of yellow/blue/white	5TG8067
1 × each of red/green/yellow	5TG8070

Color coding according to IEC 60073

Color	Safety of people/ environment	Process state	System state
Red	Danger	Emergency	Faulty
Green	Safety	Normal	Normal
Yellow	Warning/Caution	Abnormal	Abnormal
Blue	Stipulation		
Black, white, gray	No special significance assigned		

5

System overview, page 5/4

© Siemens 2025

5TE81/82 on-off switches

	5TE81 on-off switches	5TE82 on-off switches
Rated operational current I_e per conducting path	20 A	32 A
Rigid conductor cross-section	1.5 ... 6 mm²	1.5 ... 6 mm²
Flexible conductor cross-section, with end sleeve	1 ... 6 mm²	1 ... 6 mm²

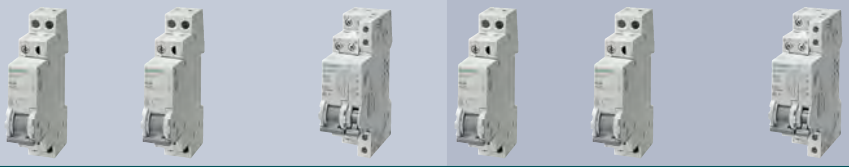

Contacts	U_e AC	Mounting width	Auxiliary switches			Auxiliary switches		
			Can be retrofitted	Cannot be retrofitted	Mounted	Can be retrofitted	Cannot be retrofitted	Mounted
1 NO	230 V	1 MW	5TE8111	–	–	5TE8211	–	–
2 NO	400 V	1 MW	5TE8112	–	–	5TE8212	–	–
3 NO	400 V	1 MW	5TE8113	–	–	5TE8213	–	–
3 NO + N	400 V	1 MW	–	5TE8114	–	–	5TE8214	–
		1.5 MW	–	–	5TE8118	–	–	5TE8218

Further technical specifications

		5TE81	5TE82
Standards			
Standards		IEC/EN 60947-3 (VDE 0660-107), IEC/EN 60669-1	IEC/EN 60947-3 (VDE 0660-107)
Approvals		IEC/EN 60947-3 (VDE 0660-107)	
Supply			
Rated power dissipation P_v	Per pole	0.7 VA	
Contacts			
Minimum contact load		10 V; 300 mA	
Rated making/rated breaking capacity	At p.f. = 0.65	60 A/60 A	96 A/96 A
Rated short-time withstand current I_{cw} per conducting path at p.f. = 0.7	Up to 0.2 s	650 A	1000 A
	Up to 0.5 s	400 A	630 A
	Up to 1 s	290 A	450 A
	Up to 3 s	170 A	250 A
Thermal rated current I_{th}		20 A	32 A
Electrical endurance/mechanical service life	Actuations	10000/25000	
Safety			
Clearances	Open contacts	2 × > 2 mm	
	Between the poles	> 7 mm	
Creepage distances		> 7 mm	
Rated short-circuit making capacity I_{cm}		10 kA	
Rated impulse voltage U_{imp}		> 5 kV	
Connections			
Terminals	± Screw (Pozidriv)	PZ1	
	Max. tightening torque	0.8 ... 1.0 Nm	
Ambient conditions			
Permissible ambient temperature		–5 ... +40 °C	
Resistance to climate at 95% relative humidity	Acc. to DIN 50015	45 °C	

System overview, page 5/4

© Siemens 2025

Accessories

Auxiliary switches (AS)

- For right-hand-side retrofitting with factory-fitted brackets

Contacts	Type	Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Handle locking device

- To prevent undesired mechanical On/Off switching
- Sealable
- For padlock with max. 3 mm shackle

Article No.
5ST3801

Terminal cover

- For covering screw openings
- Sealable

Article No.
5ST3800

Spacer

- Contour for modular devices with a mounting depth of 70 mm
- Can be snapped onto either side of the busbar for convenient cable routing
- Spacer is recommended for better heat dissipation

Article No.
5TG8240

5

System overview, page 5/4

© Siemens 2025

5TL1 on-off switches

	Rated operational current I_e per conducting path					
	32 A	40 A	63 A		80 A	100 A
Rigid conductor cross-section	1 ... 35 mm²	1 ... 35 mm²	1 ... 35 mm²		2.5 ... 50 mm²	2.5 ... 50 mm²
Flexible conductor cross-section, with end sleeve	1 ... 25 mm²	1 ... 25 mm²	1 ... 25 mm²		2.5 ... 50 mm²	2.5 ... 50 mm²
Contacts	**Rated operational voltage U_e AC**	**Mounting width**	**Gray handle**	**Gray handle**	**Gray handle**	**Red handle**	**Gray handle**	**Gray handle**
1 NO	230 V	1 MW	5TL1132-0	5TL1140-0	5TL1163-0	5TL1163-1	5TL1180-0	5TL1191-0
2 NO	400 V	2 MW	5TL1232-0	5TL1240-0	5TL1263-0	5TL1263-1	5TL1280-0	5TL1291-0
3 NO	400 V	3 MW	5TL1332-0	5TL1340-0	5TL1363-0	5TL1363-1	5TL1380-0	5TL1391-0
4 NO	400 V	4 MW	5TL1432-0	5TL1440-0	5TL1463-0	–	5TL1480-0	5TL1491-0
3 NO + N	400 V	4 MW	5TL1632-0	5TL1640-0	5TL1663-0	5TL1663-1	5TL1680-0	5TL1691-0

5

Further technical specifications

		5TL1.32	5TL1.40	5TL1.63	5TL1.80	5TL1.91	5TL1.92
Standards							
Standards		IEC/EN 60947-3 (VDE 0660-107)					
Approvals		IEC/EN 60947-3 (VDE 0660-107)					
Supply							
Rated power dissipation P_v	Per pole, max.	0.7 VA	0.9 VA	2.2 VA	3.5 VA	5.5 VA	8.6 VA
Contacts							
Minimum contact load		24 V; 300 mA					
Rated making/rated breaking capacity AC-22A	At p.f. = 0.65	96 A/ 96 A	120 A/ 120 A	196 A/ 196 A	240 A/ 240 A	300 A/ 300 A	375 A/ 375 A
Rated short-time withstand current I_{cw} per conducting path at p.f. = 0.7 [1]	Up to 0.2 s	760 A	950 A	1500 A	2700 A	3400 A	
	Up to 0.5 s	500 A	630 A	1000 A	1650 A	2100 A	
	Up to 1 s	400 A	500 A	800 A	1350 A	1700 A	
	Up to 3 s	280 A	350 A	560 A	800 A	1000 A	
Thermal rated current I_{th}		32 A	40 A	63 A	80 A	100 A	125 A
Electrical endurance/mechanical service life	Switching cycles	10000/ 20000	10000	5000	2000		
Rated power for the switching of resistive load including moderate overload AC-21	1-pole	5 kW	6.5 kW	10 kW	13 kW	16 kW	
	2-pole	9 kW	11 kW	18 kW	22 kW	28 kW	
	3/4-pole	15 kW		30 kW	39 kW	48 kW	
Safety							
Creepage distances		> 7 mm					
Clearances	Open contacts	> 7 mm					
	Between the poles	> 7 mm					
Rated short-circuit making capacity I_{cm} (in conjunction with fuse of the same rated operational current EN 60269 gL/gG)		10 kA					
Rated impulse voltage U_{imp}		6 kV					
Connections							
Terminals	± Screw (Pozidriv)	PZ2					
	Max. tightening torque	3.5 Nm					
Ambient conditions							
Permissible ambient temperature		–5 ... +40 °C					
Resistance to climate at 95% relative humidity	Acc. to DIN 50015	45 °C					

System overview, page 5/4

© Siemens 2025

	125 A
	2.5 ... 50 mm²
	2.5 ... 50 mm²
Red handle	**Gray handle**
5TL1191-1	5TL1192-0
5TL1291-1	5TL1292-0
5TL1391-1	5TL1392-0
–	5TL1492-0
5TL1691-1	5TL1692-0

Accessories

Auxiliary switches (AS)

- For right-hand-side retrofitting with factory-fitted brackets

Contacts	Type	Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Remote control auxiliaries (RCA)

Type	U_e	Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058

Adapters for remote control auxiliaries (RCA)

Mounting width	Article No.
1–2 MW	5ST3820-6
3–4 MW	5ST3820-7

Handle locking device

- To prevent undesired mechanical On/Off switching
- Sealable
- For padlock with max. 3 mm shackle

Article No.
5ST3806

Terminal cover

- For covering screw openings
- Sealable

Article No.
5ST3800

Spacer

- Contour for modular devices with a mounting depth of 70 mm
- Can be snapped onto either side of the busbar for convenient cable routing
- Spacer is recommended for better heat dissipation

Article No.
5TG8240

Phase connectors

- For easy wiring in various circuit versions and bus mountings
- As a support terminal for conductors from 2.5 to 50 mm²

Number of poles	I_e	U_e AC	Mounting width	Article No.
1-pole	125 A	230 V	1 MW	5TL1192-4

N conductor connectors

- For easy wiring in various circuit versions and bus mountings
- As a support terminal for N conductors from 2.5 to 50 mm² with blue color marking

Number of poles	I_e	U_e AC	Mounting width	Article No.
1-pole	125 A	230 V	1 MW	5TL1192-3

5

System overview, page 5/4

© Siemens 2025

5TE DC isolator

Can be used as switch disconnectors according to EN 60947-3

	Rated operational current I_e 63 A
Rigid conductor cross-section	0.75 ... 35 mm²
Flexible conductor cross-section, with end sleeve	0.75 ... 25 mm²

Contacts	Max. operational voltage U_{max} DC	Mounting width	Auxiliary switches can be retrofitted
4 NO	1000 V	4 MW	5TE2515-1

5

Further technical specifications

Standards		
Standards		IEC/EN 60947-3; GB14048.3-2008 CCC
Supply		
Rated operational voltage U_e	For 4 poles in series	880 V DC
Rated power dissipation P_v	Per pole, max.	4.4 W
Contacts		
Minimum contact load		24 V; 300 mA
Rated short-time withstand current I_{cw}	1000 V DC, 4-pole	760 A
Electrical endurance/mechanical service life	Actuations	5000/10000
Safety		
Rated short-circuit making capacity I_{cm}	1000 V DC, 4-pole	500 A
Rated impulse voltage U_{imp}		> 5 kV
Overvoltage category	At U = 440 ... 880 V	II
	At U = 1000 V	I
Utilization category		DC-21B
Connections		
Terminals	± Screw (Pozidriv)	PZ2
	Max. tightening torque	2.5 ... 3 Nm
Ambient conditions		
Permissible ambient temperature		–25 ... +40 °C
Resistance to climate at 95% relative humidity	Acc. to DIN 50015	45 °C

System overview, page 5/4

© Siemens 2025

Accessories

Auxiliary switches (AS)

- For right-hand-side retrofitting with factory-fitted brackets

Contacts	Type	Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Shunt trips (ST)

Rated operational voltage U_e	Article No.
110 ... 415 V AC, 110 ... 220 V DC	5ST3030
24 ... 48 V AC/DC	5ST3031
12 V AC/DC	5ST3031-0XX01

Undervoltage releases (UR)

Type	Rated operational voltage U_e	Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

System overview, page 5/4

© Siemens 2025

5TT41 remote control switches

Rated current 16 A

	Rated operational current I_e 16 A
Rigid conductor cross-section	1 ... 6 mm²
Flexible conductor cross-section, with end sleeve	1 ... 6 mm²

Contacts	U_e	U_c AC	U_c DC	Mounting width 1 MW	Mounting width 2 MW	Auxiliary switches can be retrofitted
1 NO	250 V	230 V	–	■	–	5TT4101-0
		115 V	–	■	–	5TT4101-1
		24 V	–	■	–	5TT4101-2
		12 V	–	■	–	5TT4101-3
		8 V	–	■	–	5TT4101-4
		–	110 V	■	–	5TT4111-1
			24 V	■	–	5TT4111-2
			12 V	■	–	5TT4111-3
1 NO + 1 NC	250 V	230 V	–	■	–	5TT4105-0
		115 V	–	■	–	5TT4105-1
		24 V	–	■	–	5TT4105-2
		12 V	–	■	–	5TT4105-3
		8 V	–	■	–	5TT4105-4
		–	110 V	■	–	5TT4115-1
			24 V	■	–	5TT4115-2
			12 V	■	–	5TT4115-3
2 NO	400 V	230 V	–	■	–	5TT4102-0
		115 V	–	■	–	5TT4102-1
		24 V	–	■	–	5TT4102-2
		12 V	–	■	–	5TT4102-3
		8 V	–	■	–	5TT4102-4
		–	110 V	■	–	5TT4112-1
			24 V	■	–	5TT4112-2
			12 V	■	–	5TT4112-3
3 NO	400 V	230 V	–	–	■	5TT4103-0
		24 V	–	–	■	5TT4103-2
4 NO	400 V	230 V	–	–	■	5TT4104-0
		24 V	–	–	■	5TT4104-2
		–	110 V	–	■	5TT4114-1
			24 V	–	■	5TT4114-2

5

System overview, page 5/4

© Siemens 2025

Further technical specifications

		5TT4101 5TT4102 5TT4105	5TT4111 5TT4112 5TT4115	5TT4103 5TT4104 5TT4114
Standards				
Standards		IEC 60669-1, IEC 60669-2, IEC 60669-3, EN 60669 (VDE 0632), EN 60669-2-2, EN 60669-2-2/A1		
Approvals		VDE		
Supply				
Rated operational current I_e	At p.f. = 0.6 ... 1 (AC-15)	16 A		
Primary operating range		0.8 ... 1.1 × U_c		
Rated frequency f_c		50 Hz		
Rated power dissipation P_v	Magnet coil, only pulse	4.5 W/7 VA		9 W/13 VA
	Per pole, max.	1.2 W		
Contacts				
Contact gap		> 1.2 mm		
Minimum contact load		10 V; 100 mA		
Electrical endurance at I_e/U_e, p.f. = 0.6, incandescent lamp load 600 W	Operating cycles	50000		
Incandescent lamp load (switching of incandescent lamps for 15000 switching cycles)	At AC-5b (230 V)	1200 W		
Glow lamp load at 230 V		5 mA		
	With 1 5TT4920 compensator	25 mA		
	With 2 5TT4920 compensators	45 mA		
Minimum pulse duration		50 ms		
Safety				
Different phases between magnet coil and contact		Permissible		
Clearances	Between magnet coil and contact	> 6 mm		
Creepage distances	Between magnet coil and contact	> 6 mm		
Rated impulse voltage U_{imp}		4 kV		
Function				
Manual operation		Yes		
Switching position indication		Yes		
Connections				
Terminals	± Screw (Pozidriv)	PZ1		
	Max. tightening torque	0.8 ... 1 Nm		
Ambient conditions				
Permissible ambient temperature		–10 ... +40 °C		
Resistance to climate at 95% relative humidity	Acc. to DIN 50015	35 °C		
Degree of protection	Acc. to EN 60529	IP20, with connected conductors		

Accessories

Auxiliary switches

- One device per remote control switch can be retrofitted

Contacts	Type	I_e	U_e	Mounting width	Article No.
1 CO	Standard	5 A	250 V AC	0.5 MW	5TT4900
	For low power	0.1 A	30 V AC/DC	0.5 MW	5TT4901

Compensator

- For increasing the glow lamp load by 20 mA

U_e	Mounting width	Article No.
250 V AC	1 MW	5TT4920

System overview, page 5/4

© Siemens 2025

5TT41 remote control switches

For special applications, rated current 16 A

				Remote control switches with central On/Off switching	Remote control switches with central and group On/Off switching
			Rigid conductor cross-section	1 ... 6 mm²	1 ... 6 mm²
			Flexible conductor cross-section, with end sleeve	1 ... 6 mm²	1 ... 6 mm²
Contacts	**U_e**	**U_c AC**	**Mounting width**	**Auxiliary switches cannot be retrofitted**	**Auxiliary switches cannot be retrofitted**
1 NO	250 V	230 V	1.5 MW	5TT4121-0	5TT4151-0
		24 V	1.5 MW	5TT4121-2	5TT4151-2
2 NO	400 V	230 V	1.5 MW	5TT4122-0	5TT4152-0
		24 V	1.5 MW	5TT4122-2	5TT4152-2
3 NO	400 V	230 V	2.5 MW	5TT4123-0	–
1 NO + 1 NC	250 V	115 V	1.5 MW	5TT4125-0	–

				Series remote control switch contact sequence 1 – 2 – 1+2 – 0	Shutter/blind remote control switch contact sequence 1 – 0 – 2 – 0
			Rigid conductor cross-section	1 ... 6 mm²	1 ... 6 mm²
			Flexible conductor cross-section, with end sleeve	1 ... 6 mm²	1 ... 6 mm²
Contacts	**U_e**	**U_c AC**	**Mounting width**	**Auxiliary switches cannot be retrofitted**	**Auxiliary switches cannot be retrofitted**
2 NO	250 V	230 V	1 MW	5TT4132-0	5TT4142-0
		24 V	1 MW	–	5TT4142-2
		12 V	1 MW	5TT4132-3	5TT4142-3

5

System overview, page 5/4

© Siemens 2025

Further technical specifications

		5TT412 5TT415	5TT413 5TT414
Standards			
Standards		EN 60669-1 (VDE 0632-1)/EN 60669-1/A1/A2 EN 60669-2-2 (VDE 0632-2-2)/EN 60669-2-2	
Approvals		VDE	
Supply			
Rated operational current I_e	At p.f. = 0.6 ... 1 (AC-15)	16 A	
Primary operating range		0.8 ... 1.1 × U_c	
Rated frequency f_c		50 Hz	
Rated power dissipation P_v	Magnet coil, only pulse	4.5 W/7 VA	
	Per pole, max.	1.2 W	
Contacts			
Contact gap		> 1.2 mm	
Minimum contact load		10 V; 100 mA	
Electrical endurance at I_e/U_e, p.f. = 0.6, incandescent lamp load 600 W	Operating cycles	50000	
Incandescent lamp load (switching of incandescent lamps for 15000 switching cycles)	At AC-5b (230 V)	1200 W	
Glow lamp load at 230 V		5 mA	
	With 1 5TT4920 compensator	25 mA	
	With 2 5TT4920 compensators	45 mA	
Minimum pulse duration		50 ms	
Safety			
Different phases between magnet coil and contact		Permissible	
Clearances	Between magnet coil and contact	> 6 mm	
Creepage distances	Between magnet coil and contact	> 6 mm	
Rated impulse voltage U_{imp}		4 kV	
Function			
Manual operation		Yes	
Switching position indication		Yes	–
Connections			
Terminals	± Screw (Pozidriv)	PZ1	
	Max. tightening torque	0.8 ... 1 Nm	
Ambient conditions			
Permissible ambient temperature		–10 ... +40 °C	
Resistance to climate at 95% relative humidity	Acc. to DIN 50015	35 °C	
Degree of protection	Acc. to EN 60529	IP20, with connected conductors	

Accessories

Auxiliary switches

- One device per remote control switch can be retrofitted

Contacts	Type	I_e	U_e	Mounting width	Article No.
1 CO	Standard	5 A	250 V AC	0.5 MW	5TT4900
	For low power	0.1 A	30 V AC/DC	0.5 MW	5TT4901

Compensator

- For increasing the glow lamp load by 20 mA

U_e	Mounting width	Article No.
250 V AC	1 MW	5TT4920

System overview, page 5/4

© Siemens 2025

5TT44 remote control switches

Rated current 20 A – 63 A

	Rated operational current I_e				
	20 A	25 A	32 A	40 A	63 A
Rigid conductor cross-section	1 ... 10 mm²	1 ... 10 mm²	1 ... 10 mm²	2.5 ... 25 mm²	2.5 ... 25 mm²
Flexible conductor cross-section, with end sleeve	1 ... 10 mm²	1 ... 10 mm²	1 ... 10 mm²	2.5 ... 25 mm²	2.5 ... 25 mm²

Contacts	U_e	U_c AC	U_c DC	Mounting width					
For AC applications – auxiliary switches can be retrofitted									
1 NO + 1 NC	440 V	230 V	–	1 MW	5TT4405-0	5TT4425-0	5TT4455-0	–	–
				2 MW	–	–	–	5TT4465-0	5TT4475-0
		24 V	–	1 MW	5TT4405-2	5TT4425-2	5TT4455-2	–	–
				2 MW	–	–	–	5TT4465-2	5TT4475-2
1 CO	250 V	230 V	–	1 MW	5TT4407-0	–	–	–	–
		24 V	–	1 MW	5TT4407-2	–	–	–	–
2 NO	440 V	230 V	–	1 MW	5TT4402-0	5TT4422-0	5TT4452-0	–	–
				2 MW	–	–	–	5TT4462-0	5TT4472-0
		24 V	–	1 MW	5TT4402-2	5TT4422-2	5TT4452-2	–	–
				2 MW	–	–	–	5TT4462-2	5TT4472-2
2 CO	440 V	230 V	–	2 MW	–	5TT4428-0	5TT4458-0	5TT4468-0	5TT4478-0
		24 V	–	2 MW	–	5TT4428-2	5TT4458-2	5TT4468-2	5TT4478-2
4 NO	440 V	230 V	–	2 MW	–	5TT4424-0	5TT4454-0	–	–
				4 MW	–	–	–	5TT4464-0	5TT4474-0
		24 V	–	2 MW	–	5TT4424-2	5TT4454-2	–	–
				4 MW	–	–	–	5TT4464-2	5TT4474-2
2 NO + 2 NC	440 V	230 V	–	2 MW	–	5TT4426-0	5TT4456-0	–	–
				4 MW	–	–	–	5TT4466-0	5TT4476-0
		24 V	–	2 MW	–	5TT4426-2	5TT4456-2	–	–
				4 MW	–	–	–	5TT4466-2	5TT4476-2
For DC applications									
1 NO	250 V	–	24 V	1 MW	5TT4411-5	5TT4431-5	5TT4451-5	–	–
2 NO	440 V	–	24 V	1 MW	5TT4412-5	5TT4432-5	5TT4452-5	–	–
1 NO + 1 NC	440 V	–	24 V	1 MW	5TT4415-5	5TT4435-5	5TT4455-5	–	–
1 CO	250 V	–	24 V	1 MW	5TT4417-5	5TT4437-5	5TT4457-5	–	–

5

System overview, page 5/4

© Siemens 2025

Further technical specifications

		5TT440	5TT442	5TT445	5TT446	5TT447
Standards						
Standards		IEC 60669-2-2			EN 60669-1 (VDE 0632-1)/EN 60669-1/A1/A2 EN 60669-2-2 (VDE 0632-2-2)/EN 60669-2-2	
Approvals		CE				
Supply						
Rated operational current I_e	At p.f. = 0.6 ... 1 (AC-15)	20 A	25 A	32 A	40 A	63 A
Rated frequency f_c		50/60 Hz				
Rated power dissipation P_v	Magnet coil, "On" pulse	13 W/18 VA			12 W/26 VA	
	Per pole, max.	1.5 W	2 W	3 W		3.5 W
Rated operational power (AC-3)	1-phase, at 230 V	0.5 kW	0.75 kW	1.1 kW	2.2 kW	4 kW
	3-phase, at 230 V	1.5 kW	2.2 kW	3 kW	5.5 kW	11 kW
	3-phase, at 400 V	3 kW	4 kW	5.5 kW	11 kW	18.5 kW
Contacts						
Contact gap		> 3 mm				
Minimum contact load AC		10 V; 100 mA				
Electrical endurance at I_e/U_e, p. f. = 0.6, incandescent lamp load 600 W	Operating cycles	50000				
Incandescent lamp load (switching of incandescent lamps for 15000 switching cycles)	At AC-5b (230 V)	4400 W	5500 W	7000 W	8800 W	13800 W
Max. switching speed	In switching cycles per hour	600 h^{-1}	450 h^{-1}		360 h^{-1}	
Safety						
Different phases between magnet coil and contact		Permissible				
Rated impulse voltage U_{imp}		3 kV				
Function						
Manual operation		Yes				
Switching position indication		Yes				
Connections						
Terminals	± Screw (Pozidriv)	Coil: PZ1, contact: PZ2				
	Max. tightening torque	Coil: 0.6 Nm, contact: 1.2 Nm			Coil: 0.6 Nm, contact: 2 Nm	
Coil conductor cross-sections		1 ... 4 mm^2				
Ambient conditions						
Permissible ambient temperature	For operation/for storage	–25 ... +55 °C/–30 ... +80 °C				
Resistance to climate at 95% relative humidity	Acc. to DIN 50015	55 °C				
Degree of protection	Acc. to EN 60529	IP20				
Mounting position		Any (not upside down)				

Accessories

Auxiliary switch

Contacts	U_e	I_e	Mounting width	Article No.
1 NO + 1 NC	250 V AC	16 A	0.5 MW	5TT4930

Central switch, central with diode

- For central function (no auxiliary switch)

U_e	Mounting width	Article No.
250 V AC	0.5 MW	5TT4931

Central switch, group with several diodes

- For group function (no auxiliary switch)

U_e	Mounting width	Article No.
250 V AC	0.5 MW	5TT4932

System overview, page 5/4

© Siemens 2025

5TT4 auxiliary switches

For 5TT4 remote control switches

	Auxiliary switches for 5TT41	Auxiliary switches for 5TT44
Rigid conductor cross-section	0.5 ... 2.5 mm²	1 ... 4 mm²
Flexible conductor cross-section, with end sleeve	0.5 ... 2.5 mm²	1 ... 4 mm²

Contacts	Type	I_e	U_e	Mounting width		
Auxiliary switches						
1 NO + 1 NC	Standard	16 A	250 V AC	0.5 MW	–	5TT4930
1 CO	Standard	5 A	250 V AC	0.5 MW	5TT4900	–
	For low power	0.1 A	30 V AC/DC	0.5 MW	5TT4901	–
Auxiliary switches, central with diode for central function						
			250 V AC	0.5 MW	–	5TT4931
Auxiliary switches, group with several diodes for group function						
			250 V AC	0.5 MW	–	5TT4932

Further technical specifications

		Auxiliary switches for 5TT41	Auxiliary switches for 5TT44		
		5TT4900 5TT4901	5TT4930	5TT4931	5TT4932
Standards					
Standards		EN 60947-1 (VDE 0660 Part 100) EN 60947-5-1 (VDE 0660 Part 200)	IEC/EN 60947-5-1		
Approvals		–	CE, EAC		
Supply					
Rated operational current I_e	At p.f. = 0.6 ... 1 (AC-15)	16 A	4 A	–	
Rated frequency f_c		–	50/60 Hz		
Rated power dissipation P_v	Per pole, max.	–	0.3 W		
Contacts					
Contact gap		< 1.2 mm	> 3 mm		
Minimum contact load		5 V; 1 mA	12 V; 5 mA		
Electrical endurance at I_e/U_e, p.f. = 0.6, incandescent lamp load 600 W	Operating cycles	–	100000	–	
Safety					
Clearances	Between magnet coil and contact	> 6 mm	–		
Creepage distances	Between magnet coil and contact	> 6 mm	–		
Rated impulse voltage U_{imp}		1 kV	1 kV		
Pushbutton malfunction protected against continuous voltage, safe due to design		Yes	–		
Function					
Manual operation		–	No		
Switching position indication		–	No		
Connections					
Terminals	± Screw (Pozidriv)	PZ1	PZ1		
	Max. tightening torque	0.5 Nm	0.8 Nm		
Ambient conditions					
Permissible ambient temperature	For operation/for storage	–10 ... +40 °C/–10 ... +40 °C	–25 ... +70 °C/–30 ... +80 °C		
Resistance to climate at 95% relative humidity	Acc. to DIN 50015	35 °C	55 °C		
Degree of protection	Acc. to EN 60529	IP20, with connected conductors	IP20		
Mounting position		Any	Any (not upside down)		

System overview, page 5/4

© Siemens 2025

Accessories

Compensator

- For increasing the glow lamp load by 20 mA

U_e	Mounting width	Article No.
250 V AC	1 MW	5TT4920

System overview, page 5/4

© Siemens 2025

5TT4 COM digital input/output module new

With measuring and communication function

	Rated operational current I_e 5 A
Rigid conductor cross-section	0.2 ... 1.5 mm²
Flexible conductor cross-section, with/without end sleeve	0.2 ... 1.5 mm²

Contacts	U_e AC	U_e DC	U_c AC	U_c DC	Mounting width	
2 NO/NC (configurable)	230 V	30 V	–	24 V	1 MW	5TT4322-2MC

5

Further technical specifications

		5TT4322-2MC
Standards		
Standards		RED 2014/53/EU, DIN EN IEC 60669-2-1
Approvals		CE
Supply		
Primary operating range		0.8 ... 1.2 × U_c
Rated power dissipation P_v	Magnet coil, only pulse	0.4 W
	Per pole, max.	0.15 W
Inputs		
Number of inputs		2
Input voltage		24 V AC/DC
Maximum signal 0		5 V
Minimal signal 1		12 V
Pulse length		> 150 ms
Outputs		
Number of outputs		2, floating
Output voltage		230 V AC/30 V DC
Breaking capacity		5 A
Relay operating mode		Monostable
Mechanical service life	Actuations	5000000
Electrical endurance at p.f. = 0.6		100000
HMI		
Button		Switching outputs, disconnecting communication
LED		Status display
Communication function		
Connection		Radio communication with Powercenter 1100/2000
Basic function		Adjustable functions of the inputs and outputs, logical operations
Time functions		ON-delay, OFF-delay, time-based switching, holiday mode
Additional functions		Temperature measurement, saving events and alarms, zero crossing circuit (can be deactivated)
Ambient conditions		
Permissible ambient temperature		–25 ... +65 °C
Storage temperature		–40 ... +85 °C
Resistance to climate at 95% relative humidity	Acc. to DIN 50015	65 °C
Degree of protection	Acc. to DIN EN 60529	IP20

System overview, page 5/4

© Siemens 2025

SENTRON Powercenter 1100/2000 data transceiver

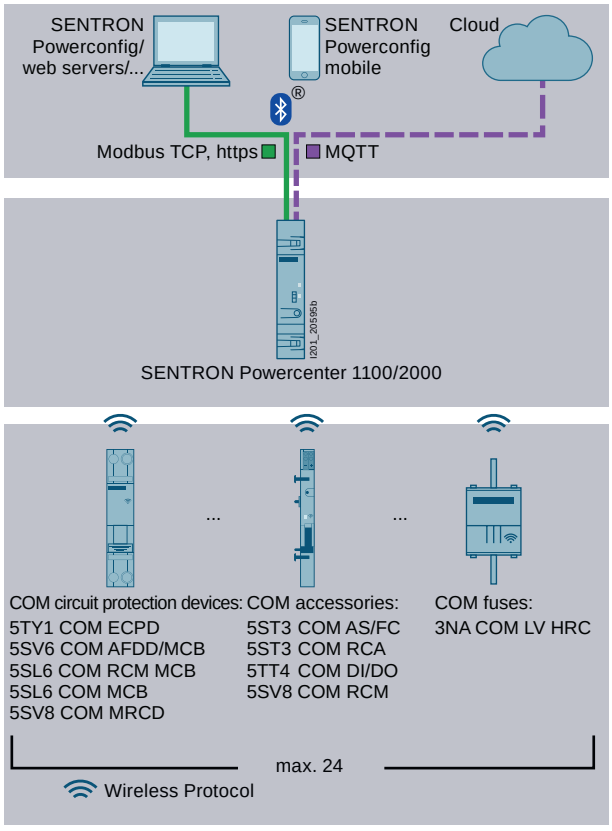

- Wireless radio transmission of measured values to the SENTRON Powercenter 1000/1100/2000 data transceiver
- Commissioning, parameter assignment, firmware updates and further processing of the data via the SENTRON Powercenter 1000/1100/2000 data transceiver

SENTRON Powercenter	Article No.
SENTRON Powercenter 1000	7KN1110-0MC00
SENTRON Powercenter 1100	7KN1111-0MC00
SENTRON Powercenter 2000	7KN1210-0MC00

See page 10/28

Weitere Informationen finden Sie unter:
www.siemens.com/lowvoltage/manuals

IInstallation Manual – Circuit protection devices with communication and measuring function **(109791805)**

System Manual – Circuit protection devices with communication and measuring function **(109791806)**

Functions

- Permit access to the installation even if it is remote or in a location that is hard to access
- Remote control via wired contact or communications interface to SENTRON Powercenter 1100/2000
- Simple parameterization of both inputs and both outputs
- Adjustability of operating modes and time functions
- Zero crossing circuit (can be deactivated)
- Status display of inputs and outputs via LEDs
- Logical operation of inputs/outputs and two external signals (data points can be written via Modbus)

System overview, page 5/4

© Siemens 2025

5TT42 switching relays

Rated current 16 A

	Rated operational current I_e 16 A
Rigid conductor cross-section	1 ... 6 mm²
Flexible conductor cross-section, with end sleeve	1 ... 6 mm²

Contacts	U_e	U_c AC	U_c DC	Mounting width	
1 NO	250 V	230 V	–	1 MW	5TT4201-0
		115 V	–	1 MW	5TT4201-1
		24 V	–	1 MW	5TT4201-2
		12 V	–	1 MW	5TT4201-3
		8 V	–	1 MW	5TT4201-4
2 NO	400 V	230 V	–	1 MW	5TT4202-0
		115 V	–	1 MW	5TT4202-1
		24 V	–	1 MW	5TT4202-2
		12 V	–	1 MW	5TT4202-3
		8 V	–	1 MW	5TT4202-4
4 NO	400 V	230 V	–	1 MW	5TT4204-0
		115 V	–	1 MW	5TT4204-1
		24 V	–	1 MW	5TT4204-2
		12 V	–	1 MW	5TT4204-3
		8 V	–	1 MW	5TT4204-4
1 NO + 1 NC	400 V	230 V	–	1 MW	5TT4205-0
		115 V	–	1 MW	5TT4205-1
		24 V	–	1 MW	5TT4205-2
		12 V	–	1 MW	5TT4205-3
		8 V	–	1 MW	5TT4205-4
1 CO	250 V	230 V	–	1 MW	5TT4206-0
		115 V	–	1 MW	5TT4206-1
		24 V	–	1 MW	5TT4206-2
		12 V	–	1 MW	5TT4206-3
		8 V	–	1 MW	5TT4206-4
2 CO	400 V	230 V	–	1 MW	5TT4207-0
		115 V	–	1 MW	5TT4207-1
		24 V	–	1 MW	5TT4207-2
		12 V	–	1 MW	5TT4207-3
		8 V	–	1 MW	5TT4207-4
		–	110 V	1 MW	5TT4217-1
			30 V	1 MW	5TT4217-6
			24 V	1 MW	5TT4217-2
			12 V	1 MW	5TT4217-3

System overview, page 5/4

© Siemens 2025

Further technical specifications

		5TT4201-.	5TT4202-.	5TT4204-.	5TT4205-.	5TT4206-.	5TT4207-.	5TT4217-.
Standards								
Standards		EN 60947-5-1, EN 60669-2-2						
Approvals		VDE, CCC						
Supply								
Rated operational current I_e	At p.f. = 0.6 ... 1	16 A						
Primary operating range		0.8 ... 1.1 × U_c						
Rated frequency f_c		50 Hz						
Rated power dissipation P_v	Magnet coil	2.4 W 3.0 VA		4.8 W 6.0 VA	2.4 W 3.0 VA			1.7 W 1.7 VA
	Per pole, max.	1.0 W						
Contacts								
Contact gap		> 1.2 mm						
Minimum contact load		10 V AC; 100 mA						
Electrical endurance at I_e/U_e, p.f. = 0.6, incandescent lamp load 600 W	Operating cycles	50000						
Safety								
Different phases between magnet coil and contact		Permissible						
Safe separation		> 6 mm						
Rated impulse voltage U_{imp}		4 kV						
Function								
Manual operation		Yes						
Connections								
Terminals	± Screw (Pozidriv)	PZ1						
	Max. tightening torque	0.8 ... 1 Nm						
Ambient conditions								
Permissible ambient temperature		–10 ... +40 °C						
Resistance to climate at 95% relative humidity	Acc. to DIN 50015	35 °C						
Degree of protection	Acc. to EN 60529	IP20, with connected conductors						

Accessories

Spacer

- Contour for modular devices with a mounting depth of 70 mm
- Can be snapped onto either side of the busbar for convenient cable routing
- Spacer is recommended for better heat dissipation

Article No.
5TG8240

System overview, page 5/4

© Siemens 2025

5TT50 Insta contactors

AC/DC technology – hum-free Insta contactors

	Rated operational current I_e			
	20 A	25 A	40 A	63 A
Main connection conductor cross-section, solid	1.0 ... 10 mm²	1.5 ... 25 mm²	1.5 ... 25 mm²	1.5 ... 25 mm²
Main connection conductor cross-section, stranded with end sleeve	1.0 ... 6 mm²	1.5 ... 16 mm²	1.5 ... 16 mm²	1.5 ... 16 mm²
Main connection conductor cross-section, AWG	16 ... 8	16 ... 4	16 ... 4	16 ... 4

5

Contacts	U_e	U_c AC	U_c DC	Mounting width				
Insta contactors with manual switch								
2 NO	400 V	230 V	220 V	1 MW	5TT5000-0	–	–	–
		24 V	24 V	1 MW	5TT5000-2	–	–	–
4 NO	400 V	230 V	220 V	2 MW	–	5TT5030-0	–	–
				3 MW	–	–	5TT5040-0	5TT5050-0
		115 V	110 V	2 MW	–	5TT5030-1	–	–
		24 V	24 V	2 MW	–	5TT5030-2	–	–
				3 MW	–	–	5TT5040-2	5TT5050-2
2 NC	400 V	230 V	220 V	1 MW	5TT5002-0	–	–	–
		24 V	24 V	1 MW	5TT5002-2	–	–	–
4 NC	400 V	230 V	220 V	2 MW	–	5TT5033-0	–	–
				3 MW	–	–	5TT5043-0	–
		24 V	24 V	2 MW	–	5TT5033-2	–	–
				3 MW	–	–	5TT5043-2	–
1 NO + 1 NC	400 V	230 V	220 V	1 MW	5TT5001-0	–	–	–
		24 V	24 V	1 MW	5TT5001-2	–	–	–
2 NO + 2 NC	400 V	230 V	220 V	2 MW	–	5TT5032-0	–	–
				3 MW	–	–	5TT5042-0	5TT5052-0
		24 V	24 V	2 MW	–	5TT5032-2	–	–
				3 MW	–	–	5TT5042-2	5TT5052-2
3 NO + 1 NC	400 V	230 V	220 V	2 MW	–	5TT5031-0	–	–
				3 MW	–	–	5TT5041-0	5TT5051-0
		24 V	24 V	2 MW	–	5TT5031-2	–	–
				3 MW	–	–	5TT5041-2	5TT5051-2
Insta contactors with O/I/Automatic								
2 NO	400 V	230 V	220 V	1 MW	5TT5000-6	–	–	–
		24 V	24 V	1 MW	5TT5000-8	–	–	–
4 NO	400 V	230 V	220 V	2 MW	–	5TT5030-6	–	–
		24 V	24 V	2 MW	–	5TT5030-8	–	–
1 NO + 1 NC	400 V	230 V	220 V	1 MW	5TT5001-6	–	–	–
		24 V	24 V	1 MW	5TT5001-8	–	–	–
3 NO + 1 NC	400 V	230 V	220 V	2 MW	–	5TT5031-6	–	–
		24 V	24 V	2 MW	–	5TT5031-8	–	–

Note:
Provision must be made for spacers to ensure heat dissipation.
See Configuration Manual – Switching devices www.siemens.com/lowvoltage/manuals (45315361).

Accessories

Spacer

- Contour for modular devices with a mounting depth of 70 mm
- Can be snapped onto either side of the busbar for convenient cable routing
- Spacer is recommended for better heat dissipation

Article No.
5TG8240

System overview, page 5/4

© Siemens 2025

Further technical specifications

		5TT500	5TT503	5TT504	5TT505
Standards					
Standards		EN 60947-4-1; EN 60947-5-1; EN 61095			
Approvals		UL 508; UL File No. E303328			
Supply					
Rated operational current I_e	AC-1/AC-7a, NO contacts/NC contacts	20 A/20 A	25 A/25 A	40 A/40 A	63 A/63 A
	AC-3/AC-7b, NO contacts/NC contacts	9 A/6 A	8.5 A/8.5 A	22 A/22 A	30 A/30 A
Primary operating range		0.85 ... 1.1 × U_c			
Rated frequency f_c at AC		50/60 Hz			
Rated power dissipation P_v	Pick-up power (without manual switch or with manual switch in "I" position)	2.1 VA/2.1 W	2.6 VA/2.6 W	5 VA/5 W	
	Pick-up power (with manual switch in "AUTO" position)	2.1 VA/4.1 W	2.6 VA/2.6 W	5 VA/5 W	
	Holding power	2.1 VA/2.1 W	2.6 VA/2.6 W	5 VA/5 W	
	Per contact AC-1/AC-7a	1.7 VA	2.2 VA	4 VA	8 VA
Contacts					
Contact gap (NO contacts)	Min.	3.6 mm			
Minimum switching capacity	(= minimum contact load)	≥ 17 V; 50 mA			
Electrical endurance at I_e and load	AC-1/AC-7a operating cycles	200000		100000	
	AC-3/AC-7b operating cycles	300000	500000		150000
Mechanical service life	Operating cycles	3 million			
Switching of resistive loads AC-1 for rated operational power P_s	1-phase (NO contacts)	4 kW (230 V)	5.4 kW (400 V)	8.7 kW (400 V)	13.3 kW (400 V)
	3-phase (NO contacts)	–	16 kW (400 V)	26 kW (400 V)	40 kW (400 V)
Switching of three-phase asynchronous motors AC-3 for rated operational power P_s	1-phase (NO contacts)	1.3 kW/0.75 kW	1.3 kW/1.3 kW	3.7 kW/3.7 kW	5/5 kW
	3-phase (NO contacts)	–	4 kW	11 kW	15 kW
Maximum switching frequency at load	AC-1/AC-7a/AC-3/AC-7b	600 h^{-1}			
Safety					
Rated impulse voltage U_{imp}		≤ 4 kV			
Short-circuit protection, according to coordination type 1	Back-up fuse characteristic gL/gG	20 A	25 A	63 A	80 A
Overload withstand capability at 10 s	Per conducting path (NO contacts only)	72 A	68 A	176 A	240 A
Function					
Switching times	Closing (NO contacts)	15 ... 45 ms		15 ... 20 ms	
	Opening (NO contacts)	20 ... 50 ms	20 ... 70 ms	35 ... 45 ms	
Connections					
Coil/main connection terminals	± Screw (Pozidriv)	PZ1/PZ1	PZ1/PZ2		
Coil connection conductor cross-section	Solid	1.0 ... 2.5 mm^2			
	Stranded, with end sleeve	1.0 ... 2.5 mm^2			
	AWG cables	16 ... 10			
Main connection conductor cross-section	Solid	1.0 ... 10 mm^2	1.5 ... 25 mm^2		
	Stranded, with end sleeve	1.0 ... 6 mm^2	1.5 ... 16 mm^2		
	AWG cables	16 ... 8	16 ... 4		
Tightening torque	Coil connection	0.6 Nm/8 lbs/in.			
	Main connection	1.2 Nm/9 lbs/in.	3.5 Nm/20 lbs/in.		
Ambient conditions					
Permissible ambient temperature	For operation [1]/For storage	–15 ... +55 °C/–50 ... +80 °C			
Degree of protection	Acc. to EN 60529	IP20, with connected conductors			
Characteristics according to UL 508					
Rated operational current I_n		20 A	25 A	40 A	63 A
UL 508 General Use 240 V/480 V	FLA	20 A	25 A	40 A	63 A
UL 508 AC discharge lamps		20 A	25 A	30 A	40 A
UL 508 motor load	Power 240 V/480 V	1 hp/–	3 hp/5 hp	7.5 hp/15 hp	10 hp/20 hp
UL 508 short-circuit at 480 V	K5 fuses	20 A	25 A	60 A	70 A

[1] Contactors can be operated at ambient temperatures of between –25 °C and +70 °C, but only under special conditions.
For further information, please contact Siemens Support. For questions concerning heat dissipation, please refer to the instructions in the Configuration Manual "Switching devices"

Accessories

Auxiliary switches

- For right-hand-side retrofitting
- Max. one auxiliary switch per Insta contactor

Contacts	Mounting width	Article No.
2 NO	0.5 MW	5TT5910-0
1 NO + 1 NC	0.5 MW	5TT5910-1

Sealable terminal covers

For Insta contactor	Mounting width	Article No.
20 A	1 MW	5TT5910-5
25 A	2 MW	5TT5910-6
40 A and 63 A	3 MW	5TT5910-7

System overview, page 5/4

© Siemens 2025

5TT58 Insta contactors

AC technology

	Rated operational current I_e				
	20 A	25 A	32 A	40 A	63 A
Main connection conductor cross-section, rigid	1.0 ... 10 mm²	1.0 ... 10 mm²	1.0 ... 10 mm²	1 ... 25 mm²	1 ... 25 mm²
Main connection conductor cross-section, flexible with end sleeve	1.0 ... 6 mm²	1.0 ... 6 mm²	1.0 ... 6 mm²	1 ... 16 mm²	1 ... 16 mm²

Contacts	U_e	U_c AC		Mounting width					
Insta contactors without manual switch									
2 NO	400 V	230 V		1 MW	5TT5800-0	5TT5810-0	5TT5860-0	–	–
				2 MW	–	–	–	5TT5870-0	–
		24 V		1 MW	5TT5800-2	–	–	–	–
4 NO	400 V	230 V	Standard	2 MW	–	5TT5830-0	–	–	–
				3 MW	–	–	–	5TT5840-0	5TT5850-0
			Capacitive loads up to 150 µF	2 MW	–	5TT5820-0	–	–	–
		115 V		2 MW	–	5TT5830-1	–	–	–
		24 V		2 MW	–	5TT5830-2	–	–	–
				3 MW	–	–	–	5TT5840-2	5TT5850-2
2 NC	400 V	230 V		1 MW	5TT5802-0	–	–	–	–
		24 V		1 MW	5TT5802-2	–	–	–	–
4 NC	400 V	230 V		2 MW	–	5TT5833-0	–	–	–
				3 MW	–	–	–	5TT5843-0	5TT5853-0
		24 V		2 MW	–	5TT5833-2	–	–	–
				3 MW	–	–	–	5TT5843-2	5TT5853-2
1 NO + 1 NC	400 V	230 V		1 MW	5TT5801-0	–	–	–	–
		24 V		1 MW	5TT5801-2	–	–	–	–
2 NO + 2 NC	400 V	230 V		2 MW	–	5TT5832-0	–	–	–
				3 MW	–	–	–	5TT5842-0	5TT5852-0
		24 V		2 MW	–	5TT5832-2	–	–	–
				3 MW	–	–	–	5TT5842-2	5TT5852-2
3 NO + 1 NC	400 V	230 V		2 MW	–	5TT5831-0	–	–	–
				3 MW	–	–	–	5TT5841-0	5TT5851-0
		115 V		2 MW	–	5TT5831-1	–	–	–
		24 V		2 MW	–	5TT5831-2	–	–	–
				3 MW	–	–	–	5TT5841-2	5TT5851-2
Insta contactors with manual switch O/I/Automatic									
2 NO	400 V	230 V		1 MW	5TT5800-6	–	–	–	–
		24 V		1 MW	5TT5800-8	–	–	–	–
4 NO	400 V	230 V		2 MW	–	5TT5830-6	–	–	–
				3 MW	–	–	–	5TT5840-6	5TT5850-6
		24 V		2 MW	–	5TT5830-8	–	–	–
				3 MW	–	–	–	5TT5840-8	–
1 NO + 1 NC	400 V	230 V		1 MW	5TT5801-6	–	–	–	–
		24 V		1 MW	5TT5801-8	–	–	–	–
3 NO + 1 NC	400 V	230 V		2 MW	–	5TT5831-6	–	–	–
				3 MW	–	–	–	5TT5841-6	–
		24 V		2 MW	–	5TT5831-8	–	–	–
				3 MW	–	–	–	5TT5841-8	–

Note:
Provision must be made for spacers to ensure heat dissipation.
See Configuration Manual – Switching devices www.siemens.com/lowvoltage/manuals (45315361).

System overview, page 5/4

© Siemens 2025

Further technical specifications

		5TT580.	5TT581.	5TT582. 5TT583.	5TT584.	5TT585.	5TT586.	5TT587.
Standards								
Standards		IEC 60947-4-1, IEC 60947-5-1, IEC 61095; EN 60947-4-1, EN 60947-5-1, EN 61095, VDE 0660						
Supply								
Number of poles		2		4			2	
Rated operational current I_e		20 A	25 A		40 A	63 A	32 A	40 A
Primary operating range		0.85 ... 1.1 × U_c						
Rated frequency f_c at AC		50/60 Hz						
Rated power dissipation P_v	Pick-up power (without manual switch or manual switch in "I" position)	6 VA/3.8 W	12 VA/10 W	10 VA/5 W	15.4 VA/4.6 W		12 VA/10 W	33 VA/25 W
	Pick-up power (with manual switch in "AUTO" position)	12 VA/10 W	–	33 VA/25 W	62 VA/50 W		–	
	Holding power	2.8 VA/1.2 W		5.5 VA/1.6 W	7.7 VA/3 W		2.8 VA/1.2 W	5.5 VA/1.6 W
	Per contact AC-1/AC-7a	1.7 VA	2.0 VA	2.2 VA	4 VA	8 VA	2.5 VA	
Contacts								
Contact gap	Minimum	3.6 mm			3.4 mm		3.6 mm	
Minimum switching capacity	(= minimum contact load)	≥ 17 V; 50 mA						
Electrical endurance at I_e and load	AC-1/AC-7a operating cycles	200000			100000		150000	100000
	AC-3/AC-7b operating cycles	300000		500000	150000		300000	150000
Mechanical service life	Operating cycles	3 million						
Switching of resistive loads AC-1/AC-7a for rated operational power P_s	1-phase (230 V) (NO contacts)	4 kW	5.4 kW		8.7 kW	13.3 kW	5.9 kW	3.7 kW
	3-phase (400 V) (NO contacts)	–		16 kW	26 kW	40 kW	–	
Switching of 3-phase asynchronous motors AC-3/AC-7b for rated operational power P_s	1-phase (230 V) (NO contacts)	1.3 kW [1]	1.3 kW		3.7 kW	5 kW	1.3 kW	–
	3-phase (400 V) (NO contacts)	–		4 kW	11 kW	15 kW	–	
Maximum switching frequency at load		600 h^{-1}						
Safety								
Rated insulation voltage U_i		440 V			500 V		440 V	230 V
Rated impulse voltage U_{imp}		4 kV						6 KV
Short-circuit protection, according to coordination type 1	Back-up fuse characteristic gL/gG	20 A	25 A		63 A	80 A	32 A	63 A
Overload withstand capability at 10 s	Per conducting path (NO contacts only)	72 A		68 A	176 A	240 A	72 A	176 A
Function								
Switching times	Closing (NO contacts)	15 ... 25 ms		10 ... 20 ms	15 ... 20 ms		15 ... 25 ms	10 ... 20 ms
	Opening (NO contacts)	20 ms	10 ... 30 ms	20 ms	10 ms		10 ... 30 ms	10 ... 15 ms
	Closing (NC contacts)	20 ... 30 ms	–	20 ... 30 ms	5 ... 10 ms		–	
	Opening (NC contacts)	10 ms	–	10 ms	10 ... 15 ms		–	
Connections								
Coil connection terminals	± Screw (Pozidriv)	PZ1						
Main connection terminals	± Screw (Pozidriv)	PZ1			PZ2		PZ1	
Coil connection conductor cross-section	Rigid	1.0 ... 2.5 mm^2						
	Flexible, with end sleeve	1.0 ... 2.5 mm^2						
Main connection conductor cross-section	Rigid	1.0 ... 10 mm^2			1 ... 25 mm^2		1.0 ... 10 mm^2	1.5 ... 25 mm^2
	Flexible, with end sleeve	1.0 ... 6 mm^2			1 ... 16 mm^2		1.0 ... 6 mm^2	1.5 ... 16 mm^2
Tightening torque	Coil connection	0.6 Nm						
	Main connection	1.2 Nm			3.5 Nm		1.2 Nm	2.5 Nm
Ambient conditions								
Permissible ambient temperature	For operation/for storage	–5 ... +55 °C/–30 ... +80 °C						
Degree of protection	Acc. to EN 60529	IP20, with connected conductors						

[1] For NO contacts only.

5

System overview, page 5/4

© Siemens 2025

5TT58 Insta contactors

AC technology

Accessories

Auxiliary switches

- For right-hand-side retrofitting
- Max. one auxiliary switch per Insta contactor

Contacts	Mounting width	Article No.
2 NO	0.5 MW	5TT5910-0
1 NO + 1 NC	0.5 MW	5TT5910-1

Sealable terminal covers

For Insta contactor	Mounting width	Article No.
20 A	1 MW	5TT5910-5
25 A	2 MW	5TT5910-6
40 A and 63 A	3 MW	5TT5910-7

Spacer

- Contour for modular devices with a mounting depth of 70 mm
- Can be snapped onto either side of the busbar for convenient cable routing
- Spacer is recommended for better heat dissipation

For Insta contactor	Mounting width	Article No.
20 A	1 MW	5TG8240

System overview, page 5/4

© Siemens 2025

5TT5 auxiliary switches

For 5TT5 Insta contactor

Rigid conductor cross-section	1 ... 2.5 mm²
Flexible conductor cross-section, with end sleeve	1 ... 2.5 mm²

Contacts	U_e AC	Mounting width	
2 NO	230 V/400 V	0.5 MW	5TT5910-0
1 NO + 1 NC	230 V/400 V	0.5 MW	5TT5910-1

5

Further technical specifications

		5TT5910
Standards		
Standards		IEC 60947-5-1
Approvals		CCC
Supply		
Number of poles		2
Rated operational current I_e	230 V	6 A
	400 V	4 A
Rated frequency f_c at AC		50/60 Hz
Contacts		
Contact gap	Minimum	4 mm
Minimum switching capacity	(= minimum contact load)	≥ 12 V; 5 mA
Mechanical service life	Operating cycles	3 million
Maximum switching frequency at load		600 h^{-1}
Safety		
Rated insulation voltage U_i		500 V
Rated impulse voltage U_{imp}		4 kV
Short-circuit protection, according to coordination type 1	Back-up fuse characteristic gL/gG	6 A
Connections		
Terminals	± Screw (Pozidriv)	PZ1
Conductor cross-section	Rigid	1 ... 2.5 mm²
	Flexible, with end sleeve	1 ... 2.5 mm²
Tightening torque		0.8 Nm
Ambient conditions		
Permissible ambient temperature	For operation/for storage	–5 ... +55 °C/–30 ... +80 °C
Degree of protection	Acc. to EN 60529	IP20, with connected conductors

System overview, page 5/4

© Siemens 2025

5TT3 soft-starting devices

For 2-phase motor control

Rigid conductor cross-section	Max. 2 × 2.5 mm²
Flexible conductor cross-section, with end sleeve	Min. 1 × 0.5 mm²

Version	U_e AC	Mounting width	
3-phase	400 V	6 MW	5TT3440

Further technical specifications

		5TT3440
Standards		
Standards		EN 60947-4-2 (VDE 0660-117)
Supply		
Line/motor voltage		400 V AC
Primary operating range		0.8 ... 1.1 × U_c
Rated frequency f_c at AC		50/60 Hz
Rated power		3.5 VA
Rated power dissipation P_v at rated operational current	Coil/drive	3.5 VA
	Per contact	4.6 VA
Rated output of motor at 400 V	Max.	5500 VA
	Min.	300 VA
Startup voltage		30 ... 70%
Starting ramp		0.1 ... 10 s
Safety		
Quick-acting semiconductor fuse		35 A
Function		
Switching frequency 3 × I_N, T_{AN} = 10 s, v_u = 20%	Operating cycles (up to 3 kW)	36 h^{-1}
	Operating cycles (from 3 ... 5.5 kW)	20 h^{-1}
Recovery time		100 ms
Connections		
Conductor cross-section	Rigid	Max. 2 × 2.5 mm²
	Flexible, with end sleeve	Min. 1 - 0.5 mm²
Ambient conditions		
Permissible ambient temperature		–20 ... +60 °C
Resistance to climate	Acc. to EN 60068-1	20/60/4

System overview, page 5/4

© Siemens 2025

5TE busbars

For modular installation devices

1-phase busbar

- For all switches 5TT41, 5TT42, 5TT44, 5TE48, 5TT49, 5TE58, 5TE81 and 5TE82
- For the cutting of unused terminal lugs and to ensure insulation clearances if one device terminal is to be supplied separately despite being mounted on the bus
- Infeed to unit terminal with conductor cross-section of 6 mm^2 up to 32 A
- Can be mounted from either top or bottom, in the front or rear terminal area
- An end cap is not required on 1-phase busbars

Length	Division	Article No.
210 mm	12 MW version with 1 MW modular clearance	5TE9100

2-phase busbar

- For all switches 5TT41, 5TT42, 5TT44, 5TE48, 5TT49, 5TE58, 5TE81 and 5TE82
- Infeed to unit terminal with conductor cross-section of 6 mm^2 up to 32 A
- Can be mounted from either top or bottom, in the front and/or rear terminal area, thus allowing realization of a 4-wire connection using 2 2-phase busbars
- Both copper conductors of the 2-phase busbar are insulated together

Length	Division	Article No.
220 mm	12 MW version each with 1 MW modular clearance, phases offset by 0.5 MW	5TE9101

End caps for 2-phase busbars



- End caps for 5TE9101 2-phase busbars to maintain insulation clearances when the bar is being cut
- 1 set = 10 units

Article No.
5TE9102

System overview, page 5/4

© Siemens 2025

7LF4 digital time switches

Mini

- Weekly program
- 28 programs
- Automatic daylight-saving adjustment

Contacts	U_c	Channels	Mounting width	
1 NO	230 V AC	1	1 MW	7LF4501-5

Further technical specifications

		Mini
Standards		
Standards		EN 60730-1, -2-7; VDE 0631-1, -2-7
Supply		
Primary operating range		0.85 ... 1.1 × U_c
Frequency range		50/60 Hz
Rated power dissipation P_v		0.9 VA
Channels		
Rated operational voltage U_e		250 V AC
Rated operational current I_e	At p.f. = 1	16 A
	At p.f. = 0.6	10 A
Contacts		
Minimum contact load		12 V/100 mA
Electrical operating cycles	At p.f. = 1	6000 (20 A)
Mechanical operating cycles		> 5 million
Incandescent lamp load		5 A
Energy-saving lamp load		300 W
Fluorescent lamp load	Parallel p.f. correction 70 µF	60 VA
	Uncorrected	2500 VA
Safety		
Different phases between operating mechanism and contact		Permissible
Rated impulse voltage U_{imp}		4 kV
Electrostatic discharge	Acc. to IEC 61000-4-2	> 8.0 kV
EMC: Burst	Acc. to IEC 61000-4-4	> 4.4 kV
EMC: Surge	Acc. to IEC 61000-4-5	> 2.0 kV
Overvoltage category	Acc. to EN 61010-1	III
Function		
Clock errors per day	Typical	±1 s/day
Power reserve storage	Battery	3 years
Make and break cycles		1 min
Minimum switching sequences		1 min
Control input	Terminal S	–
Programs [1)]		28
Battery type		Li primary cell
Connections		
Terminals	± Screw (Pozidriv)	PZ1
Conductor cross-sections of main conducting path	Rigid	1.5 ... 4 mm²
	Flexible, with end sleeve	Max. 2.5 mm²
Ambient conditions		
Permissible ambient temperature	For operation/ for storage	–10 ... +55 °C/ –20 ... +60 °C
Resistance to climate	Acc. to EN 60068-1	10/055/21
Degree of protection	Acc. to EN 60529	IP20, with connected conductors
Protection class	Acc. to EN 61140	II

[1)] A program consists of an ON time, an OFF time and assigned ON and OFF days or day blocks.

System overview, page 5/4

© Siemens 2025

Top

- Weekly program
- 28 programs
- Text-assisted programming concept
  - Language: English
- Manual daylight-saving adjustment

Contacts	U_c	Channels	Mounting width	
1 CO	230 V AC	1	2 MW	7LF4511-0
2 CO	230 V AC	2	2 MW	7LF4512-0

Further technical specifications

		Top
Standards		
Standards		EN 60730-1, -2-7; VDE 0631-1, -2-7
Supply		
Primary operating range		0.85 ... 1.1 × U_c
Frequency range		50/60 Hz
Rated power dissipation P_v		2 VA
Channels		
Rated operational voltage U_e		250 V AC
Rated operational current I_e	At p.f. = 1	16 A
	At p.f. = 0.6	10 A
Contacts		
Minimum contact load		12 V/100 mA
Electrical operating cycles	At p.f. = 1	100000
Mechanical operating cycles		10 million
Incandescent lamp load		8 A
Energy-saving lamp load		60 VA
Fluorescent lamp load	Parallel p.f. correction 70 µF	60 VA
	Uncorrected	2300 VA
Safety		
Different phases between operating mechanism and contact		Permissible [2]
Rated impulse voltage U_{imp}		4 kV
Electrostatic discharge	Acc. to IEC 61000-4-2	> 8.0 kV
EMC: Burst	Acc. to IEC 61000-4-4	> 4.4 kV
EMC: Surge	Acc. to IEC 61000-4-5	> 2.0 kV
Overvoltage category	Acc. to EN 61010-1	III
Function		
Clock errors per day	Typical	±1.5 s/day
Power reserve storage	Battery	3 years
Make and break cycles		1 min
Minimum switching sequences		1 min
Control input	Terminal S	No
Programs [1]		28 (14 per channel)
Program memory	Captive	No
Battery type		Li primary cell
Connections		
Terminals	± Screw (Pozidriv)	PZ1
Conductor cross-sections of main conducting path	Rigid	1.5 ... 4 mm²
	Flexible, with end sleeve	Max. 2.5 mm²
Ambient conditions		
Permissible ambient temperature	For operation/ for storage	–20 ... +55 °C/ –20 ... +60 °C
Resistance to climate	Acc. to EN 60068-1	20/055/21
Degree of protection	Acc. to EN 60529	IP20, with connected conductors
Protection class	Acc. to EN 61140	II

[1] A program consists of an ON time, an OFF time and assigned ON and OFF days or day blocks.
[2] The combination of line voltage (230 V) and SELV is not permissible in conjunction with a 2-channel time switch. This requirement is, however, admissible in the case of 1-channel time switch.

System overview, page 5/4

© Siemens 2025

7LF4 digital time switches

Profi

- Weekly program
- Vacation program
- Random program
- Expert mode
- Cycle function
- Text-assisted programming concept
  – 15 languages
- Simple program creation on a PC
  using the supplied software, with 7LF4941-0 USB adapter
- Automatic daylight-saving adjustment
- Operating hours counter, counting range: 65535 h
- Accurate to the second hh:mm:ss
- Synchronization 50/60 Hz

Contacts	U_c	Channels	Mounting width	
1 CO	230 V AC	1	2 MW	7LF4521-0
	24 V AC/DC	1	2 MW	7LF4521-2
2 CO	230 V AC	2	2 MW	7LF4522-0
	24 V AC/DC	2	2 MW	7LF4522-2

Further technical specifications

		Profi
Standards		
Standards		EN 60730-1, -2-7; VDE 0631-1, -2-7
Approvals		UL File No. E301698
Supply		
Primary operating range	U_c 230 V	0.85 ... 1.1 × U_c
	U_c 24 V	0.9 ... 1.1 × U_c
Frequency range	U_c 230 V	50/60 Hz
	U_c 24 V	50/60 Hz
Rated power dissipation P_v	U_c 230 V	2 VA
	U_c 24 V	2 VA
Channels		
Rated operational voltage U_e		250 V AC
Rated operational current I_e	At p.f. = 1	16 A
	At p.f. = 0.6	10 A
Contacts		
Minimum contact load		12 V/100 mA
Electrical operating cycles	At p.f. = 1	100000
Mechanical operating cycles		10 million
Incandescent lamp load		8 A
Energy-saving lamp load		1000 W
Fluorescent lamp load	Parallel p.f. correction 70 µF	600 VA
	Uncorrected	2000 VA
Safety		
Different phases between operating mechanism and contact		Permissible [2]
Rated impulse voltage U_{imp}		4 kV
Electrostatic discharge	Acc. to IEC 61000-4-2	> 8.0 kV
EMC: Burst	Acc. to IEC 61000-4-4	> 4.4 kV
EMC: Surge	Acc. to IEC 61000-4-5	> 2.0 kV
Overvoltage category	Acc. to EN 61010-1	III
Function		
Clock errors per day	Typical	±0.1 s/day
Power reserve storage	Battery	5 years
Make and break cycles		1 s
Minimum switching sequences		1 s
Control input	Terminal S	No
Programs [1]		28
Program memory	Captive	Yes
Battery type		Li primary cell
Connections		
Terminals	± Screw (Pozidriv)	PZ1
Conductor cross-sections of main conducting path	Rigid	1.5 ... 4 mm²
	Flexible, with end sleeve	Max. 2.5 mm²
Ambient conditions		
Permissible ambient temperature	For operation/for storage	–20 ... +55 °C/ –20 ... +60 °C
Resistance to climate	Acc. to EN 60068-1	20/055/21
Degree of protection	Acc. to EN 60529	IP20, with connected conductors
Protection class	Acc. to EN 61140	II

[1] A program consists of an ON time, an OFF time and assigned ON and OFF days or day blocks.
[2] The combination of line voltage (230 V) and SELV is not permissible in conjunction with a 2-channel time switch. This requirement is, however, admissible in the case of 1-channel time switch.

System overview, page 5/4

© Siemens 2025

Astro

- Weekly program
- Vacation program
- Random program
- Expert mode
- Astro function
- Text-assisted programming concept
  – 15 languages
- Simple program creation on a PC using the supplied software, with 7LF4941-0 USB adapter
- Automatic daylight-saving adjustment
- Operating hours counter, counting range: 65535 h
- Accurate to the second hh:mm:ss
- Synchronization 50/60 Hz
- Input disable via PIN code
- Daylight-saving correction
- 1 h test

Contacts	U_c	Channels	Mounting width	
1 CO	230 V AC	1	2 MW	7LF4531-0
2 CO	230 V AC	2	2 MW	7LF4532-0

Further technical specifications

		Astro
Standards		
Standards		EN 60730-1, -2-7; VDE 0631-1, -2-7
Approvals		UL File No. E301698
Supply		
Primary operating range		0.85 ... 1.1 × U_c
Frequency range		50/60 Hz
Rated power dissipation P_v		2 VA
Channels		
Rated operational voltage U_e		250 V AC
Rated operational current I_e	At p.f. = 1	16 A
	At p.f. = 0.6	10 A
Contacts		
Minimum contact load		12 V/100 mA
Electrical operating cycles	At p.f. = 1	100000
Mechanical operating cycles		10 million
Incandescent lamp load		8 A
Energy-saving lamp load		1000 W
Fluorescent lamp load	Parallel p.f. correction 70 µF	600 VA
	Uncorrected	2000 VA
Safety		
Different phases between operating mechanism and contact		Permissible [2]
Rated impulse voltage U_{imp}		4 kV
Electrostatic discharge	Acc. to IEC 61000-4-2	> 8.0 kV
EMC: Burst	Acc. to IEC 61000-4-4	> 4.4 kV
EMC: Surge	Acc. to IEC 61000-4-5	> 2.0 kV
Overvoltage category	Acc. to EN 61010-1	III
Function		
Clock errors per day	Typical	±0.1 s/day
Power reserve storage	Battery	5 years
Make and break cycles		1 s
Minimum switching sequences		1 s
Control input	Terminal S	Yes (with 1K clock)
Programs [1]		56 (2 × 28)
Program memory	Captive	Yes
Battery type		Li primary cell
Connections		
Terminals	± Screw (Pozidriv)	PZ1
Conductor cross-sections of main conducting path	Rigid	1.5 ... 4 mm²
	Flexible, with end sleeve	Max. 2.5 mm²
Ambient conditions		
Permissible ambient temperature	For operation/ for storage	–20 ... +55 °C/ –20 ... +60 °C
Resistance to climate	Acc. to EN 60068-1	20/055/21
Degree of protection	Acc. to EN 60529	IP20, with connected conductors
Protection class	Acc. to EN 61140	II

[1] A program consists of an ON time, an OFF time and assigned ON and OFF days or day blocks.
[2] The combination of line voltage (230 V) and SELV is not permissible in conjunction with a 2-channel time switch. This requirement is, however, admissible in the case of 1-channel time switch.

System overview, page 5/4

© Siemens 2025

7LF4 digital time switches

Accessories

		Mini	Top	Profi	Astro
Data keys					
• For Profi and Astro digital time switches • Programming at the PC (7LF4941-0 USB adapter and software required) • Read-in of programs to the time switch • Writing of programs from the time switch • Transfer of programs – From PC to time switch and vice versa – From time switch to time switch					
	Article No.				
	7LF4941-1	–	–	■	■
USB adapter and software					
• For Profi and Astro digital time switches • For the reading and writing of data keys at the PC • Including programming software • Including 7LF4941-1 data key for Profi and Astro • Compatible with 7LF4940-1 data key (predecessor model) and 7LF4940-2 data key • Can be connected via USB interface • System requirements: – Windows 7, Windows Vista, Windows 2000, Windows ME, Windows XP or Windows 98 Second Edition – USB connection – 40 MB free disk space					
	Article No.				
	7LF4941-0	–	–	■	■
Holders for front panel installation					
• Universal application for devices from 1 MW ... 6 MW • Cutout dimensions: – Height $45^{+0.5}$ mm – Width 23 mm, 41 mm, 59 mm, 77 mm, 95 mm or 113 mm					
	Article No.				
	7LF9006	■	■	■	■

System overview, page 5/4

© Siemens 2025

System overview, page 5/4

© Siemens 2025

7LF5 mechanical time switches

Time switches without power reserve

		For DIN rail		For wall mounting (surface mounting)
Contacts	**Mounting width**			
With day disk				
1 NO	1 MW	7LF5300-1	–	–
1 CO	3 MW	–	7LF5300-5	–
	–	–	–	7LF5301-0
With week disk				
1 CO	3 MW	–	7LF5300-6	–

5

System overview, page 5/4

© Siemens 2025

Further technical specifications

		7LF5300-1	7LF5300-5	7LF5300-6	7LF5301-0
Standards					
Standards		EN 60730-1, -2-7, UL 917, UL 917, CSA C22.2 No. 14 and 177			
Approvals		VDE			
Supply					
Rated control supply voltage U_c		230 V AC			
Primary operating range	U_c 230 V AC	0.85 ... 1.1 × U_c			
Rated frequency		50 Hz			
Frequency range		50 Hz			
Rated power dissipation P_v		1 VA			
Channels					
Rated operational voltage U_e		250 V AC			
Rated operational current I_e	At p.f. = 1	16 A			
	At p.f. = 0.6	4 A			
Contacts					
Minimum contact load		4 V/1 mA			
Electrical operating cycles	At p.f. = 1	100000			
Mechanical operating cycles		20 million			
Incandescent lamp load		5 A			
Fluorescent lamp load	Parallel p.f. correction 70 µF	60 VA			
	Uncorrected	1400 VA			
Safety					
Different phases between operating mechanism and contact		Permissible			
Electrical isolation, creepage distances and clearances	Operating mechanism	8 mm			
	Contact	6 mm			
Rated impulse voltage U_{imp}		4 kV			
Electrostatic discharge	Acc. to IEC 61000-4-2	> 8.0 kV			
EMC: Burst	Acc. to IEC 61000-4-4	> 4.4 kV			
EMC: Surge	Acc. to IEC 61000-4-5	> 2.0 kV			
Overvoltage category	Acc. to EN 61010-1	III			
Function					
Switching accuracy		±5 min		±30 min	±5 min
Clock errors		System-synchronized			
Make and break cycles		15 min		120 min	10 min
Minimum switching sequences		30 min		240 min	30 min
Connections					
Terminals	± Screw (Pozidriv)	PZ1			
Conductor cross-sections of main conducting path	Rigid	1.5 ... 4 mm²			
	Flexible, with end sleeve	Max. 2.5 mm²			
	Flexible, without end sleeve	Max. 4 mm²			
Ambient conditions					
Permissible ambient temperature	For operation/for storage	–10 ... +55 °C/–10 ... +60 °C			
Resistance to climate	Acc. to EN 60068-1	10/055/21			
Degree of protection	Acc. to EN 60529	IP20, with connected conductors			
Protection class	Acc. to EN 61140	II			

Accessories

Holders for front panel installation

- Universal application for devices from 1 MW ... 6 MW
- Cutout dimensions:
  - Height $45^{+0.5}$ mm
  - Width 23 mm, 41 mm, 59 mm, 77 mm, 95 mm or 113 mm

	Article No.
	7LF9006

System overview, page 5/4

© Siemens 2025

7LF5 mechanical time switches

Time switches with power reserve

	For DIN rail			For wall mounting (surface mounting)
Time buffering in the event of a power failure	–	–	■	–
Automatic daylight-saving adjustment	–	–	■	–
Automatic time setting for Central European time zone during commissioning	–	–	■	–

Contacts	Mounting width				
With day disk					
1 NO	1 MW	7LF5301-1	–	–	–
1 CO	3 MW	–	7LF5301-6	7LF5301-4	–
	–	–	–	–	7LF5305-0
With week disk					
1 CO	3 MW	–	7LF5301-7	7LF5301-5	–

5

System overview, page 5/4

© Siemens 2025

Further technical specifications

		7LF5301-1	7LF5301-4	7LF5301-5	7LF5301-6	7LF5301-7	7LF5305-0
Standards							
Standards		EN 60730-1, -2-7, UL 917, UL 917, CSA C22.2 No. 14 and 177					
Approvals		VDE, UL File: E301698					
Supply							
Rated control supply voltage U_c		230 V AC					
Primary operating range		0.85 ... 1.1 × U_c					
Rated frequency		50 Hz					
Frequency range		50/60 Hz					
Rated power dissipation P_v		1 VA	0.2 VA		1 VA		
Channels							
Rated operational voltage U_e		250 V AC					
Rated operational current I_e	At p.f. = 1	16 A					
	At p.f. = 0.6	4 A					
Contacts							
Minimum contact load		4 V/1 mA					
Electrical operating cycles	At p.f. = 1	100000					
Mechanical operating cycles		20 million					
Incandescent lamp load		5 A					
Fluorescent lamp load	Parallel p.f. correction 70 µF	60 VA					
	Uncorrected	1400 VA					
Safety							
Different phases between operating mechanism and contact		Permissible					
Electrical isolation, creepage distances and clearances	Operating mechanism	8 mm					
	Contact	6 mm					
Rated impulse voltage U_{imp}		4 kV					
Electrostatic discharge	Acc. to IEC 61000-4-2	> 8.0 kV					
EMC: Burst	Acc. to IEC 61000-4-4	> 4.4 kV					
EMC: Surge	Acc. to IEC 61000-4-5	> 2.0 kV					
Overvoltage category	Acc. to EN 61010-1	III					
Function							
Switching accuracy		±5 min		±30 min	±5 min	±30 min	±5 min
Clock errors		±2.5 s/day	±0.2 s/day	±60 s/day	±2.5 s/day		
Power reserve storage		100 h	6 years		100 h		
Make and break cycles		15 min		120 min	15 min	120 min	15 min
Minimum switching sequences		30 min		240 min	30 min	240 min	30 min
Battery type		NiMH cell	Li primary cell		NiMH cell		
Minimum loading time		48 h	–		48 h		
Service life of battery	At 20 °C	6 years	10 years		6 years		
	At 40 °C	5 years					
Connections							
Terminals	± Screw (Pozidriv)	PZ1					
Conductor cross-sections of main conducting path	Rigid	1.5 ... 4 mm²					
	Flexible, with end sleeve	Max. 2.5 mm²					
	Flexible, without end sleeve	Max. 4 mm²					
Ambient conditions							
Permissible ambient temperature	Storage/operation	–10 ... +60 °C/–10 ... +55 °C					
Resistance to climate	Acc. to EN 60068-1	10/055/21					
Degree of protection	Acc. to EN 60529	IP20, with connected conductors					
Protection class	Acc. to EN 61140	II					

Accessories

Holders for front panel installation

- Universal application for devices from 1 MW ... 6 MW
- Cutout dimensions:
  - Height $45^{+0.5}$ mm
  - Width 23 mm, 41 mm, 59 mm, 77 mm, 95 mm or 113 mm

Article No.
7LF9006

System overview, page 5/4

© Siemens 2025

7LF6 timers for buildings

	Stairwell lighting timers	
	Standard	**Multi**
3-wire circuit	■	■
4-wire circuit	■	■
Zero crossing circuit	■	■
Operation	Resettable	Resettable

Contacts	**Warning of impending switch-off**	**Mounting width**		
1 NO	–	1 MW	7LF6310	–
	Flickering	1 MW	–	7LF6311

Further technical specifications

		7LF6310	7LF6311
Supply			
Rated operational current I_e	At p.f. = 1	16 A	
Rated operational voltage U_e		250 V AC	
Rated control supply voltage U_c		230 V AC	
Frequency range		50/60 Hz	
Rated power dissipation P_v		1 W	
Rated impulse voltage U_{imp}		4 kV	
Contacts			
Channels		1	
Max. glow lamp load		25 mA	50 mA
Separate multi-voltage input		–	8 ... 230 V AC/DC
Switching capacity	Inductive p.f. = 0.6	2000 VA	
Incandescent lamp load	Max.	3680 W	
Fluorescent lamp load	Series p.f. correction	2000 VA	
	Parallel p.f. correction at 70 µF	1000 W	
Compact fluorescent lamp load		1000 W	
LED		1000 W	
Electronic transformers		2000 VA	
Conventional transformers		2000 VA	
Function			
Setting range		0.5 ... 10 min	0.5 ... 12 min
Manual switches		Yes	
Programs		–	7 [1]
Ambient conditions			
Permissible ambient temperature	For operation	–20 ... +55 °C	
	For storage	–20 ... +60 °C	
Degree of protection	Installed	IP30	
Pollution degree		2	

[1] 7 functions, can be selected using selector switch on the device

System overview, page 5/4

© Siemens 2025

5TT3 timers for industrial applications

		Multifunction timers	Delay timers
Programmable for:		• Response delay • Passing make contact function • Pulse generator, delayed • Clock generator, starting with impulse • OFF-delay • Pulse converter • Passing break contact function • Response delay/OFF-delay	–
Contacts	**Mounting width**		
1 CO	1 MW	5TT3185	5TT3181

Further technical specifications

		5TT3185	5TT3181
Standards			
Standards		EN 60255; DIN VDE 0435-110	
Supply			
Rated operational current I_e		4 A	8 A
Rated operational voltage U_e		250 V AC	
Rated control supply voltage U_c		12 ... 240 V AC	220 ... 240 V AC
		12 ... 240 V DC	–
Primary operating range	U_c 230 V AC, 50/60 Hz	0.8 ... 1.1 × U_c	
Rated frequency f_n		45 ... 400 Hz	50/60 Hz
Rated power dissipation P_v		Approx. 3 VA	Approx. 5 VA
Contacts			
Contact gap		µm contact	
Minimum contact load		10 V/300 mA	
Electrical endurance	Switching cycles	1.5×10^5	–
	At AC-15	–	1.5×10^5
Safety			
Rated impulse voltage U_{imp}	Input/output	> 4 kV	
Function			
Setting range		1 s ... 300 h	
Recovery time		15 ... 80 ms	Approx. 40 ms
Connections			
Terminals	± Screw (Pozidriv)	PZ2	
Conductor cross-sections of main conducting path	Rigid	Max. 2 × 2.5 mm²	
	Flexible, with end sleeve	Min. 2 × 1.5 mm²	
Ambient conditions			
Permissible ambient temperature		–40 ... +60 °C	
Resistance to climate	Acc. to EN 60068-1	40/60/4	

System overview, page 5/4

© Siemens 2025

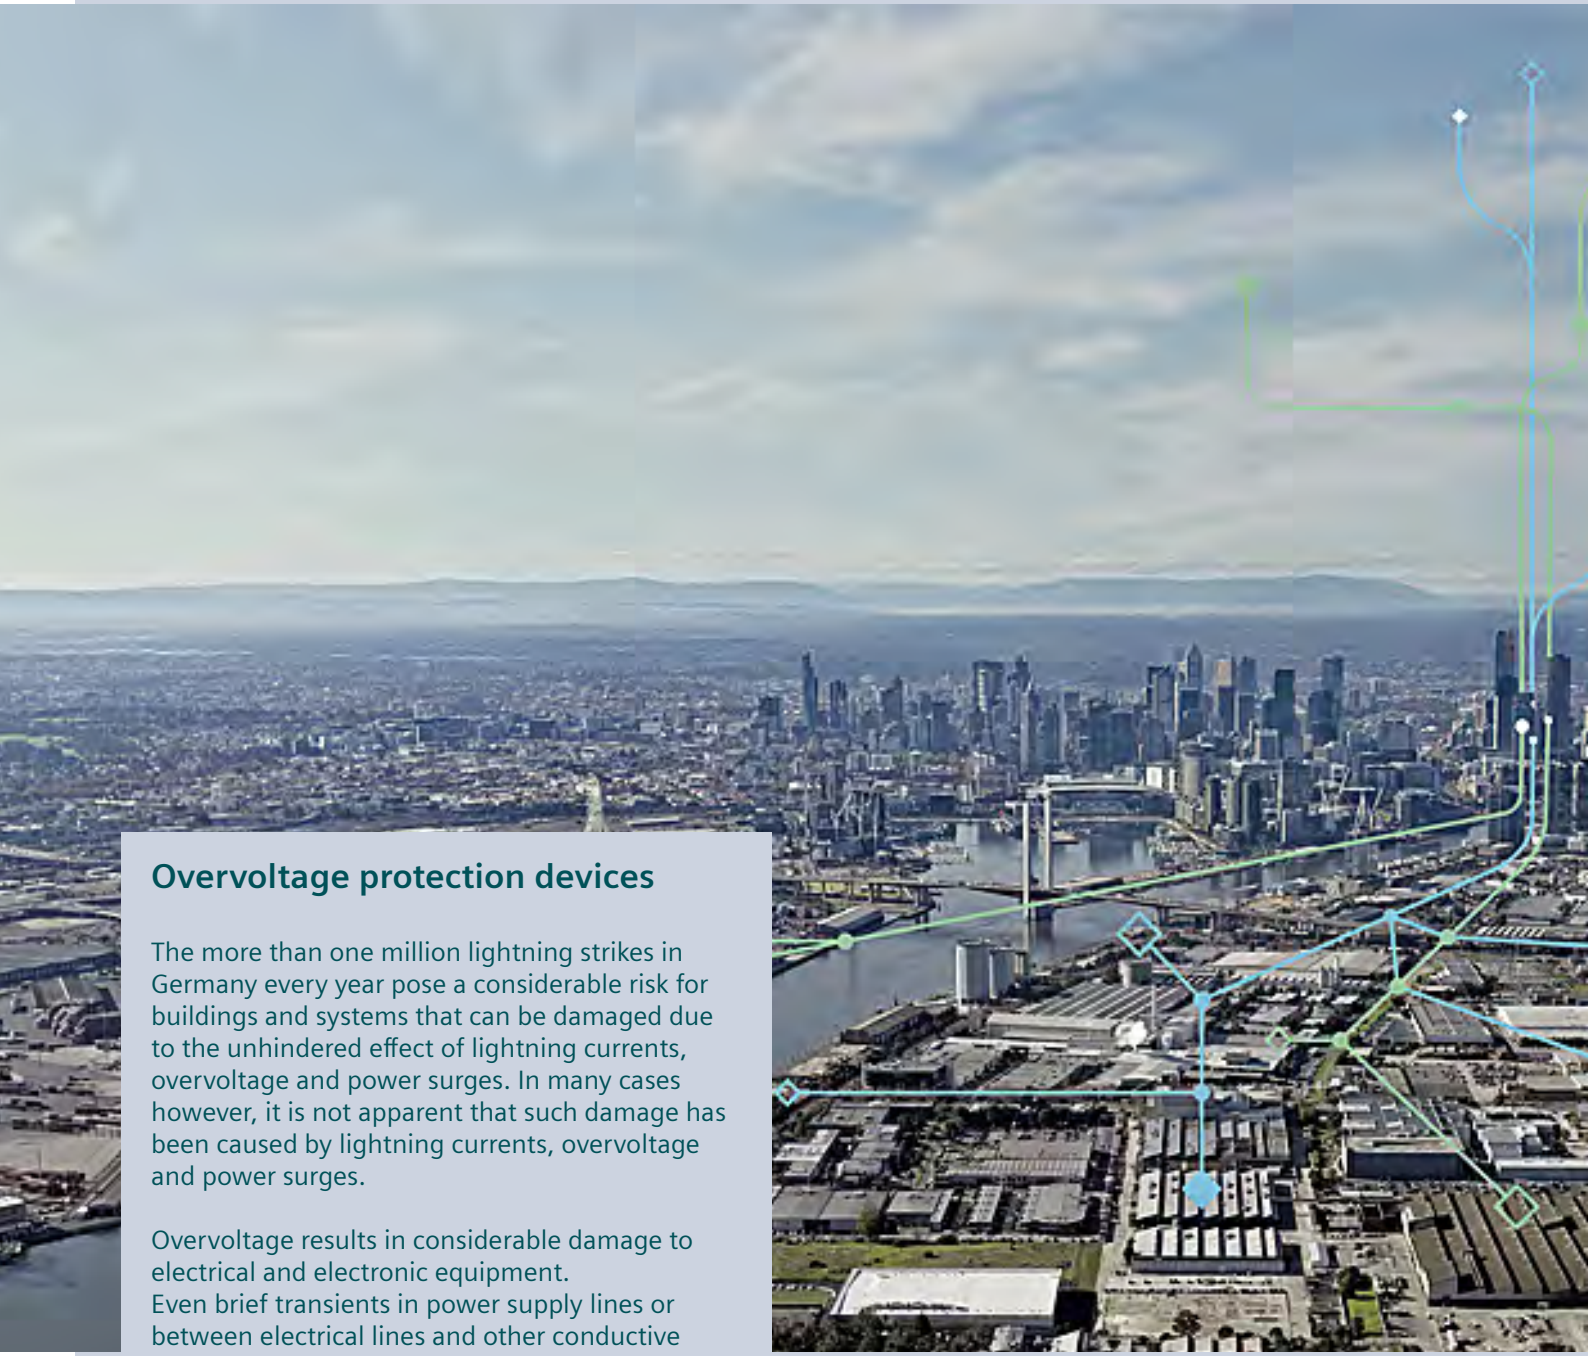

Overvoltage protection devices

The more than one million lightning strikes in Germany every year pose a considerable risk for buildings and systems that can be damaged due to the unhindered effect of lightning currents, overvoltage and power surges. In many cases however, it is not apparent that such damage has been caused by lightning currents, overvoltage and power surges.

Overvoltage results in considerable damage to electrical and electronic equipment.
Even brief transients in power supply lines or between electrical lines and other conductive parts (e.g. grounded metallic parts, ground) are sufficient to cause such damage. The damage patterns of destroyed lines, printed circuit boards or switchgear demonstrate this. Such damage can be prevented employing suitable overvoltage protection means.

Reliably protected by Siemens lightning and surge arresters !

© Siemens 2025

Overvoltage Protection Devices

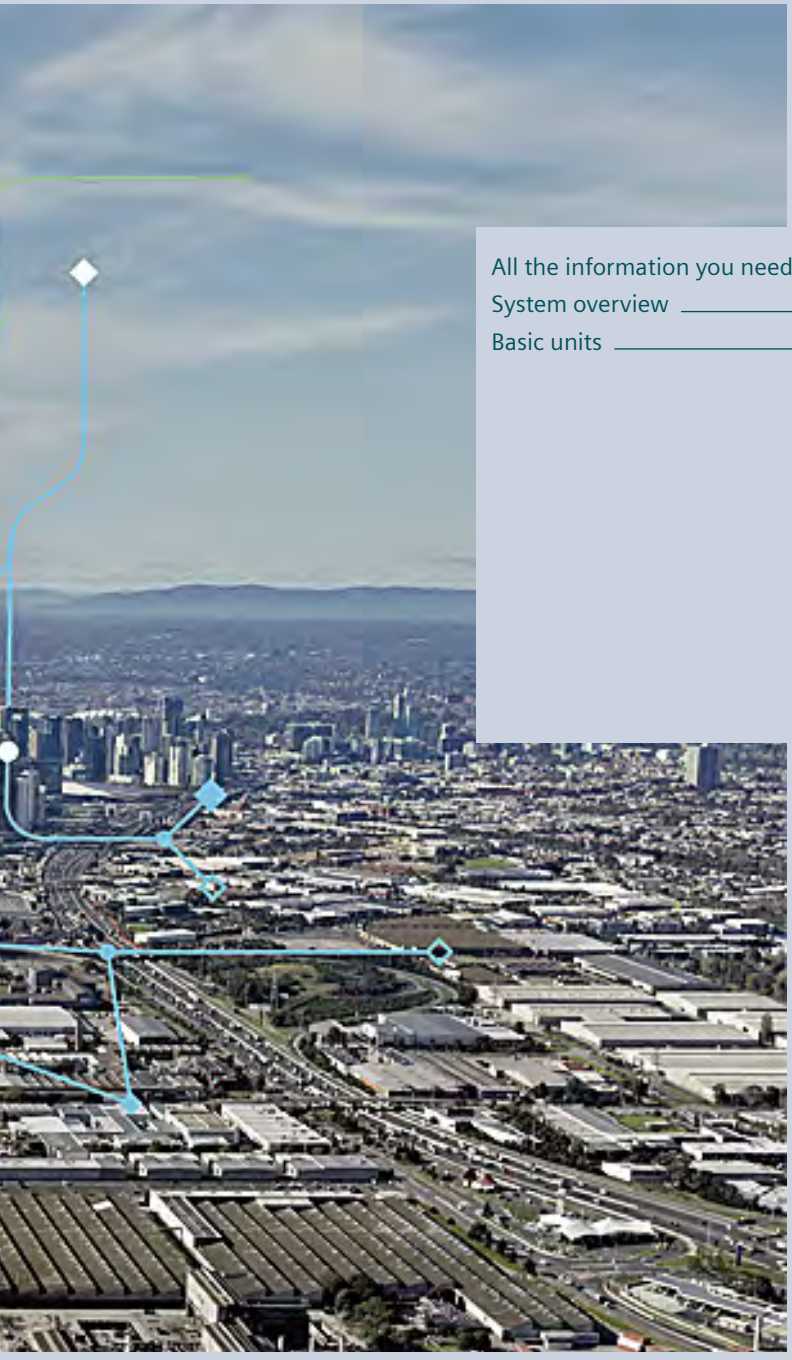

All the information you need 6/2
System overview 6/4
Basic units 6/6
5SD74 lightning arresters, type 1 6/6
5SD74 combination surge arresters, type 1 + type 2 6/8
5SD74 combination surge arresters with integrated back-up fuse 6/10
5SD74 surge arresters, type 1 + type 2 + type 3 for 40 mm busbar system 6/12
5SD74 combination surge arresters, type 1/type 2 6/14
5SD74 surge arresters, type 2 6/16
5SD74 surge arresters, type 3 6/20
5SD74 surge arresters, type 1 (UL) 6/21

© Siemens 2025

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about overvoltage protection devices, please visit our website
www.siemens.com/overvoltage-protection

Your product in detail

The SiePortal platform (knowledge base) provides comprehensive information
www.siemens.com/lowvoltage/product-support

- Technology Primer
  - Overvoltage protection devices **(109756965)**

The relevant tender specifications can be found at
www.siemens.com/tenderspecifications

Use our conversion tool for quick and easy conversion to Siemens products **www.siemens.com/conversion-tool**

Everything you need for your order

Refer to SiePortal to find an overview of your products (product catalog)

- Overvoltage protection devices **sie.ag/3ZMwRuw**

Direct forwarding to the individual products in SiePortal by clicking on the article number in the catalog or entering this web address incl. article number
www.siemens.com/product_catalog_SIEP?Article No.

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services.
You can find your local contacts at
www.siemens.com/lowvoltage/components/contact

You will find further information on services at
www.siemens.com/service-offers

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at
www.siemens.com/support-request

© Siemens 2025

… can be found in our online services

Commissioning + operation

Your product in detail

The SiePortal platform (knowledge base) provides detailed technical information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Certificates

Online Support app available for download from the **App Store** and **Play Store**
You will find further information at
www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)
- SiePortal (product catalog)
  www.siemens.com/lowvoltage/product-catalog
- Image database
  www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAx Download Manager at
www.siemens.com/cax

Manuals

Manuals can be found in SiePortal at
www.siemens.com/lowvoltage/manuals

- Configuration Manual
  – Overvoltage protection devices **(45315289)**

Face-to-face or online training

Our training courses can be found at
www.siemens.com/sitrain-lowvoltage

- Basic principles of electrical engineering (WT-LVBGET)
- Protection concept (WT-LVBPC)

Technical overview – Overvoltage protection devices

The fast way to get you to our online services

This page provides you with comprehensive information and links on overvoltage protection devices
www.siemens.com/lowvoltage/product-support (109769084)

© Siemens 2025

System overview

Basic units

5SD74 lightning arresters, type 1

5SD74 combination surge arresters, type 1 + type 2

5SD74 combination surge arresters with integrated back-up fuse

5SD74 surge arresters, type 1 + type 2 + type 3 for 40 mm busbar system

5SD74 combination surge arresters, type 1/type 2

5SD74 surge arresters, type 2 (standard design)

5SD74 surge arresters, type 3

5SD74 surge arresters, type 1 (UL)

Spare part plugs

N-PE

L-N, L-PEN (type 1)

L-PEN

Note:
You will find a detailed range of accessories with the basic units.

© Siemens 2025

Installation locations for surge protection devices (SPDs)

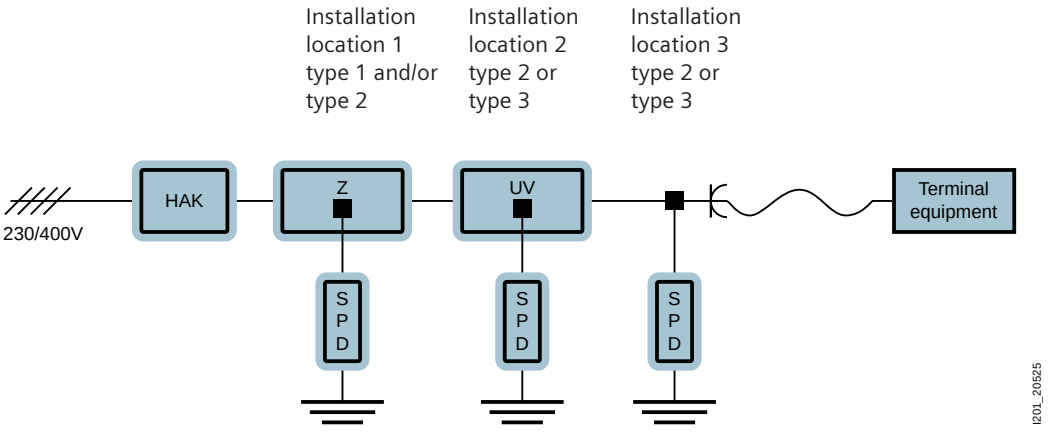

HAK: Main terminal box Z/HV: In or close to the central meter system/main distribution board UV: Subdistribution board

Installation location 1 must be as close as possible to the supply point for the electrical system, so that the downstream installations are protected. The SPDs at installation locations 2 and 3 shall not be used without SPDs at installation location 1, and they must be coordinated with these SPDs (i.e. SPDs all from the same manufacturer).

© Siemens 2025

5SD74 lightning arresters, type 1

	For TN-C systems and IT networks	For TN-C systems	For TN-S and TT systems	
Protection paths	L-PE	L-PEN	L-N, L-PE and N-PE	L-N, L-PE and N-PE
Rated voltage U_n	690 V AC	240/415 V AC	240 V AC	240/415 V AC
Maximum continuous voltage U_c	800 V AC	350 V AC	350 V AC	350 V AC

Circuit	Mounting width				
With remote signaling					
1 + 0	– [1]	5SD7411-2	–	–	–
1 + 1	4 MW	–	–	5SD7412-1	–
3 + 0	6 MW	–	5SD7413-1	–	–
3 + 1	8 MW	–	–	–	5SD7414-1

[1] No modular installation device.

6

Further technical specifications

		5SD7411-2	5SD7412-1	5SD7413-1	5SD7414-1
Standards					
Standards		IEC 61643-11; EN 61643-11			
Approvals		–	KEMA, UL/cUL		
Voltage					
Protection level U_p	L-N and L-PEN	≤ 4.50 kV	≤ 1.50 kV		
	L-PE	–	≤ 2.50 kV	–	≤ 2.50 kV
	N-PE	–	≤ 1.50 kV	–	≤ 1.50 kV
Current					
Lightning impulse current I_{imp} (10/350 µs)	L-N and L-PEN, 1P/3P	35 kA	25 kA	25/75 kA	
	N-PE	–	100 kA	–	100 kA
Rated discharge surge current I_n (8/20 µs)	L-N and L-PEN, 1P/3P	35 kA	25 kA	25/75 kA	
	N-PE	–	100 kA	–	100 kA
Follow current discharge capacity I_{fi} (AC)	L-N and L-PEN for 264/350 V	–	50/25 kA		
	N-PE	–	100 A	–	100 A
Function					
Response time t_A	L-N and L-PEN	≤ 100 ns			
	L-N and N-PE	–	≤ 100 ns	–	≤ 100 ns
Connections					
Conductor cross-section	Finely stranded	16 ... 50 mm²	2.5 ... 25 mm²		
	Solid	16 ... 50 mm²	2.5 ... 35 mm²		
Protection devices					
Max. back-up fuse acc. to IEC 61643-1	For stub wiring (gL/gG)	400 A	315 A		
	For V wiring (gL/gG)	125 A	125 A		
Short-circuit strength	With max. back-up fuse	50 kA	50 kA		
Ambient conditions					
Degree of protection		IP20, with connected conductors			
Temperature range		–40 ... +80 °C			

System overview, page 6/4

© Siemens 2025

Accessories

Spare part plugs

Protection paths	Basic units	Article No.
N-PE	5SD7412-1 and 5SD7414-1	5SD7418-0
L-N and L-PEN	For 5SD7412-1, 5SD7413-1 and 5SD7414-1	5SD7418-1

System overview, page 6/4

© Siemens 2025

5SD74 combination surge arresters, type 1 + type 2

	For TN-C systems	For TN-S and TT systems	
Protection paths	L-PEN	L-N, L-PE and N-PE	L-N, L-PE and N-PE
Rated voltage U_n	240/415 V AC	240 V AC	240 V AC
Maximum continuous voltage U_c	350 V AC	350 V AC	350 V AC

Circuit	Mounting width			
With remote signaling				
1 + 1	4 MW	–	5SD7442-1	–
3 + 0	6 MW	5SD7443-1	–	–
3 + 1	8 MW	–	–	5SD7444-1

6

Further technical specifications

		5SD7442-1	5SD7443-1	5SD7444-1
Standards				
Standards		IEC 61643-11; DIN EN 61643-11		
Approvals		KEMA, UL/cUL		
Voltage				
Protection level U_p	L-N and L-PEN	≤ 1.50 kV		
	L-PE	≤ 2.20 kV	–	≤ 2.20 kV
	N-PE	≤ 1.50 kV	–	≤ 1.50 kV
Current				
Lightning impulse current I_{imp} (10/350 µs)	L-N and L-PEN	25 kA		
	N-PE	100 kA	–	100 kA
Rated discharge surge current I_n (8/20 µs)	L-N and L-PEN	25 kA		
	N-PE	100 kA	–	100 kA
Follow current discharge capacity I_{fi} (AC)	L-N and L-PEN	25 kA		
	N-PE	100 A	–	100 A
Function				
Response time t_A	L-N and L-PEN	≤ 25 ns		
	L-N and N-PE	≤ 100 ns	–	≤ 100 ns
Connections				
Conductor cross-section	Finely stranded	2.5 … 25 mm²		
	Solid	2.5 … 35 mm²		
Protection devices				
Max. back-up fuse acc. to IEC 61643-1	For stub wiring (gL/gG)	315 A		
	For V wiring (gL/gG)	125 A		
Short-circuit strength	With max. back-up fuse	25 kA		
Ambient conditions				
Degree of protection		IP20, with connected conductors		
Temperature range		–40 … +80 °C		
Display				
Visual function/fault indication		Yes		

System overview, page 6/4

© Siemens 2025

Accessories

Spare part plugs

Protection paths	Type	Basic units	Article No.
N-PE	–	5SD7442-1 and 5SD7444-1	5SD7418-0
L-N and L-PEN	1	5SD7442-1, 5SD7443-1 and 5SD7444-1	5SD7448-1
	2	5SD7442-1, 5SD7443-1 and 5SD7444-1	5SD7428-1

6

System overview, page 6/4

© Siemens 2025

5SD74 combination surge arresters with integrated back-up fuse

		For TN-S and TT systems	
	Protection paths	L-N	N-PE
	Rated voltage U_n	230 V AC	–
	Maximum continuous voltage U_c	255 V AC	–
Circuit	**Mounting width**		
1+0	2 MW	5SD7441-1KF00	–
N-PE new	2 MW	–	5SD7401-1

6

Further technical specifications

		5SD7441-1KF00	5SD7401-1
Standards			
Standards		EN 61643-11/... IEC 61643-11	
Approvals		KEMA	
Voltage			
Protection level U_p	L-N and L-N/PE	≤ 1,50 kV	–
	N-PE	–	≤ 1,50 kV
Current			
Lightning impulse current I_{imp} (10/350 µs)	L-N and L-N/PE	25 kA	–
	N-PE	–	100 kA
Rated discharge surge current I_n (8/20 µs)	L-N and L-N/PE	25 kA	–
Follow current discharge capacity I_{fi} (AC)	L-N and L-N/PE	50 kA	–
	N-PE	–	100 kA
Function			
Response time t_A	L-N and L-N/PE	≤ 100 ns	–
	N-PE	–	≤ 100 ns
Connections			
Conductor cross-section	Finely stranded	35 mm²	25 mm²
	Solid/stranded	50 mm²	35 mm²
Protection devices			
Max. back-up fuse		None necessary because integrated coordinated back-up fuse contained in the device	
Ambient conditions			
Degree of protection		IP20, with connected conductors	
Temperature range		–40 ... +80 °C	

System overview, page 6/4

© Siemens 2025

Accessories

Connection bars

Version	Number of poles	Article No.
1-phase	3-pole	5SD7490-6
	4-pole	5SD7490-7

System overview, page 6/4

© Siemens 2025

5SD74 surge arresters, type 1 + type 2 + type 3 for 40 mm busbar system

	For TN-C systems			
Protection paths	L-PEN			
Lightning impulse current I_{imp} (10/350 µs)	12.5 kA		7.5 kA	
Rated voltage U_n	240/415 V AC	240/415 V AC	240/415 V AC	240/415 V AC
Maximum continuous voltage U_c	300 V AC	300 V AC	300 V AC	300 V AC
Circuit **Mounting width**				
With remote signaling				
3 + 0 47 mm	5SD7443-8KK21	–	5SD7443-8KK11	–
3 + 1 47 mm	–	–	–	–
With remote signaling and phase tap				
3 + 0 47 mm	–	5SD7443-8KK22	–	5SD7443-8KK12
3 + 1 47 mm	–	–	–	–

6

Further technical specifications

		5SD7443-8KK21	5SD7443-8KK22	5SD7443-8KK11	5SD7443-8KK12
Standards					
Standards		IEC 61643-11			
Approvals		VDE			
Voltage					
Protection level U_p	L-N and L-PEN	≤ 1.50 kV			
	L-N/N-PE	–			≤ 1.5/1.5 kV
Current					
Lightning impulse current I_{imp} (10/350 µs)	L-N/N-PEN and N-PE	12.5 kA		7.5 kA	
Rated discharge surge current I_n (8/20 µs)	L-N/L-PEN and N-PE	20 kA			
Follow current discharge capacity I_{fi} (AC)	N-PE	–			
Connections					
Conductor cross-section	Finely stranded	25 mm²			
	Solid	35 mm²			
Type of mounting					
40 mm busbar system		5 and 10 mm			
Protection devices					
Max. back-up fuse acc. to IEC 61643-1	For stub wiring (gL/gG)	315 A			
Short-circuit strength	With max. back-up fuse	25 kA			
Ambient conditions					
Degree of protection		IP20			
Temperature range		–40 ... +80 °C			
Display					
Visual function/fault indication		Yes			

System overview, page 6/4

© Siemens 2025

For TN-S and TT systems			
L-N, L-PE and N-PE			
12.5 kA		7.5 kA	
240/415 V AC	240/415 V AC	240/415 V AC	240/415 V AC
300 V AC	300 V AC	300 V AC	300 V AC
–	–	–	–
5SD7444-8KK21	–	5SD7444-8KK11	–
–	–	–	–
–	5SD7444-8KK22	–	5SD7444-8KK12

6

5SD7444-8KK21	5SD7444-8KK22	5SD7444-8KK11	5SD7444-8KK12
12.5 kA		7.5 kA	
20/80 kA			
100 A RMS			

System overview, page 6/4

© Siemens 2025

5SD74 combination surge arresters, type 1/type 2

	For TN-C systems and IT networks	For TN-C systems	For TN-S and TT systems		For photovoltaic systems
Protection paths	L-PE	L-PEN	L-N, L-PE and N-PE	L-N, L-PE and N-PE	(L+) – (L–)
Rated voltage U_n	690 V AC	240/415 V AC	240 V AC	240/415 V AC	–
Maximum continuous voltage U_c	800 V AC	335 V AC	335 V AC	335 V AC	1000 V DC

Circuit	Mounting width					Plug-in
With remote signaling						
1 + 0	– [1]	5SD7411-2	–	–	–	–
3 + 0	3 MW	–	5SD7413-3	–	–	–
3 + 1	4 MW	–	–	–	5SD7414-3	–
Without remote signaling						
1 + 1	2 MW	–	–	5SD7412-2	–	–
3 + 0	3 MW	–	5SD7413-2	–	–	5SD7483-6
3 + 1	4 MW	–	–	–	5SD7414-2	–

[1] No modular installation device.

Further technical specifications

		5SD7411-2	5SD7412-2	5SD7413-2 5SD7413-3	5SD7414-2 5SD7414-3	5SD7483-6
Standards						
Standards		IEC 61643-11				EN 61643-31
Approvals		–	KEMA			
Voltage						
Protection level U_p	L-N and L-PEN	≤ 4.50 kV	≤ 1.20 kV			≤ 3.50 kV
	L-PE	–			≤ 2.0 kV	–
	N-PE	–	≤ 1.70 kV	–	≤ 1.70 kV	–
Current						
Lightning impulse current I_{imp} (10/350 µs)	L-N and L-PEN	35 kA	12.5 kA			≤ 5 kA
	N-PE	–	50 kA	–	50 kA	–
Rated discharge surge current I_n (8/20 µs)	L-N and L-PEN	35 kA	12.5 kA			15 kA
	N-PE	–	50 kA	–		
Max. discharge surge current $I_{max.}$ (8/20 µs)	L-N	100 kA	12.5 kA	50 kA		40 kA
	N-PE	–	50 kA	–	50 kA	–
Function						
Response time t_A	L-N and L-PEN	< 100 ns	≤ 25 ns			
	L-N and N-PE	–	≤ 100 ns	–	≤ 100 ns	≤ 25 ns
Connections						
Conductor cross-section	Finely stranded	16 ... 50 mm²	1.5 ... 25 mm²			
	Solid	16 ... 50 mm²	1.5 ... 35 mm²			
Protection devices						
Max. back-up fuse acc. to IEC 61643-1	For stub wiring (gL/gG)	400 A	160 A			–
	For V wiring (gL/gG)	125 A	80 A			–
Short-circuit strength	With max. back-up fuse	50 kA	25 kA			–
Ambient conditions						
Degree of protection		IP20, with connected conductors				
Temperature range		–40 ... +80 °C				

System overview, page 6/4

© Siemens 2025

Accessories

Spare part plugs

	Protection paths	Type	Basic units	Article No.
	N-PE	–	5SD7412-2, 5SD7412-3, 5SD7414-2 and 5SD7414-3	5SD7418-2
	L-N and L-PEN	1	5SD7412-2, 5SD7412-3, 5SD7413-2, 5SD7413-3, 5SD7414-2 and 5SD7414-3	5SD7418-3
	L-PE (PV)	2	5SD7483-6	5SD7498-3

System overview, page 6/4

© Siemens 2025

5SD74 surge arresters, type 2

Standard design

		For TN and TT systems		For TN-C systems and IT networks	For TN-C systems	For IT networks	
Protection paths		N-PE	L-PEN and L-N	L-PEN and L-N	L-PEN	L-PEN and L-PE	L-PEN and L-PE
Rated voltage U_n		240/415 V AC	240/415 V AC	400/690 V AC	240/415 V AC	400/690 V AC	554/960 V AC
Maximum continuous voltage U_c		260 V AC	350 V AC	800 V AC	350 V AC	580 V AC	760 V AC
Circuit	**Mounting width**						
With remote signaling							
1 + 0	1 MW	–	5SD7461-1	–	–	–	–
	2 MW	–	–	5SD7481-1	–	–	–
3 + 0	3 MW	–	–	–	5SD7463-1	5SD7473-1	5SD7483-5
3 + 1	4 MW	–	–	–	–	–	–
Without remote signaling							
1 + 0	1 MW	5SD7481-0	5SD7461-0	–	–	–	–
3 + 0	3 MW	–	–	–	5SD7463-0	–	–
3 + 1	4 MW	–	–	–	–	–	–

6

Further technical specifications

		5SD7481-0	5SD7461-0 5SD7461-1	5SD7481-1	5SD7463-0 5SD7463-1	5SD7464-0 5SD7464-1	5SD7473-1	5SD7483-5
Standards								
Standards		IEC 61643-11; DIN EN 61643-11						
Approvals		KEMA					–	KEMA, UL/cUL
Voltage								
Protection level U_p	L-N and L-PEN	–	≤ 1.50 kV	≤ 5 kV	≤ 1.50 kV	≤ 1.60 kV	≤ 2.50 kV	≤ 2.90 kV
	L-PE	–				≤ 1.90 kV	–	
	N-PE	≤ 1.50 kV	–			≤ 1.50 kV	–	
Current								
Rated discharge surge current I_n (8/20 µs)	L-N and L-PEN	–	20 kA	15 kA	20 kA		15 kA	
	N-PE	20 kA	–			20 kA	–	
Max. discharge surge current $I_{max.}$ (8/20 µs)	L-N	–	40 kA	30 kA	40 kA		30 kA	
	N-PE	40 kA	–			40 kA	–	
Function								
Response time t_A	L-N and L-PEN	–	≤ 25 ns	≤ 100 ns	≤ 25 ns			
	L-N and N-PE	≤ 100 ns	–			≤ 100 ns	–	
Connections								
Conductor cross-section	Finely stranded	1.5 ... 25 mm²						
	Solid	1.5 ... 35 mm²						
Protection devices								
Max. back-up fuse acc. to IEC 61643-1	For stub wiring (gL/gG)	–	125 A	100 A	125 A			100 A
	For V wiring (gL/gG)	–		80 A				
Short-circuit strength	With max. back-up fuse	25 kA						
Ambient conditions								
Degree of protection		IP20, with connected conductors						
Temperature range		–40 ... +80 °C						

System overview, page 6/4

© Siemens 2025

For TN-S and TT systems	Fuse bases for photovoltaic fuses	
L-N, L-PE and N-PE	(L+) – (L–); (L+) – PE; (L–) – PE	(L+) – (L–); (L+) – PE; (L–) – PE
240/415 V AC	–	–
350 V AC (L-N, L-PE) 260 V AC (N-PE)	1000 V DC	600 V DC
–	–	–
–	–	–
–	–	–
5SD7464-1	–	–
–	–	–
–	5SD7483-0KK02	5SD7483-0KK01
5SD7464-0	–	–

5SD7483-0KK01
5SD7483-0KK02

EN 61643-31
KEMA
≤ 3.70 kV
–
–
15 kA
–
40 kA
–
≤ 25 ns
≤ 25 ns
1.5 ... 25 mm²
1.5 ... 35 mm²
–
–
–
IP20, with connected conductors
–40 ... +80 °C

Accessories

Spare part plugs

	Protection paths	Basic units	Article No.
	N-PE	5SD7481-0, 5SD7464-0 und 5SD7464-1	5SD7488-0
	L-N and L-PEN	5SD7461-0, 5SD7461-1, 5SD7463-0, 5SD7463-1, 5SD7464-0 und 5SD7464-1	5SD7468-1
	L-PEN	5SD7481-1 und 5SD7483-5	5SD7488-2
		5SD7481-1	5SD7488-4
	L-PE (PV)	5SD7483-0KK02	5SD7498-4
		5SD7483-0KK01	5SD7498-5

System overview, page 6/4

© Siemens 2025

5SD74 surge arresters, type 2

Narrow design

	For TN-S and TT systems	
Protection paths	L-N and N-PE	L-N and N-PE
Rated voltage U_n	240 V AC	240/415 V AC
Rated arrester voltage U_C; L-N, N-PE, L-(PE)N	350 V AC	350 V AC
Rated arrester voltage U_C; N-PE	264 V AC	264 V AC
Circuit / **Mounting width**		
With remote signaling		
1 + 1 / 24 mm (1 1/3 MW)	5SD7422-1	–
3 + 1 / 48 mm (2 2/3 MW)	–	5SD7424-1
Without remote signaling		
1 + 1 / 24 mm (1 1/3 MW)	5SD7422-0	–
3 + 1 / 48 mm (2 2/3 MW)	–	5SD7424-0

6

Further technical specifications

		5SD7422-0 5SD7422-1	5SD7424-0 5SD7424-1
Standards			
Standards		IEC 61643-11; DIN EN 61643-11	
Approvals		KEMA/UL/cUL	
Voltage			
Protection level U_p	L-N and L-PEN	≤ 1.50 kV	
	L-PE	≤ 1.90 kV	
	N-PE	≤ 1.50 kV	
Current			
Rated discharge surge current I_n (8/20 µs)	L-N and L-PEN	20 kA	
	N-PE	20 kA	
Max. discharge surge current $I_{max.}$ (8/20 µs)	L-N	40 kA	
	N-PE	40 kA	
Function			
Response time t_A	L-N and L-PEN	≤ 25 ns	
	L-N and N-PE	≤ 100 ns	
Connections			
Conductor cross-section	Finely stranded	2.5 ... 16 mm²	
	Solid	2.5 ... 25 mm²	
Protection devices			
Max. back-up fuse acc. to IEC 61643-1	For stub wiring (gL/gG)	315 A	
	For V wiring (gL/gG)	63 A	
Short-circuit strength	With max. back-up fuse	25 kA	
Ambient conditions			
Degree of protection		IP20, with connected conductors	
Temperature range		–40 ... +80 °C	

System overview, page 6/4

© Siemens 2025

Accessories

Spare part plugs

	Protection paths	Basic units	Article No.
	N-PE	5SD7422-0, 5SD7422-1, 5SD7424-0 and 5SD7424-1	5SD7428-0
	L-N and L-PEN	5SD7422-0, 5SD7422-1, 5SD7424-0 and 5SD7424-1	5SD7428-1

System overview, page 6/4

© Siemens 2025

5SD74 surge arresters, type 3

		For TN-S and TT systems		
Protection paths		L-N, L-PE, N-PE, (L+) – (L–) and (L+/L–) – PE	L-N, L-PE, N-PE, (L+) – (L–) and (L+/L–) – PE	L-N, L-PE, N-PE, (L+) – (L–) and (L+/L–) – PE
Rated voltage U_n		24 V AC	120 V AC	230 V AC
Rated arrester voltage U_C		34 V AC	150 V AC	264 V AC
Circuit	**Mounting width**			
With remote signaling				
1 + 0	1 MW	5SD7432-5	5SD7432-6	5SD7432-7

6

Further technical specifications

		5SD7432-5	5SD7432-6	5SD7432-7
Standards				
Standards		IEC 61643-11; DIN EN 61643-11		
Approvals		KEMA/UR	KEMA/UL	KEMA/UR
Voltage				
Protection level U_p	L-N, L-PE and N-PE	≤ 200/≤ 600 V	≤ 750/≤ 850 V	≤ 1250/≤ 1400 V
Current				
Rated load current I_L (at 30 °C)		26 A		
Rated discharge surge current I_n (8/20 µs)		1 kA	5 kA	
Combined surge U_{oc}		2 kV	6 kV	
Function				
Response time t_A		≤ 100 ns		
Connections				
Conductor cross-section	Finely stranded	0.2 ... 2.5 mm²		
	Solid	0.2 ... 4 mm²		
Protection devices				
Required back-up fuse, max.	(gG/B/C)	25 A		
Ambient conditions				
Degree of protection		IP20, with connected conductors		
Temperature range		–40 ... +80 °C		
Display				
Visual function/fault indication		Yes		

System overview, page 6/4

© Siemens 2025

5SD74 surge arresters, type 1 (UL)

Without CE marking

	For wye (star)				For delta
Protection paths	L-G and L-L	L-N, L-G, L-L and N-G	L-G and L-L	L-N, L-G, L-L and N-G	L-G and L-L
Rated voltage U_n: L-N	–	277 V AC	–	347 V AC	–
L-G	277 V AC	277 V AC	347 V AC	347 V AC	480 V AC
L-L	480 V AC	480 V AC	600 V AC	600 V AC	480 V AC
N-G	–	0 V AC	–	0 V AC	–
Rated arrester voltage U_C: L-N	–	385 V AC	–	510 V AC	–
L-G	385 V AC	565 V AC	510 V AC	690 V AC	550 V AC
L-L	770 V AC	770 V AC	1020 V AC	1020 V AC	1100 V AC
N-G	–	180 V AC	–	180 V AC	–

Circuit	Mounting width					
With remote signaling						
3 + 0	3 TE	5SD7413-1KU02	–	5SD7413-1KU03	–	5SD7413-1KU04
3 + 1	4 TE	–	5SD7414-1KU02	–	5SD7414-1KU03	–

6

Further technical specifications		**5SD7413-1KU02**	**5SD7414-1KU02**	**5SD7413-1KU03**	**5SD7414-1KU03**	**5SD7413-1KU04**
Standards						
Standards		ANSI UL 1449; CSA C22.2 No. 269.1				
Approvals		UL, CSA				
Voltage						
Protection level U_p	L-N	–	≤ 1.20 kV	–	≤ 1.50 kV	–
	L-G	≤ 1.20 kV	≤ 1.80 kV	≤ 1.50 kV	≤ 2.0 kV	≤ 1.80 kV
	L-L	≤ 2.50 kV	≤ 2.50 kV	≤ 3.0 kV	≤ 3.0 kV	≤ 3.0 kV
	N-G	–	≤ 0.60 kV	–	≤ 0.60 kV	–
Current						
Rated discharge surge current I_n (8/20 µs)	L-N, L-G and L-L	20 kA				
	N-G	20 kA				
Max. discharge surge current I_{max} (8/20 µs)	L-N, L-G and L-L	50 kA				
	N-G	50 kA				
Connections						
Conductor cross-section	Finely stranded/ Solid	2.5 ... 25 mm²				
	Busbar	16 mm²				
	Remote signaling contact	0.34 ... 1.5 mm²				
Protection devices						
Short-circuit strength		200 kA				
Ambient conditions						
Degree of protection		IP20				
Temperature range		–40 ... +85 °C				
Display						
Visual/ Electrical function/fault indication		Yes				

System overview, page 6/4

© Siemens 2025

Mandatory basic protection in electrical installations

Overcurrents in electrical installations occur as a result of excessive load or short-circuits and can cause serious accidents, fires and financial damage. Appropriate protection devices have therefore been mandatory ever since electricity was first harnessed to power equipment. As a pioneer in fuse systems, we offer you the complete range of devices for the protection of cables as well as electrical devices and installations in the event of overloads and short-circuits.

Fuses are capable of safely switching off circuits as soon as an overload or short-circuit occurs. This prevents damage to electrical equipment or extended power failures. Specific variants of fuse systems are used for different applications.

Among other things, our fuses are used for protecting cables and lines, switching devices and semiconductors as well as in photovoltaics and wind power.

© Siemens 2025

Fuse Systems

All the information you need 7/2
System overview 7/4
Overview of fuse systems according to IEC 7/6
Fuse holders and bases 7/8
- Quick selection guide 7/8
- MINIZED fuse switch disconnectors 7/14
- MINIZED switch disconnectors with fuses 7/15
- NEOZED bus-mounting switch disconnectors with fuses 7/16
- NEOZED fuse bases 7/18
- DIAZED fuse bases 7/20
- Bus-mounting bases for busbar systems 7/22
- LV HRC fuse bases 7/24
- Cylindrical fuse holders 7/26
- Fuse holders and bases for SITOR semiconductor fuses 7/27
- Fuse holders and bases for photovoltaic fuses 7/28
- Class J fuse holders 7/30
- Class CC fuse holders 7/31

Fuse links 7/32
- Quick selection guide 7/32
- NEOZED fuse links 7/34
- DIAZED fuse links 7/35
- SILIZED fuse links 7/36
- LV HRC fuse links 7/38
- 3NA3 COM LV HRC fuse links with measuring and communication functions 7/52
- 3NA6 COM LV HRC fuse links with measuring and communication functions new 7/54
- Cylindrical fuse links 7/58
- SITOR semiconductor fuse links, LV HRC design (AC/DC) 7/60
- SITOR semiconductor fuse links, LV HRC design (DC) 7/76
- SITOR semiconductor fuses, cylindrical fuse design (AC/DC) 7/82
- Photovoltaic fuse links 7/90
- Class CC fuse links 7/92

Accessories 7/94
- Busbars 7/94
- LV HRC signal detectors, electronic fuse monitoring 7/100

© Siemens 2025

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about fuse systems, please visit our website **www.siemens.com/fuses**

Your product in detail

The SiePortal platform (knowledge base) provides comprehensive information **www.siemens.com/lowvoltage/product-support**

- Technology Primer
  - Fuse systems **(109482303)**

The relevant tender specifications can be found at **www.siemens.com/tenderspecifications**

Use our conversion tool for quick and easy conversion to Siemens products **www.siemens.com/conversion-tool**

Siemens YouTube channel

- Siemens fuse systems **sie.ag/2J9ihb**

Electrical Designer

With the Electrical Designer in the TIA Selection Tool, it is possible to design and dimension the electrical equipment of a machine in conformity with the standards – from the suitable switching devices to the correctly dimensioned cables
www.siemens.com/controlpanel/electrical-designer

Everything you need for your order

Refer to SiePortal to find an overview of your products (product catalog)

- Fuse systems **sie.ag/2kW3pnU**

Direct forwarding to the individual products in SiePortal by clicking on the article number in the catalog or entering this web address incl. article number
www.siemens.com/product_catalog_SIEP?Article No.

Configurators

The configurator reduces the time and effort required in the planning and ordering process, and allows for individual adaptations. Configure your fuse systems under **www.siemens.com/lowvoltage/fusesystems-configurator**

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services.
You can find your local contacts at
www.siemens.com/lowvoltage/components/contact

You will find further information on services at
www.siemens.com/service-offers

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at
www.siemens.com/support-request

© Siemens 2025

… can be found in our online services

Commissioning + operation

Your product in detail

The SiePortal platform (knowledge base) provides detailed technical information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Characteristic curves
- Certificates

Online Support app available for download from the **App Store** and **Play Store**
You will find further information at
www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)
- SiePortal (product catalog)
  www.siemens.com/lowvoltage/product-catalog
- Image database
  www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAx Download Manager at
www.siemens.com/cax

Manuals

Manuals can be found in SiePortal at
www.siemens.com/lowvoltage/manuals

- Configuration Manual
  – Fuse systems **(45314810)**
- Planning Manual
  – Planning with SIVACON 8PS **(109478425)**
- Installation Manual
  – Circuit protection devices with communication and measuring function **(109791805)**
- System Manual
  – Circuit protection devices with communication and measuring function **(109791806)**

Face-to-face or online training

Our training courses can be found at
www.siemens.com/sitrain-lowvoltage

- SENTRON circuit protection devices with measuring and communication function (WT-LVBCOM)

Technical overview – Fuse systems

The fast way to get you to our online services

This page provides you with comprehensive information and links on fuse systems
www.siemens.com/lowvoltage/product-support (109769085)

© Siemens 2025

System overview

Fuse holders and bases

IEC fuse holders and bases

MINIZED

NEOZED

DIAZED

Bus-mounting bases for busbars

Photovoltaic fuses (LV HRC design)

IEC/UL fuse holders and bases

LV HRC fuses

Cylindrical fuses

SITOR semiconductor fuses (LV HRC design)

SITOR semiconductor fuses (cylindrical fuse design)

Photovoltaic fuses (cylindrical fuse design)

UL fuse holders and bases

Class CC

Class J

Accessories for fuse holders and bases

Covers

Screw caps

Adapter sleeves

Isolating blades

LV HRC signal detectors

Busbars and accessories

Can be cut

Terminals

Touch protection

End caps

Note:
You will find a detailed range of accessories with the basic units.

© Siemens 2025

Fuse links

IEC fuse links

NEOZED

DIAZED

LV HRC

LV HRC
(3NA COM)

Cylindrical fuses

SILIZED

Photovoltaic fuses
(LV HRC design)

Photovoltaic fuses
(cylindrical fuse design)

IEC/UL fuse links

SITOR semiconductor fuses
(LV HRC design)

SITOR semiconductor fuses
(cylindrical fuse design)

UL fuse links

Class CC

Note:
You will find a detailed range of accessories with the basic units.

7

© Siemens 2025

Overview of fuse systems according to IEC

Fuse links

Standard	IEC	IEC
Rated current I_n	2 ... 100 A	2 ... 100 A
Rated voltage U_n (AC)	400 V	500 ... 750 V
Rated voltage U_n (DC)	250 V	500 ... 750 V
Design/ application	NEOZED/SILIZED	DIAZED/SILIZED

Selection according to protection task

Cables and conductors, general (gG, gFF)	■	■
Motor protection (aM)	–	–
Power semiconductor (aR, gR, gS)	■	■
Photovoltaic protection (gPV)	–	–
Battery protection (aR, gR, gBAT)	–	–
Type	5SE	5SA, 5SB, 5SC, 5SD
Further information	See page 7/34, 7/36	See page 7/35, 7/36

Fuse holders and bases

For protection tasks

Overview, see page 7/8

	Floor mounting	DIN rail	Busbar	Type	Standard	Further information		
Fuse bases	–	■	■	5SG	IEC	See page 7/14	■	–
	■	■	■	5SF	IEC	See page 7/20	–	■
	■	–	–	3NH	IEC/UL	See page 7/24	–	–
	■	–	–	3NH7	IEC	See page 7/24	–	–
	–	■	■	3NW7	IEC/UL	See page 7/26	–	–
	–	■	–	3NC..	IEC/UL	See page 7/27	–	–
	–	■	–	3NW7...-4	IEC	See page 7/28	–	–

For protection and switching tasks

System overview, see page 8/80, 8/110

	Floor mounting	DIN rail	Busbar	Type	Standard	Further information		
Fuse switch disconnectors	■	■	■	3NP1	IEC/UL	See page 8/82	–	–
	–	■	■	5SG76	IEC	See page 8/108	■	–
	–	–	■	3NJ4	IEC	See page 8/96	–	–
Switch disconnector with fuse	■	■	–	3KF LV HRC	IEC	See page 8/114	–	–
	■	■	–	3KF SITOR	IEC/UL	See page 8/114	–	–
	–	–	■	3NJ63	IEC	See page 8/130	–	–
	–	■	■	5SG71	IEC	See page 8/138	■	–

7

System overview, page 7/4

© Siemens 2025

Overview, see page 7/32

IEC	IEC	IEC	IEC/UL	IEC/UL	IEC	UL
2 ... 1250 A	80 ... 315 A	0.5 ... 100 A	2 ... 2400 A	1 ... 125 A	2 ... 630 A	0.5 ...30 A
400 ... 690 V	400 V	400 ... 690 V	500 ... 2500 V	600 ... 1500 V	–	600 V
250 ... 400 V	250 V	–	440 ... 3000 V	250 ... 1000 V	1000 ... 1500 V	150 ... 300 V
LV HRC	LV HRC	Cylindrical	SITOR LV HRC	SITOR cylindrical	Photovoltaic	Class CC
■	■	■	–	–	–	■
■	–	■	–	–	–	■
–	–	–	■	■	–	–
–	–	–	–	–	■	–
–	–	–	■	■	–	–
3NA, 3ND	3NA COM	3NW6, 3NW8	3NE, 3NC	3NC10	3NE..., 3NW...	3NW1, 3NW2, 3NW3
See page 7/38, 7/50	**See page 7/54**	**See page 7/58**	**See page 7/60, 7/64**	**See page 7/84**	**See page 7/90**	**See page 7/92**
–	–	–	–	–	–	–
–	–	–	–	–	–	–
■	■	–	■	–	–	–
–	–	–	–	–	■	–
–	–	■	–	–	–	■
–	–	–	–	■	–	–
–	–	–	–	–	■	–
■	■	–	■	–	–	–
–	–	–	–	–	–	–
■	■	–	–	–	–	–
■	■	–	(■)	–	–	–
–	–	–	■	–	–	–
■	■	–	–	–	–	–
–	–	–	–	–	–	–

7

System overview, page 7/4

© Siemens 2025

Quick selection guide of fuse holders, bases and D0 fuse switching devices

IEC

			MINIZED switch disconnectors with fuses	MINIZED fuse switch disconnectors	NEOZED fuse bases			NEOZED comfort bases	NEOZED fuse bases
Basic data									
Size/for fuses of size			D02	D01	D01	D02	D03	D01, D02	D01, D02
Type			5SG71	5SG76	5SG15 5SG55	5SG16 5SG56	5SG18	5SG1301 5SG1701 5SG5301 5SG5701	5SG1302 5SG1702 5SG5302 5SG5702
Direction of incoming supply			Any	Any	From below			From below	From below
Standards									
Standards			DIN VDE 0638; IEC/EN 60947-3 (VDE 0660-107) IEC/EN 60947-3	DIN VDE 0638; IEC/EN 60947-3 (VDE 0660-107) IEC/EN 60947-3	IEC 60269-3; DIN VDE 0636-3			IEC 60269-3; DIN VDE 0636-3	IEC 60269-3; DIN VDE 0636-3
Approvals			–	–	–			–	–
Certifications			–	–	–			–	–
Technical specifications AC									
Rated voltage U_n		V AC	230/400, 240/415	230/400, 240/415	400	400	400	–	–
Rated insulation voltage		V AC	500	690	–	–	–	–	–
Short-circuit strength		kA AC	50	50	50	50	50	50	50
Rated current I_n		A	63	16	16	63	100	16/63	16/63
Rated impulse withstand voltage		kV AC	6	6	–	–	–	–	–
Utilization category	Acc. to VDE 0638	A	AC-22	AC-22	–	–	–	–	–
	Acc. to EN 60947-3	A	AC-22B, AC-23B (35A)	AC-22A	–	–	–	–	–
Technical specifications DC									
Rated voltage	U_n	V DC	65 (1P), 130 (2P)	48 (1P), 110 (2P)	250	250	250	–	–
Short-circuit strength		kA DC	–	–	8	8	8	8	8
Utilization category	Acc. to EN 60947-3	A	DC-22B	–	–	–	–	–	–
Further technical specifications									
Overvoltage category			IV	IV	–			–	–
Max. power dissipation of fuse links (conductor cross-section used)		W	–	–	–			–	–
Pollution degree			–	–	–			–	–
Further information									
			See page 7/15	See page 7/14	See page 7/18				

System overview, page 7/4

© Siemens 2025

IEC

DIAZED fuse bases	Cylindrical fuse holders		NEOZED bus-mounting bases for 8US 60 mm compact busbar systems	NEOZED bus-mounting bases for 8US 60 mm busbar systems	DIAZED bus-mounting bases for 8US 60 mm busbar systems	
NDz, DII, DIII	8 × 32 mm	22 × 58 mm	D02	D02	DII	DII
5SF	3NW73..	3NW72..	5SG6208	5SG6202 5SG6206 5SG6207	5SF6015 5SF6020	5SF6215 5SF6220
From below	Any		From the busbar	From the busbar	From the busbar	
IEC 60269-3; DIN VDE 0635; DIN VDE 0636-3; CEE 16	IEC 60269-1, -2, -3; NF C 60-200, NF C 63-210, -211; NBN C 63269-2-1; CEI 32-4, -12; UL 4248-1		IEC 60269-3, DIN VDE 0636-3	IEC 60269-3, DIN VDE 0636-3	IEC 60269-3, DIN VDE 0636-3	IEC 60269-3, DIN VDE 0636-3
–	UL File number E171267		–	–	–	–
–	–	–	–	–	–	–
500, 690, 750	400	690	400	400	500	690
–	–	–	–	–	–	–
50	20	100	–	–	–	–
2 ... 100	20	100	63	63	25	63
–	–	–	–	–	–	–
–	–	–	–	–	–	–
–	AC-20B (switching without load)		–	–	–	–
500, 600, 750	–	–	250	250	–	600
–	–	–	8	8	8	8
–	DC-20B (switching without load)		–	–	–	–
III; II (DIAZED fuse bases made of molded plastic for use at 690 V AC/ 600 V DC)	–		–	–	–	–
–	–		–	–	–	–
–	–		–	–	–	–
See page 7/20	See page 7/26		See page 7/22			

7

System overview, page 7/4

© Siemens 2025

Quick selection guide of LV HRC fuse bases new

			IEC				IEC/UL				
			LV HRC fuse bases plastic				LV HRC fuse bases steel/ceramic				
Basic data											
Size/for fuses of size			000/00	1	2	3	000/00	1	2	3	4
Type			3NH1030 3NH1032 3NH2030 3NH2032	3NH1230 3NH2230	3NH1330 3NH2330	3NH1430	3NH6030 3NH8030	3NH6220 3NH6230 3NH8230	3NH6320 3NH6330	3NH6420 3NH6430	3NH3530
Direction of incoming supply			Any				Any				
Standards											
Standards			IEC 60269-2; EN IEC 63000:2018; DIN VDE 0636-2;				IEC 60269-1, -2; EN60269-1; DIN VDE 0636-2; UL 4248-1 (only downstream from the branch protection)				
Approvals			CCC on request				cURus, CCC on request				
Certifications			IEC 61373 Cat. 1B Railway equipment				DNV, IEC 61373 Cat. 1B Railway equipment				
Technical specifications AC											
Rated voltage	U_n	V AC	690	690	690	690	690 [1]	690 [1]	690 [1]	690 [1]	690
	U_n acc. to UL	V AC	–	–	–	–	690	690	690	690	690
	U_n acc. to CSA	V AC	–	–	–	–	690	690	690	690	690
Rated insulation voltage		V AC	–	–	–	–	–	–	–	–	–
Short-circuit strength		kA AC	120 kA				120 kA				
Rated current	I_n	A	160	250	400	630	160	250	400	630	1250
	I_n acc. to UL	A	–	–	–	–	160	250	400	630	–
	I_n acc. to CSA	A	–	–	–	–	160	250	400	630	–
Rated impulse withstand voltage		kV AC	–	–	–	–	–	–	–	–	–
Utilization category	Acc. to VDE 0638	A	–	–	–	–	–	–	–	–	–
	Acc. to DIN EN 60947-3	A	–	–	–	–	–	–	–	–	–
Technical specifications DC											
Rated voltage	U_n	V DC	690	690	690	690	690 [1]	690 [1]	690 [1]	690 [1]	440
	U_n acc. to UL	V DC	–	–	–	–	690	690	690	690	–
	U_n acc. to CSA	V DC	–	–	–	–	690	690	690	690	–
Short-circuit strength		kA DC	120 kA				120 kA				25 kA
Utilization category	Acc. to DIN EN 60947-3	A	–	–	–	–	–	–	–	–	–
Further technical specifications											
Overvoltage category			–	–	–	–	–	–	–	–	–
Max. power dissipation of fuse links (conductor cross-section used)		W	12	32	45	60	12	32	45	60	90
Pollution degree			–	–	–	–	–	–	–	–	–
Further information											
			See page 7/24				See page 7/24				

[1] Extended rated voltage up to 1000 V

System overview, page 7/4

© Siemens 2025

IEC				UL
LV HRC fuse bases steel/ceramic (special sizes, PV and DC applications)				
1L	2L	3L	1XL	2XL
3NH6260	3NH6360	3NH6460	3NH6261	3NH6361
Any				
IEC 60269-1, -2, -6; EN 60269-6:2011; DIN VDE 0636-1, -2, -6				
–	–	–	–	UL
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
30 kA				
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
1500	1500	1500	1500	1500
–	–	–	–	–
–	–	–	–	–
30 kA				
–	–	–	–	–
–	–	–	–	–
32	45	60	32	45
–	–	–	–	–
See page 7/24				

System overview, page 7/4

© Siemens 2025

Quick selection guide of fuse holders

IEC/UL

			Fuse holders for SITOR semiconductor fuses (cylindrical fuse design)				Cylindrical fuse holders	
Basic data								
Size/for fuses of size			10 × 38 mm	14 × 51 mm	22 × 58 mm	22 × 127 mm	10 × 38 mm	14 × 51 mm
Type [1]			3NC10	3NC14	3NC22	3NC23	3NW70.. 3NW703.-1	3NW71..
Direction of incoming supply			Any				Any	
Standards								
Standards			UL 4248-1; CSA C22.2; IEC 60269-2, IEC 60947-3	UL 4248-1; CSA C22.2; IEC 60269-2, IEC 60947-3	UL 4248-1; CSA C22.2; IEC 60269-2, IEC 60947-3	IEC 60269-2, IEC 60947-3	IEC 60269-1, -2, -3; NF C 60-200, NF C 63-210, -211; NBN C 63269-2-1; CEI 32-4, -12; UL 4248-1	
Approvals			UL 4248-1; UL File number E171267; CSA C22.2 No. 39-M			–	UL File number E171267	
Certifications			UL, CSA	UL, CSA	UL, CSA	–	VDE, CSA	VDE
Technical specifications AC								
Rated voltage	U_n	V AC	690	690	690	1500	690	690
	U_n acc. to UL	V AC	600	600	600	–	600	700
	U_n acc. to CSA	V AC	–	–	–	–	–	–
Rated insulation voltage		V AC	–	–	–	–	–	–
Short-circuit strength		kA AC	50	50 (100 at 400 V)	50 (100 at 500 V)	30	100	100
Rated current	I_n	A	32	50	100	63	32	50
	I_n acc. to UL	A	30	50	80	–	–	–
	I_n acc. to CSA	A	30	40	80	–	–	–
Rated impulse withstand voltage		kV AC	6	6	6	–	–	–
Utilization category	Acc. to VDE 0638	A	–	–	–	–	–	–
	Acc. to EN 60947-3	A	AC-22B (400 V)	AC-22B (400 V)	AC-20B (690 V)	AC-20B	AC-20B (switching without load)	
Technical specifications DC								
Rated voltage	U_n	V DC	800			1000	–	–
	U_n acc. to UL	V DC	–	–	–	–	–	–
	U_n acc. to CSA	V DC	–	–	–	–	–	–
Short-circuit strength		kA DC	–	–	–	50	–	–
Utilization category	Acc. to EN 60947-3	A	–	–	–	DC-20B	DC-20B (switching without load)	
Further technical specifications								
Overvoltage category			–	–	–	–	–	
Max. power dissipation of fuse links (conductor cross-section used)		W	3 (6 mm²), 4.3 (10 mm²)	5 (10 mm²), 6.5 (25 mm²)	9.5 (35 mm²), 11 (50 mm²)	15 (1 ... 50 mm²)	–	
Pollution degree			2	2	2	–	–	
Further information								
			See page 7/27				See page 7/26	

[1] Types with UL approval and types with CSA approval may differ

System overview, page 7/4

© Siemens 2025

IEC/UL

UL

Cylindrical fuse holders for PV fuses		Class CC fuse holders	Class J fuse holders				
10 × 38 mm	10 × 85 mm	–	–				
3NW70..-4	3NW76..-4	3NW75.3-0HG 3NW753.-1HG	3NW75.3-3HG, 3NW75.3-5HG, 3NW75.3-6HG, 3NW75.3-7HG, 3NW75.3-8HG, 3NW7431-6HG, 3NW7431-7HG, 3NW7431-8HG				
Any		Any	Any				
IEC 60269, IEC 60269-2, IEC 60947, UL 4248-1, -18	IEC 60269, IEC 60269-2, IEC 60947, UL 4248-1, -18	UL 4248-1; CSA C22.2	UL 4248-1 Ed.1, UL 4248-8 Ed.1				
(File number E469670, CCC) (types without signal detector)	(E355487)	UL 4248-1; UL File number E171267; CSA C22.2	UL File number E171267; CSA File number 233322; Class number 6225-01				
–	–	–					Busbar device:
–	–	–	–	–	–	–	–
–	–	600	600	600	600	600	600
–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–
–	–	200	200	200	200	200	200
30	32	30	30	60	100	200	400
–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–
6	–	6	No information as the devices are only tested and certified to UL/CSA and not to IEC				
–	–	–	–				
–	–	AC-20B (switching without load)	AC-20B (switching without load)				
1000	1500	300	–	–	–	–	–
–	–	–	600	600	600	600	600
–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–
–	–	DC-20B (switching without load)	DC-20B (switching without load)				
II	–	II	No information as the devices are only tested and certified to UL/CSA and not to IEC				
4	6	3 (6 mm²), 4.3 (10 mm²)	–				
2	–	2	No information as the devices are only tested and certified to UL/CSA and not to IEC				
See page 7/28		See page 7/31	See page 7/30				

System overview, page 7/4

© Siemens 2025

MINIZED fuse switch disconnectors

Number of poles	1P	1P+N	2P	3P	3P+N
Size	**I_n**					
D01	2 ... 6 A	5SG7611-0KK06	–	–	5SG7631-0KK06	–
	10 A	5SG7611-0KK10	–	–	5SG7631-0KK10	–
	16 A	5SG7611-0KK16	5SG7651-0KK16	5SG7621-0KK16	5SG7631-0KK16	5SG7661-0KK16

Note:
NEOZED adapter sleeves are not required for these devices

7

Accessories

Electronic fuse monitor

- For all low-voltage fuse systems
- For monitoring all types and versions of melting fuses that cannot be equipped with a fault signal contact
- Can be used in asymmetric systems afflicted with harmonics and regenerative feedback motors
- Signal also for disconnected loads

U_e AC	I_n	U_c	Article No.
230 V	4 A	3 AC 380 ... 415 V	5TT3170

Quick selection guide, page 7/8

© Siemens 2025

MINIZED switch disconnectors with fuses

Number of poles	1P	1P+N	2P	3P	3P+N
Size	**I_n**					
D02	25 A	–	–	–	5SG7133-8BA25 [1]	–
	35 A	–	–	–	5SG7133-8BA35 [1]	–
	50 A	–		–	5SG7133-8BA50 [1]	–
	63 A	5SG7113	5SG7153	5SG7123	5SG7133	5SG7163

[1] Versions for Austria only, with permanently fitted adapter sleeves and incl. fuse link

Note:
NEOZED adapter sleeves are required for these devices, see page 7/18
Use fuse links from 35 A with silver-plated contact caps, see page 7/34

Accessories

Reducers

Use	Article No.
For D01 fuse links in MINIZED switch disconnectors with fuses D02	5SH5527

Auxiliary switches (AS)

Version	Article No.
1 NO + 1 NC	5ST3010
2 NO	5ST3011
2 NC	5ST3012

Auxiliary switches (AS) with TEST button

Version	Article No.
1 NO + 1 NC	5ST3010-2
2 NO	5ST3011-2
2 NC	5ST3012-2

5ST3 COM Auxiliary switches and fault signal contacts (AS+FC) with measuring and communication functions

- Wireless information about manual ON/OFF, temperature, operating cycles, operating hours, warnings

Article No.
5ST3062-0MC

Electronic fuse monitor

- For all low-voltage fuse systems
- For monitoring all types and versions of melting fuses that cannot be equipped with a fault signal contact
- Can be used in asymmetric systems afflicted with harmonics and regenerative feedback motors
- Signal also for disconnected loads

U_e AC	I_n	U_c	Article No.
230 V	4 A	3 AC 380 ... 415 V	5TT3170

Quick selection guide, page 7/8

© Siemens 2025

NEOZED bus-mounting switch disconnectors with fuses

For 8US 60 mm busbar systems

							Size D02		
						Mounting width	1.5 MW	1.5 MW	1.5 MW
For flat copper profiles	I_n IEC	UL 508	U_n IEC AC	IEC DC	UL 508	Standard	Without LED signal detector		With LED signal detector
Box terminals									
5 mm and 10 mm	63 A [1]	–	400 V AC	–	–	IEC	5SG7234-1	–	5SG7234-2
	63 A [2]	–	400 V AC	110 V DC	–	IEC	–	5SG7230	–

[1] In the case of permanent load over 35 A, we recommend the use of lateral module 5SH5533. Please observe EN 60439-1, Table 1.
[2] In the case of permanent load over 35 A, we recommend the use of lateral module 5SH5526. Please observe EN 60439-1, Table 1.

7

Suitable accessories

Auxiliary switches

- For signaling the switching state for bus-mounting switch disconnectors

Contacts	Mounting width	Article No.	Article No.	Article No.
1 CO	0.5 MW	–	5SH5525	–

Lateral modules

- For greater heat dissipation for loads from 35 A

Mounting width	Article No.	Article No.	Article No.
0.5 MW	5SH5533	5SH5526	5SH5533

Reducers

Use	Article No.	Article No.	Article No.
For NEOZED D01 fuse links in bus-mounting switch disconnectors	5SH5527	5SH5527	5SH5527

Electronic fuse monitor

- For all low-voltage fuse systems
- For monitoring all types and versions of melting fuses that cannot be equipped with a fault signal contact
- Can be used in asymmetric systems afflicted with harmonics and regenerative feedback motors
- Signal also for disconnected loads

U_e AC	I_n	U_c	Article No.	Article No.	Article No.
230 V	4 A	3 AC 380 ... 415 V AC	5TT3170	5TT3170	5TT3170

See Busbar systems, **from page 13/1 onwards**

Quick selection guide, page 7/8

© Siemens 2025

Quick selection guide, page 7/8

© Siemens 2025

NEOZED fuse bases

		Comfort bases made of molded plastic		Fuse bases made of molded plastic			
				Without LED signal detector		With LED signal detector	
Number of poles		1P	3P	1P	3P	1P	3P
Size	I_n						
D01	16 A	5SG1301	5SG5301	5SG1302	5SG5302	5SG1302-1	5SG5302-1
D02	63 A	5SG1701	5SG5701	5SG1702	5SG5702	5SG1702-1	5SG5702-1
D03	100 A	–	–	–	–	–	–

Accessories

NEOZED screw caps

	Material	Version	Fuse size	Article No.
	Molded plastic	With inspection hole	D01	5SH4116
			D02	5SH4163
	Ceramic	Without inspection hole, sealable	D01	5SH4316
			D02	5SH4363
		Without inspection hole	D03	5SH4100
		With inspection hole	D01	5SH4317
			D02	5SH4362

NEOZED adapter sleeves

	Fuse size	I_n	Color	Article No.
	D01	2 A	Pink	5SH5002
		4 A	Brown	5SH5004
		6 A	Green	5SH5006
		10/13 A	Red	5SH5010
	D02	20 A	Blue	5SH5020
		25 A	Yellow	5SH5025
		32 A	Violet	5SH5032
		35/40 A	Black	5SH5035
		50 A	White	5SH5050
	D03	80 A	Silver	5SH5080
	D01 fuse links in D02 base or MINIZED switch disconnectors with fuses D02	2 A	Pink	5SH5402
		4 A	Brown	5SH5404
		6 A	Green	5SH5406
		10/13 A	Red	5SH5410
		16 A	Gray	5SH5416

7

Quick selection guide, page 7/8

© Siemens 2025

Fuse bases made of ceramic					
With clamp-type terminal, on both sides		With saddle terminal, on both sides		With screw head contact at incoming feeder, clamp-type terminal at outgoing feeder	
1P	3P	1P	3P	1P	3P
5SG1553	5SG5553	–	–	–	–
–	–	5SG1653	5SG5653	5SG1693	5SG5693
–	–	–	–	5SG1812	–

NEOZED covers

Fuse size	Article No.
D03	5SH5233

NEOZED adapter sleeve fitters

	Article No.
	5SH5100

NEOZED retaining springs

Use	Article No.
For D01 fuse links in D02 screw caps, 2 ... 16 A	5SH5400

Electronic fuse monitor

- For all low-voltage fuse systems
- For monitoring all types and versions of melting fuses that cannot be equipped with a fault signal contact
- Can be used in asymmetric systems afflicted with harmonics and regenerative feedback motors
- Signal also for disconnected loads

U_e AC	I_n	U_c	Article No.
230 V	4 A	3 AC 380 ... 415 V	5TT3170

Quick selection guide, page 7/8

© Siemens 2025

DIAZED fuse bases

			Fuse bases made of molded plastic With box terminal		Fuse bases made of ceramic With clamp-type terminal, on both sides
		Number of poles	1P	3P	1P
Size	I_n	U_n AC/DC			
DII	25 A	500 V/500 V	5SF1060	5SF5068	5SF1005
DIII	63 A	500 V/500 V	5SF1260 [1]	5SF5268 [1]	–
		750 V/750 V	–	–	–

[1] Can also be used for 690 V AC/600 V DC.

7

Accessories

DIAZED screw caps

	Material	Version	Fuse size	Rated voltage AC/DC	Article No.
	Molded plastic	With inspection hole	NDz	500 V/500 V	5SH1112
			DII	500 V/500 V	5SH1221
			DIII	500 V/500 V	5SH1231
	Ceramic	Without inspection hole	DII	500 V/500 V	5SH112
			DIII	500 V/500 V	5SH113
		With inspection hole, sealable	DII	500 V/500 V	5SH122
			DIII	500 V/500 V	5SH123
		Extended version	DIII	690 V/600 V	5SH1170
		With fine thread	DIII	750 V/750 V	5SH1161

DIAZED screw adapters

- Also for 5SF230 up to 750 V

	Fuse size	I_n	Article No.
	DII	2 A	5SH310
		4 A	5SH311
		6 A	5SH312
		10 A	5SH313
		16 A	5SH314
		20 A	5SH315
		25 A	5SH316
	DIII	32 A	5SH327
		35 A	5SH317
		50 A	5SH318
		63 A	5SH320

Quick selection guide, page 7/8

© Siemens 2025

With clamp-type terminal at incoming feeder, saddle terminal at outgoing feeder	With screw head contact, on both sides
1P	1P
–	–
5SF1205 [1]	–
–	5SF4230

DIAZED reduction sleeves for screw caps

Use	Article No.
For DII fuse links in DIII base	5SH302

DIAZED screw adapter keys

Use	Article No.
For DII/DIII screw adapters	5SH3703

DIAZED cover rings

Fuse size	Material	Article No.
DII	Molded plastic	5SH3401
DIII	Molded plastic	5SH3411

Electronic fuse monitor

- For all low-voltage fuse systems
- For monitoring all types and versions of melting fuses that cannot be equipped with a fault signal contact
- Can be used in asymmetric systems afflicted with harmonics and regenerative feedback motors
- Signal also for disconnected loads

U_e AC	I_n	U_c	Article No.
230 V	4 A	3 AC 380 ... 415 V	5TT3170

Quick selection guide, page 7/8

© Siemens 2025

Bus-mounting bases

For busbar systems

				60 mm compact busbar systems	60 mm busbar systems			
				NEOZED design	NEOZED design		DIAZED design	
			Number of poles	3P	3P		3P	
Size	**I_n**	**Mounting width**	**U_n AC/DC**	**With touch protection cover**	**Standard**	**With touch protection cover**	**Standard**	**With touch protection cover**
D02	63 A	1.5 MW	–	–	5SG6202 [1]	5SG6206 [1]	–	–
		2 MW	–	5SG6208	–	5SG6207	–	–
DII	25 A	–	500 V/500 V	–	–	–	5SF6015	5SF6020
DIII	63 A	–	500 V/500 V [2]	–	–	–	5SF6215	5SF6220

[1] From 35 A continuous current load, mount the fuse base with spacing and use a wider cover.
[2] Can also be used for 690 V AC/ 600 V DC

Note:
NEOZED adapter sleeves and DIAZED screw adapters as well as the respective screw caps are required, see page 7/18 and 7/20

Accessories

Covers for bus-mounting base standard version for 60 mm busbar systems

	Design	Fuse size	Version	Mounting width (1 MW = 18 mm)	Article No.
	NEOZED	D02	Standard	1.5 MW	5SH5241
			Extra wide	2 MW	5SH5242
			Double width	3 MW	5SH5243
	DIAZED	DII			5SH2042
		DIII			5SH2242

Electronic fuse monitor

- For all low-voltage fuse systems
- For monitoring all types and versions of melting fuses that cannot be equipped with a fault signal contact
- Can be used in asymmetric systems afflicted with harmonics and regenerative feedback motors
- Signal also for disconnected loads

U_e AC	I_n	U_c	Article No.
230 V	4 A	3 AC 380 ... 415 V	5TT3170

See Busbar systems, from page 13/1 onwards

Quick selection guide, page 7/8

© Siemens 2025

Quick selection guide, page 7/8

© Siemens 2025

LV HRC fuse bases

	Ceramic new			Plastic new
Number of poles	1P	3P	1P	1P

Size	I_n	U_n AC/DC	Flat terminals		Double busbar terminal	Flat terminals
00	160 A	690 V/690 V	3NH6030	3NH8030	–	3NH1030
1	250 A	690 V/690 V	3NH6230	3NH8230	3NH6220	3NH1230
2	400 A	690 V/690 V	3NH6330	–	3NH6320	3NH1330
3	630 A	690 V/690 V	3NH6430	–	3NH6420	3NH1430
4	1250 A	690 V/440 V	3NH3530	–	–	–
4a	1250 A	690 V/600 V	–	–	–	–
1L	250 A	–/1500 V	3NH6260	–	–	–
2L	400 A	–/1500 V	3NH6360	–	–	–
3L	630 A	–/1500 V	3NH6460	–	–	–
1XL	250 A	–/1500 V	3NH6261	–	–	–
2XL	400 A	–/1500 V	3NH6361	–	–	–

7

Accessories

LV HRC protective covers for LV HRC fuse bases new

- As touch protection for contact pieces

Size	Type	Article No.
00	3NH10/3NH60	3NX3140
	3NH20	3NX3144
1	3NH12/3NH62	3NX3141
2	3NH13/3NH63	3NX3142
3	3NH14/3NH64	3NX3143

LV HRC partitions for LV HRC fuse bases new

- As intermediate phase and end barrier

Size	Type	Article No.
00	3NH10	3NX2050
	3NH20	3NX2054

LV HRC protective covers new

Size	Number of poles	Article No.
00	1P	3NX3150
	3P	3NX3154
1	1P	3NX3151
2	1P	3NX3152
3	1P	3NX3153

Quick selection guide, page 7/10

© Siemens 2025

			With swivel device
3P	1P	3P	1P
	Saddle-type terminal		Flat terminals
3NH2030	3NH1032	3NH2032	–
3NH2230	–	–	–
3NH2330	–	–	–
–	–	–	–
–	–	–	–
–	–	–	3NH7520
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–

7

Blanking covers for LV HRC fuse bases (instead of LV HRC fuse link)

- Red color
- With inscription "Isolating point"
- Observe width 60 mm of the blank insert when using for size 1

Size	Article No.
000/00	3NX1003
1, 2, 3	3NX1004

Fuse pullers for LV HRC fuse links

Size	Version	Article No.
000 ... 3	Without sleeve	3NX1015
	With sleeve	3NX1016

Isolating blades for LV HRC fuse bases and fuse switch disconnectors

Version	Contacts	Size	Article No.
With insulated grip lugs	Silver-plated	000/00	3NG1002
		0	3NG1102
		1	3NG1202
		2	3NG1302
		3	3NG1402
With non-insulated grip lugs	Tin-coated	4	3NG1503
	Nickel-plated	4a	3NG1505

Neutral terminal new

Material	Size	I_n	U_n AC/DC	Article No.
Plastic	00	160 A	690 V/690 V	3NG2000
Ceramic	1	250 A	690 V/690 V	3NG2200
	2	400 A	690 V/690 V	3NG2300

Quick selection guide, page 7/10

© Siemens 2025

Cylindrical fuse holders

Number of poles		1P	1P+N	2P	3P			3P+N
For fuses of size	I_n	**Standard**	**Standard**	**Standard**	**Standard**	**Compact**	**Bus-mounting fuse holders**	**Standard**
Without LED signal detector								
8 × 32 mm	20 A	3NW7313	3NW7353	3NW7323	3NW7333	–	–	3NW7363
10 × 38 mm	30 A	–	–	–	–	–	3NW7431	–
	32 A	3NW7013	3NW7053	3NW7023	3NW7033	3NW7033-1	–	3NW7063
14 × 51 mm	50 A	3NW7111	3NW7151	3NW7121	3NW7131	–	–	3NW7161
22 × 58 mm	100 A	3NW7211	3NW7251	3NW7221	3NW7231	–	–	3NW7261
With LED signal detector								
8 × 32 mm	20 A	3NW7314	3NW7354	3NW7324	3NW7334	–	–	3NW7364
10 × 38 mm	32 A	3NW7014	3NW7054	3NW7024	3NW7034	3NW7034-1	–	3NW7064
14 × 51 mm	50 A	3NW7112	3NW7152	3NW7122	3NW7132	–	–	3NW7162
22 × 58 mm	100 A	3NW7212	3NW7252	3NW7222	3NW7232	–	–	3NW7262

Note:
Semiconductor fuses heat up substantially more than standard fuses of operational classes gG and aM.
We therefore recommend only using SITOR cylindrical fuses in the intended SITOR fuse holders and complying with the maximum permissible current-carrying capacity.

Accessories

Auxiliary switches for cylindrical fuse holders, standard

- For retrofitting using the factory-fitted brackets

Display	Fuse link size	Article No.
Disconnection of the fuse link, only for striker fuse links	14 × 51 mm	3NW7901
	22 × 58 mm	3NW7902
Switching state of fuse holder	8 × 32 mm and 10 × 38 mm	3NW7903

Busbars for cylindrical fuse holders, compact

Number of poles	I_n	Pin spacing	Length	Article No.
2 × 3P	63 A	15 mm	45 mm	5ST2601
3 × 3P	63 A	15 mm	90 mm	5ST2602
4 × 3P	63 A	15 mm	135 mm	5ST2603
5 × 3P	63 A	15 mm	180 mm	5ST2604

Terminals for cylindrical fuse holders, compact

Version	Article No.
For conductor cross-sections 2.5 ... 35 mm²	5ST2600

See Busbar systems, from page 13/1 onwards

© Siemens 2025

Fuse holders and bases for SITOR semiconductor fuses

For SITOR fuses with bolt-on links or blade contacts

				Ceramic	Metal
I_n	U_n AC/DC	For fuse series	Mounting dimensions		
50 A	690 V	3NC18	75 mm	3NH5723	–
315 A	690 V	3NE87, 3NC26	80 mm	3NH5023	–
400 A	690 V	3NE80..-3MK	80 mm	3NH5323	–
630 A	1800 V	3NE53, 3NE56	170 mm	–	3NH5473
1250 A	1250 V	3NC24, 3NC33..-1U, 3NC34..-1U, 3NC84, 3NE1..-3, NE32, 3NE33	110 mm	–	3NH5463
1600 A	690 V	3NE82..-3MK	80 mm	–	3NH5423

7

For cylindrical fuses

	Cylindrical fuse holders, can be used as fuse switch disconnectors			
Number of poles	1P		2P	3P
For fuses of size	U_n AC/DC		With signaling switch		
10 × 38 mm	600 V/–	–	–	–	–
	690 V/800 V	3NC1091	–	3NC1092	3NC1093
14 × 51 mm	690 V/800 V	3NC1491	3NC1491-5	3NC1492	3NC1493
22 × 58 mm	690 V/800 V	3NC2291	3NC2291-5	3NC2292	3NC2293
22 × 127 mm	1500 V/1000 V	3NC2391-0MK	–	3NC2392-0MK	3NC2393-0MK

Note:
Please comply with the maximum permissible current-carrying capacity.

Accessories

Fuse tongs

For fuses of size	Article No.
10 × 38 mm 14 × 51 mm 22 × 58 mm	3NC1000

Quick selection guide, page 7/12

© Siemens 2025

Fuse holders and bases for photovoltaic fuses

Cylindrical fuse holders for PV fuses

			Without signal detector			With signal detector	
		Number of poles	1P	1P	2P	1P	2P
For fuses of size	I_n	U_n DC					
10 × 38 mm	30 A	1000 V	3NW7013-4	–	3NW7023-4	3NW7014-4	3NW7024-4
10 × 85 mm	32 A	1500 V	–	3NW7613-4	–	–	–

7

Quick selection guide, page 7/12

© Siemens 2025

LV HRC fuse bases for PV fuses new

			With flat terminals, ceramic
Size	**I_n**	**U_n DC**	
1	250 A	690 V	3NH6230
1L	250 A	1500 V	3NH6260
2L	400 A	1500 V	3NH6360
3L	630 A	1500 V	3NH6460
1XL	250 A	1500 V	3NH6261
2XL	400 A	1500 V	3NH6361

7

Quick selection guide, page 7/12

© Siemens 2025

Class J fuse holders

			For mounting on DIN mounting rail			For screwing onto mounting plate	Bus-mounting fuse holders for 8US 60 mm busbar systems		
Number of poles			1P	2P	3P	3P	3P	3P	3P
For fuses of size	I_n	U_n							
21 × 57 mm	30 A	600 V	3NW7511-3HG	3NW7521-3HG	3NW7531-3HG	–	–	–	–
27 × 60 mm	60 A	600 V	3NW7511-5HG	3NW7521-5HG	3NW7531-5HG	–	–	–	–
29 × 118 mm	100 A	600 V	–	–	–	3NW7531-6HG	3NW7431-6HG	–	–
41 × 146 mm	200 A	600 V	–	–	–	3NW7531-7HG	–	3NW7431-7HG	–
54 × 181 mm	400 A	600 V	–	–	–	3NW7531-8HG	–	–	3NW7431-8HG

7

Quick selection guide, page 7/12

© Siemens 2025

Class CC fuse holders

		Standard			Compact		Bus-mounting fuse holders for 8US 60 mm busbar systems
Number of poles		1P	2P	3P	3P		3P
I_n	U_n				Signal detector without	with	
30 A	600 V	3NW7513-0HG	3NW7523-0HG	3NW7533-0HG	3NW7533-1HG	3NW7534-1HG	3NW7431-0HG

Accessories

Busbars for Class CC fuse holders, compact

Number of poles	I_n	Pin spacing	Length	Article No.
2 × 3P	63 A	15 mm	45 mm	5ST2601
3 × 3P	63 A	15 mm	90 mm	5ST2602
4 × 3P	63 A	15 mm	135 mm	5ST2603
5 × 3P	63 A	15 mm	180 mm	5ST2604

Terminals for Class CC fuse holders, compact

Version	Article No.
For conductor cross-sections 2.5 ... 35 mm²	5ST2600

Quick selection guide, page 7/12

© Siemens 2025

Quick selection guide of fuse links

IEC

		NEOZED fuse links	DIAZED fuse links	SILIZED fuse links	LV HRC fuse links	3NA COM LV HRC fuse links [1]
Basic data						
Design		NEOZED	DIAZED	NEOZED, DIAZED	LV HRC	LV HRC
Size/for fuses of size		D01, D02, D03	NDz, DII, DIII	D01, D02, DII, DIII, DIV	000/00, 0, 1, 2, 3, 4, 4a	2
Operational class		gG	gG	gR	gG, aM	gG, gFF
Rated current	A	2 ... 100	2 ... 100	10 ... 100	2 ... 1250	80 ... 315
Standards						
Standard		IEC 60269-3; DIN VDE 0636-3	IEC 60269-3; DIN VDE 0635, DIN VDE 0636-3; CEE 16	IEC 60269-3/-4; DIN VDE 0636-3; EN 60269-4 (VDE 0636-4)	IEC 60269-1/-2; EN 60269-1/-2; DIN VDE 0636-1/-2	IEC 60269-1/-2; EN 60269-1/-2; DIN VDE 0636-1/-2
Approvals		VDE	VDE	–	CSA 22.2, VDE	VDE, KEMA, DEKRA
Technical specifications AC						
Rated voltage AC	V	400	500 ... 750	400 ... 500	400 ... 690 600 (CSA)	400
Rated breaking capacity AC	kA	50	50	50	120	100
Technical specifications DC						
Rated voltage DC	V	250	500 ... 750	250 ... 500	250 ... 440	–
Rated breaking capacity DC	kA	8	8	8	25	–
Further information						
		See page 7/34	See page 7/35	See page 7/36	See page 7/38	See page 7/52

[1] With current measuring function and wireless communication

System overview, page 7/4

© Siemens 2025

IEC			IEC/UL		UL
Cylindrical fuse links	**Photovoltaic fuse links, cylindrical fuse design**	**Photovoltaic fuse links, LV HRC design**	**SITOR semiconductor fuse links, LV HRC design (AC/DC) and LV HRC design (DC)**	**SITOR semiconductor fuse links, cylindrical fuse design (AC/DC)**	**Class CC fuse links**
Cylindrical	Cylindrical	LV HRC	LV HRC	Cylindrical	Cylindrical
8 × 32 mm, 10 × 38 mm, 14 × 51 mm, 22 × 58 mm	10 × 38 mm, 10 × 85 mm	1, 1L, 2L, 3L, 1XL, 2XL	000, 00, 1, 2, 3	10 × 38 mm, 14 × 51 mm, 22 × 58 mm	–
gG, aM	gPV	gPV	gS, gR, aR	gS, gR, aR	–
0.5 ...100	2 ... 20	63 ... 630	6 ... 2400	1 ... 125	0.6 ... 30
IEC 60269-1/-2; NF C 60-200, NF C 63-210/-211; NBN C 63269-2; IEC 32-4/-12	IEC 60269-6	IEC 60269-6	IEC 60269-4	IEC 60269-2	–
UL 248-1, CSA	–	–	UL 248-1, UL 248-13	UL 248-1, UL 248-13	UL 248-1; CSA C22.2
400 ... 690 400 ... 600 (UL/CSA)	–	–	500 ... 2500	690 ... 1500 600 ... 1500 (UL/CSA)	600
20 ... 120	–	–	100 ... 150	100	200
–	1000 ... 1500	1000 ... 1500	400 ... 1500	250 ... 1000	150 ... 300
–	30	30	–	–	–
See page 7/58	See page 7/90	See page 7/91	See page 7/60	See page 7/82	See page 7/92

System overview, page 7/4

© Siemens 2025

NEOZED fuse links

Operational class gG

				Size D01	Size D02	Size D03
I_n	Identification color	Contacts	U_n AC/DC			
2 A	Pink	–	400 V/250 V	5SE2302	–	–
4 A	Brown	–	400 V/250 V	5SE2304	–	–
6 A	Green	–	400 V/250 V	5SE2306	–	–
10 A	Red	–	400 V/250 V	5SE2310	–	–
13 A	Black	–	400 V/250 V	5SE2013-2A	–	–
16 A	Gray	–	400 V/250 V	5SE2316	–	–
20 A	Blue	Tin-coated	400 V/250 V	–	5SE2320	–
25 A	Yellow	Tin-coated	400 V/250 V	–	5SE2325	–
32 A	Violet	Tin-coated	400 V/250 V	–	5SE2332	–
35 A	Black	Tin-coated	400 V/250 V	–	5SE2335	–
40 A	Black	Silver-plated	400 V/250 V	–	5SE2340	–
50 A	White	Silver-plated	400 V/250 V	–	5SE2350	–
63 A	Copper	Silver-plated	400 V/250 V	–	5SE2363	–
80 A	Blue	–	400 V/250 V	–	–	5SE2280
100 A	Red	–	400 V/250 V	–	–	5SE2300

Quick selection guide, page 7/32

© Siemens 2025

DIAZED fuse links

			Size DII E27	Size DIII [1] E33		Size DIV R 1 1/4"	Size TNDz E16
		Operational class	gG	gG	quick	gG	slow
							
I_n	Identification color	U_n AC/DC					
2 A	Pink	500 V/500 V	5SB211	–	–	–	5SA211
		690 V/600 V	–	5SD8002	–	–	–
		750 V/750 V	–	–	5SD601	–	–
4 A	Brown	500 V/500 V	5SB221	–	–	–	5SA221
		690 V/600 V	–	5SD8004	–	–	–
		750 V/750 V	–	–	5SD602	–	–
6 A	Green	500 V/500 V	5SB231	–	–	–	5SA231
		690 V/600 V	–	5SD8006	–	–	–
		750 V/750 V	–	–	5SD603	–	–
10 A	Red	500 V/500 V	5SB251	–	–	–	5SA251
		690 V/600 V	–	5SD8010	–	–	–
		750 V/750 V	–	–	5SD604	–	–
16 A	Gray	500 V/440 V	5SB2611	–	–	–	5SA2611
		690 V/600 V	–	5SD8016	–	–	–
		750 V/750 V	–	–	5SD605	–	–
20 A	Blue	500 V/440 V	5SB2711	–	–	–	5SA2711
		690 V/600 V	–	5SD8020	–	–	–
		750 V/750 V	–	–	5SD606	–	–
25 A	Yellow	500 V/440 V	5SB2811	–	–	–	5SA2811
		690 V/600 V	–	5SD8025	–	–	–
		750 V/750 V	–	–	5SD607	–	–
32 A	Violet	500 V/440 V	–	5SB4011	–	–	–
35 A	Black	500 V/440 V	–	5SB4111	–	–	–
		690 V/600 V	–	5SD8035	–	–	–
		750 V/750 V	–	–	5SD608	–	–
50 A	White	500 V/440 V	–	5SB4211	–	–	–
		690 V/600 V	–	5SD8050	–	–	–
		750 V/750 V	–	–	5SD610	–	–
63 A	Copper	500 V/440 V	–	5SB4311	–	–	–
		690 V/600 V	–	5SD8063	–	–	–
		750 V/750 V	–	–	5SD611	–	–
80 A	Silver	500 V/400 V	–	–	–	5SC211	–
100 A	Red	500 V/400 V	–	–	–	5SC221	–

[1] For 2 ... 25 A use screw adaptor DII

7

Quick selection guide, page 7/32

© Siemens 2025

SILIZED fuse links

Operational class gR

				NEOZED design		DIAZED design		
				Size D01	Size D02	Size DII	Size DIII	Size DIV
I_n	Switch-off I^2t value	Power loss P_v	U_n AC/DC					
10 A	73 A^2s	6.9 W	400 V/250 V	5SE1310	–	–	–	–
16 A	60 A^2s	12.1 W	500 V/500 V	–	–	5SD420	–	–
	120 A^2s	6.2 W	400 V/250 V	5SE1316	–	–	–	–
20 A	139 A^2s	12.3 W	500 V/500 V	–	–	5SD430	–	–
	190 A^2s	8.1 W	400 V/250 V	–	5SE1320	–	–	–
25 A	205 A^2s	12.5 W	500 V/500 V	–	–	5SD440	–	–
	215 A^2s	8.2 W	400 V/250 V	–	5SE1325	–	–	–
30 A	310 A^2s	13.5 W	500 V/500 V	–	–	5SD480	–	–
35 A	470 A^2s	16.7 W	400 V/250 V	–	5SE1335	–	–	–
	539 A^2s	14.8 W	500 V/500 V	–	–	–	5SD450	–
50 A	1250 A^2s	18.5 W	500 V/500 V	–	–	–	5SD460	–
	1960 A^2s	12.0 W	400 V/250 V	–	5SE1350	–	–	–
63 A	1890 A^2s	28.0 W	500 V/500 V	–	–	–	5SD470	–
	4230 A^2s	15.5 W	400 V/250 V	–	5SE1363	–	–	–
80 A	4200 A^2s	34.3 W	500 V/500 V	–	–	–	–	5SD510
100 A	8450 A^2s	41.5 W	500 V/500 V	–	–	–	–	5SD520

Quick selection guide, page 7/32

© Siemens 2025

Quick selection guide, page 7/32

© Siemens 2025

LV HRC fuse links

Operational class gG, with combination alarm

		Size 000	Size 00	Size 1
Mounting width		21 mm	30 mm	30 mm
I_n	U_n AC/DC			
Insulated grip lugs				
2 A	500 V/250 V	3NA6802	–	–
	690 V [1]/250 V	3NA6802-6	–	–
4 A	500 V/250 V	3NA6804	–	–
	690 V [1]/250 V	3NA6804-6	–	–
6 A	500 V/250 V	3NA6801	–	–
	690 V [1]/250 V	3NA6801-6	–	–
10 A	400 V/–	3NA6803-4	–	–
	500 V/250 V	3NA6803	–	–
	690 V [1]/250 V	3NA6803-6	–	–
16 A	400 V/–	3NA6805-4	–	–
	500 V/250 V	3NA6805	–	–
	690 V [1]/250 V	3NA6805-6	–	–
	500 V/440 V	–	–	3NA6105
20 A	400 V/–	3NA6807-4	–	–
	500 V/250 V	3NA6807	–	–
	690 V [1]/250 V	3NA6807-6	–	–
	500 V/440 V	–	–	3NA6107
25 A	400 V/–	3NA6810-4	–	–
	500 V/250 V	3NA6810	–	–
	690 V [1]/250 V	3NA6810-6	–	–
	500 V/440 V	–	–	3NA6110
32 A	400 V/–	3NA6812-4	–	3NA6114-4
	500 V/250 V	3NA6812	–	–
	690 V [1]/250 V	3NA6812-6	–	–
35 A	400 V/–	3NA6814-4	–	–
	500 V/250 V	3NA6814	–	–
	690 V [1]/250 V	3NA6814-6	–	–
	500 V/440 V	–	–	3NA6114
40 A	400 V/–	3NA6817-4	–	3NA6117-4
	500 V/250 V	3NA6817	–	–
	690 V [1]/250 V	3NA6817-6KJ	3NA6817-6	–
	500 V/440 V	–	–	3NA6117
50 A	400 V/–	3NA6820-4	–	3NA6120-4
	500 V/250 V	3NA6820	–	–
	690 V [1]/250 V	3NA6820-6KJ	3NA6820-6	–
	500 V/440 V	–	–	3NA6120
	690 V [1]/440 V	–	–	3NA6120-6

[1] Manufacturer's confirmation for 690 V +10% rated voltage available on request.

Quick selection guide, page 7/32

© Siemens 2025

Size 1	Size 2	Size 2
47.2 mm	47.2 mm	57.8 mm
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	3NA6214	–
–	–	–
–	–	–
–	–	–
–	–	–
–	3NA6220-4	–
–	–	–
–	–	–
–	3NA6220	–
–	–	–

7

Quick selection guide, page 7/32

© Siemens 2025

LV HRC fuse links

Operational class gG, with combination alarm (continued)

		Size 000	Size 00	Size 1
Mounting width		21 mm	30 mm	30 mm
I_n	U_n AC/DC			
Insulated grip lugs				
63 A	400 V/–	3NA6822-4	–	3NA6122-4
	500 V/250 V	3NA6822	–	–
	690 V [1]/250 V	–	3NA6822-6	–
	500 V/440 V	–	–	3NA6122
	690 V [1]/440 V	–	–	3NA6122-6
80 A	400 V/–	3NA6824-4	3NA6824-4KK	3NA6124-4
	500 V/250 V	3NA6824	3NA6824-7	–
	690 V [1]/250 V	–	3NA6824-6	–
	500 V/440 V	–	–	3NA6124
	690 V [1]/440 V	–	–	3NA6124-6
100 A	400 V/–	3NA6830-4	3NA6830-4KK	3NA6130-4
	500 V/250 V	3NA6830	3NA6830-7	–
	690 V [1]/250 V	–	3NA6830-6	–
	500 V/440 V	–	–	3NA6130
	690 V [1]/440 V	–	–	3NA6130-6
125 A	400 V/–	–	3NA6832-4	–
	500 V/250 V	–	3NA6832	–
	500 V/440 V	–	–	3NA6132
	690 V [1]/440 V	–	–	3NA6132-6
160 A	400 V/–	–	3NA6836-4	3NA6136-4
	500 V/250 V	–	3NA6836	–
	500 V/440 V	–	–	3NA6136
	690 V [1]/440 V	–	–	3NA6136-6
200 A	400 V/–	–	–	–
	500 V/440 V	–	–	–
	690 V [1]/440 V	–	–	–
224 A	400 V/–	–	–	–
	500 V/440 V	–	–	–
	690 V [1]/440 V	–	–	–
250 A	400 V/–	–	–	–
	500 V/440 V	–	–	–
	690 V [1]/440 V	–	–	–
300 A	400 V/–	–	–	–
	500 V/440 V	–	–	–
	690 V [1]/440 V	–	–	–
315 A	400 V/–	–	–	–
	500 V/440 V	–	–	–
	690 V [1]/440 V	–	–	–
355 A	400 V/–	–	–	–
	500 V/440 V	–	–	–
400 A	400 V/–	–	–	–
	500 V/440 V	–	–	–

[1] Manufacturer's confirmation for 690 V +10% rated voltage available on request.

7

Quick selection guide, page 7/32

© Siemens 2025

Size 1	Size 2	Size 2
47.2 mm	47.2 mm	57.8 mm
–	3NA6222-4	–
–	–	–
–	–	–
–	3NA6222	–
–	–	–
–	3NA6224-4	–
–	–	–
–	–	–
–	3NA6224	–
–	3NA6224-6	–
–	3NA6230-4	–
–	–	–
–	–	–
–	3NA6230	–
–	3NA6230-6	–
–	3NA6232-4	–
–	–	–
–	3NA6232	–
–	3NA6232-6	–
–	3NA6236-4	–
–	–	–
–	3NA6236	–
–	3NA6236-6	–
3NA6140-4	3NA6240-4	–
3NA6140	3NA6240	–
3NA6140-6	3NA6240-6	–
3NA6142-4	3NA6242-4	–
3NA6142	3NA6242	–
–	–	3NA6242-6
3NA6144-4	3NA6244-4	–
3NA6144	3NA6244	–
–	–	3NA6244-6
–	–	3NA6250-4
–	–	3NA6250
–	–	3NA6250-6
–	–	3NA6252-4
–	–	3NA6252
–	–	3NA6252-6
–	–	3NA6254-4
–	–	3NA6254
–	–	3NA6260-4
–	–	–

Quick selection guide, page 7/32

© Siemens 2025

LV HRC fuse links

Operational class gG, with combination alarm

		Size 000	Size 00	Size 1
	Mounting width	21 mm	30 mm	30 mm
I_n	U_n AC/DC			
Non-insulated grip lugs				
2 A	500 V/250 V	3NA7802	–	–
	690 V [1]/250 V	3NA7802-6	–	–
4 A	500 V/250 V	3NA7804	–	–
	690 V [1]/250 V	3NA7804-6	–	–
6 A	500 V/250 V	3NA7801	–	–
	690 V [1]/250 V	3NA7801-6	–	–
10 A	500 V/250 V	3NA7803	–	–
	690 V [1]/250 V	3NA7803-6	–	–
16 A	500 V/250 V	3NA7805	–	–
	690 V [1]/250 V	3NA7805-6	–	–
	500 V/440 V	–	–	3NA7105
20 A	500 V/250 V	3NA7807	–	–
	690 V [1]/250 V	3NA7807-6	–	–
	500 V/440 V	–	–	3NA7107
25 A	500 V/250 V	3NA7810	–	–
	690 V [1]/250 V	3NA7810-6	–	–
	500 V/440 V	–	–	3NA7110
32 A	500 V/250 V	3NA7812	–	–
	690 V [1]/250 V	3NA7812-6	–	–
35 A	500 V/250 V	3NA7814	–	–
	690 V [1]/250 V	3NA7814-6	–	–
	500 V/440 V	–	–	3NA7114
40 A	500 V/250 V	3NA7817	–	–
	690 V [1]/250 V	3NA7817-6KJ	3NA7817-6	–
	500 V/440 V	–	–	3NA7117
50 A	500 V/250 V	3NA7820	–	–
	690 V [1]/250 V	3NA7820-6KJ	3NA7820-6	–
	500 V/440 V	–	–	3NA7120
	690 V [1]/440 V	–	–	3NA7120-6
63 A	500 V/250 V	3NA7822	–	–
	690 V [1]/250 V	–	3NA7822-6	–
	500 V/440 V	–	–	3NA7122
	690 V [1]/440 V	–	–	3NA7122-6
80 A	500 V/250 V	3NA7824	3NA7824-7	–
	690 V [1]/250 V	–	3NA7824-6	–
	500 V/440 V	–	–	3NA7124
	690 V [1]/440 V	–	–	3NA7124-6
100 A	500 V/250 V	3NA7830	3NA7830-7	–
	690 V [1]/250 V	–	3NA7830-6	–
	500 V/440 V	–	–	3NA7130
	690 V [1]/440 V	–	–	3NA7130-6
125 A	500 V/250 V	–	3NA7832	–
	500 V/440 V	–	–	3NA7132
	690 V [1]/440 V	–	–	3NA7132-6

[1] Manufacturer's confirmation for 690 V +10% rated voltage available on request.

7

Quick selection guide, page 7/32

© Siemens 2025

Size 1	Size 2	Size 2
47.2 mm	47.2 mm	57.8 mm
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	3NA7214	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	3NA7220	–
–	–	–
–	–	–
–	–	–
–	3NA7222	–
–	–	–
–	–	–
–	–	–
–	3NA7224	–
–	3NA7224-6	–
–	–	–
–	–	–
–	3NA7230	–
–	3NA7230-6	–
–	–	–
–	3NA7232	–
–	3NA7232-6	–

7

Quick selection guide, page 7/32

© Siemens 2025

LV HRC fuse links

Operational class gG, with combination alarm (continued)

	Size 000	Size 00	Size 1
Mounting width	21 mm	30 mm	30 mm

I_n	U_n AC/DC			
Non-insulated grip lugs				
160 A	500 V/250 V	–	3NA7836	–
	500 V/440 V	–	–	3NA7136
	690 V [1]/440 V	–	–	3NA7136-6
200 A	500 V/440 V	–	–	–
	690 V [1]/440 V	–	–	–
224 A	500 V/440 V	–	–	–
	690 V [1]/440 V	–	–	–
250 A	500 V/440 V	–	–	–
	690 V [1]/440 V	–	–	–
300 A	690 V [1]/440 V	–	–	–
315 A	500 V/440 V	–	–	–
	690 V [1]/440 V	–	–	–
355 A	–	–	–	–
400 A	500 V/440 V	–	–	–

[1] Manufacturer's confirmation for 690 V +10% rated voltage available on request.

Quick selection guide, page 7/32

© Siemens 2025

Size 1	Size 2	Size 2
47.2 mm	47.2 mm	57.8 mm
–	–	–
–	3NA7236	–
–	3NA7236-6	–
3NA7140	3NA7240	–
3NA7140-6	3NA7240-6	–
3NA7142	3NA7242	–
–	–	3NA7242-6
3NA7144	3NA7244	–
–	–	3NA7244-6
–	–	3NA7250-6
–	–	3NA7252
–	–	3NA7252-6
–	–	–
–	–	3NA7260

Quick selection guide, page 7/32

© Siemens 2025

LV HRC fuse links

Operational class gG, with front indicator

		Size 000	Size 00	Size 0	Size 1	
Mounting width		21 mm	30 mm	30 mm	30 mm	47.2 mm
I_n	U_n AC/DC					
Non-insulated grip lugs						
2 A	500 V/250 V	3NA3802	–	–	–	–
	690 V [1]/250 V	3NA3802-6	–	–	–	–
4 A	500 V/250 V	3NA3804	–	–	–	–
	690 V [1]/250 V	3NA3804-6	–	–	–	–
6 A	500 V/250 V	3NA3801	–	–	–	–
	690 V [1]/250 V	3NA3801-6	–	–	–	–
	500 V/440 V	–	–	3NA3001	–	–
10 A	500 V/250 V	3NA3803	–	–	–	–
	690 V [1]/250 V	3NA3803-6	–	–	–	–
	500 V/440 V	–	–	3NA3003	–	–
16 A	500 V/250 V	3NA3805	–	–	–	–
	690 V [1]/250 V	3NA3805-6	–	–	–	–
	500 V/440 V	–	–	3NA3005	3NA3105	–
20 A	500 V/250 V	3NA3807	–	–	–	–
	690 V [1]/250 V	3NA3807-6	–	–	–	–
	500 V/440 V	–	–	3NA3007	3NA3107	–
25 A	500 V/250 V	3NA3810	–	–	–	–
	690 V [1]/250 V	3NA3810-6	–	–	–	–
	500 V/440 V	–	–	3NA3010	3NA3110	–
32 A	500 V/250 V	3NA3812	–	–	–	–
	690 V [1]/250 V	3NA3812-6	–	–	–	–
	500 V/440 V	–	–	3NA3012	–	–
35 A	500 V/250 V	3NA3814	3NA3814-7	–	–	–
	690 V [1]/250 V	–	–	–	–	–
	500 V/440 V	–	–	3NA3014	3NA3114	–
40 A	500 V/250 V	3NA3817	–	–	–	–
	690 V [1]/250 V	3NA3817-6KJ	3NA3817-6	–	–	–
	500 V/440 V	–	–	3NA3017	3NA3117	–
50 A	500 V/250 V	3NA3820	3NA3820-7	–	–	–
	690 V [1]/250 V	3NA3820-6KJ	3NA3820-6	–	–	–
	500 V/440 V	–	–	3NA3020	3NA3120	–
	690 V [1]/440 V	–	–	–	3NA3120-6	–
63 A	500 V/250 V	3NA3822	3NA3822-7	–	–	–
	690 V [1]/250 V	–	3NA3822-6	–	–	–
	500 V/440 V	–	–	3NA3022	3NA3122	–
	690 V [1]/440 V	–	–	–	3NA3122-6	–
80 A	500 V/250 V	3NA3824	3NA3824-7	–	–	–
	690 V [1]/250 V	–	3NA3824-6	–	–	–
	500 V/440 V	–	–	3NA3024	3NA3124	–
	690 V [1]/440 V	–	–	–	3NA3124-6	–
100 A	500 V/250 V	3NA3830	3NA3830-7	–	–	–
	690 V [1]/250 V	–	3NA3830-6	–	–	–
	500 V/440 V	–	–	3NA3030	3NA3130	–
	690 V [1]/440 V	–	–	–	–	–

[1] Manufacturer's confirmation for 690 V +10% rated voltage available on request.

Quick selection guide, page 7/32

© Siemens 2025

Size 2		Size 3		Size 4 (IEC design)	Size 4a
47.2 mm	57.8 mm	57.8 mm	71.2 mm	101.8 mm	101.8 mm
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
3NA3214	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
3NA3220	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
3NA3224	–	–	–	–	–
3NA3224-6	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
3NA3230	–	–	–	–	–
–	–	–	–	–	–

Quick selection guide, page 7/32

© Siemens 2025

LV HRC fuse links

Operational class gG, with front indicator (continued)

		Size 000	Size 00	Size 0	Size 1	
Mounting width		21 mm	30 mm	30 mm	30 mm	47.2 mm
I_n	U_n AC/DC					
Non-insulated grip lugs						
125 A	400 V/250 V	3NA3832-8	–	–	–	–
	500 V/250 V	–	3NA3832	–	–	–
	500 V/440 V	–	–	3NA3032	3NA3132	–
	690 V [1]/440 V	–	–	–	3NA3132-6	–
160 A	400 V/250 V	3NA3836-8	–	–	–	–
	500 V/250 V	–	3NA3836	–	–	–
	500 V/440 V	–	–	3NA3036	3NA3136	–
	690 V [1]/440 V	–	–	–	3NA3136-6	–
200 A	500 V/440 V	–	–	–	–	3NA3140
	690 V [1]/440 V	–	–	–	–	3NA3140-6
224 A	500 V/440 V	–	–	–	–	3NA3142
	690 V [1]/440 V	–	–	–	–	–
250 A	500 V/440 V	–	–	–	–	3NA3144
	690 V [1]/440 V	–	–	–	–	3NA3144-6
300 A	500 V/440 V	–	–	–	–	–
	690 V [1]/440 V	–	–	–	–	–
315 A	500 V/440 V	–	–	–	–	–
	690 V [1]/440 V	–	–	–	–	–
355 A	500 V/440 V	–	–	–	–	–
	690 V [1]/440 V	–	–	–	–	–
400 A	500 V/440 V	–	–	–	–	–
	690 V [1]/440 V	–	–	–	–	–
425 A	500 V/440 V	–	–	–	–	–
	690 V [1]/440 V	–	–	–	–	–
500 A	500 V/440 V	–	–	–	–	–
	690 V [1]/440 V	–	–	–	–	–
630 A	500 V/440 V	–	–	–	–	–
800 A	500 V/440 V	–	–	–	–	–
1000 A	500 V/440 V	–	–	–	–	–
1250 A	500 V/440 V	–	–	–	–	–

[1] Manufacturer's confirmation for 690 V +10% rated voltage available on request.

Quick selection guide, page 7/32

© Siemens 2025

Size 2		Size 3		Size 4 (IEC design)	Size 4a
47.2 mm	57.8 mm	57.8 mm	71.2 mm	101.8 mm	101.8 mm
–	–	–	–	–	–
–	–	–	–	–	–
3NA3232	–	–	–	–	–
3NA3232-6	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
3NA3236	–	–	–	–	–
3NA3236-6	–	–	–	–	–
3NA3240	–	3NA3340	–	–	–
3NA3240-6	–	–	–	–	–
3NA3242	–	3NA3342	–	–	–
–	3NA3242-6	–	–	–	–
3NA3244	–	3NA3344	–	–	–
–	3NA3244-6	3NA3344-6	–	–	–
–	3NA3250	3NA3350	–	–	–
–	3NA3250-6	–	–	–	–
–	3NA3252	3NA3352	–	–	–
–	3NA3252-6	3NA3352-6	–	–	–
–	3NA3254	3NA3354	–	–	–
–	–	–	3NA3354-6	–	–
–	3NA3260	3NA3360	–	–	–
–	–	–	3NA3360-6	–	–
–	–	–	3NA3362	–	–
–	–	–	3NA3362-6	–	–
–	–	–	3NA3365	–	3NA3665
–	–	–	3NA3365-6	–	–
–	–	–	3NA3372	3NA3472	3NA3672
–	–	–	–	3NA3475	3NA3675
–	–	–	–	3NA3480	3NA3680
–	–	–	–	3NA3482	3NA3682

Quick selection guide, page 7/32

© Siemens 2025

LV HRC fuse links

Operational class aM, with front indicator

		Size 000	Size 00	Size 1		Size 2		Size 3	
Mounting width		21 mm	30 mm	30 mm	47.2 mm	47.2 mm	57.8 mm	57.8 mm	71.2 mm
I_n	U_n AC								
Non-insulated grip lugs									
6 A	500 V	3ND1801	–	–	–	–	–	–	–
10 A	500 V	3ND1803	–	–	–	–	–	–	–
16 A	500 V	3ND1805	–	–	–	–	–	–	–
20 A	500 V	3ND1807	–	–	–	–	–	–	–
25 A	500 V	3ND1810	–	–	–	–	–	–	–
32 A	500 V	3ND1812	–	–	–	–	–	–	–
35 A	500 V	3ND1814	–	–	–	–	–	–	–
40 A	500 V	3ND1817	–	–	–	–	–	–	–
50 A	500 V	3ND1820	–	–	–	–	–	–	–
63 A	500 V	3ND1822	–	–	–	–	–	–	–
	690 V	–	–	3ND2122	–	–	–	–	–
80 A	500 V	3ND1824	–	–	–	–	–	–	–
	690 V	–	–	3ND2124	–	–	–	–	–
100 A	500 V	3ND1830-8	3ND1830	–	–	–	–	–	–
	690 V	–	–	3ND2130	–	–	–	–	–
125 A	500 V	–	3ND1832	–	–	–	–	–	–
	690 V	–	–	–	3ND2132	3ND2232	–	–	–
160 A	500 V	–	3ND1836	–	–	–	–	–	–
	690 V	–	–	–	3ND2136	3ND2236	–	–	–
200 A	690 V	–	–	–	3ND2140	3ND2240	–	–	–
250 A	690 V	–	–	–	3ND2144	3ND2244	–	–	–
315 A	690 V	–	–	–	–	–	3ND2252	3ND2352	–
355 A	690 V	–	–	–	–	–	3ND2254	3ND2354	–
400 A	690 V	–	–	–	–	–	3ND2260	3ND2360	–
500 A	690 V	–	–	–	–	–	–	–	3ND1365
630 A	690 V	–	–	–	–	–	–	–	3ND1372

7

Quick selection guide, page 7/32

© Siemens 2025

Quick selection guide, page 7/32

© Siemens 2025

3NA3 COM LV HRC fuse links with measuring and communication functions

With front indicator and non-insulated grip lugs, size 2

	With electronic module [1]		Without electronic module [2]		Electronic module
	Operational class gG	Operational class gFF (for the Netherlands)	Operational class gG	Operational class gFF (for the Netherlands)	
Mounting width	59 mm	59 mm	59 mm	59 mm	59 mm
I_n	U_n AC				
80 A	400 V	–	3NA3224-4KK03	–	3NA3224-4KK04	3NX8201
100 A	400 V	3NA3230-4KK01	3NA3230-4KK03	3NA3230-4KK02	3NA3230-4KK04	3NX8201
125 A	400 V	3NA3232-4KK01	3NA3232-4KK03	3NA3232-4KK02	3NA3232-4KK04	3NX8201
160 A	400 V	3NA3236-4KK01	3NA3236-4KK03	3NA3236-4KK02	3NA3236-4KK04	3NX8201
200 A	400 V	3NA3240-4KK01	3NA3240-4KK03	3NA3240-4KK02	3NA3240-4KK04	3NX8201
224 A	400 V	3NA3242-4KK01	–	3NA3242-4KK02	–	3NX8201
250 A	400 V	3NA3244-4KK01	3NA3244-4KK03	3NA3244-4KK02	3NA3244-4KK04	3NX8201
315 A	400 V	3NA3252-4KK01	–	3NA3252-4KK02	–	3NX8201

[1] Electronic module is mounted by simple insertion

[2] For spare part purposes (electronic module can be reused after the fuse has been replaced!)

SENTRON Powercenter 1100/2000 data transceiver

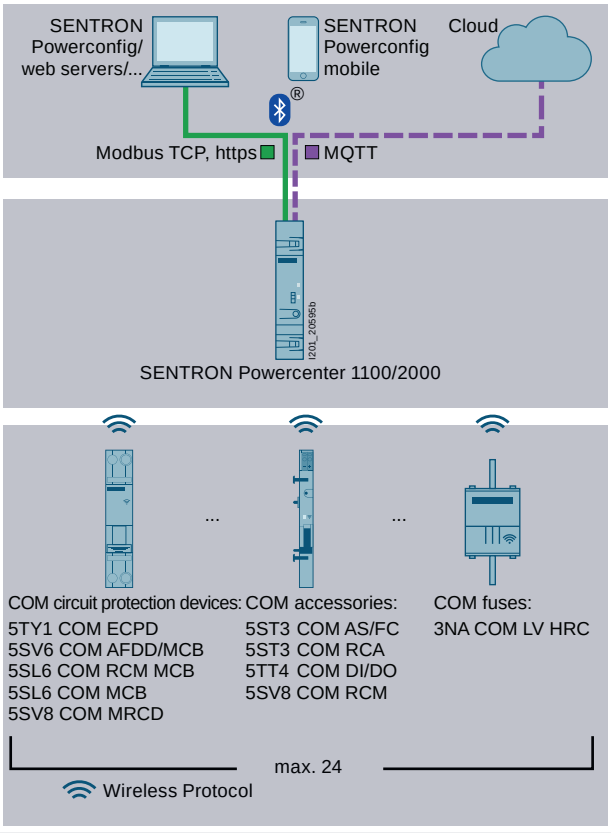

- Wireless radio transmission of measured values to the SENTRON Powercenter 1000/1100/2000 data transceiver
- Commissioning, parameter assignment, firmware updates and further processing of the data via the SENTRON Powercenter 1000/1100/2000 data transceiver

SENTRON Powercenter	Article No.
SENTRON Powercenter 1000	7KN1110-0MC00
SENTRON Powercenter 1100	7KN1111-0MC00
SENTRON Powercenter 2000	7KN1210-0MC00

See page 10/28

You will find further information at **www.siemens.com/lowvoltage/manuals**

Installation Manual – Circuit protection devices with communication and measuring function **(109791805)**

System Manual – Circuit protection devices with communication and measuring function **(109791806)**

Quick selection guide, page 7/32

© Siemens 2025

Measuring functions

- Rms value of the current
- Temperature (measured in electronic module)

Monitoring functions (alarm) with limit monitoring

- Limit values can be set for:
  - Current/overcurrent > Limit value 1
  - Current/overcurrent > Limit value 2
  - Overtemperature
  - Operating hours counter
  - Operating hours counter with load current > Limit value

Technical specifications

	Electronic module for 3NA COM 3NX8201
	Size 2
Rated current/current measuring range	400 A/2.5 ... 440 A (rms value)
Measuring accuracy of current measurement/5-minute average of rms value	
• At reference temperature 25 °C	±1% (8 ... 440 A), ±2% (2.5 ... 8 A)
• In the range –10 °C ... +70 °C	±2.2% (8 ... 440 A), ±3.2% (2.5 ... 8 A)
Minimum current (to maintain the radio connection)	2 A for operation, 3.5 A for commissioning
Temperature measuring range	+10 ... +150 °C
Measuring accuracy of temperature measurement	±2.5 °C
Maximum transmit power	8 dBm
Minimum/maximum ambient temperature during operation	–25 °C/+70 °C
Minimum/maximum ambient temperature during storage	–25 °C/+85 °C
Relative humidity at 25 °C without condensation	Max. 95%
Degree of protection IP	IP20
Pollution degree	3
Reference condition for measuring accuracy	IEC 61557-12
Measuring method	TRMS
Power supply	CT Harvesting
European standards	
RED Safety	EN 60669-2-5
RED Health	EN 62479
RED EMV	EN 63044-3/-5-3, EN 301489-17
RED Radio Spec	EN 300328
International standards	
For EMC	EN 63044-5-3, IEC 61000-6-2, IEC 61000-4-2/-3/-4/-5/-6/-8/-11
For shocks, bumps, free fall, environmental tests	IEC 60068-2-1/-2/-6/-27/-30/-32
Approvals	VDE, KEMA KEUR

Measured values

		Measuring interval	Storage time
Current			
Current (rms value)	A	2 s	1 h
Average current (rms value)	A	Adjustable from 3 ... 2600 s	7 d
Minimum current	A	1 d	10 d
Maximum current	A	No limit	10 d
Temperature			
Temperature	°C	2 s	1 h
Average temperature	°C	Adjustable	7 d
Minimum temperature	°C	1 d	10 d
Maximum temperature	°C	1 d	10 d
Operating hours counter			
Operating hours counter	h	Unlimited	Unlimited
Operating hours counter with load current > Limit value	h	Unlimited	Unlimited

Quick selection guide, page 7/32

© Siemens 2025

3NA6 COM LV HRC fuse links with measuring and communication functions

new

Operational class gG, with front indicator and insulated grip lugs, size 2

		With electronic module [1]	Without electronic module [2]	Electronic module
Mounting width		59 mm	59 mm	59 mm
I_n	U_n AC			
100 A	400 V	3NA6230-4KK01	3NA6230-4KK02	3NX8202
125 A	400 V	3NA6232-4KK01	3NA6232-4KK02	3NX8202
160 A	400 V	3NA6236-4KK01	3NA6236-4KK02	3NX8202
200 A	400 V	3NA6240-4KK01	3NA6240-4KK02	3NX8202
224 A	400 V	3NA6242-4KK01	3NA6242-4KK02	3NX8202
250 A	400 V	3NA6244-4KK01	3NA6244-4KK02	3NX8202
315 A	400 V	3NA6252-4KK01	3NA6252-4KK02	3NX8202

[1] Electronic module is mounted by simple insertion
[2] For spare part purposes (electronic module can be reused after the fuse has been replaced!)

Quick selection guide, page 7/32

© Siemens 2025

SENTRON Powercenter 1100/2000 data transceiver

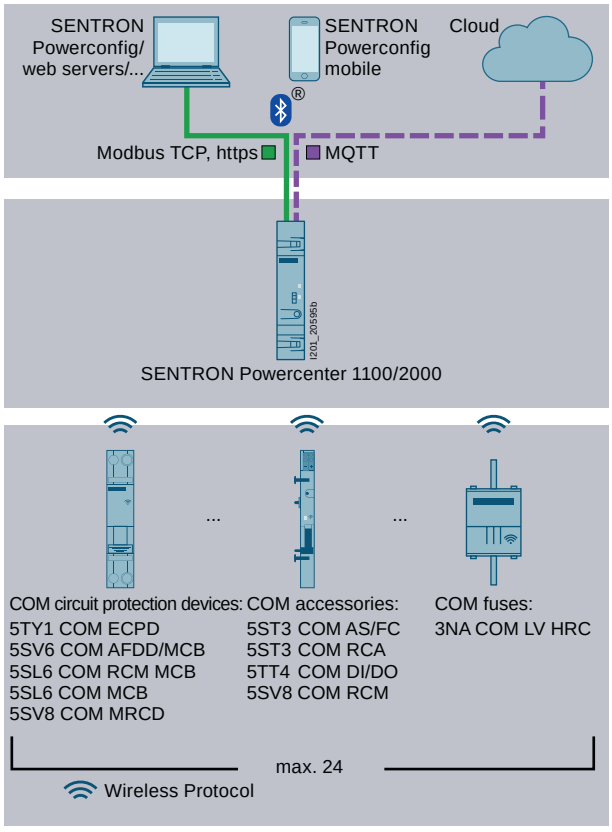

- Wireless radio transmission of measured values to the SENTRON Powercenter 1100/2000 data transceiver
- Commissioning, parameter assignment, firmware updates and further processing of the data via the SENTRON Powercenter 1100/2000 data transceiver

SENTRON Powercenter	Article No.
SENTRON Powercenter 1100	7KN1111-0MC00
SENTRON Powercenter 2000	7KN1210-0MC00

See page 10/28

You will find further information at **www.siemens.com/lowvoltage/manuals**

Installation Manual – Circuit protection devices with communication and measuring function **(109791805)**

System Manual – Circuit protection devices with communication and measuring function **(109791806)**

Quick selection guide, page 7/32

© Siemens 2025

3NA6 COM LV HRC fuse links with measuring and communication functions

new

Operational class gG, with front indicator and insulated grip lugs, size 2

SICAM EGS data transceiver

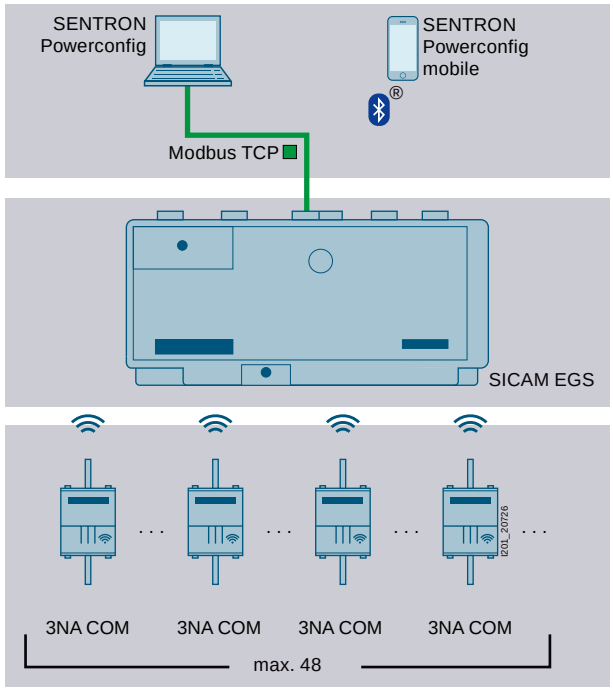

Measuring functions

- Rms value of the current
- Direction of power flow (only works in combination with SICAM EGS)
- Temperature (measured in electronic module)

Monitoring functions (alarm) with limit monitoring

- Limit values can be set for:
  - Current/overcurrent > Limit value 1
  - Current/overcurrent > Limit value 2
  - Overtemperature
  - Operating hours counter
  - Operating hours counter with load current > Limit value

Quick selection guide, page 7/32

© Siemens 2025

Technical specifications	Electronic module for 3NA COM 3NX8202
	Size 2
Rated current/current measuring range	400 A/2,5 ... 440 A (rms value)
Measuring accuracy of current measurement/5-minute average of rms value	
• At reference temperature 25 °C	±1% (8 A ... 440 A), ±2% (2.5 A ... 8 A)
• In the range –10 °C ... +70 °C	±1% (8 A ... 440 A), ±2% (2.5 A ... 8 A)
Measuring accuracy of total harmonic distortion (THD)	2% (Rated frequency 50 Hz) 3% (Rated frequency 60 Hz)
Minimum current (to maintain the radio connection) Minimum current (full operation & firmware update)	3.5 A for commissioning 10 A
Temperature measuring range	–25 ... +150 °C
Measuring accuracy of temperature measurement	±2 °C
Maximum transmit power	2 dBm
Minimum/maximum ambient temperature during operation	–25 °C/+70 °C
Minimum/maximum ambient temperature during storage	–25 °C/+85 °C
Relative humidity at 25 °C without condensation	Max. 95%
Degree of protection IP	IP20
Pollution degree	3
Reference condition for measuring accuracy	IEC 61557-12
Measuring method	TRMS
Power supply	CT Harvesting
European standards	
RED Safety	EN 60669-2-5
RED Health	EN 62479
RED EMV	EN 63044-3/-5-3, EN 301489-17
RED Radio Spec	EN 300328
International standards	
For EMC	EN 63044-5-3, IEC 61000-6-2, IEC 61000-4-2/-3/-4/-5/-6/-8/-11
For shocks, bumps, free fall, environmental tests	IEC 60068-2-1/-2/-6/-27/-30/-32
Approvals	VDE, DEKRA

Measured values		Measuring interval
Current		
Current (rms value)	A	2 s (sampling time 200 ms)
Average current (rms value)	A	Adjustable from 3 s ... 3600 s
Temperature		
Temperature	°C	2 s
Average temperature	°C	Adjustable from 60 s ... 3600 s
Operating hours counter		
Operating hours counter	h	60 s
Operating hours counter with load current > Limit value	h	60 s

7

Quick selection guide, page 7/32

© Siemens 2025

Cylindrical fuse links

Operational class gG

		Size 8 × 32 mm	Size 10 × 38 mm	Size 14 × 51 mm	Size 22 × 58 mm
					
I_n	U_n AC				
0.5 A	500 V	–	3NW6000-1	–	–
1 A	500 V	–	3NW6011-1	–	–
2 A	400 V	3NW6302-1	–	–	–
	500 V	–	3NW6002-1	–	–
4 A	400 V	3NW6304-1	–	–	–
	500 V	–	3NW6004-1	–	–
	690 V	–	–	3NW6104-1	–
6 A	400 V	3NW6301-1	–	–	–
	500 V	–	3NW6001-1	–	–
	690 V	–	–	3NW6101-1	–
8 A	500 V	–	3NW6008-1	–	–
	690 V	–	–	3NW6108-1	–
10 A	400 V	3NW6303-1	–	–	–
	500 V	–	3NW6003-1	–	–
	690 V	–	–	3NW6103-1	–
12 A	500 V	–	3NW6006-1	–	–
	690 V	–	–	3NW6106-1	–
16 A	400 V	3NW6305-1	–	–	–
	500 V	–	3NW6005-1	–	–
	690 V	–	–	3NW6105-1	3NW6205-1
20 A	400 V	3NW6307-1	–	–	–
	500 V	–	3NW6007-1	–	–
	690 V	–	–	3NW6107-1	3NW6207-1
25 A	500 V	–	3NW6010-1	–	–
	690 V	–	–	3NW6110-1	3NW6210-1
32 A	400 V	–	3NW6012-1	–	–
	690 V	–	–	3NW6112-1	3NW6212-1
40 A	500 V	–	–	3NW6117-1	–
	690 V	–	–	–	3NW6217-1
50 A	500 V	–	–	3NW6120-1	–
	690 V	–	–	–	3NW6220-1
63 A	500 V	–	–	–	3NW6222-1
80 A	500 V	–	–	–	3NW6224-1
100 A	500 V	–	–	–	3NW6230-1

Quick selection guide, page 7/32

© Siemens 2025

Operational class aM

		Size 10 × 38 mm	Size 14 × 51 mm	Size 22 × 58 mm
I_n	U_n AC			
0.5 A	500 V	3NW8000-1	–	–
1 A	500 V	3NW8011-1	–	–
2 A	500 V	3NW8002-1	–	–
	690 V	–	3NW8102-1	–
4 A	500 V	3NW8004-1	–	–
	690 V	–	3NW8104-1	–
6 A	500 V	3NW8001-1	–	–
	690 V	–	3NW8101-1	–
8 A	500 V	3NW8008-1	–	–
	690 V	–	3NW8108-1	–
10 A	500 V	3NW8003-1	–	–
	690 V	–	3NW8103-1	–
12 A	500 V	3NW8006-1	–	–
	690 V	–	3NW8106-1	–
16 A	500 V	3NW8005-1	3NW8105-1	–
	690 V	–	–	3NW8205-1
20 A	400 V	3NW8007-1	–	–
	500 V	–	3NW8107-1	–
	690 V	–	–	3NW8207-1
25 A	400 V	3NW8010-1	–	–
	500 V	–	3NW8110-1	–
	690 V	–	–	3NW8210-1
32 A	400 V	3NW8012-1	–	–
	500 V	–	3NW8112-1	–
	690 V	–	–	3NW8212-1
40 A	500 V	–	3NW8117-1	–
	690 V	–	–	3NW8217-1
50 A	400 V	–	3NW8120-1	–
	690 V	–	–	3NW8220-1
63 A	500 V	–	–	3NW8222-1
80 A	500 V	–	–	3NW8224-1
100 A	500 V	–	–	3NW8230-1

Quick selection guide, page 7/32

© Siemens 2025

SITOR semiconductor fuse links, LV HRC design (AC/DC)

Operational class gS, with blade contacts without slots

					Size 000	Size 00	Size 1	Size 2	Size 3
I_n	Switch-off I^2t value	Power loss P_v	Varying load factor WL	U_n AC					
16 A	200 A²s	4 W	1.00	690 V [1]	3NE1813-0	–	–	–	–
20 A	430 A²s	5 W	1.00	690 V [1]	3NE1814-0	–	–	–	–
25 A	780 A²s	5 W	1.00	690 V [1]	3NE1815-0	–	–	–	–
35 A	1700 A²s	3.5 W	1.00	690 V [1]	3NE1803-0	–	–	–	–
40 A	3000 A²s	3 W	1.00	690 V [1]	3NE1802-0	–	–	–	–
50 A	4400 A²s	6 W	1.00	690 V [1]	3NE1817-0	–	–	–	–
63 A	9000 A²s	7 W	1.00	690 V [1]	3NE1818-0	–	–	–	–
80 A	18000 A²s	8 W	1.00	690 V [1]	3NE1820-0	–	–	–	–
100 A	33000 A²s	10 W	1.00	690 V [1]	–	3NE1021-0	–	–	–
125 A	63000 A²s	11 W	1.00	690 V [1]	–	3NE1022-0	–	–	–
160 A	60000 A²s	24 W	1.00	690 V [1]	–	–	3NE1224-0	–	–
200 A	100000 A²s	27 W	1.00	690 V [1]	–	–	3NE1225-0	–	–
250 A	200000 A²s	30 W	1.00	690 V [1]	–	–	3NE1227-0	–	–
315 A	310000 A²s	38 W	1.00	690 V [1]	–	–	3NE1230-0	–	–
350 A	430000 A²s	42 W	1.00	690 V [1]	–	–	–	3NE1331-0	–
400 A	590000 A²s	45 W	1.00	690 V [1]	–	–	–	3NE1332-0	–
450 A	750000 A²s	53 W	1.00	690 V [1]	–	–	–	3NE1333-0	–
500 A	950000 A²s	56 W	1.00	690 V [1]	–	–	–	3NE1334-0	–
560 A	1700000 A²s	50 W	1.00	690 V [1]	–	–	–	–	3NE1435-0
630 A	2350000 A²s	55 W	1.00	690 V [1]	–	–	–	–	3NE1436-0
710 A	3400000 A²s	58 W	1.00	690 V [1]	–	–	–	–	3NE1437-0
800 A	5000000 A²s	58 W	1.00	690 V [1]	–	–	–	–	3NE1438-0
Further information									
Installation in 3NH LV HRC fuse bases					■	■	■	■	■
Installation in 3NP and 3KF fuse switching devices					■	■	■	■	■

[1] For the max. DC voltage, see the Configuration Manual – Fuse systems, chapter Configuration, Use with direct current www.siemens.com/lowvoltage/manuals (45314810)

7

Quick selection guide, page 7/32

© Siemens 2025

Operational class gR, with bolt-on links

						Size 000	Size 00
					Screw fixing, mounting dimension	M8, 80 mm	M10, 80 mm
I_n	**Switch-off I^2t value**	**Power loss P_v**	**Varying load factor WL**	**U_n AC/DC (IEC)**	**U_n DC (UL)**		
20 A	83 A^2s	7 W	0.90	690 V/600 V	700 V	3NE8714-1	–
25 A	140 A^2s	9 W	0.90	690 V/600 V	700 V	3NE8715-1	–
32 A	285 A^2s	10 W	0.90	690 V/600 V	700 V	3NE8701-1	–
40 A	490 A^2s	12 W	0.90	690 V/600 V	700 V	3NE8702-1	–
50 A	815 A^2s	15 W	0.90	690 V/600 V	700 V	3NE8717-1	–
63 A	1550 A^2s	16 W	0.95	690 V/700 V	700 V	3NE8718-1	–
80 A	3200 A^2s	23 W	on req.	690 V/440 V	–	–	3NE8020-3MK
100 A	5200 A^2s	29 W	on req.	690 V/440 V	–	–	3NE8021-3MK
Further information							
Screw fixing						■	■
Installation in SITOR fuse bases						3NH5023	3NH5023
Further currents, operational class aR						See page 7/66	See page 7/66

Quick selection guide, page 7/32

© Siemens 2025

SITOR semiconductor fuse links, LV HRC design (AC/DC)

Operational class gR, with blade contacts without slots

					Size 000	Size 00
I_n	Switch-off I^2t value	Power loss P_v	Varying load factor WL	U_n AC/DC		
6 A	37 A^2s	2.7 W	on req.	690 V/400 V	3NE8810-0MK	–
10 A	50 A^2s	4.5 W	on req.	690 V/400 V	3NE8812-0MK	–
16 A	73 A^2s	6.7 W	on req.	690 V/400 V	3NE8813-0MK	–
20 A	90 A^2s	8 W	on req.	690 V/400 V	3NE8814-0MK	–
25 A	150 A^2s	8.1 W	on req.	690 V/400 V	3NE8815-0MK	–
	180 A^2s	7 W	0.95	690 V [1]/–	–	3NE8015-1
32 A	280 A^2s	12 W	0.90	1000 V [1]/–	–	–
	350 A^2s	10.5 W	on req.	690 V/400 V	3NE8801-0MK	–
35 A	400 A^2s	9 W	0.95	690 V [1]/–	–	3NE8003-1
40 A	480 A^2s	12 W	on req.	690 V/400 V	3NE8802-0MK	–
	500 A^2s	13 W	0.90	1000 V [1]/–	–	–
50 A	700 A^2s	14 W	0.90	690 V [1]/–	–	3NE8017-1
	800 A^2s	16 W	0.90	1000 V [1]/–	–	–
	1050 A^2s	14.5 W	on req.	690 V/400 V	3NE8817-0MK	–
63 A	1400 A^2s	16 W	0.95	690 V [1]/–	–	3NE8018-1
	1960 A^2s	23 W	on req.	690 V/400 V	3NE8818-0MK	–
80 A	5800 A^2s	10.5 W	1.00	690 V [1]/–	–	3NE1020-2
100 A	11000 A^2s	12 W	1.00	690 V [1]/–	–	3NE1021-2
125 A	23000 A^2s	13.5 W	1.00	690 V [1]/–	–	3NE1022-2
160 A	18600 A^2s	32 W	1.00	690 V [1]/–	–	–
200 A	51800 A^2s	35 W	1.00	690 V [1]/–	–	–
250 A	80900 A^2s	37 W	1.00	690 V [1]/–	–	–
315 A	168000 A^2s	40 W	1.00	690 V [1]/–	–	–
350 A	177000 A^2s	43 W	1.00	690 V [1]/–	–	–
400 A	224000 A^2s	50 W	1.00	690 V [1]/–	–	–
450 A	276500 A^2s	58 W	1.00	690 V [1]/–	–	–
500 A	398000 A^2s	64 W	1.00	690 V [1]/–	–	–
560 A	890000 A^2s	60 W	1.00	690 V [1]/–	–	–
630 A	1390000 A^2s	60 W	1.00	690 V [1]/–	–	–
670 A	1640000 A^2s	64 W	1.00	690 V [1]/–	–	–
710 A	1818000 A^2s	72 W	1.00	690 V [1]/–	–	–
	2460000 A^2s	65 W	1.00	690 V [1]/–	–	–
800 A	2475000 A^2s	84 W	1.00	690 V [1]/–	–	–
	3350000 A^2s	72 W	1.00	600 V [1]/–	–	–
850 A	3640000 A^2s	76 W	1.00	690 V [1]/–	–	–
Further information						
Installation in 3NH LV HRC fuse bases					■	■
Installation in 3NP and 3KF fuse switching devices					■	■
Further currents, operational class aR					See page 7/67	–

[1] For the max. DC voltage, see the Configuration Manual – Fuse systems, chapter Configuration, Use with direct current www.siemens.com/lowvoltage/manuals (45314810)

7

Quick selection guide, page 7/32

© Siemens 2025

Size 0	Size 1	Size 2	Size 3	
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
3NE4101	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
3NE4102	–	–	–	–
–	–	–	–	–
3NE4117	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	3NE1224-2	–	–	–
–	3NE1225-2	–	–	–
–	3NE1227-2	–	–	–
–	3NE1230-2	–	–	–
–	–	3NE1331-2	–	–
–	–	3NE1332-2	–	–
–	–	3NE1333-2	–	–
–	–	3NE1334-2	–	–
–	–	–	–	3NE1435-2
–	–	–	–	3NE1436-2
–	–	–	–	3NE1447-2
–	–	–	–	3NE1437-2
–	–	–	3NE1437-1	–
–	–	–	–	3NE1438-2
–	–	–	3NE1438-1	–
–	–	–	–	3NE1448-2
■	■	■	■	■
■	■	■	■	■
See page 7/67	–	–	–	–

7

Quick selection guide, page 7/32

© Siemens 2025

SITOR semiconductor fuse links, LV HRC design (AC/DC)

Operational class gR, with slotted blade contacts

	With 2 oblong slots		With oblong and transverse slots	
	Size 3		Size 1	
Screw fixing, mounting dimension (lateral)	M10, 110 mm		M10, 110 mm	

I_n	Switch-off I^2t value	Power loss P_v	Varying load factor WL	U_n AC/DC				
32 A	4500 A²s	9 W	on req.	1000 V/600 V	–	–	–	3NE3201-0MK
40 A	900 A²s	26 W	on req.	1500 V/1000 V	–	–	–	–
	6000 A²s	13 W	on req.	1000 V/600 V	–	–	–	3NE3202-0MK
50 A	1800 A²s	27 W	on req.	1500 V/1000 V	–	–	–	–
	8000 A²s	18 W	on req.	1000 V/600 V	–	–	–	3NE3217-0MK
63 A	3100 A²s	34 W	on req.	1500 V/1000 V	–	–	–	–
	9000 A²s	25 W	on req.	1000 V/600 V	–	–	–	3NE3218-0MK
150 A	17600 A²s	40 W	0.85	690 V [1]/–	–	3NC8423-0C	–	–
	33000 A²s	35 W	0.85	500 V/–	3NC2423-0C	–	–	–
160 A	18600 A²s	32 W	1.00	690 V [1]/–	–	–	3NE1224-3	–
200 A	38400 A²s	55 W	0.85	690 V [1]/–	–	3NC8425-0C	–	–
	51800 A²s	35 W	1.00	690 V [1]/–	–	–	3NE1225-3	–
	64000 A²s	40 W	0.85	500 V/–	3NC2425-0C	–	–	–
250 A	70400 A²s	72 W	0.85	690 V [1]/–	–	3NC8427-0C	–	–
	80900 A²s	37 W	1.00	690 V [1]/–	–	–	3NE1227-3	–
	99000 A²s	50 W	0.85	500 V/–	3NC2427-0C	–	–	–
300 A	132000 A²s	65 W	0.85	500 V/–	3NC2428-0C	–	–	–
315 A	168000 A²s	40 W	1.00	690 V [1]/–	–	–	3NE1230-3	–
350 A	176000 A²s	95 W	0.85	690 V [1]/–	–	3NC8431-0C	–	–
	177000 A²s	43 W	1.00	690 V [1]/–	–	–	–	–
	249000 A²s	60 W	0.85	500 V/–	3NC2431-0C	–	–	–
400 A	224000 A²s	50 W	1.00	690 V [1]/–	–	–	–	–
450 A	276500 A²s	58 W	1.00	690 V [1]/–	–	–	–	–
500 A	398000 A²s	64 W	1.00	690 V [1]/–	–	–	–	–
	448000 A²s	130 W	0.85	690 V [1]/–	–	3NC8434-0C	–	–
560 A	890000 A²s	60 W	1.00	690 V [1]/–	–	–	–	–
630 A	1390000 A²s	60 W	1.00	690 V [1]/–	–	–	–	–
670 A	1640000 A²s	64 W	1.00	690 V [1]/–	–	–	–	–
710 A	1818000 A²s	72 W	1.00	690 V [1]/–	–	–	–	–
800 A	2475000 A²s	84 W	1.00	690 V [1]/–	–	–	–	–
850 A	3640000 A²s	76 W	1.00	690 V [1]/–	–	–	–	–
1000 A	1400000 A²s	138 W	1.00	690 V [3]/–	–	–	–	–
1100 A	3000000 A²s	110 W	1.00	690 V [3]/–	–	–	–	–
1250 A	4100000 A²s	104 W	1.00	690 V [3]/–	–	–	–	–
1350 A	4800000 A²s	126 W	1.00	690 V [3]/–	–	–	–	–
1400 A	5200000 A²s	127 W	1.00	690 V [3]/–	–	–	–	–
1600 A	6900000 A²s	152 W	1.00	690 V [3]/–	–	–	–	–
1700 A	6400000 A²s	179 W	1.00	690 V [3]/–	–	–	–	–
	10000000 A²s	143 W	1.00	690 V [3]/–	–	–	–	–
1900 A	8200000 A²s	196 W	1.00	690 V [3]/–	–	–	–	–
Further information								
Screw fixing					■	■	■	■
Installation in SITOR fuse bases					3NH5463	3NH5463	3NH5463	3NH5463
Installation in LV HRC fuse bases					■	■	■	■
Installation in fuse switching devices					■	■	■	■
Further currents, operational class aR					See page 7/68	–	–	–

[1] For the max. DC voltage, see the Configuration Manual – Fuse systems, chapter Configuration, Use with direct current www.siemens.com/lowvoltage/manuals (45314810)
[2] Minimum clearance 90 mm
[3] UL voltage 700 V AC

7

Quick selection guide, page 7/32

© Siemens 2025

Size 2		Size 3			Size 2 × 3	Size 3 × 3
M10, 110 mm	M10, 170 mm	M10, 110 mm		M12, 110 mm	M12, 110 mm [2]	M12, 110 mm [2]
–	–	–	–	–	–	–
–	3NE5302-0MK06	–	–	–	–	–
–	–	–	–	–	–	–
–	3NE5317-0MK06	–	–	–	–	–
–	–	–	–	–	–	–
–	3NE5318-0MK06	–	–	–	–	–
–	–	–	–	–	–	–
–	–	–	3NC8423-3C	–	–	–
–	–	3NC2423-3C	–	–	–	–
–	–	–	–	–	–	–
–	–	–	3NC8425-3C	–	–	–
–	–	–	–	–	–	–
–	–	3NC2425-3C	–	–	–	–
–	–	–	3NC8427-3C	–	–	–
–	–	–	–	–	–	–
–	–	3NC2427-3C	–	–	–	–
–	–	3NC2428-3C	–	–	–	–
–	–	–	–	–	–	–
–	–	–	3NC8431-3C	–	–	–
3NE1331-3	–	–	–	–	–	–
–	–	3NC2431-3C	–	–	–	–
3NE1332-3	–	–	–	–	–	–
3NE1333-3	–	–	–	–	–	–
3NE1334-3	–	–	–	–	–	–
–	–	–	3NC8434-3C	–	–	–
–	–	–	–	3NE1435-3	–	–
–	–	–	–	3NE1436-3	–	–
–	–	–	–	3NE1447-3	–	–
–	–	–	–	3NE1437-3	–	–
–	–	–	–	3NE1438-3	–	–
–	–	–	–	3NE1448-3	–	–
–	–	–	–	–	3NB3350-1KK26	–
–	–	–	–	–	3NB3351-1KK26	–
–	–	–	–	–	3NB3352-1KK26	–
–	–	–	–	–	3NB3354-1KK26	–
–	–	–	–	–	3NB3355-1KK26	–
–	–	–	–	–	3NB3357-1KK26	–
–	–	–	–	–	–	3NB3358-1KK27
–	–	–	–	–	3NB3358-1KK26	–
–	–	–	–	–	–	3NB3362-1KK27
■	■	■	■	■	■	■
3NH5463	3NH5473	3NH5463	3NH5463	3NH5463	–	–
■	■	■	■	■	–	–
■	■	■	■	■	–	–
–	–	See page 7/70	See page 7/70	See page 7/70	–	–

Quick selection guide, page 7/32

© Siemens 2025

SITOR semiconductor fuse links, LV HRC design (AC/DC)

Operational class aR, with bolt-on links

						Size 000	
					Screw fixing, mounting dimension	M8, 80 mm	M10, 80 mm
I_n	**Switch-off I^2t value**	**Power loss P_v**	**Varying load factor WL**	**U_n AC/DC (IEC)**	**U_n DC (UL)**		
80 A	2700 A^2s	18 W	0.90	690 V/600 V	700 V	3NE8720-1	–
100 A	4950 A^2s	19 W	0.95	690 V/600 V	700 V	3NE8721-1	–
125 A	9100 A^2s	23 W	0.95	690 V/600 V	700 V	3NE8722-1	–
160 A	17000 A^2s	31 W	0.90	690 V/600 V	700 V	3NE8724-1	–
200 A	30000 A^2s	36 W	0.90	690 V/600 V	700 V	3NE8725-1	–
250 A	55000 A^2s	42 W	0.90	690 V/600 V	700 V	3NE8727-1	–
315 A	85500 A^2s	54 W	0.85	690 V/600 V	700 V	3NE8731-1	–
350 A	135000 A^2s	58.8 W	on req.	690 V/440 V	–	–	3NE8031-3MK
400 A	170000 A^2s	74.5 W	on req.	690 V/440 V	–	–	3NE8032-3MK
Further information							
Screw fixing						■	■
Installation in SITOR fuse bases						3NH5023	3NH5023
Further currents, operational class gR						See page 7/61	See page 7/61

Quick selection guide, page 7/32

© Siemens 2025

Operational class aR, with blade contacts without slots

					Size 000	Size 00	Size 0	Size 1	Size 2
I_n	Switch-off I^2t value	Power loss P_v	Varying load factor WL	U_n AC/DC					
63 A	1500 A²s	20 W	0.90	1000 V [1]/–	–	–	3NE4118	–	–
80 A	2200 A²s	23.3 W	on req.	690 V/440 V	3NE8820-0MK	–	–	–	–
	2400 A²s	19 W	0.95	690 V [1]/–	–	3NE8020-1	–	–	–
	3000 A²s	22 W	0.90	1000 V [1]/–	–	–	3NE4120	–	–
100 A	3650 A²s	27 W	on req.	690 V/440 V	3NE8821-0MK	–	–	–	–
	6050 A²s	25.5 W	on req.	690 V/440 V	–	–	–	3NE8221-0MK	–
	4200 A²s	22 W	0.95	690 V [1]/–	–	3NE8021-1	–	–	–
	6000 A²s	24 W	0.90	1000 V [1]/–	–	–	3NE4121	–	–
125 A	7800 A²s	30 W	on req.	690 V/440 V	3NE8822-0MK	–	–	–	–
	8900 A²s	28.5 W	on req.	690 V/440 V	–	–	–	3NE8222-0MK	–
	6500 A²s	28 W	0.95	690 V [1]/–	–	3NE8022-1	–	–	–
	14000 A²s	30 W	0.90	1000 V [1]/–	–	–	3NE4122	–	–
160 A	14000 A²s	34 W	on req.	500 V/440 V	3NE8824-0MK	–	–	–	–
	16200 A²s	37 W	on req.	690 V/440 V	–	–	–	3NE8224-0MK	–
	13000 A²s	38 W	0.95	690 V [1]/–	–	3NE8024-1	–	–	–
	29000 A²s	35 W	0.90	1000 V [1]/–	–	–	3NE4124	–	–
200 A	26000 A²s	49 W	on req.	690 V/440 V	–	–	–	3NE8225-0MK	–
250 A	59000 A²s	52 W	on req.	690 V/440 V	–	–	–	3NE8227-0MK	–
315 A	120000 A²s	68 W	on req.	690 V/440 V	–	–	–	3NE8230-0MK	–
350 A	83500 A²s	68.6 W	on req.	690 V/440 V	–	–	–	–	3NE8331-0MK
400 A	136000 A²s	72.8 W	on req.	690 V/440 V	–	–	–	–	3NE8332-0MK
450 A	207000 A²s	80.1 W	on req.	690 V/440 V	–	–	–	–	3NE8333-0MK
500 A	318000 A²s	77.5 W	on req.	690 V/440 V	–	–	–	–	3NE8334-0MK
550 A	399000 A²s	86.4 W	on req.	690 V/440 V	–	–	–	–	3NE8335-0MK
630 A	740000 A²s	90.7 W	on req.	690 V/440 V	–	–	–	–	3NE8336-0MK
Further information									
Installation in 3NH LV HRC fuse bases					■	■	■	■	■
Installation in 3NP and 3KF fuse switching devices					■	■	■	■	■
Further currents, operational class gR					See page 7/62	–	See page 7/62	–	–

[1] For the max. DC voltage, see the Configuration Manual – Fuse systems, chapter Configuration, Use with direct current www.siemens.com/lowvoltage/manuals (45314810)

7

Quick selection guide, page 7/32

© Siemens 2025

SITOR semiconductor fuse links, LV HRC design (AC/DC)

Operational class aR, with slotted blade contacts

					With 2 oblong slots Size 3	With oblong and transverse slots Size 1	
				Screw fixing, mounting dimension	M10, 110 mm	M8, 80 mm	M10, 110 mm
I_n	Switch-off I^2t value	Power loss P_v	Varying load factor WL	U_n AC/DC			
80 A	3900 A²s	42 W	on req.	1500 V/1000 V	–	–	–
100 A	4800 A²s	28 W	0.95	1000 V [1]/–	–	–	3NE3221
	3200 A²s	25 W	on req.	690 V/440 V	–	3NE8221-3MK	–
	8700 A²s	45 W	on req.	1500 V/1000 V	–	–	–
125 A	7200 A²s	36 W	0.95	1000 V [1]/–	–	–	3NE3222
	6000 A²s	28 W	on req.	690 V/440 V	–	3NE8222-3MK	–
	11800 A²s	59 W	on req.	1500 V/1000 V	–	–	–
160 A	13000 A²s	42 W	1.00	1000 V [1]/–	–	–	3NE3224
	10500 A²s	35 W	on req.	690 V/440 V	–	3NE8224-3MK	–
	37000 A²s	54 W	on req.	1500 V/1000 V	–	–	–
200 A	30000 A²s	42 W	1.00	1000 V [1]/–	–	–	3NE3225
	17500 A²s	42 W	on req.	690 V/440 V	–	3NE8225-3MK	–
	70000 A²s	56 W	on req.	1500 V/1000 V	–	–	–
250 A	29700 A²s	105 W	0.85	800 V [1]/–	–	–	–
	48000 A²s	50 W	1.00	1000 V [1]/–	–	–	3NE3227
	28500 A²s	53.5 W	on req.	690 V/440 V	–	3NE8227-3MK	–
	165000 A²s	59 W	on req.	1500 V/1000 V	–	–	–
315 A	60700 A²s	120 W	0.85	800 V [1]/–	–	–	–
	80000 A²s	60 W	0.95	1000 V [1]/–	–	–	3NE3230-0B
	300000 A²s	245 W	on req.	–/3000 V	–	–	–
	53500 A²s	61 W	on req.	690 V/440 V	–	3NE8230-3MK	–
	250000 A²s	76 W	on req.	1500 V/1000 V	–	–	–
350 A	100000 A²s	75 W	0.95	1000 V [1]/–	–	–	3NE3231
	66000 A²s	69 W	on req.	690 V/440 V	–	3NE8231-3MK	–
400 A	390000 A²s	50 W	0.85	500 V [1]/–	3NC2432-0C	–	–
	135000 A²s	80 W	1.00	1000 V [1]/–	–	–	–
		85 W	0.90	1000 V [1]/–	–	–	3NE3232-0B
	110000 A²s	70.5 W	on req.	690 V/440 V	–	3NE8232-3MK	–
	470000 A²s	89 W	on req.	1500 V/1000 V	–	–	–
450 A	191000 A²s	140 W	0.85	800 V [1]/–	–	–	–
	175000 A²s	90 W	1.00	1000 V [1]/–	–	–	–
		95 W	0.90	1000 V [1]/–	–	–	3NE3233
	180000 A²s	71 W	on req.	690 V/440 V	–	3NE8233-3MK	–
500 A	276000 A²s	155 W	0.85	800 V [1]/–	–	–	–
	260000 A²s	90 W	1.00	1000 V [1]/–	–	–	–
	215000 A²s	84 W	on req.	690 V/440 V	–	3NE8234-3MK	–
	500000 A²s	105 W	on req.	1000 V/600 V	–	–	3NE3234-0MK08
	800000 A²s	109 W	on req.	1500 V/1000 V	–	–	–
550 A	290000 A²s	87 W	on req.	690 V/440 V	–	3NE8235-3MK	–
	700000 A²s	110 W	on req.	1000 V/600 V	–	–	3NE3235-0MK08
560 A	360000 A²s	95 W	1.00	1000 V [1]/–	–	–	–
630 A	600000 A²s	100 W	1.00	1000 V [1]/–	–	–	–
	440000 A²s	96 W	on req.	690 V/440 V	–	3NE8236-3MK	–
	850000 A²s	127 W	on req.	1000 V/600 V	–	–	3NE3236-0MK08
	1100000 A²s	163 W	on req.	1500 V/1000 V	–	–	–
710 A	923000 A²s	155 W	0.95	800 V [1]/–	–	–	–
	800000 A²s	105 W	1.00	900 V [1]/–	–	–	–
800 A	850000 A²s	130 W	0.95	800 V [1]/–	–	–	–
900 A	920000 A²s	165 W	0.95	690 V [1]/–	–	–	–
Further information							
Screw fixing					■	■	■
Installation in SITOR fuse bases					3NH5463	3NH5423	3NH5463
Installation in 3NH3 LV HRC fuse bases					■	–	■
Installation in 3NP and 3KF fuse switching devices					■	–	■
Further currents, operational class gR					See page 7/64	–	–

[1] For the max. DC voltage, see the Configuration Manual – Fuse systems, chapter Configuration, Use with direct current www.siemens.com/lowvoltage/manuals (45314810)

7

Quick selection guide, page 7/32

© Siemens 2025

Size 2			
M10, 110 mm	M10, 170 mm	M10, 190 mm	M12, 260 mm
–	3NE5320-0MK06	–	–
–	–	–	–
–	–	–	–
–	3NE5321-0MK06	–	–
–	–	–	–
–	–	–	–
–	3NE5322-0MK06	–	–
–	–	–	–
–	–	–	–
–	3NE5324-0MK06	–	–
–	–	–	–
–	–	–	–
–	3NE5325-0MK06	–	–
3NE4327-0B	–	–	–
–	–	–	–
–	–	–	–
–	3NE5327-0MK06	–	–
3NE4330-0B	–	–	–
–	–	–	–
–	–	–	3NE9330-0MK07
–	–	–	–
–	3NE5330-0MK06	–	–
–	–	–	–
–	–	–	–
–	–	–	–
3NE3332-0B	–	–	–
–	–	–	–
–	–	–	–
–	3NE5332-0MK06	–	–
3NE4333-0B	–	–	–
3NE3333	–	–	–
–	–	–	–
–	–	–	–
3NE4334-0B	–	–	–
3NE3334-0B	–	–	–
–	–	–	–
–	–	–	–
–	3NE5334-0MK06	–	–
–	–	–	–
–	–	–	–
3NE3335	–	–	–
3NE3336	–	–	–
–	–	–	–
–	–	–	–
–	3NE5336-0MK06	3NE5336-0MK66	–
3NE4337	–	–	–
3NE3337-8	–	–	–
3NE3338-8	–	–	–
3NE3340-8	–	–	–
■	■	■	■
3NH5463	3NH5473	3NH5473	–
■	–	–	–
■	–	–	–
–	See page 7/64	–	–

Quick selection guide, page 7/32

© Siemens 2025

SITOR semiconductor fuse links, LV HRC design (AC/DC)

Operational class aR, with slotted blade contacts

					With oblong and transverse slots Size 3			
				Screw fixing, mounting dimension	M10, 110 mm	M10, 130 mm	M10, 170 mm	M10, 210 mm
I_n	Switch-off I^2t value	Power loss P_v	Varying load factor WL	U_n AC [1]				
100 A	13500 A²s	25 W	1.00	1000 V	–	3NE3421-0C	–	–
125 A	34500 A²s	78 W	1.00	2500 V	–	–	–	–
160 A	54000 A²s	56 W	1.00	1500 V	–	–	–	3NE5424-0C
200 A	138000 A²s	75 W	1.00	2000 V	–	–	–	3NE7425-0U
224 A	54000 A²s	85 W	1.00	1000 V	–	3NE3626-0C	–	–
	138000 A²s	80 W	1.00	1500 V	–	–	–	3NE5426-0C
250 A	84000 A²s	130 W	1.00	1500 V	–	–	3NE5627-0C	–
	218000 A²s	110 W	1.00	2000 V	–	–	–	3NE7427-0U
315 A	218000 A²s	80 W	1.00	1000 V	–	3NE3430-0C	–	–
	72500 A²s	80 W	0.95	1250 V	–	–	–	–
	311000 A²s	115 W	1.00	1500 V	–	–	–	3NE5430-0C
350 A	428000 A²s	135 W	1.00	1500 V	–	–	–	3NE5431-0C
	555000 A²s	120 W	1.00	2000 V	–	–	–	3NE7431-0U
400 A	390000 A²s	50 W	0.85	500 V	3NC2432-3C	–	–	–
	364000 A²s	110 W	1.00	1000 V	–	3NE3432-0C	–	–
	163000 A²s	95 W	0.95	1250 V	–	–	–	–
	620000 A²s	205 W	1.00	2500 V	–	–	–	–
	870000 A²s	150 W	1.00	2000 V	–	–	–	3NE7432-0U
450 A	488000 A²s	110 W	1.00	1000 V	–	3NE3635-0C	–	–
	590000 A²s	160 W	1.00	1500 V	–	–	3NE5633-0C	–
	870000 A²s	145 W	0.95	1500 V	–	–	–	3NE5433-0C
	960000 A²s	160 W	1.00	2000 V	–	–	–	3NE7633-0U
500 A	870000 A²s	95 W	1.00	1000 V	–	3NE3434-0C	–	–
	290000 A²s	115 W	0.90	1250 V	–	–	–	–
	1270000 A²s	235 W	1.00	2500 V	–	–	–	–
525 A	1120000 A²s	210 W	1.00	2000 V	–	–	–	–
600 A	1950000 A²s	145 W	1.00	1500 V	–	–	3NE5643-0C	–
630 A	244000 A²s	120 W	0.85	690 V	–	–	–	–
	418000 A²s	145 W	0.85	1000 V	–	–	–	–
	1280000 A²s	132 W	1.00	1000 V	–	3NE3636-0C	–	–
	650000 A²s	120 W	0.95	1250 V	–	–	–	–
	1950000 A²s	220 W	1.00	2000 V	–	–	–	3NE7636-0U
	2800000 A²s	275 W	1.00	2500 V	–	–	–	–
710 A	346000 A²s	130 W	0.85	690 V	–	–	–	–
	569000 A²s	150 W	0.85	1000 V	–	–	–	–
	1950000 A²s	145 W	1.00	1000 V	–	3NE3637-0C	–	–
	3110000 A²s	275 W	1.00	2000 V	–	–	–	–
800 A	498000 A²s	135 W	0.90	690 V	–	–	–	–
	819000 A²s	155 W	0.85	1000 V	–	–	–	–
	985000 A²s	145 W	0.90	1100 V	–	–	–	–
900 A	677000 A²s	145 W	0.90	690 V	–	–	–	–
	1160000 A²s	165 W	0.90	1000 V	–	–	–	–
1000 A	2480000 A²s	140 W	0.85	600 V	3NC8444-3C	–	–	–
	975000 A²s	155 W	0.95	690 V	–	–	–	–
	1670000 A²s	170 W	0.90	1000 V	–	–	–	–
1100 A	1382000 A²s	165 W	0.95	690 V	–	–	–	–
	1910000 A²s	185 W	0.90	800 V	–	–	–	–
1250 A	1990000 A²s	175 W	0.95	690 V	–	–	–	–
	2600000 A²s	210 W	0.90	800 V	–	–	–	–
1400 A	2100000 A²s	200 W	0.95	500 V	–	–	–	–
1600 A	2860000 A²s	240 W	0.90	500 V	–	–	–	–
Further information								
Screw fixing					■	■	■	■
Installation in SITOR fuse bases					3NH5463	–	3NH5473	–
Installation in 3NH LV HRC fuse bases					■	–	–	–
Installation in 3NP and 3KF fuse switching devices					■	–	–	–
Further currents, operational class gR					See page 7/64	–	–	–

[1] For the max. DC voltage, see the Configuration Manual – Fuse systems, chapter Configuration, Use with direct current www.siemens.com/lowvoltage/manuals (45314810)

7

Quick selection guide, page 7/32

© Siemens 2025

M12, 80 mm	M12, 110 mm	M12, 140 mm	M12, 210 mm	M12, 260 mm
–	–	–	–	–
–	–	–	–	3NE9622-1C
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	3NC3430-1U	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	3NC3432-1U	–	–	–
–	–	–	–	3NE9632-1C
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	3NE5433-1C	–
–	–	–	3NE7633-1U	–
–	–	–	–	–
–	3NC3434-1U	–	–	–
–	–	–	–	3NE9634-1C
–	–	–	3NE7648-1U	–
–	–	–	–	–
3NC3236-1U	–	–	–	–
–	3NC3336-1U	–	–	–
–	–	–	–	–
–	3NC3436-1U	–	–	–
–	–	–	3NE7636-1U	–
–	–	–	–	3NE9636-1C
3NC3237-1U	–	–	–	–
–	3NC3337-1U	–	–	–
–	–	3NE3637-1C	–	–
–	–	–	3NE7637-1U	–
3NC3238-1U	–	–	–	–
–	3NC3338-1U	–	–	–
–	3NC3438-1U	–	–	–
3NC3240-1U	–	–	–	–
–	3NC3340-1U	–	–	–
–	–	–	–	–
3NC3241-1U	–	–	–	–
–	3NC3341-1U	–	–	–
3NC3242-1U	–	–	–	–
–	3NC3342-1U	–	–	–
3NC3243-1U	–	–	–	–
–	3NC3343-1U	–	–	–
3NC3244-1U	–	–	–	–
3NC3245-1U	–	–	–	–
■	■	■	■	■
–	3NH5463	–	–	–
–	■	–	–	–
–	■	–	–	–
–	–	–	–	–

7

Quick selection guide, page 7/32

© Siemens 2025

SITOR semiconductor fuse links, LV HRC design (AC/DC)

Operational class aR, with female thread at both ends

					Size 3	
				Screw fixing, flange dimension	M10, 109 mm	M12, 52 mm
I_n	**Switch-off I^2t value**	**Power loss P_v**	**Varying load factor WL**	**U_n AC [1]**		
315 A	72500 A²s	80 W	0.95	1250 V	–	–
400 A	163000 A²s	95 W	0.95	1250 V	–	–
450 A	488000 A²s	110 W	1.00	1000 V	3NE3635-6	–
500 A	290000 A²s	115 W	0.90	1250 V	–	–
630 A	244000 A²s	125 W	0.90	690 V	–	3NC3236-6U
	418000 A²s	130 W	0.90	1000 V	–	–
	650000 A²s	120 W	0.95	1250 V	–	–
710 A	346000 A²s	130 W	0.90	690 V	–	3NC3237-6U
	569000 A²s	140 W	0.90	1000 V	–	–
800 A	498000 A²s	135 W	0.95	690 V	–	3NC3238-6U
	819000 A²s	150 W	0.90	1000 V	–	–
	985000 A²s	145 W	0.95	1100 V	–	–
900 A	677000 A²s	140 W	0.95	690 V	–	3NC3240-6U
	1160000 A²s	160 W	0.95	1000 V	–	–
1000 A	975000 A²s	145 W	1.00	690 V	–	3NC3241-6U
	1670000 A²s	165 W	0.95	1000 V	–	–
1100 A	1382000 A²s	150 W	1.00	690 V	–	3NC3242-6U
	1910000 A²s	175 W	0.95	800 V	–	–
1250 A	1990000 A²s	155 W	1.00	690 V	–	3NC3243-6U
	2600000 A²s	185 W	0.95	800 V	–	–
1400 A	2100000 A²s	175 W	1.00	500 V	–	3NC3244-6U
1600 A	2860000 A²s	195 W	0.95	500 V	–	3NC3245-6U
Further information						
Screw fixing					■	■

[1] For the max. DC voltage, see the Configuration Manual – Fuse systems, chapter Configuration, Use with direct current www.siemens.com/lowvoltage/manuals (45314810)

7

Quick selection guide, page 7/32

© Siemens 2025

M12, 73 mm	M12, 73 mm
–	3NC3430-6U
–	3NC3432-6U
–	–
–	3NC3434-6U
–	–
3NC3336-6U	–
–	3NC3436-6U
–	–
3NC3337-6U	–
–	–
3NC3338-6U	–
–	3NC3438-6U
–	–
3NC3340-6U	–
–	–
3NC3341-6U	–
–	–
3NC3342-6U	–
–	–
3NC3343-6U	–
–	–
–	–
■	■

7

Quick selection guide, page 7/32

© Siemens 2025

SITOR semiconductor fuse links, LV HRC design (AC/DC)

Operational class gR, special designs

					Without installation bracket	With installation bracket For SITOR 6QG11 thyristor sets
				Screw fixing, flange dimension	M10, 89 mm	
I_n	Switch-off I^2t value	Power loss P_v	Varying load factor WL	U_n AC		
50 A	1100 A²s	20 W	0.85	600 V	–	3NE4117-5
850 A	2480000 A²s	85 W	1.00	1000 V	3NE9440-6	–
Further information						
Screw fixing					■	■

7

Operational class aR, special designs

					Without installation bracket	
					For screwing onto water-cooled busbars	For air-cooled rectifiers in electrolysis systems
				Flange dimension	83 mm	89 mm
I_n	Switch-off I^2t value	Power loss P_v	Varying load factor WL	U_n AC		
100 A	7400 A²s	35 W	0.85	1000 V	–	–
170 A	60500 A²s	43 W	0.85	800 V	–	–
200 A	44000 A²s	50 W	0.85	1000 V	–	–
250 A	635000 A²s	25 W	0.90	680 V	–	–
	29700 A²s	105 W	0.85	800 V	–	–
315 A	60700 A²s	120 W	0.85	800 V	–	–
350 A	1430000 A²s	32 W	0.90	680 V	–	–
450 A	191000 A²s	140 W	0.85	800 V	–	–
	395000 A²s	90 W	0.85	1000 V	–	–
500 A	276000 A²s	155 W	0.85	800 V	–	–
600 A	888000 A²s	150 W	0.90	1000 V	3NC5840	–
630 A	888000 A²s	145 W	0.90	800 V	3NC5841	–
710 A	923000 A²s	155 W	0.95	800 V	–	–
	620000 A²s	150 W	0.90	900 V	3NE6437-7	3NE6437
800 A	1728000 A²s	170 W	0.90	1000 V	3NC5838	–
900 A	1920000 A²s	170 W	0.90	900 V	–	3NE6444
1250 A	2480000 A²s	210 W	0.90	600 V	3NE9450-7	3NE9450
Further information						
Screw fixing					■	■

Quick selection guide, page 7/32

© Siemens 2025

		With installation bracket	
For mounting directly in the railway supply rectifier	**For SITOR 6QG12 thyristor sets**	**For SITOR 6QG10 thyristor sets**	**For SITOR 6QG11 thyristor sets**
	77 mm		
–	–	–	3NE4121-5
–	–	–	3NE4146-5
–	–	3NE3525-5	–
3NC7327-2	–	–	–
–	3NE4327-6B	–	–
–	3NE4330-6B	–	–
3NC7331-2	–	–	–
–	3NE4333-6B	–	–
–	–	3NE3535-5	–
–	3NE4334-6B	–	–
–	–	–	–
–	–	–	–
–	3NE4337-6	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
■	■	■	■

Quick selection guide, page 7/32

© Siemens 2025

SITOR semiconductor fuse links, LV HRC design (DC)

Operational class aR, with slotted blade contacts

					Size 1L	Size 2L	Size 3L	Size 2 × 3L
				Screw fixing, Mounting dimensions	M10, 190 mm	M12, 190 mm	M12, 190 mm	M12, 190 mm
I_n	Switch-off I^2t value at U_{VSI} [1]	Power loss P_v	U_n DC/ U_{VSI} DC (IEC)	U_n DC (UL)				
25 A	100 A^2s	8.2 W	440 V/700 V	500 V	–	–	–	–
32 A	220 A^2s	10.8 W	440 V/700 V	500 V	–	–	–	–
40 A	270 A^2s	12.5 W	440 V/700 V	500 V	–	–	–	–
50 A	480 A^2s	16 W	440 V/700 V	500 V	–	–	–	–
63 A	1100 A^2s	18.5	440 V/700 V	500 V	–	–	–	–
80 A	2600 A^2s	23 W	440 V/700 V	500 V	–	–	–	–
	1800 A^2s	42 W	1000 V/1250 V	1100 V	–	–	–	–
100 A	4000 A^2s	29 W	440 V/700 V	500 V	–	–	–	–
	4200 A^2s	28 W	600 V/1250 V	750 V	–	–	–	–
	3100 A^2s	45 W	1000 V/1250 V	1100 V	–	–	–	–
125 A	4800 A^2s	28.4 W	440 V/700 V	500 V	–	–	–	–
	6800 A^2s	36 W	600 V/1250 V	750 V	–	–	–	–
	6000 A^2s	59 W	1000 V/1250 V	1100 V	–	–	–	–
160 A	9800 A^2s	35.5 W	440 V/700 V	500 V	–	–	–	–
	12600 A^2s	42 W	600 V/1250 V	750 V	–	–	–	–
	13000 A^2s	54 W	1000 V/1250 V	1100 V	–	–	–	–
200 A	16000 A^2s	45.5 W	440 V/700 V	500 V	–	–	–	–
	24000 A^2s	42 W	600 V/1250 V	750 V	–	–	–	–
	28400 A^2s	56 W	1000 V/1250 V	1100 V	–	–	–	–
	100000 A^2s	75 W	1100 V/1800 V	1300 V	–	–	–	–
	39000 A^2s	50 W	1250 V/1500 V	1250 V	3NB1126-4KK11	–	–	–
250 A	34600 A^2s	50 W	600 V/1100 V	750 V	–	–	–	–
	60100 A^2s	59 W	1000 V/1250 V	1100 V	–	–	–	–
	150000 A^2s	110 W	1100 V/1800 V	1300 V	–	–	–	–
	80500 A^2s	51 W	1250 V/1500 V	1250 V	3NB1128-4KK11	–	–	–
315 A	69000 A^2s	65 W	600 V/1100 V	750 V	–	–	–	–
	75000 A^2s	80 W	900 V/1250 V	1000 V	–	–	–	–
	107000 A^2s	76 W	1000 V/1250 V	1100 V	–	–	–	–
	129000 A^2s	63 W	1250 V/1500 V	1250 V	–	3NB1231-4KK11	–	–
350 A	82000 A^2s	75 W	600 V/1100 V	750 V	–	–	–	–
	300000 A^2s	120 W	1100 V/1800 V	1300 V	–	–	–	–
400 A	109000 A^2s	85 W	600 V/1100 V	750 V	–	–	–	–
	107000 A^2s	95 W	900 V/1250 V	1000 V	–	–	–	–
	225000 A^2s	89 W	1000 V/1250 V	1100 V	–	–	–	–
	520000 A^2s	150 W	1100 V/1800 V	1300 V	–	–	–	–
	290000 A^2s	68 W	1250 V/1500 V	1250 V	–	3NB1234-4KK11	–	–
Further information								
Screw fixing					■	■	■	■
Installation in SITOR fuse bases					–	–	–	–
Installation in 3NH LV HRC fuse bases					–	–	–	–
Installation in 3NP and 3KF fuse switching devices					–	–	–	–

[1] For further I^2t values at U_n DC, see Configuration Manual – Fuse systems
www.siemens.com/lowvoltage/manuals (45314810)

7

Quick selection guide, page 7/32

© Siemens 2025

Size 3 × 3L	Size 1	Size 2	Size 3	Size 3 (long)		Size 2 (long)	Size 00
M12, 190 mm	M10, 110 mm	M10, 110 mm	M12, 110 mm	M10, 210 mm	M12, 210 mm	M10, 170 mm	M10, 80 mm Bolt-on bracket
–	–	–	–	–	–	–	3NB1713-0KK13
–	–	–	–	–	–	–	3NB1715-0KK13
–	–	–	–	–	–	–	3NB1717-0KK13
–	–	–	–	–	–	–	3NB1720-0KK13
–	–	–	–	–	–	–	3NB1721-0KK13
–	–	–	–	–	–	–	3NB1722-0KK13
–	–	–	–	–	–	3NB1222-3KK15	–
–	–	–	–	–	–	–	3NB1723-0KK13
–	3NB1123-1KK15	–	–	–	–	–	–
–	–	–	–	–	–	3NB1223-3KK15	–
–	–	–	–	–	–	–	3NB1724-0KK13
–	3NB1124-1KK15	–	–	–	–	–	–
–	–	–	–	–	–	3NB1224-3KK15	–
–	–	–	–	–	–	–	3NB1725-0KK13
–	3NB1125-1KK15	–	–	–	–	–	–
–	–	–	–	–	–	3NB1225-3KK15	–
–	–	–	–	–	–	–	3NB1726-0KK13
–	3NB1126-1KK15	–	–	–	–	–	–
–	–	–	–	–	–	3NB1226-3KK15	–
–	–	–	–	3NB1326-4KK11	–	–	–
–	–	–	–	–	–	–	–
–	3NB1128-1KK15	–	–	–	–	–	–
–	–	–	–	–	–	3NB1228-3KK15	–
–	–	–	–	3NB1328-4KK11	–	–	–
–	–	–	–	–	–	–	–
–	3NB1131-1KK15	–	–	–	–	–	–
–	–	–	3NB1331-3KK11	–	–	–	–
–	–	–	–	–	–	3NB1231-3KK15	–
–	–	–	–	–	–	–	–
–	3NB1132-1KK15	–	–	–	–	–	–
–	–	–	–	3NB1332-4KK11	–	–	–
–	3NB1134-1KK15	3NB1234-1KK15	–	–	–	–	–
–	–	–	3NB1334-3KK11	–	–	–	–
–	–	–	–	–	–	3NB1234-3KK15	–
–	–	–	–	3NB1334-4KK11	–	–	–
–	–	–	–	–	–	–	–
■	■	■	■	■	■	■	■
–	3NH5463	3NH5463	3NH5463	–	–	–	–
–	■	■	■	–	–	–	–
–	■	■	■	–	–	–	–

Quick selection guide, page 7/32

© Siemens 2025

SITOR semiconductor fuse links, LV HRC design (DC)

Operational class aR, with slotted blade contacts (continued)

					Size 1L	Size 2L	Size 3L	Size 2 × 3L
				Screw fixing, Mounting dimensions	M10, 190 mm	M12, 190 mm	M12, 190 mm	M12, 190 mm
I_n	Switch-off I^2t value at U_{VSI} [1]	Power loss P_v	U_n DC/ U_{VSI} DC (IEC)	U_n DC (UL)				
450 A	125000 A²s	95 W	600 V/1100 V	750 V	–	–	–	–
	480000 A²s	160 W	1100 V/1800 V	1300 V	–	–	–	–
500 A	178000 A²s	105 W	600 V/700 V	700 V	–	–	–	–
	182000 A²s	90 W	600 V/750 V	750 V	–	–	–	–
	200000 A²s	115 W	900 V/1250 V	1000	–	–	–	–
	410000 A²s	109 W	1000 V/1250 V	1100 V	–	–	–	–
	600000 A²s	89 W	1250 V/1500 V	1250 V	–	–	3NB1337-4KK11	–
525 A	620000 A²s	210 W	1100 V/1800 V	1300 V	–	–	–	–
550 A	230000 A²s	110 W	600 V/700 V	700 V	–	–	–	–
560 A	240000 A²s	95 W	600 V/750 V	750 V	–	–	–	–
630 A	280000 A²s	127 W	600 V/700 V	700 V	–	–	–	–
	350000 A²s	100 W	600 V/750 V	750 V	–	–	–	–
	290000 A²s	120 W	600 V/1000 V	750 V	–	–	–	–
	410000 A²s	120 W	900 V/1250 V	1000 V	–	–	–	–
	520000 A²s	163 W	1000 V/1250 V	1100 V	–	–	–	–
	1000000 A²s	220 W	1100 V/1800 V	1300 V	–	–	–	–
710 A	430000 A²s	105 W	500 V/600 V	600 V	–	–	–	–
	390000 A²s	130 W	600 V/1000 V	750 V	–	–	–	–
	1150000 A²s	275 W	1100 V/1800 V	1300 V	–	–	–	–
800 A	590000 A²s	130 W	500 V/600 V	600 V	–	–	–	–
	550000 A²s	135 W	600 V/1000 V	750 V	–	–	–	–
	620000 A²s	145 W	800 V/1000 V	900 V	–	–	–	–
	1910000 A²s	135 W	1250 V/1500 V	1250 V	–	–	3NB1345-4KK11	–
	1150000 A²s	160 W	1250 V/1500 V	1250 V	–	–	–	3NB2345-4KK16
900 A	650000 A²s	165 W	500 V/600 V	600 V	–	–	–	–
	740000 A²s	145 W	600 V/1000 V	750 V	–	–	–	–
1000 A	2250000 A²s	195 W	1250 V/1500 V	1250 V	–	–	–	3NB2350-4KK16
	1050000 A²s	155 W	600 V/1000 V	750 V	–	–	–	–
1100 A	1600000 A²s	165 W	600 V/900 V	750 V	–	–	–	–
1250 A	1800000 A²s	175 W	500 V/900 V	600 V	–	–	–	–
1400 A	5100000 A²s	250 W	1250 V/1500 V	1250 V	–	–	–	3NB2355-4KK16
1600 A	7450000 A²s	275 W	1250 V/1500 V	1250 V	–	–	–	3NB2357-4KK16
2100 A	1195000 A²s	365 W	1250 V/1500 V	1250 V	–	–	–	–
2400 A	18100000 A²s	445 W	1250 V/1500 V	1250 V	–	–	–	–
Further information								
Screw fixing					■	■	■	■
Installation in SITOR fuse bases					–	–	–	–
Installation in 3NH LV HRC fuse bases					–	–	–	–
Installation in 3NP and 3KF fuse switching devices					–	–	–	–

[1] For further I^2t values at U_n DC, see Configuration Manual – Fuse systems
www.siemens.com/lowvoltage/manuals (45314810)

Quick selection guide, page 7/32

© Siemens 2025

Size 3 × 3L	Size 1	Size 2	Size 3	Size 3 (long)		Size 2 (long)	Size 00
M12, 190 mm	M10, 110 mm	M10, 110 mm	M12, 110 mm	M10, 210 mm	M12, 210 mm	M10, 170 mm	M10, 80 mm Bolt-on bracket
–	3NB1136-1KK15	3NB1236-1KK15	–	–	–	–	–
–	–	–	–	3NB1336-4KK11	3NB1336-4KK15	–	–
–	3NB1137-1KK11	–	–	–	–	–	–
–	–	3NB1237-1KK15	–	–	–	–	–
–	–	–	3NB1337-3KK11	–	–	–	–
–	–	–	–	–	–	3NB1237-3KK15	–
–	–	–	–	–	–	–	–
–	–	–	–	–	3NB1337-4KK15	–	–
–	3NB1138-1KK11	–	–	–	–	–	–
–	–	3NB1240-1KK15	–	–	–	–	–
–	3NB1142-1KK11	–	–	–	–	–	–
–	–	3NB1242-1KK15	–	–	–	–	–
–	–	–	3NB1342-1KK11	–	–	–	–
–	–	–	3NB1342-3KK11	–	–	–	–
–	–	–	–	–	–	3NB1242-3KK15	–
–	–	–	–	3NB1342-4KK11	3NB1342-4KK15	–	–
–	–	3NB1243-1KK15	–	–	–	–	–
–	–	–	3NB1343-1KK11	–		–	–
–	–	–	–	–	3NB1343-4KK15	–	–
–	–	3NB1245-1KK15	–	–	–	–	–
–	–	–	3NB1345-1KK11	–	–	–	–
–	–	–	3NB1345-3KK11	–	–	–	–
–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–
–	–	3NB1247-1KK15	–	–	–	–	–
–	–	–	3NB1347-1KK11	–	–	–	–
–	–	–	–	–	–	–	–
–	–	–	3NB1350-1KK11	–	–	–	–
–	–	–	3NB1351-1KK11	–	–	–	–
–	–	–	3NB1352-1KK11	–	–	–	–
–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–
3NB2364-4KK17	–	–	–	–	–	–	–
3NB2366-4KK17	–	–	–	–	–	–	–
■	■	■	■	■	■	■	■
–	3NH5463	3NH5463	3NH5463	–	–	–	–
–	■	■	■	–	–	–	–
–	■	■	■	–	–	–	–

7

Quick selection guide, page 7/32

© Siemens 2025

SITOR semiconductor fuse links, LV HRC design (DC)

Operational class aR, with blade contacts without slots

					Size 00	Size 0	Size 1	Size 2
I_n	Switch-off I^2t value at U_{VSI} [1]	Power loss P_v	U_n DC/ U_{VSI} DC (IEC)	U_n DC (UL)				
32 A	280 A²s	12 W	600 V/900 V	750 V	–	3NB1015-1KK10	–	–
40 A	330 A²s	13 W	600 V/900 V	750 V	–	3NB1017-1KK10	–	–
50 A	520 A²s	16 W	600 V/900 V	750 V	–	3NB1020-1KK10	–	–
63 A	900 A²s	20 W	600 V/900 V	750 V	–	3NB1021-1KK10	–	–
80 A	2100 A²s	22 W	600 V/900 V	750 V	–	3NB1022-1KK10	–	–
	1100 A²s	19 W	440 V/700 V	500 V	3NB1722-0KK10	–	–	–
100 A	3900 A²s	24 W	600 V/900 V	750 V	–	3NB1023-1KK10	–	–
	3100 A²s	25.5 W	440 V/600 V	500 V	–	–	3NB1123-0KK10	–
	3200 A²s	22 W	440 V/700 V	500 V	3NB1723-0KK10	–	–	–
125 A	6800 A²s	30 W	600 V/900 V	750 V	–	3NB1024-1KK10	–	–
	5400 A²s	28.5 W	440 V/600 V	500 V	–	–	3NB1124-0KK10	–
	6200 A²s	28 W	440 V/700 V	500 V	3NB1724-0KK10	–	–	–
160 A	13000 A²s	35 W	600 V/800 V	750 V	–	3NB1025-1KK10	–	–
	8500 A²s	37 W	440 V/600 V	500 V	–	–	3NB1125-0KK10	–
	8500 A²s	38 W	440 V/700 V	500 V	3NB1725-0KK10	–	–	–
200 A	14500 A²s	49 W	440 V/600 V	500 V	–	–	3NB1126-0KK10	–
250 A	30000 A²s	52 W	440 V/600 V	500 V	–	–	3NB1128-0KK10	–
315 A	75000 A²s	68 W	440 V/500 V	500 V	–	–	3NB1131-0KK10	–
350 A	45000 A²s	68.6 W	440 V/500 V	500 V	–	–	–	3NB1232-0KK10
400 A	80000 A²s	72.8 W	440 V/500 V	500 V	–	–	–	3NB1234-0KK10
450 A	100000 A²s	80.1 W	440 V/500 V	500 V	–	–	–	3NB1236-0KK10
500 A	160000 A²s	77.5 W	440 V/500 V	500 V	–	–	–	3NB1237-0KK10
550 A	230000 A²s	86.4 W	440 V/500 V	500 V	–	–	–	3NB1238-0KK10
630 A	330000 A²s	90.7 W	440 V/500 V	500 V	–	–	–	3NB1242-0KK10
Further information								
Installation in 3NH LV HRC fuse bases					■	■	■	■
Installation in 3NP and 3KF fuse switching devices					■	■	■	■

[1] For further I^2t values at U_n DC, see Configuration Manual – Fuse systems
www.siemens.com/lowvoltage/manuals (45314810)

7

Quick selection guide, page 7/32

© Siemens 2025

Operational class aR, with female thread at both ends

					Size 3
				Screw fixing, mounting dimension	M12, 73 mm
I_n	**Switch-off I^2t value at U_{VSI} [1]**	**Power loss P_v**	**U_n DC/ U_{VSI} DC (IEC)**	**U_n DC (UL)**	
315 A	75000 A^2s	80 W	900 V/1250 V	1000 V	3NB1331-3KK12
400 A	107000 A^2s	95 W	900 V/1250 V	1000 V	3NB1334-3KK12
500 A	200000 A^2s	115 W	900 V/1250 V	1000 V	3NB1337-3KK12
630 A	290000 A^2s	130 W	600 V/1000 V	750 V	3NB1342-1KK12
	410000 A^2s	120 W	900 V/1250 V	1000 V	3NB1342-3KK12
710 A	390000 A^2s	140 W	600 V/1000 V	750 V	3NB1343-1KK12
800 A	550000 A^2s	150 W	600 V/1000 V	750 V	3NB1345-1KK12
	620000 A^2s	145 W	800 V/1000 V	900 V	3NB1345-3KK12
900 A	740000 A^2s	160 W	600 V/1000 V	750 V	3NB1347-1KK12
1000 A	1050000 A^2s	165 W	600 V/1000 V	750 V	3NB1350-1KK12
1100 A	1600000 A^2s	175 W	600 V/900 V	750 V	3NB1351-1KK12
1250 A	1800000 A^2s	185 W	500 V/900 V	600 V	3NB1352-1KK12
Further information					
Screw fixing					■

1) For further I^2t values at U_n DC, see Configuration Manual – Fuse systems
www.siemens.com/lowvoltage/manuals (45314810)

Quick selection guide, page 7/32

© Siemens 2025

SITOR semiconductor fuse links, cylindrical fuse design (AC/DC)

Operational class gS

				Size 22 × 127 mm
I_n	Switch-off I^2t value	Power loss P_v	U_n AC/DC	
1 A	2 A^2s	2 W	1500 V/1000 V	3NC2301-0MK
2 A	4.4 A^2s	2.5 W	1500 V/1000 V	3NC2302-0MK
4 A	55 A^2s	5.3 W	1500 V/1000 V	3NC2304-0MK
6 A	150 A^2s	6.4 W	1500 V/1000 V	3NC2306-0MK
10 A	540 A^2s	3.1 W	1500 V/1000 V	3NC2310-0MK
16 A	1120 A^2s	4.7 W	1500 V/1000 V	3NC2316-0MK
20 A	2850 A^2s	5.4 W	1500 V/1000 V	3NC2320-0MK
25 A	3300 A^2s	6.9 W	1500 V/1000 V	3NC2325-0MK
32 A	9050 A^2s	6.7 W	1500 V/1000 V	3NC2332-0MK
Further information				
Installation in SITOR fuse holders				3NC23
Further currents, operational class gR				See page 7/84
Further currents, operational class aR				See page 7/86

Quick selection guide, page 7/32

© Siemens 2025

Quick selection guide, page 7/32

© Siemens 2025

SITOR semiconductor fuse links, cylindrical fuse design (AC/DC)

Operational class gR

I_n	Switch-off I^2t value	Power loss P_v	U_n AC/DC	Size 10 × 38 mm	Size 14 × 51 mm	Size 22 × 58 mm	Size 22 × 127 mm
2 A	33 A^2s	0.5 W	–/1100 V [2]	3NC1202-0MK	–	–	–
4 A	99 A^2s	0.7 W	–/1100 V [2]	3NC1204-0MK	–	–	–
6 A	3,5 A^2s	3.1 W	690 V/700 V [1]	–	3NC1406-0MK	–	–
	6,5 A^2s	2.5 W	690 V/440 V	3NC1006-0MK	–	–	–
	120 A^2s	1.4 W	–/1100 V [2]	3NC1206-0MK	–	–	–
8 A	210 A^2s	1.7 W	–/1100 V [2]	3NC1208-0MK	–	–	–
10 A	15 A^2s	4.6 W	690 V/700 V [1]	–	3NC1410-0MK	–	–
	17 A^2s	4.3 W	690 V/440 V	–	–	–	–
	18 A^2s	3.3 W	690 V/440 V	3NC1010-0MK	–	–	–
	260 A^2s	2.3 W	–/1000 V [3]	3NC1210-0MK	–	–	–
12 A	35 A^2s	4 W	690 V/440 V	3NC1012-0MK	–	–	–
16 A	32 A^2s	6.7 W	690 V/600 V	–	3NC1416-0MK	–	–
	45 A^2s	6 W	690 V/440 V	3NC1016-0MK	–	–	–
	52 A^2s	4.4 W	690 V/440 V	–	–	–	–
20 A	68 A^2s	7.4 W	690 V/600 V	–	3NC1420-0MK	–	–
	90 A^2s	6.5 W	690 V/440 V	–	–	–	–
	110 A^2s	7.8 W	690 V/250 V	3NC1020-0MK	–	–	–
25 A	108 A^2s	8.4 W	690 V/600 V	–	3NC1425-0MK	–	–
	120 A^2s	9.5 W	690 V/440 V	–	–	–	–
	140 A^2s	8.7 W	690 V/250 V	3NC1025-0MK	–	–	–
	160 A^2s	8.5 W	690 V/440 V	–	–	–	–
	180 A^2s	8.1 W	690 V/700 V [1]	–	–	3NC2225-0MK	–
32 A	175 A^2s	12.3 W	690 V/600 V	–	3NC1432-0MK	–	–
	220 A^2s	12.3 W	690 V/440 V	–	–	–	–
	400 A^2s	8.9 W	690 V/440 V	–	–	–	–
	420 A^2s	9 W	690 V/600 V	–	–	3NC2232-0MK	–
	450 A^2s	12 W	690 V/250 V	3NC1032-0MK	–	–	–
40 A	400 A^2s	14.8 W	690 V/440 V	–	–	–	–
	470 A^2s	11.7 W	690 V/440 V	–	3NC1440-0MK	–	–
	600 A^2s	11 W	690 V/440 V	–	–	–	–
	700 A^2s	12.5 W	690 V/440 V	–	–	3NC2240-0MK	–
	18500 A^2s	9.4 W	1500 V/1000 V	–	–	–	3NC2340-0MK
50 A	830 A^2s	16.3 W	690 V/250 V	–	3NC1450-0MK	–	–
	980 A^2s	17.5 W	690 V/440 V	–	–	–	–
	1250 A^2s	13.8 W	690 V/440 V	–	–	–	–
	1250 A^2s	15.2 W	690 V/250 V	–	–	–	–
63 A	2050 A^2s	18.8 W	690 V/440 V	–	–	–	–
	2400 A^2s	17.5 W	690 V/250 V	–	–	–	–
80 A	4400 A^2s	23 W	690 V/250 V	–	–	–	–
100 A	11500 A^2s	28.7 W	690 V/250 V	–	–	–	–
Further information							
Screw fixing				–	–	–	–
Installation in SITOR fuse holders				3NC109.	3NC149.	3NC229.	3NC23
Installation in SITOR fuse bases				–	–	–	–
Further currents, operational class gS				–	–	–	See page 7/82
Further currents, operational class aR				–	–	–	See page 7/86

[1] Observe 600 V DC voltage according to IEC, 700 V according to UL, time constant and minimum breaking current MBC.
[2] DC voltage (IEC) at time constant 10 ms, VSI voltage 1150 V at time constant < 3 ms, UL voltage 1250 V at time constant 10 ms
[3] DC voltage (IEC) at time constant 10 ms, VSI voltage 1150 V at time constant < 3 ms, UL voltage 1100 V at time constant 10 ms

7

Quick selection guide, page 7/32

© Siemens 2025

With M8 bolt-on links Size 18 × 88 mm	Size 26 × 103 mm
–	–
–	–
–	–
–	–
–	–
–	–
–	–
3NC1810-0MK	–
–	–
–	–
–	–
–	–
–	–
3NC1816-0MK	–
–	–
3NC1820-0MK	–
–	–
–	–
–	3NC2625-0MK
–	–
3NC1825-0MK	–
–	–
–	–
–	3NC2632-0MK
3NC1832-0MK	–
–	–
–	–
–	3NC2640-0MK
–	–
3NC1840-0MK	–
–	–
–	–
–	–
–	3NC2650-0MK
3NC1850-0MK	–
–	–
–	3NC2663-0MK
–	–
–	–
–	–
■	■
–	–
3NH5723	3NH5023
–	–
–	–

Quick selection guide, page 7/32

© Siemens 2025

SITOR semiconductor fuse links, cylindrical fuse design (AC/DC)

Operational class aR

				Size 10 × 38 mm [1]	Size 14 × 51 mm	
					Standard	With striker
I_n	Switch-off I^2t value	Power loss P_v	U_n AC/DC			
1 A	1.2 A²s	5 W	660 V/–	–	3NC1401	–
2 A	10 A²s	3 W	660 V/–	–	3NC1402	–
3 A	8 A²s	1.2 W	600/700 V [1]	3NC1003	–	–
	15 A²s	2.5 W	660 V/–	–	3NC1403	–
4 A	25 A²s	3 W	660 V/–	–	3NC1404	–
5 A	11 A²s	1.5 W	690/700 V [1]	–	3NC1405	–
6 A	11 A²s	1.5 W	690/700 V [1]	–	3NC1406	–
	20 A²s	1.5 W	600/700 V [1]	3NC1006	–	–
8 A	30 A²s	2 W	600/700 V [1]	3NC1008	–	–
10 A	22 A²s	4 W	690/700 V [1]	–	3NC1410	–
	32 A²s	4 W	690/600 V [1]	–	–	3NC1410-5
	60 A²s	2.5 W	600/700 V [1]	3NC1010	–	–
12 A	110 A²s	3 W	600/700 V [1]	3NC1012	–	–
15 A	63 A²s	5.5 W	690/600 V [1]	–	–	3NC1415-5
	70 A²s	5.5 W	690/700 V [1]	–	3NC1415	–
16 A	150 A²s	3.5 W	600/700 V [1]	3NC1016	–	–
20 A	100 A²s	6 W	690/700 V [1]	–	3NC1420	–
	200 A²s	4.8 W	600/700 V [1]	3NC1020	–	–
	220 A²s	4.6 W	690/700 V [1]	–	–	–
	234 A²s	6 W	690/600 V [1]	–	–	3NC1420-5
	240 A²s	5 W	690/500 V [1]	–	–	–
25 A	250 A²s	6 W	600/700 V [1]	3NC1025	–	–
	300 A²s	5.6 W	690/700 V [1]	–	–	–
	320 A²s	7 W	690/700 V [1]	–	3NC1425	–
	350 A²s	6 W	690/500 V [1]	–	–	–
	378 A²s	7 W	690/600 V [1]	–	–	3NC1425-5
30 A	400 A²s	9 W	690/700 V [1]	–	3NC1430	–
	466 A²s	9 W	690/600 V [1]	–	–	3NC1430-5
32 A	450 A²s	7 W	690/700 V [1]	–	–	–
	500 A²s	7.5 W	660 V/–	3NC1032	–	–
	500 A²s	8 W	690/500 V [1]	–	–	–
	600 A²s	7.6 W	690/700 V [1]	–	3NC1432	
	600 A²s	7.6 W	690/600 V [1]			3NC1432-5
40 A	700 A²s	8.5 W	690/700 V [1]	–	–	–
	750 A²s	8 W	690/600 V [1]			3NC1440-5
	750 A²s	8 W	690/700 V [1]	–	3NC1440	
	800 A²s	9 W	690/500 V [1]	–	–	–
Further information						
Screw fixing				–	–	–
Installation in SITOR fuse holders				3NC109.	3NC149.	3NC149.-5
Installation in SITOR fuse bases				–	–	–
Further currents, operational class gR				–	–	–
Further currents, operational class gS				–	–	–

[1] Observe DC voltage acc. to UL, time constant and minimum breaking current MBC

7

Quick selection guide, page 7/32

© Siemens 2025

Size 22 × 58 mm		Size 22 × 127 mm	Size 26 × 103 mm
Standard	With striker		With M8 bolt-on links
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
3NC2220	–	–	–
–	–	–	–
–	3NC2220-5	–	–
–	–	–	–
3NC2225	–	–	–
–	–	–	–
–	3NC2225-5	–	–
–	–	–	–
–	–	–	–
–	–	–	–
3NC2232	–	–	–
–	–	–	–
–	3NC2232-5	–	–
–	–	–	–
3NC2240	–	–	–
–	–	–	–
–	3NC2240-5	–	–
–	–	–	■
3NC229.	3NC229.-5	3NC23	–
–	–	–	3NH5023
–	–	See page 7/84	–
–	–	See page 7/82	–

Quick selection guide, page 7/32

© Siemens 2025

SITOR semiconductor fuse links, cylindrical fuse design (AC/DC)

Operational class aR (continued)

				Size 10 × 38 mm [1]	Size 14 × 51 mm	
					Standard	With striker
I_n	Switch-off I^2t value	Power loss P_v	U_n AC/DC			
50 A	1350 A^2s	9.5 W	690/700 V [1]	–	–	–
	1500 A^2s	9.5 W	690/500 V [1]	–	–	–
	1800 A^2s	9 W	690/600 V [1]			3NC1450-5
	1800 A^2s	9 W	690/700 V [1]	–	3NC1450	
	26000 A^2s	11.6 W	1500/1000 V	–	–	–
63 A	2100 A^2s	16.7 W	690/250 V	–	3NC1463-0MK [2]	–
	2600 A^2s	11 W	690/700 V [1]	–	–	–
	3000 A^2s	11 W	690/500 V [1]	–	–	–
80 A	3500 A^2s	22.5 W	690/440 V	–	–	–
	5500 A^2s	13.5 W	690/700 V [1]	–	–	–
	6000 A^2s	13.5 W	690/500 V [1]	–	–	–
100 A	5400 A^2s	31.5 W	690/440 V	–	–	–
	8000 A^2s	16 W	690/700 V [1]	–	–	–
	8500 A^2s	16 W	600/500 V [1]	–	–	–
125 A	11800 A^2s	39 W	690/440 V	–	–	–
	29000 A^2s	35.3 W	690/250 V	–	–	–
Further information						
Screw fixing				–	–	–
Installation in SITOR fuse holders				3NC109.	3NC149.	3NC149.-5
Installation in SITOR fuse bases				–	–	–
Further currents, operational class gR				–	–	–
Further currents, operational class gS				–	–	–

[1] Observe DC voltage acc. to UL, time constant and minimum breaking current MBC
[2] I_n = 63 A cannot be used in the 3NC149. (3NC149. only permissible for max. 50 A)

7

Quick selection guide, page 7/32

© Siemens 2025

Size 22 × 58 mm		Size 22 × 127 mm	Size 26 × 103 mm
Standard	With striker		With M8 bolt-on links
3NC2250	–	–	–
–	3NC2250-5	–	–
–	–	–	–
–	–	3NC2350-0MK	–
–	–	–	–
3NC2263	–	–	–
–	3NC2263-5	–	–
–	–	–	3NC2680-0MK
3NC2280	–	–	–
–	3NC2280-5	–	–
–	–	–	3NC2600-0MK
3NC2200	–	–	–
–	3NC2200-5	–	–
–	–	–	3NC2611-0MK
3NC2211-0MK	–	–	–
–	–	–	■
3NC229.	3NC229.-5	3NC23	–
–	–	–	3NH5023
–	–	See page 7/84	–
–	–	See page 7/82	–

7

Quick selection guide, page 7/32

© Siemens 2025

Photovoltaic fuse links

Cylindrical fuse de sign, operational class gPV

				Size 10 × 38 mm	Size 10 × 85 mm
I_n DC	Power loss P_v	Power loss P_v at 70% [1]	U_n DC		
2 A	1.4 W	0.6 W	1000 V	3NW6002-4	–
4 A	1.6 W	0.7 W	1000 V	3NW6004-4	–
	2.7 W	1.1 W	1500 V	–	3NW6604-4
6 A	1.7 W	0.7 W	1000 V	3NW6001-4	–
	3.0 W	1.2 W	1500 V	–	3NW6601-4
8 A	1.9 W	0.8 W	1000 V	3NW6008-4	–
	3.6 W	1.5 W	1500 V	–	3NW6608-4
10 A	2.3 W	1.0 W	1000 V	3NW6003-4	–
	3.7 W	1.6 W	1500 V	–	3NW6603-4
12 A	2.7 W	1.1 W	1000 V	3NW6006-4	–
	3.3 W	1.4 W	1500 V	–	3NW6606-4
16 A	3.2 W	1.3 W	1000 V	3NW6005-4	–
	3.7 W	1.6 W	1500 V	–	3NW6605-4
20 A	3.4 W	1.4 W	1000 V	3NW6007-4	–
	4.0 W	1.7 W	1200 V	–	3NW6607-4
Further information					
Installation in fuse holders				3NW70..-4	3NW76..-4

[1] Tested in fuse holders 3NW7013-4 and 3NW7613-4.

7

Quick selection guide, page 7/32

© Siemens 2025

LV HRC design, operational class gPV, with blade contacts without slots

			Size 1	Size 1L	Size 2L	Size 3L	Size 1XL	Size 2XL
I_n DC	Power loss P_v	U_n DC						
63 A	19 W	1000 V	3NE1218-4	–	–	–	–	–
	20 W	1500 V	–	–	–	–	3NE1218-5E	–
80 A	20 W	1000 V	3NE1220-4	–	–	–	–	–
	25 W	1500 V	–	–	–	–	3NE1220-5E	–
100 A	24 W	1000 V	3NE1221-4	–	–	–	–	–
	30 W	1500 V	–	–	–	–	3NE1221-5E	–
125 A	26 W	1000 V	3NE1222-4	–	–	–	–	–
	29 W	1500 V	–	–	–	–	3NE1222-5E	–
160 A	32 W	1000 V	3NE1224-4	–	–	–	–	–
	34 W	1500 V	–	–	–	–	3NE1224-5E	–
200 A	41 W	1500 V	–	–	–	–	3NE1225-5E	–
	51 W	1000 V	–	3NE1225-4D	–	–	–	–
250 A	53 W	1500 V	–	–	–	–	–	3NE1327-5E
	54 W	1000 V	–	3NE1227-4D	–	–	–	–
315 A	63 W	1500 V	–	–	–	–	–	3NE1330-5E
	73 W	1000 V	–	–	3NE1330-4D	–	–	–
400 A	82 W	1000 V	–	–	3NE1332-4D	–	–	–
			–	–	3NE1332-4F [1]	–	–	–
500 A	100 W	1000 V	–	–	–	3NE1434-4E	–	–
630 A	110 W	1000 V	–	–	–	3NE1436-4E	–	–

[1] With slotted blade contacts for screw fixing, connection dimension = 150 mm

Quick selection guide, page 7/32

© Siemens 2025

Class CC fuse links

Acc. to UL

		Characteristic: Slow	Characteristic: Slow, current-limiting	Characteristic: Quick
I_n	I_n [1]			
0.6 A	6/10 A	3NW1006-0HG	–	–
0.8 A	8/10 A	3NW1008-0HG	–	–
1 A	–	3NW1010-0HG	3NW3010-0HG	3NW2010-0HG
1.5 A	1.5 A	3NW1015-0HG	–	–
2 A	–	3NW1020-0HG	3NW3020-0HG	3NW2020-0HG
2.5 A	–	3NW1025-0HG	–	–
3 A	–	3NW1030-0HG	3NW3030-0HG	3NW2030-0HG
4 A	–	3NW1040-0HG	3NW3040-0HG	3NW2040-0HG
5 A	–	3NW1050-0HG	3NW3050-0HG	3NW2050-0HG
6 A	–	3NW1060-0HG	3NW3060-0HG	3NW2060-0HG
7.5 A	–	3NW1075-0HG	–	–
8 A	–	3NW1080-0HG	3NW3080-0HG	3NW2080-0HG
10 A	–	3NW1100-0HG	3NW3100-0HG	3NW2100-0HG
12 A	–	–	3NW3120-0HG	3NW2120-0HG
15 A	–	3NW1150-0HG	3NW3150-0HG	3NW2150-0HG
20 A	–	3NW1200-0HG	3NW3200-0HG	3NW2200-0HG
25 A	–	3NW1250-0HG	3NW3250-0HG	3NW2250-0HG
30 A	–	3NW1300-0HG	3NW3300-0HG	3NW2300-0HG
Further information				
Installation in fuse holders		3NW75.3-0HG, 3NW753.-1HG, 3NW7431-0HG	3NW75.3-0HG, 3NW753.-1HG, 3NW7431-0HG	3NW75.3-0HG, 3NW753.-1HG, 3NW7431-0HG

[1] American English wording

Quick selection guide, page 7/32

© Siemens 2025

Quick selection guide, page 7/32

© Siemens 2025

Busbars

According to IEC, can be cut

Pin spacing 1 MW

Pin spacing in MW (1 MW = 18 mm)	Application	Length	Version	Conductor cross-section	
1-phase, angled 90°					**Article No.**
	For cylindrical fuse holders 8 × 32 mm and 10 × 38 mm For SITOR cylindrical fuse holders 10 × 38 mm	214 mm	With end caps	16 mm²	5ST3700
		1016 mm	Without end caps	16 mm²	5ST3701
2-phase					**Article No.**
	For cylindrical fuse holders 8 × 32 mm and 10 × 38 mm For SITOR cylindrical fuse holders 10 × 38 mm	214 mm	With end caps	16 mm²	5ST3704
		1016 mm	Without end caps	16 mm²	5ST3705
3-phase					**Article No.**
	For cylindrical fuse holders 8 × 32 mm and 10 × 38 mm For SITOR cylindrical fuse holders 10 × 38 mm	214 mm	With end caps	16 mm²	5ST3708
		1016 mm	Without end caps	16 mm²	5ST3710

Fork spacing 1 MW

Fork spacing in MW (1 MW = 18 mm)	Application	Length	Version	Conductor cross-section	
1-phase					**Article No.**
	For MINIZED D01 fuse switch disconnectors	1000 mm	Without end caps	16 mm²	5ST2190
2-phase					**Article No.**
	For MINIZED D01 fuse switch disconnectors	1000 mm	Without end caps	16 mm²	5ST2191
3-phase					**Article No.**
	For MINIZED D01 fuse switch disconnectors	1000 mm	Without end caps	16 mm²	5ST2192

7

System overview, page 7/4

© Siemens 2025

According to IEC, can be cut

Pin spacing 1.5 MW

Pin spacing in MW (1.5 MW = 27 mm)	Application	Length	Version	Conductor cross-section	
1-phase, angled 90°					**Article No.**
	For 5SG71.3 MINIZED D02 switch disconnectors with fuses For NEOZED D01/D02 fuse bases made of molded plastic 5SG1301, 5SG1701, 5SG1302, 5SG1702 For NEOZED D01/D02 fuse bases made of ceramic with saddle terminals For cylindrical fuse holders 14 × 51 mm, 3NW7111 For SITOR cylindrical fuse holders 14 × 51 mm, 3NC1491	1016 mm	Without end caps	16 mm²	5ST3703
3-phase					**Article No.**
	For 5SG71.3 MINIZED D02 switch disconnectors with fuses For NEOZED D01/D02 fuse bases made of molded plastic 5SG5301, 5SG5701, 5SG5302, 5SG5702 For NEOZED D01/D02 fuse bases made of ceramic with saddle terminals For cylindrical fuse holders 14 × 51 mm, 3NW7131 For SITOR cylindrical fuse holders 14 × 51 mm, 3NC1493	1016 mm	Without end caps	16 mm²	5ST3714

Fork spacing 1.5 MW

Fork spacing in MW (1.5 MW = 27 mm)	Application	Length	Version	Conductor cross-section	
1-phase					**Article No.**
	For NEOZED D01/D02 fuse bases made of ceramic with clamp-type terminal and screw head contacts	1000 mm	Without end caps, non-insulated	36 mm²	5SH5322
3-phase					**Article No.**
	For NEOZED D01/D02 fuse bases made of ceramic with clamp-type terminals and screw head contacts	1000 mm	Without end caps	16 mm²	5SH5320

7

System overview, page 7/4

© Siemens 2025

Busbars

According to UL 508, can be cut

Pin spacing 1 MW

Pin spacing in MW (1 MW = 18 mm)	Application	Length	Version	Conductor cross-section	
1-phase					**Article No.**
	For Class CC fuse holders 10 × 38 mm (3NC1091, 3NW7513-0HG)	1000 mm	Without end caps	18 mm²	5ST3701-0HG
2-phase					**Article No.**
	For Class CC fuse holders 10 × 38 mm (3NC1092, 3NW7523-0HG)	1000 mm	Without end caps	18 mm²	5ST3705-0HG
3-phase					**Article No.**
	For Class CC fuse holders 10 × 38 mm (3NC1093, 3NW7533-0HG)	1000 mm	Without end caps	18 mm²	5ST3710-0HG

System overview, page 7/4

© Siemens 2025

According to UL 508, can be cut

Pin spacing 1.5 MW

Pin spacing in MW (1 MW = 18 mm)	Application	Length	Version	Conductor cross-section	
1-phase					**Article No.**
	For fuse holders 14 × 51 mm (3NC1491, 3NW7111)	1000 mm	Without end caps	18 mm²	5ST3703-0HG
				25 mm²	5ST3701-2HG
2-phase					
	For fuse holders 14 × 51 mm (3NC1492, 3NW7121)	1000 mm	Without end caps	25 mm²	5ST3705-2HG
3-phase					**Article No.**
	For fuse holders 14 × 51 mm (3NC1493, 3NW7131)	1000 mm	Without end caps	18 mm²	5ST3714-0HG
				25 mm²	5ST3710-2HG

7

System overview, page 7/4

© Siemens 2025

Busbars

Accessories

For busbars according to IEC

Terminals

- For NEOZED D01/D02 fuse bases made of ceramic
- For DIAZED DII/DIII fuse bases made of ceramic

	Terminal version	Conductor cross-section	Article No.
	Terminal version S	2 ... 25 mm²	5SH5327
	Terminal versions B and K	6 ... 25 mm²	5SH5328

Touch protection

- For free connections, yellow (RAL 1004) 5 × 1 pin

Article No.
5ST3655

End caps

	Version	For busbar type	Article No.
	For 1-phase busbars	5ST2190	5ST2196
		5ST37 and 5SH55	5ST3748
	For 2-phase and 3-phase busbars	5ST2191 and 5ST2192	5ST2197
		5ST37 and 5SH5320	5ST3750

7

System overview, page 7/4

© Siemens 2025

For busbars according to UL 508

Terminals according to UL 508

	Version	Infeed	Article No.
	For busbars 35 mm²	Device	5ST3770-0HG
	For busbars 30 mm²	Busbar	5ST3770-1HG

Busbar touch protection according to UL 508

- For free connections, yellow (RAL 1004) 5 × 1 pin

Article No.
5ST3655-0HG

End caps for 5ST37. .-.HG

	Version	Article No.
	For 1-phase busbars	5ST3748-0HG
	For 2 and 3-phase busbars	5ST3750-0HG

7

System overview, page 7/4

© Siemens 2025

LV HRC signal detectors, electronic fuse monitoring

LV HRC signal detectors

- Only for SIEMENS 3NA3, 3NA7, 3ND LV HRC fuse links with non-insulated grip lugs
- Rated voltage of up to 690 V AC/600 V DC
- Contact: Microswitches 250 V AC, 6 A
- Connection: flat male tab A 2.8 × 0.5 mm acc. to DIN EN 61210; VDE 0613-6 from 2011

Fuse size	Article No.
000 ... 4	3NX1021

Signal detector links

- Rated voltage of up to 690 V AC/600 V DC

Fuse size	Response value	Application	Article No.
000 ... 4	> 9 V/2.5 A	For standard applications	3NX1022
	> 2 V/7 A	Only for meshed networks	3NX1023

Signal detector tops

- Only for SIEMENS 3NA3, 3NA7, 3ND LV HRC fuse links with non-insulated grip lugs
- Rated voltage of up to 690 V AC/600 V DC
- Contact: Microswitch 230 V AC, 5 A, 1 CO
- Connection: flat connector 2.3 mm

Fuse size	Article No.
000, 00, 1, 2	3NX1024

7

Electronic fuse monitor

- For all low-voltage fuse systems
- For monitoring all types and versions of melting fuses that cannot be equipped with a fault signal contact
- Can be used in asymmetric systems afflicted with harmonics and regenerative feedback motors
- Signal also for disconnected loads

U_e AC	I_n	U_c	Article No.
230 V	4 A	3 AC 380 ... 415 V	5TT3170

Electronic fuse monitor for remote display of tripped fuses

- Remote display by auxiliary contact (1 CO)
- Local detection by integrated LED
- For all sizes
- For 3KF LV HRC and 3KF SITOR

U_e AC	I_n	U_c	Article No.
230 V	1.5 A	3 AC 690 V	3KF9010-1AA00

System overview, page 7/4

© Siemens 2025

System overview, page 7/4

© Siemens 2025

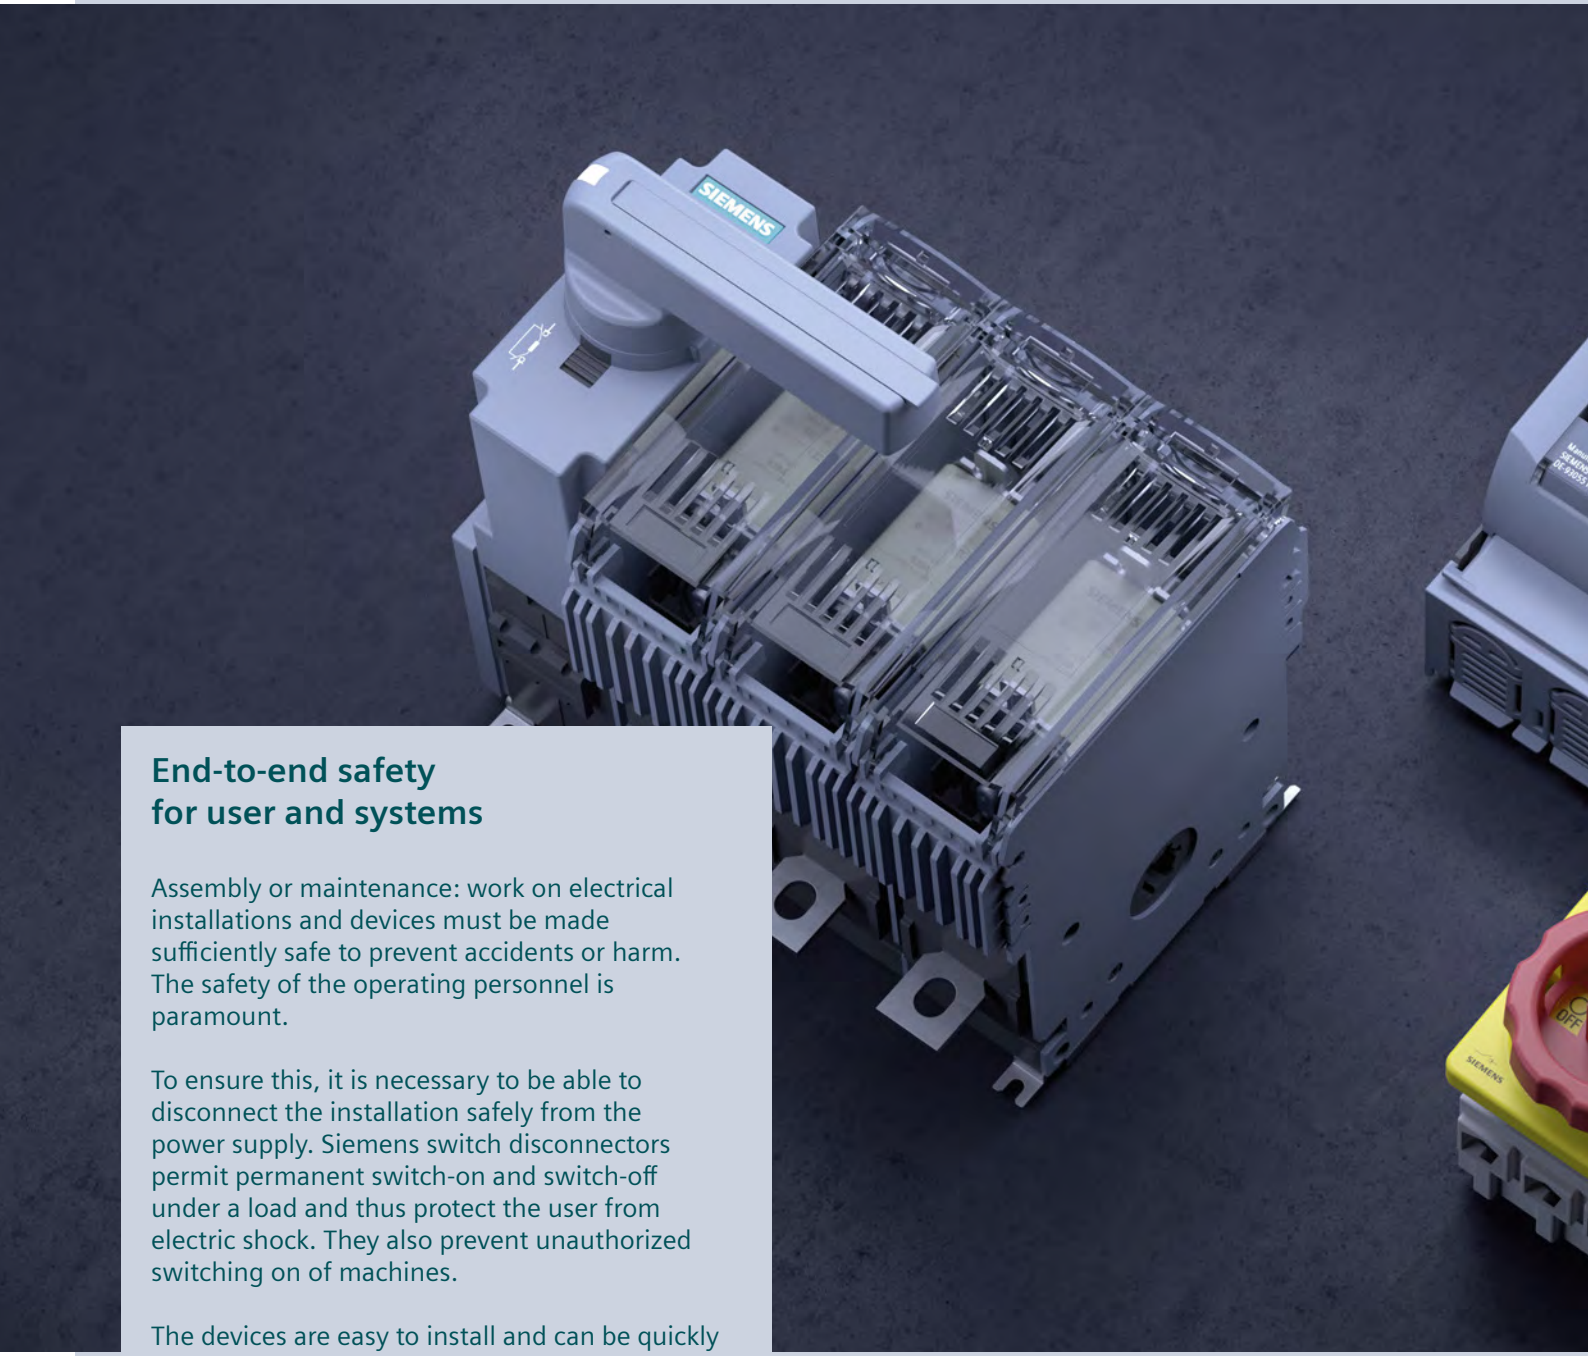

End-to-end safety for user and systems

Assembly or maintenance: work on electrical installations and devices must be made sufficiently safe to prevent accidents or harm. The safety of the operating personnel is paramount.

To ensure this, it is necessary to be able to disconnect the installation safely from the power supply. Siemens switch disconnectors permit permanent switch-on and switch-off under a load and thus protect the user from electric shock. They also prevent unauthorized switching on of machines.

The devices are easy to install and can be quickly put into operation. Additional functions can be retrofitted at any time – thanks to the modular design of the devices and a comprehensive range of accessories.

Convenient ordering processes and fast delivery optimize stock-keeping and save you time and money. You can also make use of our CAx data for automated, simplified planning and configuring.

© Siemens 2025

Switch Disconnectors

All the information you need 8/2
Quick selection guide 8/4
Fuseless switch disconnectors 8/6
Quick selection guide 8/6
3LD switch disconnectors 8/14
3KD switch disconnectors 8/62
Fuse switch disconnectors 8/80
Quick selection guide 8/80
3NP1 fuse switch disconnectors 8/82
3NJ4 fuse switch disconnectors 8/96
5SG76 fuse switch disconnectors 8/108
Switch disconnectors with fuses 8/110
Quick selection guide 8/110
3KF switch disconnectors with fuses 8/114
3NJ63 switch disconnectors with fuses 8/130
5SG switch disconnectors with fuses 8/138

© Siemens 2025

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about switch disconnectors, please visit our website **www.siemens.com/switching-devices**

Your product in detail

The relevant tender specifications can be found at **www.siemens.com/tenderspecifications**

Use our conversion tool for quick and easy conversion to Siemens products **www.siemens.com/conversion-tool**

Configurators

The configurator reduces the time and effort required in the planning and ordering process, and allows for individual adaptations.
Configure your switch disconnector at
www.siemens.com/lowvoltage/3nj63-configurator
www.siemens.com/lowvoltage/3ld-configurator
www.siemens.com/lowvoltage/3kd-configurator
your 3KF switch disconnector with fuses at
www.siemens.com/lowvoltage/3kf-configurator
and your 3NP1 fuse switch disconnector at
www.siemens.com/lowvoltage/3np1-configurator

Choose the right fuse systems for your application
www.siemens.com/lowvoltage/fusesystems-configurator

Everything you need for your order

Refer to SiePortal to find an overview of your products (product catalog)

- Switch disconnectors **sie.ag/36HDiZp**

Direct forwarding to the individual products in SiePortal by clicking on the article number in the catalog or entering this web address incl. article number
www.siemens.com/product_catalog_SIEP?Article No.

You will find order support for the electrical wholesale trade carrying fast-selling items in SiePortal at
www.siemens.com/lowvoltage/product-support

- Order Support
  - 3KD switch disconnectors – End-to-end safety for user and systems **(109750228)**
  - 3LD2 main control and EMERGENCY-STOP-switching equipment – End-to-end safety for user and systems **(109755626)**
  - 3NP1 fuse switch disconnectors – End-to-end safety for user and systems **(109755624)**
  - 3KF switch disconnectors with fuses – End-to-end safety for user and systems **(109750229)**
  - 3NJ63 switch disconnectors with fuses – End-to-end safety for user and systems **(109755619)**

Electrical Designer

With the Electrical Designer in the TIA Selection Tool, it is possible to design and dimension the electrical equipment of a machine in conformity with the standards – from the suitable switching devices to the correctly dimensioned cables
www.siemens.com/controlpanel/electrical-designer

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services.
You can find your local contacts at
www.siemens.com/lowvoltage/components/contact

You will find further information on services at
www.siemens.com/service-offers

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at
www.siemens.com/support-request

© Siemens 2025

… can be found in our online services

Commissioning + operation

Your product in detail

The SiePortal platform (knowledge base) provides detailed technical information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Certificates

Online Support app available for download from the **App Store** and **Play Store**
You will find further information at
http://www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)

- SiePortal (product catalog)
  www.siemens.com/lowvoltage/product-catalog
- Image database
  www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAx Download Manager at
www.siemens.com/cax

Manuals

Manuals can be found in SiePortal at
www.siemens.com/lowvoltage/manuals

- Configuration Manual
  - Switch disconnectors **(109769744)**
  - Fuse systems **(45314810)**
  - Transfer switching equipment and load transfer switches **(109769745)**
  - 8US busbar systems **(109769746)**
- System Manual
  - SENTRON 3NJ63 in-line plug-in switch disconnectors with fuses **(31753460)**
  - SENTRON 3NP1 fuse switch disconnector **(33515690)**
- Equipment Manual
  - 3KD switch disconnector **(109758120)**

Technical overview – Switch disconnectors

The fast way to get you to our online services

This page provides you with comprehensive information and links on switch disconnectors
www.siemens.com/lowvoltage/product-support (109764946)

© Siemens 2025

Quick selection guide

Load switching devices for all applications

Fuseless switch disconnectors [3]

Functional switching [1]

	Type	3LD3	3LD2	3LD5 UL	3KD	3VA
	Uninterrupted current I_u	16 ... 63 A	16 ... 250 A	30 ... 160 A	16 ... 2000 A	63 ... 630 A
	Short-circuit current max.	10 kA	50 kA	50 kA	100 kA	110 kA [5]
Selection acc. to utilization category	**AC max.**	AC-3	AC-3	AC-3	AC-23A	AC-23A
	DC max.	–	DC-22A	–	DC-23A	DC-23A (up to 250 A)
	Suitable fuses	–	–	–	–	–
Types of mounting	**Floor mounting**	■	■	■	■	■
	Mounting on a DIN rail	■	■ (up to 125 A)	■ (up to 63 A)	■ (up to 250 A)	■ (up to 160 A)
	Front mounting	■	■	■	–	–
	Mounting on busbar systems (spacing of the busbars)	–	–	–	–	■
	Draw-out technology	–	–	–	–	■
Methods of operation	**Manual from the front**	■	■	■	■	■
	Manual from the side	–	–	–	■	■
	Remote-controllable	–	–	–	–	■
Number of poles	**1-pole**	–	–	–	–	–
	2-pole	–	–	–	■	■
	3-pole	■	■	■	■	■
	4-pole	■	■	■	■	■
	6-pole	–	■	–	■	–
Switching function	**All poles**	■	■	■	■	■
	Individual poles switchable	–	–	–	–	–

Further information From page 8/6 From page 2/1

[1] According to DIN VDE 0100-200, functional switching is an operation intended to switch on or off or vary the supply of electric energy to an electrical installation or parts of it for normal operating purposes.

[2] Devices for occasional switching usually have a substantially lower electrical endurance and are switched no more than 1 × per minute in the tests.

[3] Pure switching without protection function

© Siemens 2025

Fuse switch disconnectors [4]



Occasional switching [2]

3NP1

160 ... 630 A

120 kA

AC-23B

DC-23B

IEC NH

■

■

–

40/60 mm

–

■

■

■

■

■

–

■

–

3NJ4

160 ... 1600 A

120 kA

AC-23B

–

IEC NH

–

■

–

60/100/185 mm

–

■

■

■

■

■

–

■

■

5SG76

16 A

50 kA

AC-22A

–

NEOZED

–

■

–

–

–

–

■

■

■

■

■

–

■

–

From page 8/80

Switch disconnectors with fuses [4]

Functional switching [1]

Occasional switching [2]

3KF NH

32 ... 800 A

100 kA

AC-23A

DC-23A

IEC NH

■

■

–

–

–

■

■

■

■

■

–

■

–

3KF SITOR

32 ... 800 A

100 kA

AC-23A

DC-23A

IEC LV HRC, optimized for semiconductor protection

■

■

–

–

–

■

■

■

■

■

–

■

–

3NJ63

63 ... 630 A

100 kA

AC-23B

DC-23B

IEC NH

–

–

–

185 mm

■

■

■

■

■

–

■

–

5SG71/72

63 A

50 kA

AC-23A

DC-22B

NEOZED

–

–

–

60 mm

–

■

–

■

■

■

■

■

–

■

–

From page 8/110

[4] The suitable fuses protect persons, motors, installations and generators against short circuit and overload

[5] With a line-side fuse for 415 V

© Siemens 2025

Fuseless switch disconnectors

Quick selection guide

Type			3LD30	3LD31	3LD32	3LD33	3LD34	3LD20	3LD21	3LD22
General technical specifications acc. to IEC 60947-3										
General technical specifications										
Rated uninterrupted current I_u		A	16	25	32	40	63	16	25	32
Rated operational voltage U_e	At 50/60 Hz AC	V			690				690	
	At DC – 2 conducting paths in series	V			–				–	
	At DC – 3 conducting paths in series	V			–				–	
	At DC – 4 conducting paths in series	V			–				–	
Operating and short-circuit behavior										
Rated operational current I_e [1]	At AC-20A | AC-20B at 1000 V	A	–	–	–	–	–	–	–	–
	At AC-21A | AC-21B at 400 V	A	16	25	32	40	63	16	25	32
	At AC-21A | AC-21B at 690 V	A	16	25	32	40	63	16	25	32
	At AC-22A | AC-22B at 400 V	A	16	20	22	36	43	16	25	32
	At AC-22A | AC-22B at 690 V	A	9	11	13	17	22	16	25	32
	At AC-22A | AC-22B at 1000 V	A	–	–	–	–	–	–	–	–
	At AC-23A | AC-23B at 400 V	A	16	20	22	36	43	16	20	22
	At AC-23A | AC-23B at 690 V	A	9	11	13	17	22	9	11	13
	At DC-20A | DC-20B at 1000 V	A	–	–	–	–	–	–	–	–
	At DC-21A | DC-21B at 110 V	A	–	–	–	–	–	–	–	–
	At DC-21A | DC-21B at 220 V	A	–	–	–	–	–	–	–	–
	At DC-21A | DC-21B at 440 V	A	–	–	–	–	–	–	–	–
	At DC-22A | DC-22B at 220 V	A	–	–	–	–	–	–	–	–
	At DC-22A | DC-22B at 440 V	A	–	–	–	–	–	–	–	–
	At DC-23A | DC-23B at 220 V	A	–	–	–	–	–	–	–	–
	At DC-23A | DC-23B at 440 V	A	–	–	–	–	–	–	–	–
Motor switching capacity	At AC-23A | AC-23B at 400 V	kW	7.5	9.5	11.5	18.5	22	7.5	9.5	11.5
	At AC-23A | AC-23B at 690 V	kW	7.5	9	11.5	15	18.5	7.5	9.5	11.5
	At AC-3 | at 400 V	kW	5.5	7.5	9.5	11.5	18.5	5.5	7.5	9.5
	At AC-3 | at 690 V	kW	5.5	7.5	9.5	11.5	15	5.5	7.5	9.5
Rated short-time withstand current I_{cw}	At 690 V AC (t = 1 s)	kA	0.5	0.5	0.5	1	1	0.34	0.64	0.64
	At 1000 V AC (t = 1 s)	kA	–	–	–	–	–	–	–	–
Rated conditional short-circuit current with upstream fuse	At 400/415 V AC	kA	10	10	10	10	10	50	50	50
	At 690 V AC	kA	6	6	6	6	6	50	50	50
Degree of protection										
Maximum achievable IP degree of protection (with a rotary operating mechanism)					IP65				IP65	
General technical specifications acc. to UL										
General technical specifications										
Certification according to UL standard					UL 508				UL 508	
I_n acc. to UL 508/UL 60947-4-1 | UL 489		A	16 | –	25 | –	32 | –	40 | –	63 | –	16 | –	25 | –	32 | –
U_e acc. to UL 508/UL 60947-4-1 | UL 489		V AC			600 | –				600 | –	
Operating and short-circuit behavior										
Operational power, 3-phase	At 480 V	hp	7.5	10	20	20	25	7.5	10	20
	At 600 V	hp	10	15	20	20	30	10	15	20
Short circuit current rating (SCCR)	At 480 V | at 600 V	kA			5 | 5			5 | 5	5 | 5	5 | 5
Upstream fuse according to UL					RK5				RK5	
Further information										
					See page 8/14				See page 8/24	

© Siemens 2025

3LD2

3LD5 UL

3LD25	3LD27	3LD28	3LD23	3LD24	3LD50	3LD52	3LD54	3LD56	3LD58
63	100	125	160	250	32	63	100	125	160
		690					690		
		–					–		
		–					–		
		–					–		
–	–	–	–	–	–	–	–	–	–
63	100	125	160	250	32	63	100	125	160
63	100	125	160	250	32	63	100	125	160
63	100	125	140	230	32	63	100	125	160
63	100	125	140	230	32	63	100	125	160
–	–	–	–	–	–	–	–	–	–
43	70	80	132	224	32	63	100	125	160
22	34	39	47	58	22	39	39	47	58
–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–
22	37	45	75	132	15	30	45	55	75
18.5	30	37	45	55	18.5	37	37	45	55
18.5	30	37	50	110	15	30	45	55	75
15	22	30	37	45	–	–	30	37	45
1.26	2	2	4	4	1.26	2	4	4	4
–	–	–	–	–	–	–	–	–	–
50	50	25	50	50	50	50	50	50	50
50	50	25	50	50	50	50	50	50	30
		IP65					IP65		
		UL 508					UL 60947-4-1/UL 489		
63 | –	100 | –	125 | –	160 | –	250 | –	30 | 30	60 | 60	100 | 100	125 | 125	150 | 150
		600 | –					480 | 480		
40	60	75	75	100	20	30	60	75	100
50	75	100	50	75	–	–	–	–	–
5 | 5	10 | 10	10 | 10	10 | 10	10 | 10	50 | –	65 | –	65 | –	65 | –	50 | –
		RK5			J | CC	J	J	J	J
		See page 8/24					See page 8/54		

8

© Siemens 2025

Fuseless switch disconnectors

Quick selection guide for AC and AC/DC applications

3KD

Type			3KD 01..–.K	3KD 02..–.K	3KD 03..–.K	3KD 03..–.L	3KD 04..–.L	3KD 05..–.L	3KD 06..–.L	3KD 16	3KD 22	3KD 26	3KD 28..–M.
General technical specifications acc. to IEC 60947-3													
General technical specifications													
Rated uninterrupted current I_u		A	16	32	63	63	80	100	125	16	32	63	80
Rated operational voltage U_e	At 50/60 Hz AC	V	690	690	415	690	690	690	690	1000	1000	1000	1000
	At DC – 2 conducting paths in series	V	–	–	–	–	–	–	–	220	220	220	220
	At DC – 3 conducting paths in series	V	–	–	–	–	–	–	–	440	440	440	440
	At DC – 4 conducting paths in series	V	–	–	–	–	–	–	–	–	–	–	–
Operating and short-circuit behavior													
Rated operational current I_e [1]	At AC-20A | AC-20B at 1000 V [2]	A	–	–	–	–	–	–	–	16	32	63	80
	At AC-21A | AC-21B at 400 V	A	16	32	63	63	80	100	125	16	32	63	80
	At AC-21A | AC-21B at 690 V	A	16	32	–	63	80	100	125	16	32	63	80
	At AC-22A | AC-22B at 400 V	A	16	32	63	63	80	100	125	16	32	63	80
	At AC-22A | AC-22B at 690 V	A	16	32	–	63	80	100	125	16	32	63	80
	At AC-22A | AC-22B at 1000 V	A	–	–	–	–	–	–	–	16	32	63	80
	At AC-23A | AC-23B at 400 V	A	16	32	63	63	75	80	90	16	32	63	80
	At AC-23A | AC-23B at 690 V	A	14	17	–	22	30	35	39	16	32	63	80
	At DC-20A | DC-20B at 1000 V [2]	A	–	–	–	–	–	–	–	16	32	63	80
	At DC-21A | DC-21B at 110 V	A	–	–	–	–	–	–	–	16	32	63	80
	At DC-21A | DC-21B at 220 V	A	–	–	–	–	–	–	–	16	32	63	80
	At DC-21A | DC-21B at 440 V	A	–	–	–	–	–	–	–	16	32	63	80
	At DC-22A | DC-22B at 220 V	A	–	–	–	–	–	–	–	16	32	63	80
	At DC-22A | DC-22B at 440 V	A	–	–	–	–	–	–	–	16	32	63	80
	At DC-23A | DC-23B at 220 V	A	–	–	–	–	–	–	–	16	32	63	80
	At DC-23A | DC-23B at 440 V	A	–	–	–	–	–	–	–	16	32	63	80
Motor switching capacity	At AC-23A | AC-23B at 400 V	kW	7,5	15	30	30	37	45	45	7,5	15	30	45
	At AC-23A | AC-23B at 690 V	kW	11	15	–	18,5	22	30	30	11	30	55	75
	At AC-3 | at 400 V	kW	–	–	–	–	–	–	–	–	–	–	–
	At AC-3 | at 690 V	kW	–	–	–	–	–	–	–	–	–	–	–
Rated short-time withstand current I_{cw}	At 690 V AC (t = 1 s)	kA	1,26	1,26	1,26 [1]	2,5	2,5	2,5	2,5	3	3	3	3
	At 1000 V AC (t = 1 s)	kA	–	–	–	–	–	–	–	3	3	3	3
Rated conditional short-circuit current with upstream fuse	At 400/415 V AC	kA	50	50	50	50	50	50	50	100	100	100	100
	At 690 V AC	kA	50	50	–	50	50	50	20	100	100	100	100
Degree of protection													
Maximum achievable IP degree of protection (with a rotary operating mechanism)			IP65										
Further information													
			See page 8/62										

[1] Applies to 415 V AC
[2] Please use label with article number 3KD9140-0 for AC-20/DC-20 applications

8

© Siemens 2025

3KD

	3KD 28..–N	3KD 30..–M.	3KD 30..–N.	3KD 32	3KD 34	3KD 36..–.N	3KD 36..–.P	3KD 38..–N.	3KD 38..–P.	3KD 40	3KD 42	3KD 44..–P.	3KD 44..–Q.	3KD 46	3KD 48	3KD 50..–Q.	3KD 50..–R.	3KD 52	3KD 54	3KD 56
	80	100	100	125	160	200	200	250	250	315	400	500	500	630	800	1000	1000	1250	1600	2000
	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
	220	220	220	220	220	220	220	220	220	220	220	220	220	220	220	220	220	220	220	220
	440	440	440	440	440	440	440	440	440	440	440	440	440	440	440	440	440	440	440	440
	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
	80	100	100	125	160	200	200	250	250	315	400	500	500	630	800	1000	1000	1250	1600	2000
	80	100	100	125	160	200	200	250	250	315	400	500	500	630	800	1000	1000	1250	1600	2000
	80	100	100	125	160	200	200	200	250	315	400	400	500	630	800	1000	1000	1250	1600	2000
	80	100	100	125	160	200	200	250	250	315	400	500	500	630	800	1000	1000	1250	1600	2000
	80	100	100	125	160	160	200	200	250	315	400	400	500	630	800	1000	1000	1250	1600	2000
	80	80	100	125	160	160	200	200	250	315	400	400	500	630	800	800	1000	1250	1600	1600
	80	80	100	125	160	160	200	160	250	315	400	400	500	630	800	1000	1000	1250	1600	2000
	80	80	100	125	160	160	200	160	250	315	400	400	500	630	800	1000	1000	1250	1600	2000
	80	100	100	125	160	200	200	250	250	315	400	500	500	630	800	1000	1000	1250	1600	2000
	80	80	100	125	160	160	200	160	250	315	400	400	500	630	800	800	1000	1250	1600	1600
	80	80	100	125	160	160	200	160	250	315	400	400	500	630	800	800	1000	1250	1600	1600
	80	80	100	125	160	160	200	160	250	315	400	400	500	630	800	800	1000	1250	1600	1600
	80	80	100	125	160	160	200	160	250	315	400	400	500	630	800	800	–	–	–	–
	80	80	100	125	160	160	200	160	250	315	400	400	500	630	800	800	–	–	–	–
	80	80	100	125	160	160	200	160	250	315	400	400	500	630	800	800	–	–	–	–
	80	80	100	125	160	160	200	160	250	315	400	400	500	630	800	800	–	–	–	–
	45	45	55	55	90	90	110	90	132	160	200	200	250	355	400	560	560	710	900	1000
	75	75	90	110	110	110	185	110	250	315	315	315	500	630	800	1000	1000	1000	1000	1000
	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
	4	3	4	4	4	4	13	4	13	13	13	13	30	30	30	30	55	55	55	55
	4	3	4	4	4	4	13	4	13	13	13	13	30	30	30	30	55	55	55	55
	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	80	80	80
	80	100	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	100	100	65
	IP65																			

See page 8/62

© Siemens 2025

Fuseless switch disconnectors

Quick selection guide for DC applications with 1200 V

3KD

Type			3KD 16	3KD 22	3KD 26	3KD 28	3KD 30	3KD 32	3KD 34	3KD 36	3KD 38
General technical specifications acc. to IEC 60947-3											
General technical specifications											
Rated uninterrupted current I_u		A	16	32	63	80	100	125	160	200	250
Rated operational voltage U_e	At DC - at degree of pollution 2	V	1200	1200	1200	1200	1200	1200	1200	1200	1200
	At DC - at degree of pollution 3	V	1000	1000	1000	1000 [1]	1000 [1]	1000 [1]	1000 [1]	1200	1200
Operating and short-circuit behavior											
Rated operational current I_e	At DC-21A at 1200 V	A	16	32	63	80	100	125	160	–	–
	At DC-21B at 1200 V	A	16	32	63	80	100	125	160	200	250
Rated short-time withstand current I_{cw}	At 1200 V DC (t = 1 s)	kA	3	3	3	4	4	4	4	10	10
Degree of protection											
Maximum achievable IP degree of protection (with a rotary operating mechanism)			IP20								
Further information											
			See page 8/62								

[1] Valid for version with box terminal, version with flat terminal max. 1200 V

8

© Siemens 2025

3KD

	3KD 40	3KD 42	3KD 44	3KD 46	3KD 48	3KD 50	3KD 52	3KD 54
	315	400	500	630	800	1000	1250	1600
	1200	1200	1200	1200	1200	1200	1200	1200
	1200	1200	1000	1000	1000	1200	1200	1200
	–	–	–	–	–	–	–	–
	315	400	500	630	800	800	1250	1600
	10	10	20	20	20	20	20	20
	IP20							

See page 8/62

© Siemens 2025

Fuseless switch disconnectors

Quick selection guide for DC applications up to 1000 V new

3KD



Type			3KD 29	3KD 31	3KD 33	3KD 35	3KD 37	3KD 39	3KD 41	3KD 43
General technical specifications acc. to IEC 60947-3										
General technical specifications										
Rated operational voltage U_e	2-pole	V	400	400	400	400	500	500	500	500
	3-pole	V	600	600	600	600	750	750	750	750
	4-pole	V	800	800	800	800	1000	1000	1000	1000
Operating and short-circuit behavior										
Rated operational current I_e	At DC-21B	A	80	100	125	160	200	250	315	400
Rated short-time withstand current I_{cw}	At 1000 V DC (t = 1 s)	kA	4	4	4	4	10	10	10	10
Degree of protection										
Maximum achievable IP degree of protection (with a rotary operating mechanism)			IP20							
Further information										
			See page 8/62							

8

© Siemens 2025

3KD

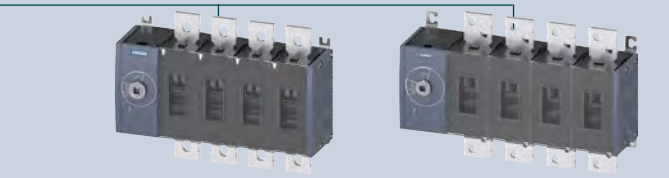

	3KD 45	3KD 47	3KD 49	3KD 51	3KD 53	3KD 55
	500	500	500	500	500	500
	750	750	750	750	750	750
	1000	1000	1000	1000	1000	1000
	500	630	800	1000	1250	1600
	15	15	15	20	20	20
	IP20					

See page 8/62

© Siemens 2025

3LD switch disconnectors

System overview of 3LD3 main control and EMERGENCY-STOP switches

Basic units for front mounting

3P rotary operating mechanisms

3P knob-operated mechanisms

3P+N rotary operating mechanisms

3P+N knob-operated mechanisms

Basic units for floor mounting

3P rotary operating mechanisms

3P knob-operated mechanisms

3P+N rotary operating mechanisms

3P+N knob-operated mechanisms

Basic units for installation in distribution boards and basic switches without knob-operated mechanism

3P knob-operated mechanisms (installation in distribution boards)

3P basic switches without knob-operated mechanism

3P+N knob-operated mechanisms (installation in distribution boards)

3P+N basic switches without knob-operated mechanism

Additional poles and auxiliary switches

N switching contacts

N/PE terminals

Auxiliary switches

Operating mechanisms

Rotary operating mechanisms for front or floor mounting (center hole)

Knob-operated mechanisms for front or floor mounting

Door-coupling rotary operating mechanisms

Door-coupling knob-operated mechanisms

Door-coupling knob-operated mechanisms, defeatable

Further accessories

Terminal covers, 1 and 3-pole

Inscription labels

Note:
You will find a detailed range of accessories with the basic units.

© Siemens 2025

Mounting concept and accessories

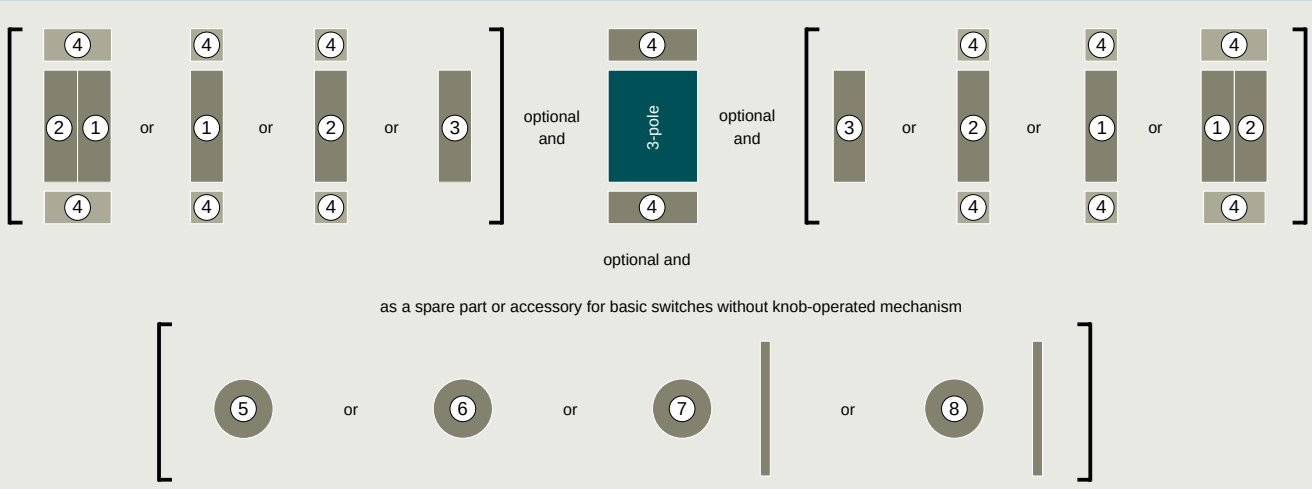

Legend

1. N switching contact [1)]
2. N/PE terminal
3. Auxiliary switch
4. Terminal cover
5. Rotary operating mechanism, center-hole mounting
6. Knob-operated mechanism, center-hole mounting
7. Door-coupling rotary operating mechanism, center-hole mounting
8. Door-coupling knob-operated mechanism, center-hole mounting

[1)] N switching contact (1) must first be installed on the basic unit

I201_20482

8

Mounting types

You will find further information under:
sie.ag/2UlrAvy

Front mounting

The switches for front mounting are mounted on the inside of covers, side panels or, if applicable, control cabinet doors (depending on the applicable standard and switching function). The switches are mounted via the 22.5 mm diameter center hole.

Floor mounting

The switches for floor mounting are snapped onto 35 mm DIN rails according to EN 60715 or screw-mounted on mounting panels. The actuators are connected to the lower section of the switch through a door coupling, which can be released in the 0 position, and a 300 mm long switch shaft. When the control cabinet door is open, the switch can be protected against inadvertent operation by removing the switch shaft from the lower section of the switch. The overall depth can be adapted to individual requirements by adjusting the switch shaft length.

Distribution board mounting

The switches for distribution board mounting are suited for operation in distribution boards and for switching inside control cabinets or distributors. They have cap and mounting dimensions acc. to DIN 43880 and can be fitted under the same cover together with miniature circuit breakers. The selector switches can be locked in their OFF position with no more than one padlock with a shackle thickness of 4 to 6 mm.

Basic switches without knob-operated mechanism

For the basic switch variant without knob-operated mechanism, the appropriate door-coupling rotary operating mechanism can be ordered separately.

© Siemens 2025

3LD switch disconnectors

3LD3 main control and EMERGENCY-STOP switches, front mounting, 10 kA_{rms}



Number of poles	Operating mechanisms, black	
	3P	
Uninterrupted current I_u At AC-21A, 380 ... 440 V	**Operational power *P* At AC-23A, 380 ... 440 V**	**Operational power *P* At AC-3, 380 ... 440 V**	**Without auxiliary switch**	**1 NO + 1 NC**
Rotary operating mechanisms				
16 A	7.5 kW	5.5 kW	3LD3054-0TK51	3LD3054-1TK51
25 A	9 kW	7.5 kW	3LD3154-0TK51	3LD3154-1TK51
32 A	11.5 kW	9.5 kW	3LD3254-0TK51	3LD3254-1TK51
40 A	18.5 kW	11.5 kW	3LD3354-0TK51	3LD3354-1TK51
63 A	22 kW	18.5 kW	3LD3454-0TK51	3LD3454-1TK51
Knob-operated mechanisms				
16 A	7.5 kW	5.5 kW	3LD3050-0TK11	3LD3050-1TK11
25 A	9 kW	7.5 kW	3LD3150-0TK11	3LD3150-1TK11
32 A	11.5 kW	9.5 kW	3LD3250-0TK11	3LD3250-1TK11
40 A	18.5 kW	11.5 kW	3LD3350-0TK11	3LD3350-1TK11
63 A	22 kW	18.5 kW	3LD3450-0TK11	3LD3450-1TK11

Scope of supply:
- Including terminal covers for the infeed side

Accessories

			3LD30 (16 A)	3LD31 (25 A)	3LD32 (32 A)	3LD33 (40 A)	3LD34 (63 A)
Additional poles							
Type	**Contacts**	**Article No.**					
N switching contact (4th contact element)	Leading switch-on, lagging switch-off	3LD9340-0B	■	■	■	■	■
N terminal	Through-type	3LD9340-2B	■	■	■	■	■
PE terminal	Through-type	3LD9340-3B	■	■	■	■	■
Auxiliary switches							
• NO: lagging during switch-on, leading during switch-off of 3LD switch • NC: leading during switch-on, lagging during switch-off of 3LD switch							
Contacts		**Article No.**					
1 NO + 1 NC		3LD9340-6B	■	■	■	■	■
Rotary operating mechanisms							
Version	**Color**	**Article No.**					
Lockable in 0 position with max. 3 padlocks	Black	3LD9344-4C	■	■	■	■	■
	Red/yellow	3LD9344-5C	■	■	■	■	■
Knob-operated mechanisms							
Version	**Color**	**Article No.**					
Lockable in 0 position with max. 2 padlocks	Black	3LD9343-6C	■	■	■	■	■
	Red/yellow	3LD9343-7C	■	■	■	■	■

Quick selection guide, page 8/6

© Siemens 2025

Operating mechanisms, red/yellow					
3P+N		3P		3P+N	
					
Without auxiliary switch	**1 NO + 1 NC**	**Without auxiliary switch**	**1 NO + 1 NC**	**Without auxiliary switch**	**1 NO + 1 NC**
3LD3054-0TL51	3LD3054-1TL51	3LD3054-0TK53	3LD3054-1TK53	3LD3054-0TL53	3LD3054-1TL53
3LD3154-0TL51	3LD3154-1TL51	3LD3154-0TK53	3LD3154-1TK53	3LD3154-0TL53	3LD3154-1TL53
3LD3254-0TL51	3LD3254-1TL51	3LD3254-0TK53	3LD3254-1TK53	3LD3254-0TL53	3LD3254-1TL53
3LD3354-0TL51	3LD3354-1TL51	3LD3354-0TK53	3LD3354-1TK53	3LD3354-0TL53	3LD3354-1TL53
3LD3454-0TL51	3LD3454-1TL51	3LD3454-0TK53	3LD3454-1TK53	3LD3454-0TL53	3LD3454-1TL53
3LD3050-0TL11	3LD3050-1TL11	3LD3050-0TK13	3LD3050-1TK13	3LD3050-0TL13	3LD3050-1TL13
3LD3150-0TL11	3LD3150-1TL11	3LD3150-0TK13	3LD3150-1TK13	3LD3150-0TL13	3LD3150-1TL13
3LD3250-0TL11	3LD3250-1TL11	3LD3250-0TK13	3LD3250-1TK13	3LD3250-0TL13	3LD3250-1TL13
3LD3350-0TL11	3LD3350-1TL11	3LD3350-0TK13	3LD3350-1TK13	3LD3350-0TL13	3LD3350-1TL13
3LD3450-0TL11	3LD3450-1TL11	3LD3450-0TK13	3LD3450-1TK13	3LD3450-0TL13	3LD3450-1TL13

8

			3LD30 (16 A)	3LD31 (25 A)	3LD32 (32 A)	3LD33 (40 A)	3LD34 (63 A)
Terminal covers							
	Version	**Article No.**					
	For N switching contacts, N terminals or PE terminals	3LD9341-2A	■	■	■	■	■
	For 3-pole 3LD3 switch disconnectors	3LD9341-0A	■	■	■	■	■
Inscription labels							
	Inscription	**Article No.**					
	German/English (Hauptschalter/Main Switch)	3LD9346-1A	■	■	■	■	■
	French/Spanish (Interrupteur Général/Interruptor Principal)	3LD9346-2A	■	■	■	■	■
	Without inscription	3LD9346-3A	■	■	■	■	■

Quick selection guide, page 8/6

© Siemens 2025

3LD switch disconnectors

3LD3 main control and EMERGENCY-STOP switches, floor mounting, 10 kA_{rms}



	Operating mechanisms, black	
Number of poles	3P	
Uninterrupted current I_u At AC-21A, 380 ... 440 V	Operational power P At AC-23A, 380 ... 440 V	Operational power P At AC-3, 380 ... 440 V	Without auxiliary switch	1 NO + 1 NC
Door-coupling rotary operating mechanisms, center-hole mounting Ø 22.5 mm				
16 A	7.5 kW	5.5 kW	3LD3048-0TK51	3LD3048-1TK51
25 A	9 kW	7.5 kW	3LD3148-0TK51	3LD3148-1TK51
32 A	11.5 kW	9.5 kW	3LD3248-0TK51	3LD3248-1TK51
40 A	18.5 kW	11.5 kW	3LD3348-0TK51	3LD3348-1TK51
63 A	22 kW	18.5 kW	3LD3448-0TK51	3LD3448-1TK51
Door-coupling knob-operated mechanisms, center-hole mounting Ø 22.5 mm				
16 A	7.5 kW	5.5 kW	3LD3040-0TK11	3LD3040-1TK11
25 A	9 kW	7.5 kW	3LD3140-0TK11	3LD3140-1TK11
32 A	11.5 kW	9.5 kW	3LD3240-0TK11	3LD3240-1TK11
40 A	18.5 kW	11.5 kW	3LD3340-0TK11	3LD3340-1TK11
63 A	22 kW	18.5 kW	3LD3440-0TK11	3LD3440-1TK11

Scope of supply:
- Including terminal covers for the infeed side

Mounting:
- Using screws- or snap-on mounting on 35 mm mounting rails

Accessories

Type	Contacts	Article No.	3LD30 (16 A)	3LD31 (25 A)	3LD32 (32 A)	3LD33 (40 A)	3LD34 (63 A)
Additional poles							
N switching contact (4th contact element)	Leading switch-on, lagging switch-off	3LD9340-0C	■	■	■	■	■
N terminal	Through-type	3LD9340-2C	■	■	■	■	■
PE terminal	Through-type	3LD9340-3C	■	■	■	■	■

Auxiliary switches
- NO: lagging during switch-on, leading during switch-off of 3LD switch
- NC: leading during switch-on, lagging during switch-off of 3LD switch

Contacts	Article No.	3LD30 (16 A)	3LD31 (25 A)	3LD32 (32 A)	3LD33 (40 A)	3LD34 (63 A)
1 NO + 1 NC	3LD9340-6C	■	■	■	■	■

Version	Color	Article No.	3LD30 (16 A)	3LD31 (25 A)	3LD32 (32 A)	3LD33 (40 A)	3LD34 (63 A)
Rotary operating mechanisms							
• Lockable in 0 position with max. 3 padlocks • Incl. funnel	Black	3LD9344-2C	■	■	■	■	■
	Red/yellow	3LD9344-3C	■	■	■	■	■

Version	Color	Article No.	3LD30 (16 A)	3LD31 (25 A)	3LD32 (32 A)	3LD33 (40 A)	3LD34 (63 A)
Knob-operated mechanisms							
• Lockable in 0 position with max. 2 padlocks • Incl. funnel	Black	3LD9343-4C	■	■	■	■	■
	Red/yellow	3LD9343-5C	■	■	■	■	■

Cross-section	Length	Article No.	3LD30 (16 A)	3LD31 (25 A)	3LD32 (32 A)	3LD33 (40 A)	3LD34 (63 A)
Switch shafts							
6 × 6 mm	600 mm	3LD9345-1C	■	■	■	■	■

Quick selection guide, page 8/6

© Siemens 2025

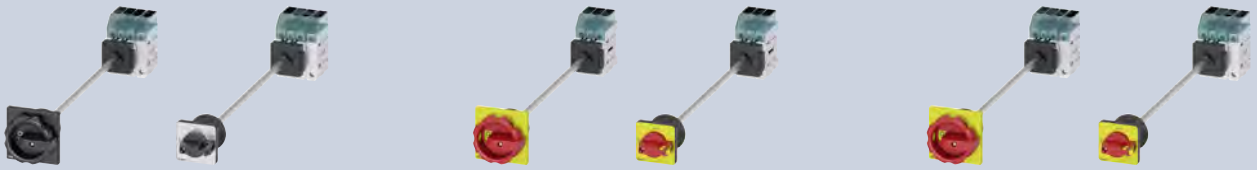

Operating mechanisms, red/yellow					
3P+N		3P		3P+N	
					
Without auxiliary switch	**1 NO + 1 NC**	**Without auxiliary switch**	**1 NO + 1 NC**	**Without auxiliary switch**	**1 NO + 1 NC**
3LD3048-0TL51	3LD3048-1TL51	3LD3048-0TK53	3LD3048-1TK53	3LD3048-0TL53	3LD3048-1TL53
3LD3148-0TL51	3LD3148-1TL51	3LD3148-0TK53	3LD3148-1TK53	3LD3148-0TL53	3LD3148-1TL53
3LD3248-0TL51	3LD3248-1TL51	3LD3248-0TK53	3LD3248-1TK53	3LD3248-0TL53	3LD3248-1TL53
3LD3348-0TL51	3LD3348-1TL51	3LD3348-0TK53	3LD3348-1TK53	3LD3348-0TL53	3LD3348-1TL53
3LD3448-0TL51	3LD3448-1TL51	3LD3448-0TK53	3LD3448-1TK53	3LD3448-0TL53	3LD3448-1TL53
3LD3040-0TL11	3LD3040-1TL11	3LD3040-0TK13	3LD3040-1TK13	3LD3040-0TL13	3LD3040-1TL13
3LD3140-0TL11	3LD3140-1TL11	3LD3140-0TK13	3LD3140-1TK13	3LD3140-0TL13	3LD3140-1TL13
3LD3240-0TL11	3LD3240-1TL11	3LD3240-0TK13	3LD3240-1TK13	3LD3240-0TL13	3LD3240-1TL13
3LD3340-0TL11	3LD3340-1TL11	3LD3340-0TK13	3LD3340-1TK13	3LD3340-0TL13	3LD3340-1TL13
3LD3440-0TL11	3LD3440-1TL11	3LD3440-0TK13	3LD3440-1TK13	3LD3440-0TL13	3LD3440-1TL13

8

				3LD30 (16 A)	3LD31 (25 A)	3LD32 (32 A)	3LD33 (40 A)	3LD34 (63 A)
Door-coupling rotary operating mechanisms								
	Type	**Color**	**Article No.**					
	Rotary operating mechanisms 66 × 66 mm	Black	3LD9344-2CA	■	■	■	■	■
		Red/yellow	3LD9344-3CA	■	■	■	■	■
	Knob-operated mechanisms 48 × 48 mm	Black	3LD9343-4CA	■	■	■	■	■
		Red/yellow	3LD9343-5CA	■	■	■	■	■
Terminal covers								
	**Version**		**Article No.**					
	For N switching contacts, N terminals or PE terminals		3LD9341-2A	■	■	■	■	■
	For 3LD3 3-pole switch disconnectors		3LD9341-0A	■	■	■	■	■
Inscription labels								
	• Not for installation in distribution boards							
	Inscription		**Article No.**					
	German/English (Hauptschalter/Main Switch)		3LD9346-1A	■	■	■	■	■
	French/Spanish (Interrupteur Général/Interruptor Principal)		3LD9346-2A	■	■	■	■	■
	Without inscription		3LD9346-3A	■	■	■	■	■

Quick selection guide, page 8/6

© Siemens 2025

3LD switch disconnectors

3LD3 main control and EMERGENCY-STOP switches, installation in distribution boards and basic switches without knob-operated mechanism, 10 kA_{rms}

	Operating mechanisms, black	
Number of poles	3P	
		
Uninterrupted current I_u At AC-21A, 380 ... 440 V	Operational power P At AC-23A, 380 ... 440 V	Operational power P At AC-3, 380 ... 440 V	Without auxiliary switch	1 NO + 1 NC
Switches for installation in distribution boards with masking plate and selector knob, DIN-rail mounting				
16 A	7.5 kW	5.5 kW	3LD3030-0TK11	3LD3030-1TK11
25 A	9 kW	7.5 kW	3LD3130-0TK11	3LD3130-1TK11
32 A	11.5 kW	9.5 kW	3LD3230-0TK11	3LD3230-1TK11
40 A	18.5 kW	11.5 kW	3LD3330-0TK11	3LD3330-1TK11
63 A	22 kW	18.5 kW	3LD3430-0TK11	3LD3430-1TK11
Basic switches without knob-operated mechanism				
16 A	7.5 kW	5.5 kW	3LD3010-0TK05	3LD3010-1TK05
25 A	9 kW	7.5 kW	3LD3110-0TK05	3LD3110-1TK05
32 A	11.5 kW	9.5 kW	3LD3210-0TK05	3LD3210-1TK05
40 A	18.5 kW	11.5 kW	3LD3310-0TK05	3LD3310-1TK05
63 A	22 kW	18.5 kW	3LD3410-0TK05	3LD3410-1TK05

Scope of supply:
- Basic switches without direct operating mechanism, incl. terminal covers for the infeed side

Mounting:
- Using screws or snap-on mounting on 35 mm mounting rails

Accessories, see page 8/22

Quick selection guide, page 8/6

© Siemens 2025

Operating mechanisms, red/yellow					
3P+N		3P		3P+N	
					
Without auxiliary switch	**1 NO + 1 NC**	**Without auxiliary switch**	**1 NO + 1 NC**	**Without auxiliary switch**	**1 NO + 1 NC**
3LD3030-0TL11	3LD3030-1TL11	3LD3030-0TK13	3LD3030-1TK13	3LD3030-0TL13	3LD3030-1TL13
3LD3130-0TL11	3LD3130-1TL11	3LD3130-0TK13	3LD3130-1TK13	3LD3130-0TL13	3LD3130-1TL13
3LD3230-0TL11	3LD3230-1TL11	3LD3230-0TK13	3LD3230-1TK13	3LD3230-0TL13	3LD3230-1TL13
3LD3330-0TL11	3LD3330-1TL11	3LD3330-0TK13	3LD3330-1TK13	3LD3330-0TL13	3LD3330-1TL13
3LD3430-0TL11	3LD3430-1TL11	3LD3430-0TK13	3LD3430-1TK13	3LD3430-0TL13	3LD3430-1TL13
3LD3010-0TL05	3LD3010-1TL05	–	–	–	–
3LD3110-0TL05	3LD3110-1TL05	–	–	–	–
3LD3210-0TL05	3LD3210-1TL05	–	–	–	–
3LD3310-0TL05	3LD3310-1TL05	–	–	–	–
3LD3410-0TL05	3LD3410-1TL05	–	–	–	–

8

Quick selection guide, page 8/6

© Siemens 2025

3LD switch disconnectors

3LD3 main control and EMERGENCY-STOP switches, installation in distribution boards and basic switches without knob-operated mechanism, 10 kA_{rms}

Accessories for switches for installation in distribution boards and basic switches without knob-operated mechanism

Additional poles

Type	Contacts	Article No.	3LD30 (16 A)	3LD31 (25 A)	3LD32 (32 A)	3LD33 (40 A)	3LD34 (63 A)
N switching contact (4th contact element)	Leading switch-on, lagging switch-off	3LD9340-0C	■	■	■	■	■
N terminal	Through-type	3LD9340-2C	■	■	■	■	■
PE terminal	Through-type	3LD9340-3C	■	■	■	■	■

Auxiliary switches

- NO: lagging during switch-on, leading during switch-off of 3LD switch
- NC: leading during switch-on, lagging during switch-off of 3LD switch

Contacts	Article No.	3LD30 (16 A)	3LD31 (25 A)	3LD32 (32 A)	3LD33 (40 A)	3LD34 (63 A)
1 NO + 1 NC	3LD9340-6C	■	■	■	■	■

Terminal covers



Version	Article No.	3LD30 (16 A)	3LD31 (25 A)	3LD32 (32 A)	3LD33 (40 A)	3LD34 (63 A)
For N switching contacts, N terminals or PE terminals	3LD9341-2A	■	■	■	■	■
For 3LD3 3-pole switch disconnectors	3LD9341-0A	■	■	■	■	■

Quick selection guide, page 8/6

© Siemens 2025

Accessories for basic switches without knob-operated mechanism

Door-coupling rotary operating mechanisms

Type	Color	Article No.	3LD30 (16 A)	3LD31 (25 A)	3LD32 (32 A)	3LD33 (40 A)	3LD34 (63 A)
Rotary operating mechanisms 66 × 66 mm	Black	3LD9344-2CA	■	■	■	■	■
	Red/yellow	3LD9344-3CA	■	■	■	■	■

Knob-operated mechanisms 48 × 48 mm	Black	3LD9343-4CA	■	■	■	■	■
	Red/yellow	3LD9343-5CA	■	■	■	■	■

Knob-operated mechanisms, defeatable, 66 × 66 mm	Black	3LD9343-2CA	■	■	■	■	■
	Red/yellow	3LD9343-3CA	■	■	■	■	■

Rotary operating mechanisms

Version	Color	Article No.	3LD30 (16 A)	3LD31 (25 A)	3LD32 (32 A)	3LD33 (40 A)	3LD34 (63 A)
• Lockable in 0 position with max. 3 padlocks • Incl. funnel	Black	3LD9344-2C	■	■	■	■	■
	Red/yellow	3LD9344-3C	■	■	■	■	■

Knob-operated mechanisms

Type	Version	Color	Article No.	3LD30 (16 A)	3LD31 (25 A)	3LD32 (32 A)	3LD33 (40 A)	3LD34 (63 A)
Knob-operated mechanisms	• Lockable in 0 position with max. 2 padlocks • Incl. funnel	Black	3LD9343-4C	■	■	■	■	■
		Red/yellow	3LD9343-5C	■	■	■	■	■

Knob-operated mechanisms, defeatable	• Lockable in 0 position with max. 3 padlocks • Incl. funnel	Black	3LD9343-2C	■	■	■	■	■
		Red/yellow	3LD9343-3C	■	■	■	■	■

Switch shafts

Cross-section	Length	Article No.	3LD30 (16 A)	3LD31 (25 A)	3LD32 (32 A)	3LD33 (40 A)	3LD34 (63 A)
6 × 6 mm	600 mm	3LD9345-1C	■	■	■	■	■

Inscription labels

• Not for installation in distribution boards

Inscription	Article No.	3LD30 (16 A)	3LD31 (25 A)	3LD32 (32 A)	3LD33 (40 A)	3LD34 (63 A)
German/English (Hauptschalter/Main Switch)	3LD9346-1A	■	■	■	■	■
French/Spanish (Interrupteur Général/Interruptor Principal)	3LD9346-2A	■	■	■	■	■
Without inscription	3LD9346-3A	■	■	■	■	■

Quick selection guide, page 8/6

© Siemens 2025

3LD switch disconnectors

System overview of 3LD2 switch disconnectors

Basic units for front mounting

3P rotary operating mechanisms

3P knob-operated mechanisms (3LD23/3LD24)

3P knob-operated mechanisms

3P+N rotary operating mechanisms

3P+N knob-operated mechanisms (3LD23/3LD24)

3P+N knob-operated mechanisms

6P rotary operating mechanisms

Basic units for floor mounting

3P rotary operating mechanisms

3P knob-operated mechanisms (3LD23/3LD24)

3P knob-operated mechanisms, defeatable

3P+N rotary operating mechanisms

3P+N knob-operated mechanisms (3LD23/3LD24)

3P+N knob-operated mechanisms, defeatable

6P rotary operating mechanisms

Basic units for installation in distribution boards/enclosures, DC

3P knob-operated mechanisms

3P+N knob-operated mechanisms

8P DC isolators

Additional poles and auxiliary switches

N switching contacts

N/PE terminals (through-type)

Auxiliary switches (standard version)

Auxiliary switch for mounting on the front

Operating mechanisms

Rotary operating mechanisms for 4-hole and center-hole mounting

Knob-operated mechanisms (3LD23/3LD24)

Supplementary handles for door-coupling rotary operating mechanism

Switch shafts

Coupling pieces without ON-lock

Assembly tools for center-hole mounting

Further accessories

Terminal covers, 1-pole

Terminal covers, 3 and 4-pole

Inscription labels (with and without inscription)

Note:
You will find a detailed range of accessories with the basic units.

© Siemens 2025

Mounting concept and accessories

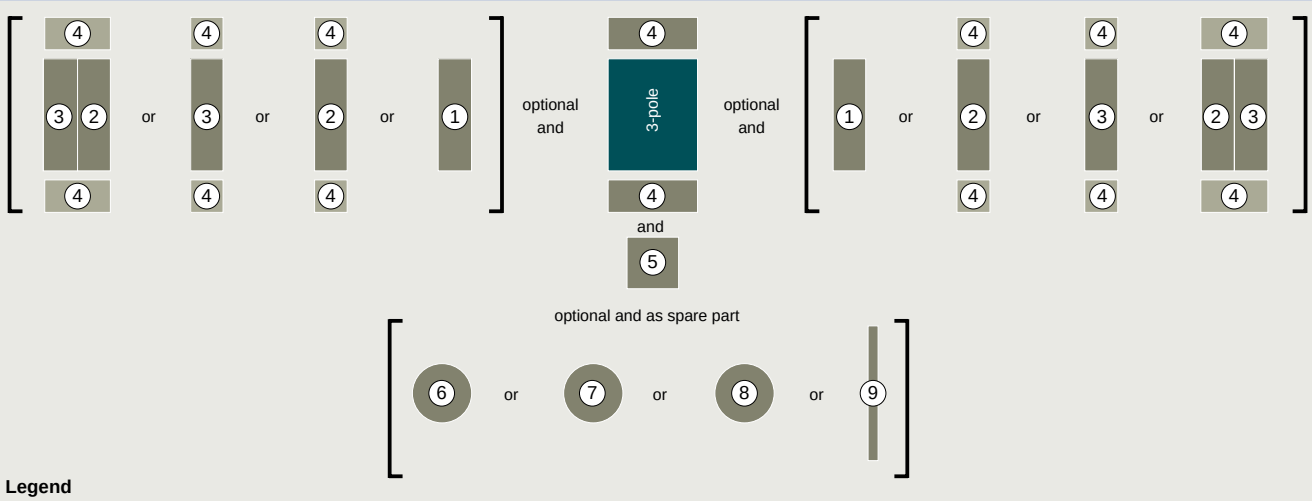

Legend

1. Auxiliary switch
2. N switching contact [1]
3. N/PE terminal
4. Terminal cover
5. Auxiliary switch for mounting on the front [2]
6. Rotary operating mechanism, center-hole mounting
7. Rotary operating mechanism, four-hole mounting
8. Knob-operated mechanism, four-hole mounting
9. Switch shaft (300 or 600mm)

[1] N switching contact (2) must first be installed on the basic unit

[2] Can only be used with four-hole front mounting and floor mounting

I201_20483

8

Mounting types

You will find further information under:
sie.ag/2UlrAvy

Front mounting

The switches for front mounting are mounted on the inside of covers, side panels or, if applicable, control cabinet doors (depending on the applicable standard and switching function). In addition to the 4-hole fastening of the handle, up to 63 A (3LD25) fastening with the 22.5 mm diameter center hole can also be chosen.

Floor mounting

The switches for floor mounting up to 125 A (3LD28) are snapped onto 35 mm DIN rails according to EN 60715 or screw-mounted on mounting panels. The switches for 160 and 250 A (3LD23/3LD24) are exclusively screwed onto mounting panels. The actuators are connected to the lower section of the switch through a door coupling, which can be released in the 0 position, and a 300 mm long switch shaft. When the control cabinet door is open, the switch can be protected against inadvertent operation by removing the switch shaft from the lower section of the switch. The overall depth can be adapted to individual requirements by adjusting the switch shaft length.

Distribution board mounting

The switches for distribution board mounting are suited for operation in distribution boards and for switching inside control cabinets or distributors. Up to 125 A (3LD28), they have cap and mounting dimensions according to DIN 43880 and can be fitted under the same cover together with miniature circuit breakers.

DC isolators

The DC isolators in the enclosure are suitable for disconnecting loads of up to 800 V DC due to their 8-pole design. To provide additional safety, the isolators can be locked in the 0 position.

© Siemens 2025

3LD switch disconnectors

3LD2 main control switches, front mounting, 25 ... 50 kA_{rms}

Operating mechanisms, black

Number of poles 3P





Version	Uninterrupted current I_u At AC-21A, 380 ... 440 V	Operational power *P* At AC-23A, 380 ... 440 V	Operational power *P* At AC-3A, 380 ... 440 V	Without auxiliary switch	1 NO + 1 NC (standard version)
Rotary operating mechanism					
Four-hole mounting	16 A	7.5 kW	5.5 kW	3LD2003-0TK51	3LD2003-1TP51
	25 A	9.5 kW	7.5 kW	3LD2103-0TK51	3LD2103-1TP51
	32 A	11.5 kW	9.5 kW	3LD2203-0TK51	3LD2203-1TP51
	63 A	22 kW	18.5 kW	3LD2504-0TK51	3LD2504-1TP51
	100 A	37 kW	30 kW	3LD2704-0TK51	3LD2704-1TP51
	125 A	45 kW	37 kW	3LD2804-0TK51	3LD2804-1TP51
Center-hole mounting Ø 22.5 mm	16 A	7.5 kW	5.5 kW	3LD2054-0TK51	3LD2054-1TP51
	25 A	9.5 kW	7.5 kW	3LD2154-0TK51	3LD2154-1TP51
	32 A	11.5 kW	9.5 kW	3LD2254-0TK51	3LD2254-0TK51 + 3LD9200-5B
	63 A	22 kW	18.5 kW	3LD2555-0TK51	3LD2555-0TK51 + 3LD9200-5B
Knob-operated mechanism					
Four-hole mounting	16 A	7.5 kW	5.5 kW	3LD2022-0TK11	3LD2022-0TK11 + 3LD9200-5B
	25 A	9.5 kW	7.5 kW	3LD2122-0TK11	3LD2122-0TK11 + 3LD9200-5B
	32 A	11.5 kW	9.5 kW	3LD2222-0TK11	3LD2222-0TK11 + 3LD9200-5B
	160 A	75 kW	50 kW	3LD2305-0TK11	3LD2305-0TK11 + 3LD9200-5B
	250 A	132 kW	110 kW	3LD2405-0TK11	3LD2405-0TK11 + 3LD9200-5B
Center-hole mounting Ø 22.5 mm	16 A	7.5 kW	5.5 kW	3LD2050-0TK11	3LD2050-0TK11 + 3LD9200-5B
	25 A	9.5 kW	7.5 kW	3LD2150-0TK11	3LD2150-0TK11 + 3LD9200-5B
	32 A	11.5 kW	9.5 kW	3LD2250-0TK11	3LD2250-0TK11 + 3LD9200-5B

Scope of supply:
- Including terminal covers for the infeed side

Accessories, see page 8/30

Quick selection guide, page 8/6

© Siemens 2025

3P+N		6P	
			
Without auxiliary switch	**1 NO + 1 NC (standard version)**	**Without auxiliary switch**	**1 NO + 1 NC (standard version)**
3LD2003-1TL51	3LD2003-2EP51	–	–
3LD2103-1TL51	3LD2103-2EP51	3LD2103-3VK51	3LD2103-4VP51
3LD2203-1TL51	3LD2203-1TL51 + 3LD9200-5B	3LD2203-3VK51	3LD2203-3VK51 + 3LD9200-5B
3LD2504-1TL51	3LD2504-1TP51 + 3LD9250-0BA	3LD2504-3VK51	3LD2504-3VK51 + 3LD9200-5B
3LD2704-0TK51 + 3LD9280-0B	3LD2704-0TK51 + 3LD9280-0B + 3LD9200-5B	–	–
3LD2804-0TK51 + 3LD9280-0B	3LD2804-0TK51 + 3LD9280-0B + 3LD9200-5B	–	–
3LD2054-1TL51	3LD2054-2EP51	–	–
3LD2154-1TL51	3LD2154-2EP51	–	–
3LD2254-1TL51	3LD2254-1TL51 + 3LD9200-5B	–	–
3LD2555-0TK51 + 3LD9250-0BA	3LD2555-0TK51 + 3LD9250-0BA + 3LD9200-5B	–	–
3LD2022-1TL11	3LD2022-1TL11 + 3LD9200-5B	–	–
3LD2122-1TL11	3LD2122-1TL11 + 3LD9200-5B	3LD2122-3VK11	–
3LD2222-0TK11 + 3LD9220-0B	3LD2222-0TK11 + 3LD9220-0B + 3LD9200-5B	–	–
3LD2305-1TL11	3LD2305-1TL11 + 3LD9200-5B	3LD2305-3VK11	3LD2305-3VK11 + 3LD9200-5B
3LD2405-1TL11	3LD2405-1TL11 + 3LD9200-5B	3LD2405-3VK11	3LD2405-3VK11 + 3LD9200-5B
3LD2050-1TL11	3LD2050-1TL11 + 3LD9200-5B	–	–
3LD2150-0TK11 + 3LD9220-0B	3LD2150-0TK11 + 3LD9220-0B + 3LD9200-5B	–	–
3LD2250-0TK11 + 3LD9220-0B	3LD2250-0TK11 + 3LD9220-0B + 3LD9200-5B	–	–

Quick selection guide, page 8/6

© Siemens 2025

3LD switch disconnectors

3LD2 EMERGENCY-STOP switches, front mounting, 25 ... 50 kA_{rms}

Operating mechanisms, red/yellow

Number of poles 3P





Version	Uninterrupted current I_u At AC-21A, 380 ... 440 V	Operational power P At AC-23A, 380 ... 440 V	Operational power P At AC-3A, 380 ... 440 V	Without auxiliary switch	1 NO + 1 NC (standard version)
Rotary operating mechanism					
Four-hole mounting	16 A	7.5 kW	5.5 kW	3LD2003-0TK53	3LD2003-1TP53
	25 A	9.5 kW	7.5 kW	3LD2103-0TK53	3LD2103-1TP53
	32 A	11.5 kW	9.5 kW	3LD2203-0TK53	3LD2203-1TP53
	63 A	22 kW	18.5 kW	3LD2504-0TK53	3LD2504-1TP53
	100 A	37 kW	30 kW	3LD2704-0TK53	3LD2704-1TP53
	125 A	45 kW	37 kW	3LD2804-0TK53	3LD2804-1TP53
Center-hole mounting Ø 22.5 mm	16 A	7.5 kW	5.5 kW	3LD2054-0TK53	3LD2054-1TP53
	25 A	9.5 kW	7.5 kW	3LD2154-0TK53	3LD2154-1TP53
	32 A	11.5 kW	9.5 kW	3LD2254-0TK53	3LD2254-0TK53 + 3LD9200-5B
	63 A	22 kW	18.5 kW	3LD2555-0TK53	3LD2555-0TK53 + 3LD9200-5B
Knob-operated mechanism					
Four-hole mounting	16 A	7.5 kW	5.5 kW	3LD2022-0TK13	3LD2022-0TK13 + 3LD9200-5B
	25 A	9.5 kW	7.5 kW	3LD2122-0TK13	3LD2122-0TK13 + 3LD9200-5B
	32 A	11.5 kW	9.5 kW	3LD2222-0TK13	3LD2222-0TK13 + 3LD9200-5B
	160 A	75 kW	50 kW	3LD2305-0TK13	3LD2305-0TK13 + 3LD9200-5B
	250 A	132 kW	110 kW	3LD2405-0TK13	3LD2405-0TK13 + 3LD9200-5B
Center-hole mounting Ø 22.5 mm	16 A	7.5 kW	5.5 kW	3LD2050-0TK13	3LD2050-0TK13 + 3LD9200-5B
	25 A	9.5 kW	7.5 kW	3LD2150-0TK13	3LD2150-0TK13 + 3LD9200-5B
	32 A	11.5 kW	9.5 kW	3LD2250-0TK13	3LD2250-0TK13 + 3LD9200-5B

Scope of supply:
- Including terminal covers for the infeed side

Accessories, see page 8/30

Quick selection guide, page 8/6

© Siemens 2025

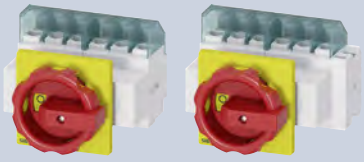

3P+N		6P	
			
Without auxiliary switch	**1 NO + 1 NC (standard version)**	**Without auxiliary switch**	**1 NO + 1 NC (standard version)**
3LD2003-1TL53	3LD2003-2EP53	–	–
3LD2103-1TL53	3LD2103-2EP53	3LD2103-3VK53	3LD2103-4VP53
3LD2203-1TL53	3LD2203-1TL53 + 3LD9200-5B	3LD2203-3VK53	3LD2203-3VK53 + 3LD9200-5B
3LD2504-1TL53	3LD2504-1TP53 + 3LD9250-0BA	3LD2504-3VK53	3LD2504-3VK53 + 3LD9200-5B
3LD2704-0TK53 + 3LD9280-0B	3LD2704-0TK53 + 3LD9280-0B + 3LD9200-5B	–	–
3LD2804-0TK53 + 3LD9280-0B	3LD2804-0TK53 + 3LD9280-0B + 3LD9200-5B	–	–
3LD2054-1TL53	3LD2054-2EP53	–	–
3LD2154-1TL53	3LD2154-2EP53	–	–
3LD2254-1TL53	3LD2254-1TL53 + 3LD9200-5B	–	–
3LD2555-0TK53 + 3LD9250-0BA	3LD2555-0TK53 + 3LD9250-0BA + 3LD9200-5B	–	–
3LD2022-1TL13	3LD2022-1TL13 + 3LD9200-5B	–	–
3LD2122-1TL13	3LD2122-1TL13 + 3LD9200-5B	3LD2122-3VK13	–
3LD2222-0TK13 + 3LD9220-0B	3LD2222-0TK13 + 3LD9220-0B + 3LD9200-5B	–	–
3LD2305-1TL13	3LD2305-1TL13 + 3LD9200-5B	3LD2305-3VK13	3LD2305-3VK13 + 3LD9200-5B
3LD2405-1TL13	3LD2405-1TL13 + 3LD9200-5B	3LD2405-3VK13	3LD2405-3VK13 + 3LD9200-5B
3LD2050-1TL13	3LD2050-1TL13 + 3LD9200-5B	–	–
3LD2150-0TK13 + 3LD9220-0B	3LD2150-0TK13 + 3LD9220-0B + 3LD9200-5B	–	–
3LD2250-0TK13 + 3LD9220-0B	3LD2250-0TK13 + 3LD9220-0B + 3LD9200-5B	–	–

Quick selection guide, page 8/6

© Siemens 2025

3LD switch disconnectors

Accessories for front mounting

			3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)	3LD23 (160 A)	3LD24 (250 A)
N switching contacts (4th contact element)										
	Contacts	**Article No.**								
	Leading switch-on, lagging switch-off	3LD9220-0B		■	■					
		3LD9250-0BA				■				
		3LD9280-0B					■	■		
		3LD9240-0B							■	■
N/PE terminals										
	Contacts	**Article No.**								
	Through-type	3LD9200-2B	■							
		3LD9220-2B		■	■					
		3LD9250-2BA				■				
		3LD9280-2B					■	■		
		3LD9240-2B							■	■
Auxiliary switches (standard version)										
	• For mounting on the left and/or right • NO: lagging during switch-on, leading during switch-off of 3LD switch • NC: leading during switch-on, lagging during switch-off of 3LD switch									
	Contacts	**Contact surface**	**Article No.**							
	1 NO + 1 NC	Standard	3LD9200-5B	■	■	■	■	■	■	■	■
		Gold-plated	3LD9200-5BF	■	■	■	■	■	■	■	■
Auxiliary switches for mounting on the front										
	• Mounted on the switch shaft • For four-hole front mounting and floor mounting only • NO: lagging during switch-on, leading (20 ... 150 ms) during switch-off of 3LD switch • NC: leading during switch-on, lagging during switch-off of 3LD switch • Not for 6-pole 3LD23 (160 A) and 3LD24 (250 A)									
	Contacts	**Contact surface**	**Article No.**							
	1 NO + 1 NC	Standard	3LD9280-5D	■	■	■	■	■	■		
			3LD9240-5D							■	■
		Gold-plated	3LD9280-5DF	■	■	■	■	■	■		
			3LD9240-5DF							■	■
Rotary operating mechanisms										
	• Lockable in 0 position with up to 3 padlocks									
	Version	**Mounting**	**Article No.**							
	For main control switches	Center-hole mounting	3LD9224-1D	■	■	■					
			3LD9284-1D				■	■	■		
		Four-hole mounting	3LD9224-1B	■	■	■					
			3LD9284-1B				■	■	■		
	For EMERGENCY-STOP switches	Center-hole mounting	3LD9224-3D	■	■	■					
			3LD9284-3D				■	■	■		
		Four-hole mounting	3LD9224-3B	■	■	■					
			3LD9284-3B				■	■	■		

System overview, page 8/24

© Siemens 2025

			3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)	3LD23 (160 A)	3LD24 (250 A)
Knob-operated mechanisms										
	• Lockable in 0 position with up to 3 padlocks • Only for 3P and 3P+N circuit breakers • Including seal									
Version	**Mounting**	**Article No.**								
For main control switches	Four-hole mounting	3LD9243-1B							■	■
For EMERGENCY-STOP switches	Four-hole mounting	3LD9243-3B							■	■
Terminal covers										
	Number of poles	**Article No.**								
	1-pole	3LD9201-2A	■							
		3LD9221-2A		■	■					
		3LD9251-2A				■				
		3LD9281-2A					■	■		
		3LD9241-2A							■	■
	3-pole	3LD9221-0A		■	■					
		3LD9251-0A				■				
	4-pole	3LD9201-1A	■							
Inscription labels										
	Inscription	**Article No.**								
	German/English (Hauptschalter/Main Switch)	3LD9286-1A	■	■	■	■	■	■		
	Without inscription	3LD9286-4A	■	■	■	■	■	■		
Assembly tools										
	• For center-hole mounting with nut									
	Version	**Article No.**								
	For main control switches and EMERGENCY-STOP switches	3LD9256-0A	■	■	■	■				

8

System overview, page 8/24

© Siemens 2025

3LD switch disconnectors

3LD2 main control switches, floor mounting, 25 ... 50 kA_{rms}

Operating mechanisms, black

Number of poles 3P



Version	Uninterrupted current I_u At AC-21A, 380 ... 440 V	Operational power P At AC-23A, 380 ... 440 V	Operational power P At AC-3A, 380 ... 440 V	Without auxiliary switch	1 NO + 1 NC (standard version)
Door-coupling rotary operating mechanism					
Four-hole mounting	16 A	7.5 kW	5.5 kW	3LD2013-0TK51	3LD2013-0TK51 + 3LD9200-5C
	25 A	9.5 kW	7.5 kW	3LD2113-0TK51	3LD2113-0TK51 + 3LD9200-5C
	32 A	11.5 kW	9.5 kW	3LD2213-0TK51	3LD2213-0TK51 + 3LD9200-5C
	63 A	22 kW	18.5 kW	3LD2514-0TK51	3LD2514-0TK51 + 3LD9200-5C
	100 A	37 kW	30 kW	3LD2714-0TK51	3LD2714-0TK51 + 3LD9200-5C
	125 A	45 kW	37 kW	3LD2814-0TK51	3LD2814-0TK51 + 3LD9200-5C
Center-hole mounting Ø 22.5 mm	16 A	7.5 kW	5.5 kW	3LD2044-0TK51	3LD2044-0TK51 + 3LD9200-5C
	25 A	9.5 kW	7.5 kW	3LD2144-0TK51	3LD2144-0TK51 + 3LD9200-5C
	32 A	11.5 kW	9.5 kW	3LD2244-0TK51	3LD2244-0TK51 + 3LD9200-5C
	63 A	22 kW	18.5 kW	3LD2545-0TK51	3LD2545-0TK51 + 3LD9200-5C
Door-coupling knob-operated mechanisms					
Four-hole mounting	160 A	75 kW	50 kW	3LD2318-0TK11	3LD2318-0TK11 + 3LD9200-5C
	250 A	132 kW	110 kW	3LD2418-0TK11	3LD2418-0TK11 + 3LD9200-5C
Defeatable door-coupling knob-operated mechanism					
Four-hole mounting	16 A	7.5 kW	5.5 kW	3LD2017-0TK11	3LD2017-0TK11 + 3LD9200-5C
	32 A	11.5 kW	9.5 kW	3LD2217-0TK11	3LD2217-0TK11 + 3LD9200-5C
	63 A	22 kW	18.5 kW	3LD2517-0TK11	3LD2517-0TK11 + 3LD9200-5C

Scope of supply:
- Including terminal covers for the infeed side
- Up to 125 A with integrated tolerance compensation

Mounting:
- Up to 125 A using screws or snap-on mounting on 35 mm mounting rails

Accessories, see page 8/36

© Siemens 2025

3P+N		6P	
			
Without auxiliary switch	**1 NO + 1 NC (standard version)**	**Without auxiliary switch**	**1 NO + 1 NC (standard version)**
3LD2013-1TL51	3LD2013-1TL51 + 3LD9200-5C	–	–
3LD2113-1TL51	3LD2113-1TL51 + 3LD9200-5C	3LD2113-3VK51	3LD2113-4VP51
3LD2213-1TL51	3LD2213-1TL51 + 3LD9200-5C	–	–
3LD2514-1TL51	3LD2514-1TL51 + 3LD9200-5C	–	–
3LD2714-0TK51 + 3LD9280-0C	3LD2714-0TK51 + 3LD9280-0C + 3LD9200-5C	–	–
3LD2814-0TK51 + 3LD9280-0C	3LD2814-0TK51 + 3LD9280-0C + 3LD9200-5C	–	–
3LD2044-1TL51	3LD2044-1TL51 + 3LD9200-5C	–	–
3LD2144-1TL51	3LD2144-1TL51 + 3LD9200-5C	–	–
3LD2244-1TL51	3LD2244-1TL51 + 3LD9200-5C	–	–
3LD2545-0TK51 + 3LD9250-0CA	3LD2545-0TK51 + 3LD9250-0CA + 3LD9200-5C	–	–
3LD2318-1TL11	3LD2318-1TL11 + 3LD9200-5C	3LD2318-3VK11	3LD2318-3VK11 + 3LD9200-5C
3LD2418-1TL11	3LD2418-1TL11 + 3LD9200-5C	3LD2418-3VK11	3LD2418-3VK11 + 3LD9200-5C
3LD2017-1TL11	3LD2017-1TL11 + 3LD9200-5C	–	–
3LD2217-1TL11	3LD2217-1TL11 + 3LD9200-5C	–	–
3LD2517-1TL11	3LD2517-1TL11 + 3LD9200-5C	–	–

Quick selection guide, page 8/6

© Siemens 2025

3LD switch disconnectors

3LD2 EMERGENCY-STOP switches, floor mounting, 25 ... 50 kA_{rms}

Operating mechanisms, red/yellow

Number of poles 3P



Version	Uninterrupted current I_u At AC-21A, 380 ... 440 V	Operational power P At AC-23A, 380 ... 440 V	Operational power P At AC-3A, 380 ... 440 V	Without auxiliary switch	1 NO + 1 NC (standard version)
Door-coupling rotary operating mechanism					
Four-hole mounting	16 A	7.5 kW	5.5 kW	3LD2013-0TK53	3LD2013-0TK53 + 3LD9200-5C
	25 A	9.5 kW	7.5 kW	3LD2113-0TK53	3LD2113-0TK53 + 3LD9200-5C
	32 A	11.5 kW	9.5 kW	3LD2213-0TK53	3LD2213-0TK53 + 3LD9200-5C
	63 A	22 kW	18.5 kW	3LD2514-0TK53	3LD2514-0TK53 + 3LD9200-5C
	100 A	37 kW	30 kW	3LD2714-0TK53	3LD2714-0TK53 + 3LD9200-5C
	125 A	45 kW	37 kW	3LD2814-0TK53	3LD2814-0TK53 + 3LD9200-5C
Center-hole mounting Ø 22.5 mm	16 A	7.5 kW	5.5 kW	3LD2044-0TK53	3LD2044-0TK53 + 3LD9200-5C
	25 A	9.5 kW	7.5 kW	3LD2144-0TK53	3LD2144-0TK53 + 3LD9200-5C
	32 A	11.5 kW	9.5 kW	3LD2244-0TK53	3LD2244-0TK53 + 3LD9200-5C
	63 A	22 kW	18.5 kW	3LD2545-0TK53	3LD2545-0TK53 + 3LD9200-5C
Door-coupling knob-operated mechanisms					
Four-hole mounting	160 A	75 kW	50 kW	3LD2318-0TK13	3LD2318-0TK13 + 3LD9200-5C
	250 A	132 kW	110 kW	3LD2418-0TK13	3LD2418-0TK13 + 3LD9200-5C
Defeatable door-coupling knob-operated mechanism					
Four-hole mounting	16 A	7.5 kW	5.5 kW	3LD2017-0TK13	3LD2017-0TK13 + 3LD9200-5C
	32 A	11.5 kW	9.5 kW	3LD2217-0TK13	3LD2217-0TK13 + 3LD9200-5C
	63 A	22 kW	18.5 kW	3LD2517-0TK13	3LD2517-0TK13 + 3LD9200-5C

Scope of supply:
- Including terminal covers for the infeed side
- Up to 125 A with integrated tolerance compensation

Mounting:
- Up to 125 A using screws or snap-on mounting on 35 mm mounting rails

Accessories, see page 8/36

Quick selection guide, page 8/6

© Siemens 2025

3P+N		6P	
			
Without auxiliary switch	**1 NO + 1 NC (standard version)**	**Without auxiliary switch**	**1 NO + 1 NC (standard version)**
3LD2013-1TL53	3LD2013-1TL53 + 3LD9200-5C	–	–
3LD2113-1TL53	3LD2113-1TL53 + 3LD9200-5C	3LD2113-3VK53	3LD2113-4VP53
3LD2213-1TL53	3LD2213-1TL53 + 3LD9200-5C	–	–
3LD2514-1TL53	3LD2514-1TL53 + 3LD9200-5C	–	–
3LD2714-0TK53 + 3LD9280-0C	3LD2714-0TK53 + 3LD9280-0C + 3LD9200-5C	–	–
3LD2814-0TK53 + 3LD9280-0C	3LD2814-0TK53 + 3LD9280-0C + 3LD9200-5C	–	–
3LD2044-1TL53	3LD2044-1TL53 + 3LD9200-5C	–	–
3LD2144-1TL53	3LD2144-1TL53 + 3LD9200-5C	–	–
3LD2244-1TL53	3LD2244-1TL53 + 3LD9200-5C	–	–
3LD2545-0TK53 + 3LD9250-0CA	3LD2545-0TK53 + 3LD9250-0CA + 3LD9200-5C	–	–
3LD2318-1TL13	3LD2318-1TL13 + 3LD9200-5C	3LD2318-3VK13	3LD2318-3VK13 + 3LD9200-5C
3LD2418-1TL13	3LD2418-1TL13 + 3LD9200-5C	3LD2418-3VK13	3LD2418-3VK13 + 3LD9200-5C
3LD2017-1TL13	3LD2017-1TL13 + 3LD9200-5C	–	–
3LD2217-1TL13	3LD2217-1TL13 + 3LD9200-5C	–	–
3LD2517-1TL13	3LD2517-1TL13 + 3LD9200-5C	–	–

Quick selection guide, page 8/6

© Siemens 2025

3LD switch disconnectors

Accessories for floor mounting

			3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)	3LD23 (160 A)	3LD24 (250 A)
N switching contacts (4th contact element)										
	Contacts	**Article No.**								
	Leading switch-on, lagging switch-off	3LD9220-0C		■	■					
		3LD9250-0CA				■				
		3LD9280-0C					■	■		
		3LD9240-0C							■	■
N/PE terminals										
	Contacts	**Article No.**								
	Through-type	3LD9200-2C	■							
		3LD9220-2C		■	■					
		3LD9250-2CA				■				
		3LD9280-2C					■	■		
		3LD9240-2C							■	■
Auxiliary switches (standard version)										
	• For mounting on the left and/or right • NO: lagging during switch-on, leading during switch-off of 3LD switch • NC: leading during switch-on, lagging during switch-off of 3LD switch									
	Contacts	**Contact surface**	**Article No.**							
	1 NO + 1 NC	Standard	3LD9200-5C	■	■	■	■	■	■	■	■
		Gold-plated	3LD9200-5CF	■	■	■	■	■	■	■	■
	2 NO	Standard	3LD9200-6C	■	■	■	■	■	■	■	■
Auxiliary switches for mounting on the front										
	• Mounted on the switch shaft • NO: lagging during switch-on, leading (20 ... 150 ms) during switch-off of 3LD switch • NC: leading during switch-on, lagging during switch-off of 3LD switch									
	Contacts	**Contact surface**	**Article No.**							
	1 NO + 1 NC	Standard	3LD9280-5D	■	■	■	■	■	■		
			3LD9240-5D							■	■
		Gold-plated	3LD9280-5DF	■	■	■	■	■	■		
			3LD9240-5DF							■	■
Rotary operating mechanisms										
	• Lockable in 0 position with up to 3 padlocks									
	Version	**Mounting**	**Article No.**							
	For main control switches	Center-hole mounting	3LD9224-1D	■	■	■					
			3LD9284-1D				■	■	■		
		Four-hole mounting	3LD9224-1B	■	■	■					
			3LD9284-1B				■	■	■		
	For EMERGENCY-STOP switches	Center-hole mounting	3LD9224-3D	■	■	■					
			3LD9284-3D				■	■	■		
		Four-hole mounting	3LD9224-3B	■	■	■					
			3LD9284-3B				■	■	■		
Knob-operated mechanisms										
	• Lockable in 0 position with up to 3 padlocks • Only for 3P and 3P+N circuit breakers • Including seal									
	Version	**Mounting**	**Article No.**							
	For main control switches	Four-hole mounting	3LD9243-1B						■	■
	For EMERGENCY-STOP switches	Four-hole mounting	3LD9243-3B						■	■
Knob-operated mechanisms, defeatable										
	• Can be used as a replacement for 3LD2.17 • Lockable in 0 position with max. 3 padlocks • Incl. funnel									
	Version	**Mounting**								
	For main control switches	Four-hole mounting	3LD9343-2C	■		■	■				
	For EMERGENCY-STOP switches	Four-hole mounting	3LD9343-3C	■		■	■				

System overview, page 8/24

© Siemens 2025

8UC7 handle with masking plate, defeatable

- For implementing defeatability of 3LD27 (100 A) to 3LD24 (250 A) with the 8UC7 door mounted rotary operator

Version	Mounting	Article No.	3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)	3LD23 (160 A)	3LD24 (250 A)
For main control switches	Four-hole mounting	8UC7110-1BB					■	■		
	Four-hole mounting	8UC7210-1BB							■	■
For EMERGENCY-STOP switches	Four-hole mounting	8UC7120-3BB					■	■		
	Four-hole mounting	8UC7220-3BB							■	■

Supplementary handles for door-coupling rotary operating mechanism

- For requirements according to UL 508A/NFPA 79
- Can be locked with up to 1 padlocks in 0 position
- Can only be switched on by deliberate action

Inscription	Color	Article No.	3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)	3LD23 (160 A)	3LD24 (250 A)
O-I	Gray	3LD9287-1C	■	■	■	■	■	■		
		3LD9247-1C							■	■
	Red/yellow	3LD9287-3C	■	■	■	■	■	■		
		3LD9247-3C							■	■

Coupling drivers

Version	Article No.	3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)	3LD23 (160 A)	3LD24 (250 A)
For 8UC71 door-coupling rotary operating mechanisms	8UC6011					■	■		
For 8UC72 door-coupling rotary operating mechanisms	8UC6012							■	■

Switch shafts

Cross-section	Length	Article No.	3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)	3LD23 (160 A)	3LD24 (250 A)
6 × 6 mm	300 mm	3LD9205-0C	■	■	■	■	■	■		
	600 mm	3LD9205-2C	■	■	■	■	■	■		
8 × 8 mm	300 mm	3LD9245-0C							■	■
	600 mm	3LD9245-2C							■	■

Coupling pieces

- Without ON and OFF interlock
- Suitable for all non-defeatable door-coupling rotary operators/knob-operated mechanisms

Version	Article No.	3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)	3LD23 (160 A)	3LD24 (250 A)
With tolerance compensation	3LD9202-4E	■	■	■	■	■	■		
Without tolerance compensation	3LD9242-4F							■	■

Terminal covers

Number of poles	Article No.	3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)	3LD23 (160 A)	3LD24 (250 A)
1-pole	3LD9201-2A	■							
	3LD9221-2A		■	■					
	3LD9251-2A				■				
	3LD9281-2A					■	■		
	3LD9241-2A							■	■
3-pole	3LD9221-0A		■	■					
	3LD9251-0A				■				
4-pole	3LD9201-1A	■							

Inscription labels

- Not for installation in distribution boards
- Cannot be used with defeatable 3LD2.17 door-coupling rotary operating mechanisms

Inscription	Article No.	3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)	3LD23 (160 A)	3LD24 (250 A)
German/English (Hauptschalter/Main Switch)	3LD9286-1A	■	■	■	■	■	■		
Without inscription	3LD9286-4A	■	■	■	■	■	■		

Assembly tools

- For center-hole mounting with nut

Version	Article No.	3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)	3LD23 (160 A)	3LD24 (250 A)
For main control switches and EMERGENCY-STOP switches	3LD9256-0A	■	■	■	■				

System overview, page 8/24

© Siemens 2025

3LD switch disconnectors

3LD2 main control switches, installation in distribution boards, 25 ... 50 kA_{rms}

	Operating mechanisms, black	
Number of poles	3P	
		
Uninterrupted current I_u At AC-21A, 380 ... 440 V	Operational power P At AC-23A, 380 ... 440 V	Operational power P At AC-3A, 380 ... 440 V	Without auxiliary switch	1 NO + 1 NC (standard version)
Knob-operated mechanisms with masking plate				
16 A	7.5 kW	5.5 kW	3LD2030-0TK11	3LD2030-0TK11 + 3LD9200-5C
25 A	9.5 kW	7.5 kW	3LD2130-0TK11	3LD2130-0TK11 + 3LD9200-5C
32 A	11.5 kW	9.5 kW	3LD2230-0TK11	3LD2230-0TK11 + 3LD9200-5C
63 A	22 kW	18.5 kW	3LD2530-0TK11	3LD2530-0TK11 + 3LD9200-5C
100 A	37 kW	30 kW	3LD2730-0TK11	3LD2730-0TK11 + 3LD9200-5C
125 A	45 kW	37 kW	3LD2830-0TK11	3LD2830-0TK11 + 3LD9200-5C
160 A	75 kW	50 kW	3LD2330-0TK11	3LD2330-0TK11 + 3LD9200-5C
250 A	132 kW	110 kW	3LD2430-0TK11	3LD2430-0TK11 + 3LD9200-5C

Scope of supply:
- 3LD23/3LD24 including terminal covers for the infeed side

Mounting:
- Up to 125 A using screws or snap-on mounting on 35 mm mounting rails
- Up to 125 A cap and mounting dimensions acc. to DIN 43880

Accessories, see page 8/42

Quick selection guide, page 8/6

© Siemens 2025

3P+N





Without auxiliary switch	1 NO + 1 NC (standard version)
3LD2030-1TL11	3LD2030-1TL11 + 3LD9200-5C
3LD2130-0TK11 + 3LD9220-0C	3LD2130-0TK11 + 3LD9220-0C + 3LD9200-5C
3LD2230-0TK11 + 3LD9220-0C	3LD2230-0TK11 + 3LD9220-0C + 3LD9200-5C
3LD2530-0TK11 + 3LD9250-0CA	3LD2530-0TK11 + 3LD9250-0CA + 3LD9200-5C
3LD2730-0TK11 + 3LD9280-0C	3LD2730-0TK11 + 3LD9280-0C + 3LD9200-5C
3LD2830-0TK11 + 3LD9280-0C	3LD2830-0TK11 + 3LD9280-0C + 3LD9200-5C
3LD2330-0TK11 + 3LD9240-0C	3LD2330-0TK11 + 3LD9240-0C + 3LD9200-5C
3LD2430-0TK11 + 3LD9240-0C	3LD2430-0TK11 + 3LD9240-0C + 3LD9200-5C

Quick selection guide, page 8/6

© Siemens 2025

3LD switch disconnectors

3LD2 EMERGENCY-STOP switches, installation in distribution boards, 25 ... 50 kA_{rms}

	Operating mechanisms, red/yellow	
Number of poles	3P	
		
Uninterrupted current I_u At AC-21A, 380 ... 440 V	**Operational power *P* At AC-23A, 380 ... 440 V**	**Operational power *P* At AC-3A, 380 ... 440 V**	**Without auxiliary switch**	**1 NO + 1 NC (standard version)**
Knob-operated mechanisms with masking plate				
16 A	7.5 kW	5.5 kW	3LD2030-0TK13	3LD2030-0TK13 + 3LD9200-5C
25 A	9.5 kW	7.5 kW	3LD2130-0TK13	3LD2130-0TK13 + 3LD9200-5C
32 A	11.5 kW	9.5 kW	3LD2230-0TK13	3LD2230-0TK13 + 3LD9200-5C
63 A	22 kW	18.5 kW	3LD2530-0TK13	3LD2530-0TK13 + 3LD9200-5C
100 A	37 kW	30 kW	3LD2730-0TK13	3LD2730-0TK13 + 3LD9200-5C
125 A	45 kW	37 kW	3LD2830-0TK13	3LD2830-0TK13 + 3LD9200-5C
160 A	75 kW	50 kW	3LD2330-0TK13	3LD2330-0TK13 + 3LD9200-5C
250 A	132 kW	110 kW	3LD2430-0TK13	3LD2430-0TK13 + 3LD9200-5C

Scope of supply:
- 3LD23/3LD24 including terminal covers for the infeed side

Mounting:
- Up to 125 A using screws or snap-on mounting on 35 mm mounting rails
- Up to 125 A cap and mounting dimensions acc. to DIN 43880

Accessories, see page 8/42

Quick selection guide, page 8/6

© Siemens 2025

3P+N





Without auxiliary switch	1 NO + 1 NC (standard version)
3LD2030-1TL13	3LD2030-1TL13 + 3LD9200-5C
3LD2130-0TK13 + 3LD9220-0C	3LD2130-0TK13 + 3LD9220-0C + 3LD9200-5C
3LD2230-0TK13 + 3LD9220-0C	3LD2230-0TK13 + 3LD9220-0C + 3LD9200-5C
3LD2530-0TK13 + 3LD9250-0CA	3LD2530-0TK13 + 3LD9250-0CA + 3LD9200-5C
3LD2730-0TK13 + 3LD9280-0C	3LD2730-0TK13 + 3LD9280-0C + 3LD9200-5C
3LD2830-0TK13 + 3LD9280-0C	3LD2830-0TK13 + 3LD9280-0C + 3LD9200-5C
3LD2330-0TK13 + 3LD9240-0C	3LD2330-0TK13 + 3LD9240-0C + 3LD9200-5C
3LD2430-0TK13 + 3LD9240-0C	3LD2430-0TK13 + 3LD9240-0C + 3LD9200-5C

8

Quick selection guide, page 8/6

© Siemens 2025

3LD switch disconnectors

Accessories for distribution board mounting

Accessories

			3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)	3LD23 (160 A)	3LD24 (250 A)
N switching contacts (4th contact element)										
	Contacts	**Article No.**								
	Leading switch-on, lagging switch-off	3LD9220-0C		■	■					
		3LD9250-0CA				■				
		3LD9280-0C					■	■		
		3LD9240-0C							■	■
N/PE terminals										
	Contacts	**Article No.**								
	Through-type	3LD9200-2C	■							
		3LD9220-2C		■	■					
		3LD9250-2CA				■				
		3LD9280-2C					■	■		
		3LD9240-2C							■	■
Auxiliary switches (standard version)										
	• For mounting on the left and/or right • NO: lagging during switch-on, leading during switch-off of 3LD switch • NC: leading during switch-on, lagging during switch-off of 3LD switch									
	Contacts	**Contact surface** / **Article No.**								
	1 NO + 1 NC	Standard	3LD9200-5C	■	■	■	■	■	■	■	■
		Gold-plated	3LD9200-5CF	■	■	■	■	■	■	■	■
	2 NO	Standard	3LD9200-6C	■	■	■	■	■	■	■	■
Terminal covers										
	Number of poles	**Article No.**								
	1-pole	3LD9201-2A	■							
		3LD9221-2A		■	■					
		3LD9251-2A				■				
		3LD9281-2A					■	■		
		3LD9241-2A							■	■
	3-pole	3LD9221-0A		■	■					
		3LD9251-0A				■				
	4-pole	3LD9201-1A	■							

8

System overview, page 8/24

© Siemens 2025

DC isolators, 50 kA_{rms}

	Operating mechanisms, black
Number of poles	8P
	

Mains voltage	Rated operational current I_e At DC-21A, 800 V DC	Rated operational current I_e At DC-22A, 800 V DC	Without auxiliary switch
Knob-operated mechanisms			
800 V DC	32 A	16 A	3LD2230-8VQ11-0AF6

8

Quick selection guide, page 8/6

© Siemens 2025

3LD switch disconnectors

System overview of 3LD2 switch disconnectors in enclosure

3LD2 main control and EMERGENCY-STOP switches in enclosure

3P/3P+N
molded-plastic enclosures

3P/6P
molded-plastic enclosures

3P/3P+N/6P
molded-plastic enclosures

3LD2 maintenance and repair switches with EMC shield plate

3P
molded-plastic enclosures

3P/6P
molded-plastic enclosures

3P/6P
molded-plastic enclosures

8

DC isolators in enclosure

8P DC isolators in a molded-plastic enclosure

Additional poles and auxiliary switch modules

N switching
contact

N/PE terminals
(through-type)

Auxiliary switches
(standard version)

Auxiliary switch for mounting on
the front

Operating mechanisms

Rotary operating mechanisms for center-hole mounting

Knob-operated mechanisms for 3LD2 with EMC shield plate

Further accessories

Shield terminal



Through-type terminal

Note:
You will find a detailed range of accessories with the basic units.

© Siemens 2025

Mounting concept and accessories

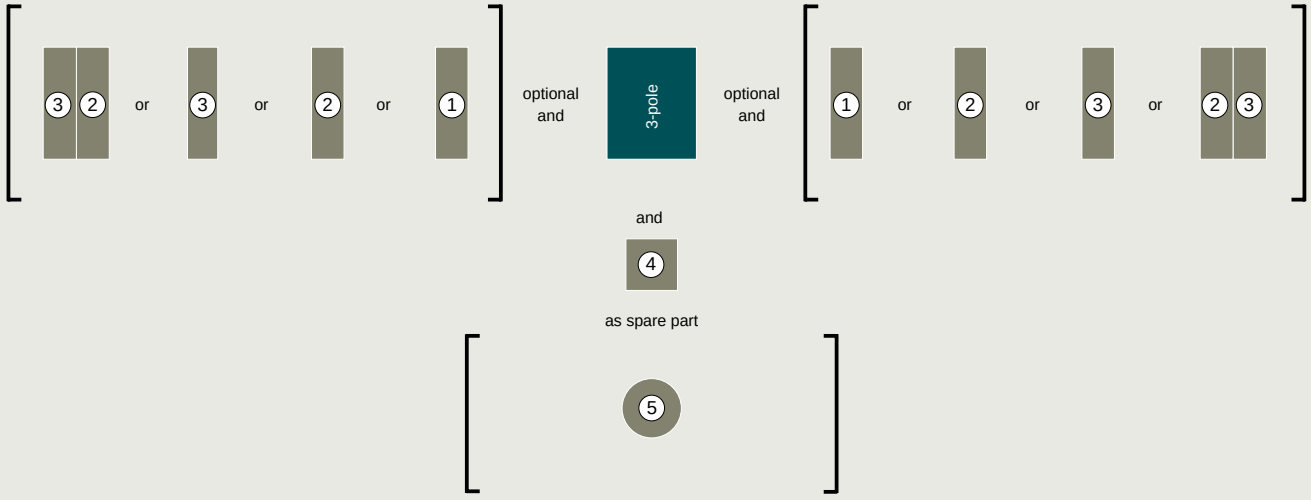

Legend

(1) Auxiliary switch
(2) N switching contact [1)]
(3) N/PE terminal
(4) Auxiliary switch for mounting on the front
(5) Rotary operating mechanism/knob-operated mechanisms

[1)] N switching contact (2) must first be installed on the basic unit
Note: Depending on the enclosure size, not all accessories can be used in combination

I201_20484a

8

Mounting types

3LD2 main control and EMERGENCY-STOP switches in enclosure

For surface mounting of individual main control and EMERGENCY-STOP switches, molded plastic-enclosed switches with degree of protection IP65 are used. The molded-plastic enclosures each contain an N and/or a PE terminal. As the switches can be locked in the 0 position, they can also be used as maintenance and repair switches.

DC isolators in enclosure

The DC isolators in the enclosure are suitable for disconnecting loads of up to 800 V DC due to their 8-pole design. To provide additional safety, the isolators can be locked in the 0 position.

3LD2 maintenance and repair switches with EMC shield plate

The 3LD2 maintenance and repair switch with EMC shield plate is ideal for use between converter and motor. A long leading (20 ... 150 ms) NO contact switches the converter group off before the main contacts of the switch open. This produces an AC20 state. The cable shield can be contacted over a large area inside the enclosure using the shield clamps or hose clips included in the scope of delivery.
The switch series provides the greatest possible safety for the user and can be locked in the 0 or I position. Tests have been performed in connection with SINAMICS converters and ratings are available for use at frequencies 0 ... 550 Hz.

© Siemens 2025

3LD switch disconnectors

3LD2 main control switches in enclosure, 25 ... 50 kA_{rms}

	Operating mechanisms, black		
Number of poles	3P		3P+N
			

Uninterrupted current I_u At AC-21A, 380 ... 440 V	Operational power P At AC-23A, 380 ... 440 V	Operational power P At AC-3A, 380 ... 440 V	Without auxiliary switch		1 NO + 1 NC (standard version)		Without auxiliary switch	
Rotary operating mechanisms with masking plate			Base terminal		Base terminal		Base terminal	
16 A	7.5 kW	5.5 kW	PE+N	3LD2064-0TB51	N	3LD2064-1GP51	PE	3LD2064-1TC51
25 A	9.5 kW	7.5 kW	PE+N	3LD2164-0TB51	N	3LD2164-1GP51	PE	3LD2164-1TC51
32 A	11.5 kW	9.5 kW	PE+N	3LD2264-0TB51	N	3LD2264-1GP51	PE	3LD2264-1TC51
63 A	22 kW	18.5 kW	PE+N	3LD2565-0TB51	N	3LD2565-1GP51	PE	3LD2565-1TC51
100 A	37 kW	30 kW	PE+N	3LD2766-0TB51	N	3LD2766-1GP51	PE+N	3LD2766-0TB51 + 3LD9280-0C
125 A	45 kW	37 kW	PE+N	3LD2866-0TB51	N	3LD2866-1GP51	PE+N	3LD2866-0TB51 + 3LD9280-0C

8

Accessoires, see page 8/50

Quick selection guide, page 8/6

© Siemens 2025

6P



1 NO + 1 NC (standard version)



Without auxiliary switch



1 NO + 1 NC (standard version)

Base terminal			Base terminal		Base terminal	
PE	3LD2064-1TC51	+ 3LD9200-5C		–		–
PE	3LD2164-1TC51	+ 3LD9200-5C	PE+N	3LD2165-3VB51	N	3LD2165-4VD51
PE	3LD2264-1TC51	+ 3LD9200-5C	PE+N	3LD2265-3VB51	N	3LD2265-4VD51
PE	3LD2565-1TC51	+ 3LD9200-5C	PE+N	3LD2566-3VB51	PE+N	3LD2566-4VD51
N	3LD2766-1GP51	+ 3LD9280-0C		–		–
N	3LD2866-1GP51	+ 3LD9280-0C		–		–

8

Quick selection guide, page 8/6

© Siemens 2025

3LD switch disconnectors

3LD2 EMERGENCY-STOP switches in enclosure, 25 ... 50 kA_{rms}

			Operating mechanisms, red/yellow					
			Number of poles	3P			3P+N	
								
Uninterrupted current I_u At AC-21A, 380 ... 440 V	Operational power P At AC-23A, 380 ... 440 V	Operational power P At AC-3A, 380 ... 440 V	Without auxiliary switch		1 NO + 1 NC (standard version)		Without auxiliary switch	
Rotary operating mechanisms with masking plate			Base terminal		Base terminal		Base terminal	
16 A	7.5 kW	5.5 kW	PE+N	3LD2064-0TB53	N	3LD2064-1GP53	PE	3LD2064-1TC53
25 A	9.5 kW	7.5 kW	PE+N	3LD2164-0TB53	N	3LD2164-1GP53	PE	3LD2164-1TC53
32 A	11.5 kW	9.5 kW	PE+N	3LD2264-0TB53	N	3LD2264-1GP53	PE	3LD2264-1TC53
63 A	22 kW	18.5 kW	PE+N	3LD2565-0TB53	N	3LD2565-1GP53	PE	3LD2565-1TC53
100 A	37 kW	30 kW	PE+N	3LD2766-0TB53	N	3LD2766-1GP53	PE+N	3LD2766-0TB53 + 3LD9280-0C
125 A	45 kW	37 kW	PE+N	3LD2866-0TB53	N	3LD2866-1GP53	PE+N	3LD2866-0TB53 + 3LD9280-0C

Accessoires, see page 8/50

Quick selection guide, page 8/6

© Siemens 2025

6P



1 NO + 1 NC (standard version)



Without auxiliary switch



1 NO + 1 NC (standard version)

Base terminal			Base terminal		Base terminal	
PE	3LD2064-1TC53	+ 3LD9200-5C		–		–
PE	3LD2164-1TC53	+ 3LD9200-5C	PE+N	3LD2165-3VB53	N	3LD2165-4VD53
PE	3LD2264-1TC53	+ 3LD9200-5C	PE+N	3LD2265-3VB53	N	3LD2265-4VD53
PE	3LD2565-1TC53	+ 3LD9200-5C	PE+N	3LD2566-3VB53	PE+N	3LD2566-4VD53
N	3LD2766-1GP53	+ 3LD9280-0C		–		–
N	3LD2866-1GP53	+ 3LD9280-0C		–		–

8

Quick selection guide, page 8/6

© Siemens 2025

3LD switch disconnectors

Accessories for 3LD2 switch disconnectors in enclosure

Accessories

			3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)
N switching contacts (4th contact element)								
	Contacts	**Article No.**						
	Leading switch-on, lagging switch-off	3LD9220-0C		■	■			
		3LD9250-0CA				■		
		3LD9280-0C					■	■
N/PE terminals								
	Contacts	**Article No.**						
	Through-type	3LD9200-2C	■					
		3LD9220-2C		■	■			
		3LD9250-2CA				■		
		3LD9280-2C					■	■
Auxiliary switches (standard version)								
	• For mounting on the left and/or right • NO: lagging during switch-on, leading during switch-off of 3LD switch • NC: leading during switch-on, lagging during switch-off of 3LD switch							
	Contacts	**Article No.**						
	1 NO + 1 NC, Standard	3LD9200-5C	■	■	■	■	■	■
	1 NO + 1 NC, Gold-plated	3LD9200-5CF	■	■	■	■	■	■
	2 NO, Standard	3LD9200-6C	■	■	■	■	■	■
Auxiliary switches for mounting on the front								
	• Mounted on the front of the switch shaft • NO: lagging during switch-on, leading (20 ... 150 ms) during switch-off of 3LD switch • NC: leading during switch-on, lagging during switch-off of 3LD switch							
	Contacts	**Article No.**						
	1 NO + 1 NC, Standard	3LD9280-5D	■	■	■	■	■	■
	1 NO + 1 NC, Gold-plated	3LD9280-5DF	■	■	■	■	■	■
Rotary operating mechanisms								
	• Lockable in 0 position with up to 3 padlocks							
	Type	**Version**	**Article No.**					
	Main control switches	3P, 3P+N	3LD9224-1GH [1]	■	■	■		
			3LD9284-1G				■	■	■
		6P	3LD9284-1G		■	■	■	
	EMERGENCY-STOP switches	3P, 3P+N	3LD9224-3GH [1]	■	■	■		
			3LD9284-3G				■	■	■
		6P	3LD9284-3G		■	■	■	

[1] Incl. enclosure cover

8

System overview, page 8/44

© Siemens 2025

3LD2 DC isolators in a molded-plastic enclosure

	Operating mechanisms, black	Operating mechanisms, red/yellow
Number of poles	8P	8P
		

Mains voltage	Rated operational current I_e At DC-21A, 800 V DC	Rated operational current I_e At DC-22A, 800 V DC	Without auxiliary switch	
Rotary operating mechanisms				
800 V DC	32 A	16 A	3LD2265-8VQ51-0AF6	3LD2265-8VQ53-0AF6

8

Quick selection guide, page 8/6

© Siemens 2025

3LD switch disconnectors

3LD2 maintenance and repair switches with EMC shield plate, 25 ... 50 kA_{rms}

	Operating mechanisms, black	
Number of poles	3P	6P
		

Uninterrupted current I_u At AC-20, 0 ... 550 Hz, 380 ... 440 V	Operational power P At AC-20, 0 ... 550 Hz, 380 ... 440 V	Uninterrupted current I_u At AC-21, 50/60 Hz, 380 ... 440 V	Operational power AC-23A, 50/60 Hz, 380 ... 440 V	1 NO + 1 NC (Auxiliary switch for mounting on the front)		1 NO + 1 NC (Auxiliary switch for mounting on the front)	
Knob-operated mechanisms with masking plate				Base terminal		Base terminal	
10.2 A	4 kW	16 A	7.5 kW	PE	3LD2084-2GP21	2 × PE	–
13.2 A	5.5 kW	25 A	9 kW	PE	3LD2184-2GP21	2 × PE	3LD2185-5VD21
18 A	7.5 kW	32 A	11.5 kW	PE	3LD2284-2GP21	2 × PE	3LD2285-5VD21
38 A	18.5 kW	63 A	22 kW	PE	3LD2585-2GP21	2 × PE	3LD2586-5VD21
75 A	37 kW	100 A	37 kW	PE	3LD2786-2GP21	2 × PE	–
90 A	45 kW	125 A	45 kW	PE	3LD2886-2GP21	2 × PE	–

Scope of supply:
- Incl. shield clamps or hose clips for contacting the cable shield
- The PE terminal as a through-type terminal is insulated from the cable shield

3LD2 cable entries with EMC shield plate

3LD2.84



3LD2.85



3LD2.86



Quick selection guide, page 8/6

© Siemens 2025

Accessories

			3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)
N switching contacts (4th contact element)								
	Contacts	**Article No.**						
	Leading switch-on, lagging switch-off	3LD9220-0C		■	■			
		3LD9250-0CA				■		
		3LD9280-0C					■	■
N/PE terminals								
	Contacts	**Article No.**						
	Through-type	3LD9200-2C	■					
		3LD9220-2C		■	■			
		3LD9250-2CA				■		
		3LD9280-2C					■	■
Auxiliary switches (standard version)								
	• For mounting on the left and/or right • NO: lagging during switch-on, leading during switch-off of 3LD switch • NC: leading during switch-on, lagging during switch-off of 3LD switch							
	Contacts	**Contact surface**	**Article No.**					
	1 NO + 1 NC	Standard	3LD9200-5C	■	■	■	■	■	■
		Gold-plated	3LD9200-5CF	■	■	■	■	■	■
	2 NO	Standard	3LD9200-6C	■	■	■	■	■	■
Auxiliary switches for mounting on the front								
	• Mounted on the front of the switch shaft • NO: lagging during switch-on, leading (20 ... 150 ms) during switch-off of 3LD switch • NC: leading during switch-on, lagging during switch-off of 3LD switch							
	Contacts	**Contact surface**	**Article No.**					
	1 NO + 1 NC	Standard	3LD9280-5D	■	■	■	■	■	■
		Gold-plated	3LD9280-5DF	■	■	■	■	■	■
Knob-operated mechanisms								
	• Can be used as a replacement • Lockable in 0 and 1 position with up to 3 padlocks							
	Version		**Article No.**					
	Main control switches		3LD9283-2G	■	■	■	■	■	■
	EMERGENCY-STOP switches		3LD9283-4G	■	■	■	■	■	■
Rotary operating mechanisms								
	• Lockable in 0 position with up to 3 padlocks • Only for 50/60 Hz applications							
	Type	**Version**	**Article No.**					
	Main control switches	3P	3LD9224-1G	■	■	■			
			3LD9284-1G				■	■	■
		6P	3LD9284-1G		■	■	■		
	EMERGENCY-STOP switches	3P	3LD9224-3G	■	■	■			
			3LD9284-3G				■	■	■
		6P	3LD9284-3G		■	■	■		
Terminal blocks								
	**Version**		**Article No.**					
	Through-type terminal with screw connection		8WH1000-0AF00	■	■	■	■	■	■
Shield terminals								
	Terminal area		**Article No.**					
	3 ...12 mm		3LD9228-1G	■	■	■	■	■	■

8

Quick selection guide, page 8/6

© Siemens 2025

3LD switch disconnectors

System overview of 3LD5 UL main control and EMERGENCY-STOP switches

Basic units for front mounting

3LD5020 (3-pole)

3LD5020 (4-pole)

3LD5420 (3-pole)

3LD5420 (4-pole)

Basic units, floor mounting with direct operating mechanism

3LD5000 (3-pole)

3LD5000 (4-pole)

3LD5400 (3-pole)

3LD5400 (4-pole)

Basic units, floor mounting with door-coupling rotary operating mechanism

3LD5010 (3-pole)

3LD5010 (4-pole)

3LD5410 (3-pole)

3LD5410 (4-pole)

Additional poles and auxiliary switches

N switching contact

N/PE terminals (through-type)

Auxiliary switches (standard version)

Auxiliary switch for mounting on the front

Operating mechanisms

Rotary operating mechanisms

for four-hole mounting

Coupling heads with and without tolerance compensation

Supplementary handles for UL 508A/NFPA 79

Switch shafts

Further accessories

Terminal covers, 1-pole

Terminal covers, 3 and 4-pole

Inscription labels (with and without inscription)

Note:
You will find a detailed range of accessories with the basic units.

© Siemens 2025

Mounting concept and accessories

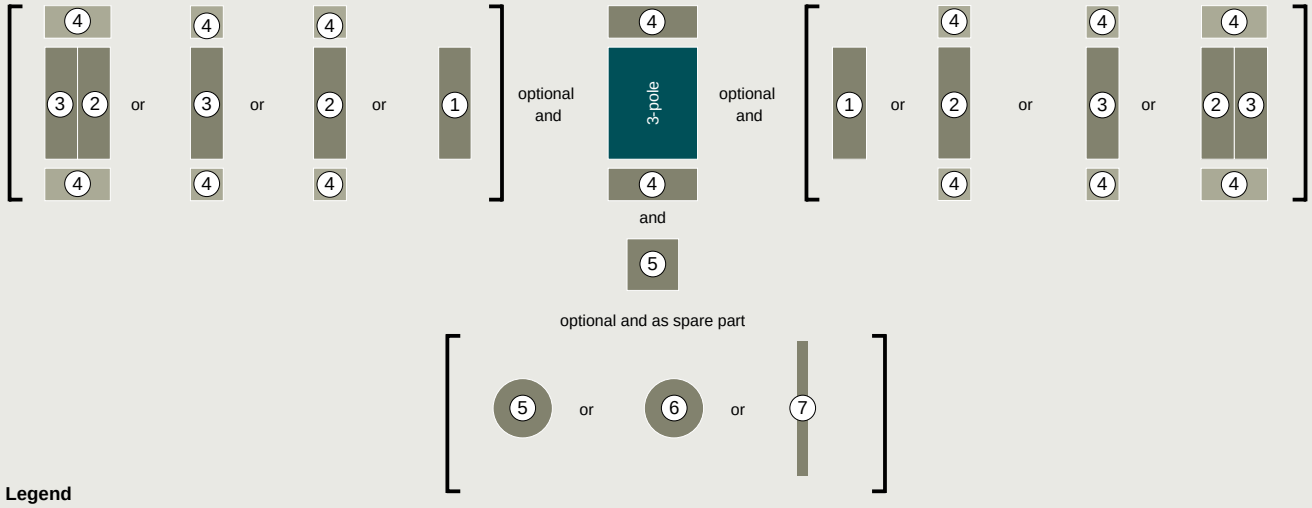

Legend

1 Auxiliary switch
2 N switching contact [1)]
3 N/PE terminal
4 Terminal cover
5 Rotary operating mechanism, four-hole mounting
6 Knob-operated mechanism, four-hole mounting
7 Switch shaft (300 or 600 mm)

[1)] N switching contact 2 must first be installed on the basic unit

I201_20485

8

Main control switches acc. to UL

The certification according to UL 489 makes the 3LD5 UL ideal for use as a main control switch for machinery and plants for export to the NAFTA states. The variety of accessories makes it especially suitable as a main disconnect switch for industrial machinery. The switch is also certified according to UL 508 and can also be used as a manual motor controller.

Mounting types

Front mounting of basic units

The switches for front mounting are mounted on the inside of covers, side panels or, if applicable, control cabinet doors (depending on the applicable standard and switching function). Installation is achieved by 4-hole mounting of the handle. This switch is especially suitable when door interlocking is not required or is implemented in a different way.

Floor mounting with direct operating mechanism

The switches for floor mounting with direct operating mechanism up to 60 A are snapped onto 35 mm DIN rails according to EN 60715 or screw-mounted on mounting panels. The switches for 100 ... 160 A (3LD54 ... 3LD58) are exclusively screwed onto mounting panels.

Basic units, floor mounting with door-coupling rotary operating mechanism

The switches for floor mounting up to 30 A (3LD50) are snapped onto 35 mm DIN rails according to EN 60715 or screw-mounted on mounting panels. The switches for 100 to 160 A (3LD54 ... 3LD58) are exclusively screwed onto mounting panels. The actuators are connected to the lower section of the switch through a door coupling, which can be released in the 0 position, and a 300 mm long switch shaft. The rotary operating mechanisms are also defeatable, i.e. it is possible to open the control cabinet door with a deliberate action while the switch is in the ON position. To meet the requirement acc. to UL 508A/NFPA 79, a supplementary handle can be mounted on the switch. Combined with the intermediate handle, the shaft can no longer be removed.

© Siemens 2025

3LD switch disconnectors

3LD5 UL main control and EMERGENCY-STOP switches, front mounting, SCCR 50 - 65 kA

	Operating mechanisms, black	
Number of poles	3P	3P+N
		

Uninterrupted current I_u At AC-21A, 380 ... 440 V	General use acc. to UL 489/60947-4-1	Operational power P At AC-23A, 380 ... 440 V		
Rotary operating mechanism, four-hole mounting				
32	30	15	3LD5020-0TK11	3LD5020-0TL11
63	60	30	3LD5220-0TK11	3LD5220-0TL11
Knob-operated mechanism, four-hole mounting				
100	100	45	3LD5420-0TK11	3LD5420-0TL11
125	125	55	3LD5620-0TK11	3LD5620-0TL11
160	150	75	3LD5820-0TK11	3LD5820-0TL11

Scope of supply:
- Including terminal covers for the infeed side

Accessories

				3LD50	3LD52	3LD54	3LD56	3LD58
N switching contacts (4th contact element)								
	Contacts		Article No.					
	Leading switch-on, lagging switch-off		3LD9250-0BA	■				
			3LD9280-0B		■			
			3LD9240-0B			■	■	■
N/PE terminals								
	Contacts		Article No.					
	Through-type		3LD9250-2BA	■				
			3LD9280-2B		■			
			3LD9240-2B			■	■	■
Auxiliary switches (standard version)								
	• For mounting on the left and/or right • NO: lagging during switch-on, leading during switch-off of 3LD switch • NC: leading during switch-on, lagging during switch-off of 3LD switch							
	Contacts	Contact surface	Article No.					
	1 NO + 1 NC	Standard	3LD9200-5B	■	■	■	■	■
		Gold-plated	3LD9200-5BF	■	■	■	■	■
Auxiliary switch for mounting on the front								
	• Mounted on the front of the switch shaft • NO: lagging during switch-on, leading (20 ... 150 ms) during switch-off of 3LD switch • NC: leading during switch-on, lagging during switch-off of 3LD switch							
	Contacts	Contact surface	Article No.					
	1 NO + 1 NC	Standard	3LD9280-5D	■	■			
			3LD9240-5D			■	■	■
		Gold-plated	3LD9280-5DF	■	■			
			3LD9240-5DF			■	■	■

Quick selection guide, page 8/6

© Siemens 2025

Operating mechanisms, red/yellow	
3P	3P+N
	
3LD5020-0TK13	3LD5020-0TL13
3LD5220-0TK13	3LD5220-0TL13
3LD5420-0TK13	3LD5420-0TL13
3LD5620-0TK13	3LD5620-0TL13
3LD5820-0TK13	3LD5820-0TL13

8

			3LD50	3LD52	3LD54	3LD56	3LD58
Rotary operating mechanisms							
	• Lockable in 0 position with up to 3 padlocks						
	Version	**Article No.**					
	For main control switches	3LD9284-1B	■	■			
	For EMERGENCY-STOP switches	3LD9284-3B	■	■			
Knob-operated mechanisms							
	• Lockable in 0 position with up to 3 padlocks • Incl. funnel						
	Version	**Article No.**					
	For main control switches	3LD9243-1B			■	■	■
	For EMERGENCY-STOP switches	3LD9243-3B			■	■	■
Terminal covers							
	Number of poles	**Article No.**					
	1-pole	3LD9251-2A	■				
		3LD9281-2A		■			
		3LD9241-2A			■	■	■
	3-pole	3LD9251-0A	■				
Inscription labels							
	Inscription	**Article No.**					
	German/English (Hauptschalter/Main Switch)	3LD9286-1A	■	■	■	■	■
	Without inscription	3LD9286-4A	■	■	■	■	■

Quick selection guide, page 8/6

© Siemens 2025

3LD switch disconnectors

3LD5 UL main control and EMERGENCY-STOP switches, floor mounting with direct operating mechanism, SCCR 50 ... 65 kA

Number of poles	Operating mechanisms, black	
	3P	3P+N
		

Uninterrupted current I_u At AC-21A, 380 ... 440 V	General use acc. to UL 489/508	Operational power P At AC-23A, 380 ... 440 V		
Knob-operated mechanism, four-hole mounting				
32	30	15	3LD5000-0TK11	3LD5000-0TL11
63	60	30	3LD5200-0TK11	3LD5200-0TL11
100	100	45	3LD5400-0TK11	3LD5400-0TL11
125	125	55	3LD5600-0TK11	3LD5600-0TL11
160	150	75	3LD5800-0TK11	3LD5800-0TL11

Scope of supply:
- Including terminal covers for the infeed side

8

Accessories

N switching contacts (4th contact element)

Contacts	Article No.	3LD50	3LD52	3LD54	3LD56	3LD58
Leading switch-on, lagging switch-off	3LD9250-0CA	■				
	3LD9280-0C		■			
	3LD9240-0C			■	■	■

N/PE terminals

Contacts	Article No.	3LD50	3LD52	3LD54	3LD56	3LD58
Through-type	3LD9250-2CA	■				
	3LD9280-2C		■			
	3LD9240-2C			■	■	■

Auxiliary switches

- For mounting on the left and/or right
- NO: lagging during switch-on, leading during switch-off of 3LD switch
- NC: leading during switch-on, lagging during switch-off of 3LD switch

Contacts	Contact surface	Article No.	3LD50	3LD52	3LD54	3LD56	3LD58
1 NO + 1 NC	Standard	3LD9200-5C	■	■	■	■	■
	Gold-plated	3LD9200-5CF	■	■	■	■	■

Terminal covers



Number of poles	Article No.	3LD50	3LD52	3LD54	3LD56	3LD58
1-pole	3LD9251-2A	■				
	3LD9281-2A		■			
	3LD9241-2A			■	■	■
3-pole	3LD9251-0A	■				

Quick selection guide, page 8/6

© Siemens 2025

Operating mechanisms, red/yellow

3P	3P+N
	
3LD5000-0TK13	3LD5000-0TL13
3LD5200-0TK13	3LD5200-0TL13
3LD5400-0TK13	3LD5400-0TL13
3LD5600-0TK13	3LD5600-0TL13
3LD5800-0TK13	3LD5800-0TL13

8

Quick selection guide, page 8/6

© Siemens 2025

3LD switch disconnectors

3LD5 UL main control and EMERGENCY-STOP switches, floor mounting with door-coupling rotary operating mechanism, SCCR 50 ... 65 kA

Number of poles	Operating mechanisms, black	
	3P	3P+N
		

Uninterrupted current I_u At AC-21A, 380 ... 440 V	General use acc. to UL 489/508	Operational power P At AC-23A, 380 ... 440 V		
Door-coupling rotary operating mechanism, four-hole mounting				
32	30	15	3LD5010-0TK11	3LD5010-0TL11
63	60	30	3LD5210-0TK11	3LD5210-0TL11
100	100	45	3LD5410-0TK11	3LD5410-0TL11
125	125	55	3LD5610-0TK11	3LD5610-0TL11
160	150	75	3LD5810-0TK11	3LD5810-0TL11

Scope of supply:
- Including terminal covers for the infeed side
- Defeatable door-coupling rotary operating mechanisms with shaft 300 mm
- Without tolerance compensation

8

Accessories

N switching contacts (4th contact element)

Contacts	Article No.	3LD50	3LD52	3LD54	3LD56	3LD58
Leading switch-on, lagging switch-off	3LD9250-0CA	■				
	3LD9280-0C		■			
	3LD9240-0C			■	■	■

N/PE terminals

Contacts	Article No.	3LD50	3LD52	3LD54	3LD56	3LD58
Through-type	3LD9250-2CA	■				
	3LD9280-2C		■			
	3LD9240-2C			■	■	■

Auxiliary switches (standard version)

- For mounting on the left and/or right
- NO: lagging during switch-on, leading during switch-off of 3LD switch
- NC: leading during switch-on, lagging during switch-off of 3LD switch

Contacts	Contact surface	Article No.	3LD50	3LD52	3LD54	3LD56	3LD58
1 NO + 1 NC	Standard	3LD9200-5C	■	■	■	■	■
	Gold-plated	3LD9200-5CF	■	■	■	■	■

Auxiliary switch for mounting on the front

- Mounted on the front of the switch shaft
- NO: lagging during switch-on, leading (20 ... 150 ms) during switch-off of 3LD switch
- NC: leading during switch-on, lagging during switch-off of 3LD switch

Contacts	Contact surface	Article No.	3LD50	3LD52	3LD54	3LD56	3LD58
1 NO + 1 NC	Standard	3LD9280-5D	■	■			
		3LD9240-5D			■	■	■
	Gold-plated	3LD9280-5DF	■	■			
		3LD9240-5DF			■	■	■

Handles

- Supplied with a masking plate, but without an extension shaft or coupling driver
- Can be locked with up to max. 3 padlocks

Inscription	Color	Article No.	3LD50	3LD52	3LD54	3LD56	3LD58
O-I	Gray	8UD1771-2AD01	■	■			
		8UD1731-2AD01			■	■	■
	Red/yellow	8UD1771-2AD05	■	■			
		8UD1731-2AD05			■	■	■

Quick selection guide, page 8/6

© Siemens 2025

Operating mechanisms, red/yellow

3P	3P+N
	
3LD5010-0TK13	3LD5010-0TL13
3LD5210-0TK13	3LD5210-0TL13
3LD5410-0TK13	3LD5410-0TL13
3LD5610-0TK13	3LD5610-0TL13
3LD5810-0TK13	3LD5810-0TL13

8

Supplementary handles for door-coupling rotary operating mechanism

- For requirements according to UL 508A/NFPA 79
- Can be locked with up to 1 padlocks in 0 position
- Can only be switched on by deliberate action

Inscription	Color	Article No.	3LD50	3LD52	3LD54	3LD56	3LD58
O-I	Gray	3LD9287-1C	■	■			
		3LD9247-1C			■	■	■
	Red/yellow	3LD9287-3C	■	■			
		3LD9247-3C			■	■	■

Coupling drivers

Version	Article No.	3LD50	3LD52	3LD54	3LD56	3LD58
With tolerance compensation	8UD1900-1GA00	■	■			
	8UD1900-2GA00			■	■	■
Without tolerance compensation	8UD1900-1HA00	■	■			
	8UD1900-2HA00			■	■	■

Terminal covers




Number of poles	Article No.	3LD50	3LD52	3LD54	3LD56	3LD58
1-pole	3LD9251-2A	■				
	3LD9281-2A		■			
	3LD9241-2A			■	■	■
3-pole	3LD9251-0A	■				

Inscription labels

- Not for installation in distribution boards

Inscription	Article No.	3LD50	3LD52	3LD54	3LD56	3LD58
German/English (Hauptschalter/Main Switch)	3LD9286-1A	■	■	■	■	■
Without inscription	3LD9286-4A	■	■	■	■	■

Switch shafts

Cross-section	Length	Article No.	3LD50	3LD52	3LD54	3LD56	3LD58
6 × 6 mm	300 mm	3LD9205-0C	■	■			
	600 mm	3LD9205-2C	■	■			
8 × 8 mm	300 mm	3LD9245-0C			■	■	■
	600 mm	3LD9245-2C			■	■	■

Quick selection guide, page 8/6

© Siemens 2025

3KD switch disconnectors

System overview

Complete units with direct operating mechanisms

Front operating mechanisms, 3-pole

Front operating mechanisms, 4-pole

Front operating mechanisms, 3-pole

Front operating mechanisms, 4-pole

Basic units

Front operating mechanisms, 3-pole

Front operating mechanisms, 4-pole

Lateral operating mechanisms, 3-pole

Lateral operating mechanisms, 4-pole

Front-mounted devices, 6-pole, for DC applications with 1200 V

Front-mounted devices, 2/3/4-pole, for DC applications up to 1000 V new

Additional poles and auxiliary switch modules

4th contact elements

N terminals

N/PE terminals

Auxiliary switch modules

Operating mechanisms

Direct operating mechanisms

Door-coupling rotary operating mechanisms

Handles for door-coupling rotary operating mechanisms

Further accessories for door-coupling rotary operating mechanisms

Further accessories and spare parts

Auxiliary switches

Terminal covers

Phase barriers

Blocking pin test function

Mounting elements

Accessories for DC applications

Note: You will find a detailed range of accessories with the basic units.

© Siemens 2025

Types of mounting

You will find further information under:
sie.ag/2UlrAvy

Floor mounting

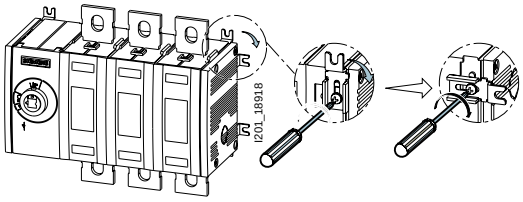

All 3KD switch disconnectors are designed for floor mounting. To ensure that the switch can be flexibly adapted to the relevant installation conditions, the mounting bracket can be rotated through 90° with size 3 or larger.

DIN rail



Sizes 01 and 02 of the 3KD0 and sizes 1 and 2 of the 3KD can be snapped onto a DIN rail (TH35 according to EN 60715) as an alternative mounting method.

© Siemens 2025

3KD switch disconnectors

Mounting concept and accessories

Front operating mechanism center, sizes 01 and 02

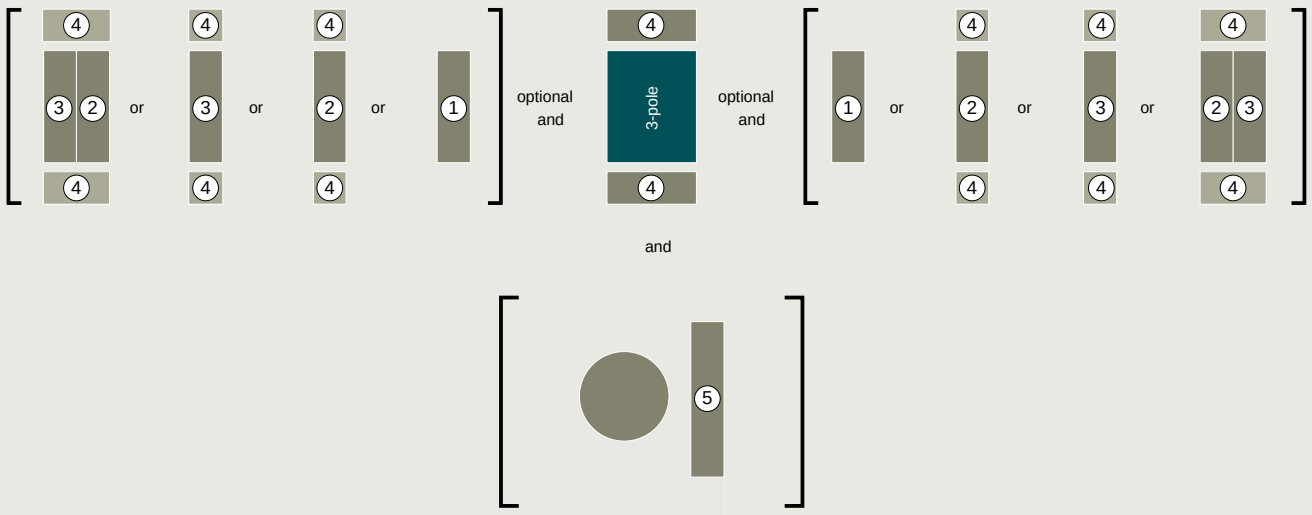

Legend

1 Auxiliary switch
2 N switching contact [1)]
3 N/PE terminal
4 Terminal cover
5 Door-coupling rotary operating mechanism

[1)] N switching contact 2 must first be installed on the basic unit
Note: Design with door-coupling rotary operating mechanism for sizes 01 and 02 only possible for basic unit without operating mechanism

I201_20486

Front operating mechanism left, sizes 1 and 2, 3/4-pole

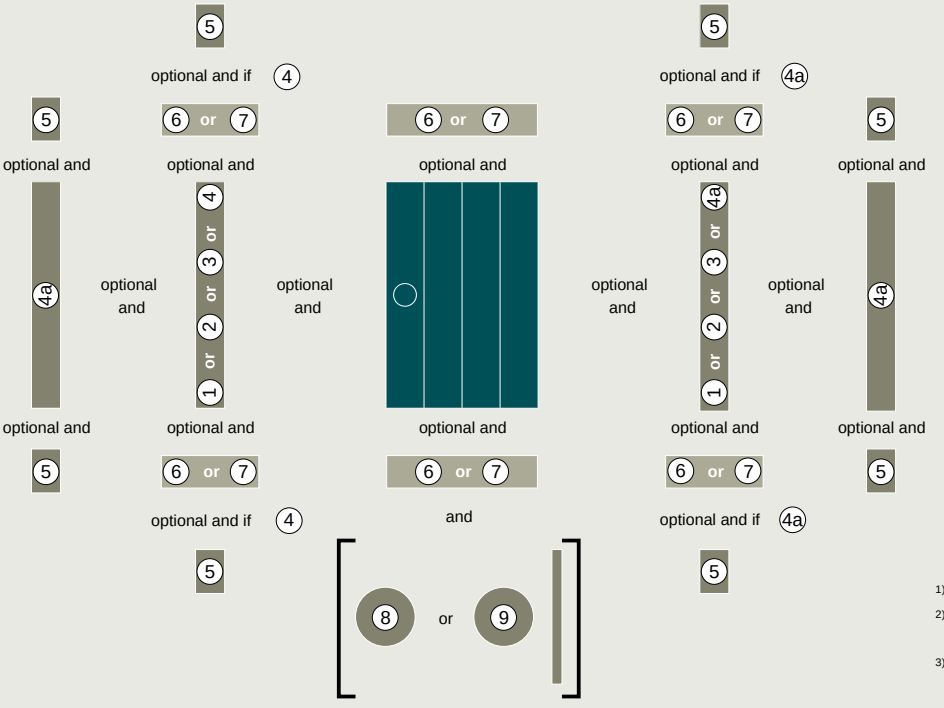

Legend

1 Neutral conductor terminal
2 N/PE terminal
3 4th contact element[1)]
4 Auxiliary switch module, version with test function and version with leading NO contact and test function [2)]
4a Auxiliary switch module for auxiliary switches, standard version [2)]
5 Auxiliary switch
6 Phase barrier [3)]
7 Terminal cover[3)]
8 Direct operating mechanism
9 Door-coupling rotary operating mechanism

[1)] Only for 3-pole 3K, max. 1× per switch
[2)] Max. 1× for each side of the switch, requires at least 1× auxiliary switch 5
[3)] Only for size 2, flat terminals

I201_20487

System overview, page 8/62

© Siemens 2025

Front operating mechanism center, sizes 1 and 2, 3/4-pole

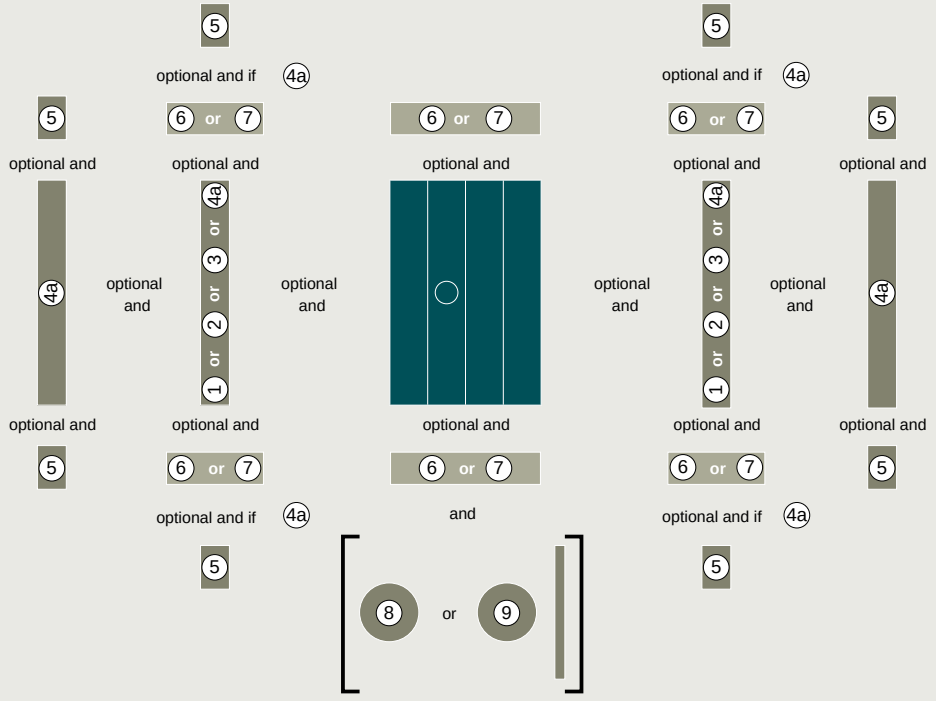

Legend

1. Neutral conductor terminal
2. N/PE terminal
3. 4th contact element[1)]
4a. Auxiliary switch module for auxiliary switches, standard version [2)]
5. Auxiliary switch
6. Phase barrier [3)]
7. Terminal cover [3)]
8. Direct operating mechanism
9. Door-coupling rotary operating mechanism

[1)] Only for 3-pole 3K, max. 1× per switch
[2)] Max. 1× for each side of the switch, requires at least 1× auxiliary switch 5
[3)] Only for size 2, flat terminals

I201_20488

Front operating mechanism center or left, sizes 3 to 5, 3/4-pole

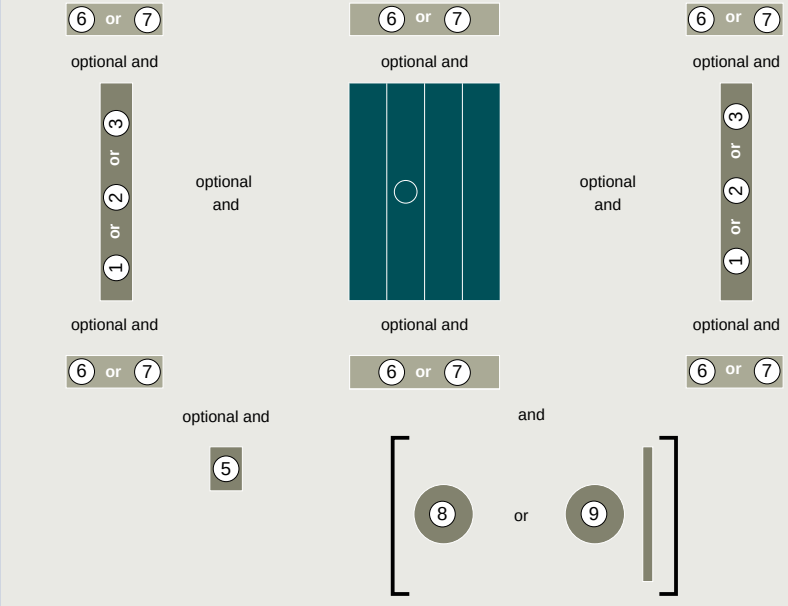

Legend

1. Neutral conductor terminal
2. N/PE terminal
3. 4th contact element [1)]
5. Auxiliary switch [2)]
6. Phase barrier
7. Terminal cover
8. Direct operating mechanism
9. Door-coupling rotary operating mechanism

[1)] Only for 3-pole 3K, max. 1× per switch
[2)] Up to 4× auxiliary switches 5

I201_20489

System overview, page 8/62

© Siemens 2025

3KD switch disconnectors

Mounting concept and accessories

Lateral operating mechanism left, sizes 1 and 2, 3/4-pole

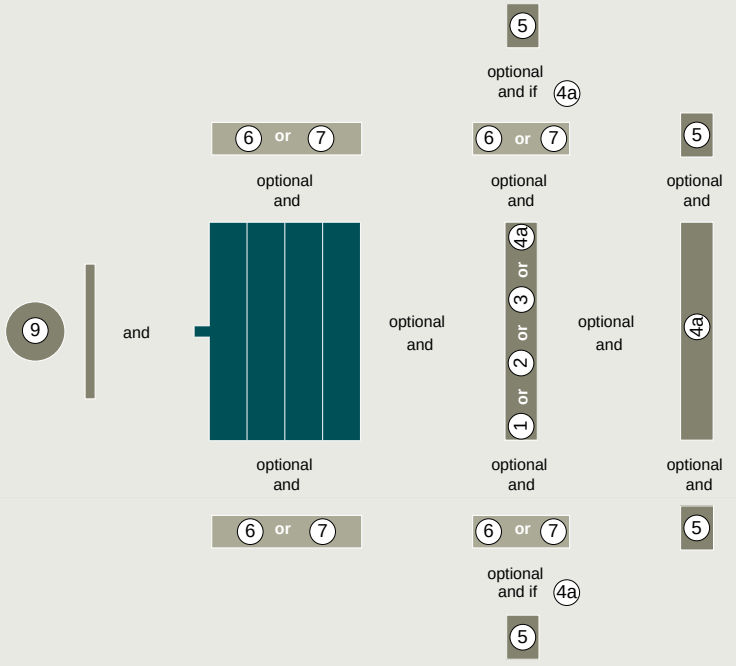

Legend

1. Neutral conductor terminal
2. N/PE terminal
3. 4th contact element [1]
4a. Auxiliary switch module for auxiliary switches, standard version [2]
5. Auxiliary switch
6. Phase barrier [3]
7. Terminal cover [3]
9. Door-coupling rotary operating mechanism

[1] Only for 3-pole 3K
[2] Max. 1× per switch, Requires at least 1× auxiliary switch 5
[3] Only for size 2, flat terminals

I201_20490

Lateral operating mechanism left, sizes 3 to 5, 3/4-pole

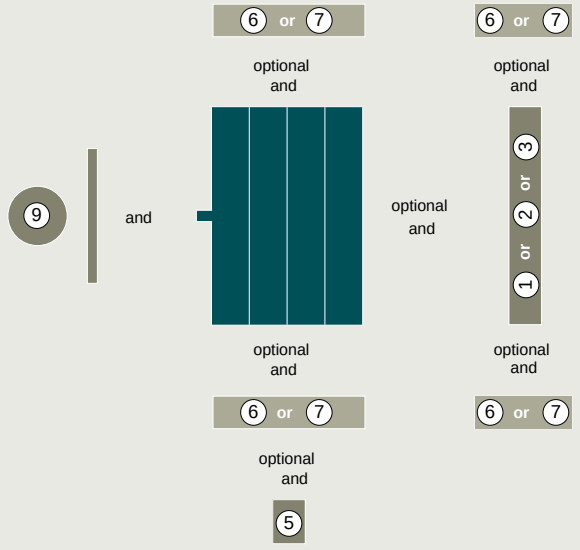

Legend

1. Neutral conductor terminal
2. N/PE terminal
3. 4th contact element [1]
5. Auxiliary switch [2]
6. Phase barrier
7. Terminal cover
9. Door-coupling rotary operating mechanism

[1] Only for 3-pole 3K
[2] Up to 4× auxiliary switches

I201_20491

8

System overview, page 8/62

© Siemens 2025

Lateral operating mechanism right, sizes 1 and 2, 3/4-pole

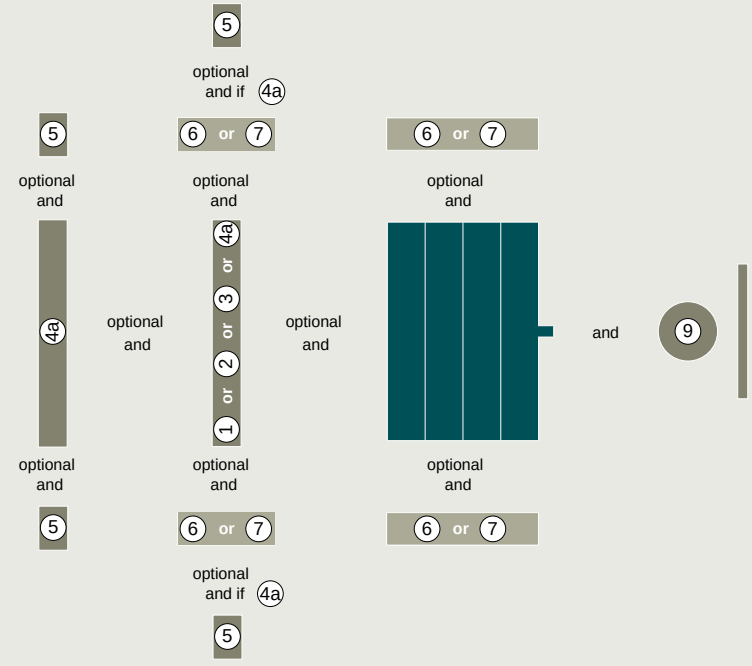

Legend

(1) Neutral conductor terminal
(2) N/PE terminal
(3) 4th contact element [1]
(4a) Auxiliary switch module for auxiliary switches, standard version [2]
(5) Auxiliary switch
(6) Phase barrier [3]
(7) Terminal cover [3]
(9) Door-coupling rotary operating mechanism

[1] Only for 3-pole 3K
[2] Max. 1× per switch, requires at least 1× auxiliary switch (5)
[3] Only for size 2, flat terminals

I201_20492

Lateral operating mechanism right, sizes 3 to 5, 3/4-pole

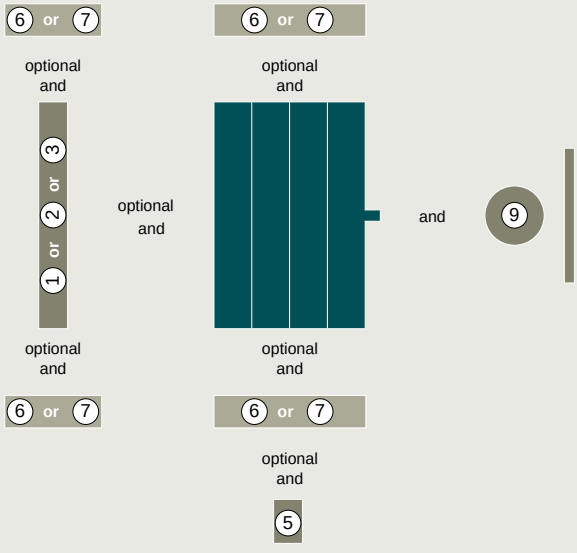

Legend

(1) Neutral conductor terminal
(2) N/PE terminal
(3) 4th contact element [1]
(5) Auxiliary switch [2]
(6) Phase barrier
(7) Terminal cover
(9) Door-coupling rotary operating mechanism

[1] Only for 3-pole 3K
[2] Up to 4× auxiliary switches (5)

I201_20493

System overview, page 8/62

© Siemens 2025

3KD switch disconnectors

Complete units with direct operating mechanisms

	Operating mechanism, gray Front operating mechanism center		Operating mechanism, gray Front operating mechanism left	
Application	AC	AC	AC/DC	AC/DC
Number of poles	3P	4P	3P	4P
				

Size	Uninterrupted current I_u				
Box terminals					
01	16 A	3KD0132-2KG20-3	3KD0142-2KG20-3	–	–
	32 A	3KD0232-2KG20-3	3KD0242-2KG20-3	–	–
	63 A	3KD0332-2KG20-3	–	–	–
02	63 A	3KD0332-2LG20-3	3KD0342-2LG20-3	–	–
	80 A	3KD0432-2LG20-3	3KD0442-2LG20-3	–	–
	100 A	3KD0532-2LG20-3	3KD0542-2LG20-3	–	–
	125 A	3KD0632-2LG20-3	3KD0642-2LG20-3	–	–
1	16 A	–	–	3KD1632-2ME10-0	3KD1642-2ME10-0
	32 A	–	–	3KD2232-2ME10-0	3KD2242-2ME10-0
	63 A	–	–	3KD2632-2ME10-0	3KD2642-2ME10-0
	80 A	–	–	3KD2832-2ME10-0	3KD2842-2ME10-0
	100 A	–	–	3KD3032-2ME10-0	3KD3042-2ME10-0
2	80 A	–	–	3KD2832-2NE10-0	3KD2842-2NE10-0
	100 A	–	–	3KD3032-2NE10-0	3KD3042-2NE10-0
	125 A	–	–	3KD3232-2NE10-0	3KD3242-2NE10-0
	160 A	–	–	3KD3432-2NE10-0	3KD3442-2NE10-0
Flat terminals					
2	80 A	–	–	3KD2832-0NE10-0	3KD2842-0NE10-0
	100 A	–	–	3KD3032-0NE10-0	3KD3042-0NE10-0
	125 A	–	–	3KD3232-0NE10-0	3KD3242-0NE10-0
	160 A	–	–	3KD3432-0NE10-0	3KD3442-0NE10-0
	200 A	–	–	3KD3632-0NE10-0	3KD3642-0NE10-0
	250 A	–	–	3KD3832-0NE10-0	3KD3842-0NE10-0
3	200 A	–	–	3KD3632-0PE10-0	3KD3642-0PE10-0
	250 A	–	–	3KD3832-0PE10-0	3KD3842-0PE10-0
	315 A	–	–	3KD4032-0PE10-0	3KD4042-0PE10-0
	400 A	–	–	3KD4232-0PE10-0	3KD4242-0PE10-0
	500 A	–	–	3KD4432-0PE10-0	3KD4442-0PE10-0
4	500 A	–	–	3KD4432-0QE10-0	3KD4442-0QE10-0
	630 A	–	–	3KD4632-0QE10-0	3KD4642-0QE10-0
	800 A	–	–	3KD4832-0QE10-0	3KD4842-0QE10-0
	1000 A	–	–	3KD5032-0QE10-0	3KD5042-0QE10-0
5	1000 A	–	–	3KD5032-0RE10-0	3KD5042-0RE10-0
	1250 A	–	–	3KD5232-0RE10-0	3KD5242-0RE10-0
	1600 A	–	–	3KD5432-0RE10-0	3KD5442-0RE10-0
	2000 A	–	–	3KD5632-0RE10-0	3KD5642-0RE10-0

Scope of supply:
- Incl. terminal covers on input and output side for 3KD0 sizes 01 and 02
- Incl. phase barriers on the input and output side for size 2 with flat terminals
- Terminal covers must be ordered separately for switch disconnectors with flat terminals and direct operating mechanisms

Mounting:
- The switch disconnectors are designed for floor mounting and the sizes 01, 02, 1 and 2 can optionally also be mounted on DIN rails

8

Quick selection guide, page 8/8

© Siemens 2025

Operating mechanism, red/yellow **Front operating mechanism center**	
AC	AC
3P	4P
	
3KD0133-2KG20-3	3KD0143-2KG20-3
3KD0233-2KG20-3	3KD0243-2KG20-3
3KD0333-2KG20-3	–
3KD0333-2LG20-3	3KD0343-2LG20-3
3KD0433-2LG20-3	3KD0443-2LG20-3
3KD0533-2LG20-3	3KD0543-2LG20-3
3KD0633-2LG20-3	3KD0643-2LG20-3
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–

Note:
- The complete units with a direct operating mechanism are not suitable for conversion to door-coupling rotary operating mechanisms; the basic units are to be used for this purpose
- All basic units without handles are suitable for use with door-coupling rotary operating mechanisms, from size 1 to size 5 these can also be equipped with direct operating mechanisms
- The switch disconnectors with lateral operating mechanism are suitable for door-coupling rotary operating mechanisms
- For 3KD switch disconnectors and lateral operating mechanism (left or right), only 8UD door-coupling rotary operating mechanisms without the test function can be used

Quick selection guide, page 8/8

© Siemens 2025

3KD switch disconnectors

Basic units without handles for AC and AC/DC applications

	Front operating mechanism Left		Front operating mechanism Center		
Application	AC/DC	AC/DC	AC	AC	AC/DC
Number of poles	3P	4P	3P	4P	3P







Size	Uninterrupted current I_u					
Box terminals						
01	16 A	–	–	3KD0130-2KG20-3	3KD0140-2KG20-3	–
	32 A	–	–	3KD0230-2KG20-3	3KD0240-2KG20-3	–
	63 A	–	–	3KD0330-2KG20-3	–	–
02	63 A	–	–	3KD0330-2LG20-3	3KD0340-2LG20-3	–
	80 A	–	–	3KD0430-2LG20-3	3KD0440-2LG20-3	–
	100 A	–	–	3KD0530-2LG20-3	3KD0540-2LG20-3	–
	125 A	–	–	3KD0630-2LG20-3	3KD0640-2LG20-3	–
1	16 A	3KD1630-2ME10-0	3KD1640-2ME10-0	–	–	3KD1630-2ME20-0
	32 A	3KD2230-2ME10-0	3KD2240-2ME10-0	–	–	3KD2230-2ME20-0
	63 A	3KD2630-2ME10-0	3KD2640-2ME10-0	–	–	3KD2630-2ME20-0
	80 A	3KD2830-2ME10-0	3KD2840-2ME10-0	–	–	3KD2830-2ME20-0
	100 A	3KD3030-2ME10-0	3KD3040-2ME10-0	–	–	3KD3030-2ME20-0
2	80 A	3KD2830-2NE10-0	3KD2840-2NE10-0	–	–	3KD2830-2NE20-0
	100 A	3KD3030-2NE10-0	3KD3040-2NE10-0	–	–	3KD3030-2NE20-0
	125 A	3KD3230-2NE10-0	3KD3240-2NE10-0	–	–	3KD3230-2NE20-0
	160 A	3KD3430-2NE10-0	3KD3440-2NE10-0	–	–	3KD3430-2NE20-0
Flat terminals						
2	80 A	3KD2830-0NE10-0	3KD2840-0NE10-0	–	–	3KD2830-0NE20-0
	100 A	3KD3030-0NE10-0	3KD3040-0NE10-0	–	–	3KD3030-0NE20-0
	125 A	3KD3230-0NE10-0	3KD3240-0NE10-0	–	–	3KD3230-0NE20-0
	160 A	3KD3430-0NE10-0	3KD3440-0NE10-0	–	–	3KD3430-0NE20-0
	200 A	3KD3630-0NE10-0	3KD3640-0NE10-0	–	–	3KD3630-0NE20-0
	250 A	3KD3830-0NE10-0	3KD3840-0NE10-0	–	–	3KD3830-0NE20-0
3	200 A	3KD3630-0PE10-0	3KD3640-0PE10-0	–	–	3KD3630-0PE20-0
	250 A	3KD3830-0PE10-0	3KD3840-0PE10-0	–	–	3KD3830-0PE20-0
	315 A	3KD4030-0PE10-0	3KD4040-0PE10-0	–	–	3KD4030-0PE20-0
	400 A	3KD4230-0PE10-0	3KD4240-0PE10-0	–	–	3KD4230-0PE20-0
	500 A	3KD4430-0PE10-0	3KD4440-0PE10-0	–	–	3KD4430-0PE20-0
4	500 A	3KD4430-0QE10-0	3KD4440-0QE10-0	–	–	3KD4430-0QE20-0
	630 A	3KD4630-0QE10-0	3KD4640-0QE10-0	–	–	3KD4630-0QE20-0
	800 A	3KD4830-0QE10-0	3KD4840-0QE10-0	–	–	3KD4830-0QE20-0
	1000 A	3KD5030-0QE10-0	3KD5040-0QE10-0	–	–	3KD5030-0QE20-0
5	1000 A	3KD5030-0RE10-0	3KD5040-0RE10-0	–	–	3KD5030-0RE20-0
	1250 A	3KD5230-0RE10-0	3KD5240-0RE10-0	–	–	3KD5230-0RE20-0
	1600 A	3KD5430-0RE10-0	3KD5440-0RE10-0	–	–	3KD5430-0RE20-0
	2000 A	3KD5630-0RE10-0	3KD5640-0RE10-0	–	–	3KD5630-0RE20-0

Scope of supply:
- Incl. terminal covers on input and output side for 3KD0 sizes 01 and 02
- Incl. phase barriers on the input and output side for size 2 with flat terminals
- Terminal covers must be ordered separately for switch disconnectors with flat terminals and direct operating mechanisms

Mounting:
- The switch disconnectors are designed for floor mounting and the sizes 1 and 2 can optionally also be mounted on DIN rails

Quick selection guide, page 8/12

© Siemens 2025

	Front operating mechanism Left		Right	
AC/DC	AC/DC	AC/DC	AC/DC	AC/DC
4P	3P	4P	3P	4P
				
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
3KD1640-2ME20-0	3KD1634-2ME10-0	3KD1644-2ME10-0	3KD1634-2ME40-0	3KD1644-2ME40-0
3KD2240-2ME20-0	3KD2234-2ME10-0	3KD2244-2ME10-0	3KD2234-2ME40-0	3KD2244-2ME40-0
3KD2640-2ME20-0	3KD2634-2ME10-0	3KD2644-2ME10-0	3KD2634-2ME40-0	3KD2644-2ME40-0
3KD2840-2ME20-0	3KD2834-2ME10-0	3KD2844-2ME10-0	3KD2834-2ME40-0	3KD2844-2ME40-0
3KD3040-2ME20-0	3KD3034-2ME10-0	3KD3044-2ME10-0	3KD3034-2ME40-0	3KD3044-2ME40-0
3KD2840-2NE20-0	3KD2834-2NE10-0	3KD2844-2NE10-0	3KD2834-2NE40-0	3KD2844-2NE40-0
3KD3040-2NE20-0	3KD3034-2NE10-0	3KD3044-2NE10-0	3KD3034-2NE40-0	3KD3044-2NE40-0
3KD3240-2NE20-0	3KD3234-2NE10-0	3KD3244-2NE10-0	3KD3234-2NE40-0	3KD3244-2NE40-0
3KD3440-2NE20-0	3KD3434-2NE10-0	3KD3444-2NE10-0	3KD3434-2NE40-0	3KD3444-2NE40-0
3KD2840-0NE20-0	3KD2834-0NE10-0	3KD2844-0NE10-0	3KD2834-0NE40-0	3KD2844-0NE40-0
3KD3040-0NE20-0	3KD3034-0NE10-0	3KD3044-0NE10-0	3KD3034-0NE40-0	3KD3044-0NE40-0
3KD3240-0NE20-0	3KD3234-0NE10-0	3KD3244-0NE10-0	3KD3234-0NE40-0	3KD3244-0NE40-0
3KD3440-0NE20-0	3KD3434-0NE10-0	3KD3444-0NE10-0	3KD3434-0NE40-0	3KD3444-0NE40-0
3KD3640-0NE20-0	3KD3634-0NE10-0	3KD3644-0NE10-0	3KD3634-0NE40-0	3KD3644-0NE40-0
3KD3840-0NE20-0	3KD3834-0NE10-0	3KD3844-0NE10-0	3KD3834-0NE40-0	3KD3844-0NE40-0
3KD3640-0PE20-0	3KD3634-0PE10-0	3KD3644-0PE10-0	3KD3634-0PE40-0	3KD3644-0PE40-0
3KD3840-0PE20-0	3KD3834-0PE10-0	3KD3844-0PE10-0	3KD3834-0PE40-0	3KD3844-0PE40-0
3KD4040-0PE20-0	3KD4034-0PE10-0	3KD4044-0PE10-0	3KD4034-0PE40-0	3KD4044-0PE40-0
3KD4240-0PE20-0	3KD4234-0PE10-0	3KD4244-0PE10-0	3KD4234-0PE40-0	3KD4244-0PE40-0
3KD4440-0PE20-0	3KD4434-0PE10-0	3KD4444-0PE10-0	3KD4434-0PE40-0	3KD4444-0PE40-0
3KD4440-0QE20-0	3KD4434-0QE10-0	3KD4444-0QE10-0	3KD4434-0QE40-0	3KD4444-0QE40-0
3KD4640-0QE20-0	3KD4634-0QE10-0	3KD4644-0QE10-0	3KD4634-0QE40-0	3KD4644-0QE40-0
3KD4840-0QE20-0	3KD4834-0QE10-0	3KD4844-0QE10-0	3KD4834-0QE40-0	3KD4844-0QE40-0
3KD5040-0QE20-0	3KD5034-0QE10-0	3KD5044-0QE10-0	3KD5034-0QE40-0	3KD5044-0QE40-0
3KD5040-0RE20-0	3KD5034-0RE10-0	3KD5044-0RE10-0	3KD5034-0RE40-0	3KD5044-0RE40-0
3KD5240-0RE20-0	3KD5234-0RE10-0	3KD5244-0RE10-0	3KD5234-0RE40-0	3KD5244-0RE40-0
3KD5440-0RE20-0	3KD5434-0RE10-0	3KD5444-0RE10-0	3KD5434-0RE40-0	3KD5444-0RE40-0
3KD5640-0RE20-0	3KD5634-0RE10-0	3KD5644-0RE10-0	3KD5634-0RE40-0	3KD5644-0RE40-0

Note:

- The complete units with a direct operating mechanism are not suitable for conversion to door-coupling rotary operating mechanisms; the basic units are to be used for this purpose
- All basic units without handles are suitable for use with door-coupling rotary operating mechanisms, from size 1 to size 5 these can also be equipped with direct operating mechanisms
- The switch disconnectors with lateral operating mechanism are suitable for door-coupling rotary operating mechanisms
- For 3KD switch disconnectors and lateral operating mechanism (left or right), only 8UD door-coupling rotary operating mechanisms without the test function can be used

Quick selection guide, page 8/12

© Siemens 2025

3KD switch disconnectors

Basic units without handles for DC applications

	Front operating mechanism Center					
Application	400 V DC new	500 V DC new	600 V DC new	750 V DC new	800 V DC new	1000 V DC new
Number of poles	2P	2P	3P	3P	4P	4P
						

Size	Uninterrupted current I_u						
Box terminals							
1	16 A	–	–	–	–	–	–
	32 A	–	–	–	–	–	–
	63 A	–	–	–	–	–	–
2	80 A	3KD2920-2NE20-0	–	3KD2930-2NE20-0	–	3KD2940-2NE20-0	–
	100 A	3KD3120-2NE20-0	–	3KD3130-2NE20-0	–	3KD3140-2NE20-0	–
	125 A	3KD3320-2NE20-0	–	3KD3330-2NE20-0	–	3KD3340-2NE20-0	–
	160 A	3KD3520-2NE20-0	–	3KD3530-2NE20-0	–	3KD3540-2NE20-0	–
Flat terminals							
2	80 A	3KD2920-0NE20-0	–	3KD2930-0NE20-0	–	3KD2940-0NE20-0	–
	100 A	3KD3120-0NE20-0	–	3KD3130-0NE20-0	–	3KD3140-0NE20-0	–
	125 A	3KD3320-0NE20-0	–	3KD3330-0NE20-0	–	3KD3340-0NE20-0	–
	160 A	3KD3520-0NE20-0	–	3KD3530-0NE20-0	–	3KD3540-0NE20-0	–
3	200 A	–	3KD3720-0PE20-0	–	3KD3730-0PE20-0	–	3KD3740-0PE20-0
	250 A	–	3KD3920-0PE20-0	–	3KD3930-0PE20-0	–	3KD3940-0PE20-0
	315 A	–	3KD4120-0PE20-0	–	3KD4130-0PE20-0	–	3KD4140-0PE20-0
	400 A	–	3KD4320-0PE20-0	–	3KD4330-0PE20-0	–	3KD4340-0PE20-0
4	500 A	–	3KD4520-0QE20-0	–	3KD4530-0QE20-0	–	3KD4540-0QE20-0
	630 A	–	3KD4720-0QE20-0	–	3KD4730-0QE20-0	–	3KD4740-0QE20-0
	800 A	–	3KD4920-0QE20-0	–	3KD4930-0QE20-0	–	3KD4940-0QE20-0
5	1000 A	–	3KD5120-0RE20-0	–	3KD5130-0RE20-0	–	3KD5140-0RE20-0
	1250 A	–	3KD5320-0RE20-0	–	3KD5330-0RE20-0	–	3KD5340-0RE20-0
	1600 A	–	3KD5520-0RE20-0	–	3KD5530-0RE20-0	–	3KD5540-0RE20-0

Quick selection guide, page 8/12

© Siemens 2025

	Front operating mechanism Left new					
1200 V DC	400 V DC	500 V DC	600 V DC	750 V DC	800 V DC	1000 V DC
6P	2P	2P	3P	3P	4P	4P
						
3KD1660-2ME20-0	–	–	–	–	–	–
3KD2260-2ME20-0	–	–	–	–	–	–
3KD2660-2ME20-0	–	–	–	–	–	–
3KD2860-2NE20-0	3KD2920-2NE10-0	–	3KD2930-2NE10-0	–	3KD2940-2NE10-0	–
3KD3060-2NE20-0	3KD3120-2NE10-0	–	3KD3130-2NE10-0	–	3KD3140-2NE10-0	–
3KD3260-2NE20-0	3KD3320-2NE10-0	–	3KD3330-2NE10-0	–	3KD3340-2NE10-0	–
3KD3460-2NE20-0	3KD3520-2NE10-0	–	3KD3530-2NE10-0	–	3KD3540-2NE10-0	–
3KD2860-0NE20-0	3KD2920-0NE10-0	–	3KD2930-0NE10-0	–	3KD2940-0NE10-0	–
3KD3060-0NE20-0	3KD3120-0NE10-0	–	3KD3130-0NE10-0	–	3KD3140-0NE10-0	–
3KD3260-0NE20-0	3KD3320-0NE10-0	–	3KD3330-0NE10-0	–	3KD3340-0NE10-0	–
3KD3460-0NE20-0	3KD3520-0NE10-0	–	3KD3530-0NE10-0	–	3KD3540-0NE10-0	–
3KD3660-0PE20-0	–	3KD3720-0PE10-0	–	3KD3730-0PE10-0	–	3KD3740-0PE10-0
3KD3860-0PE20-0	–	3KD3920-0PE10-0	–	3KD3930-0PE10-0	–	3KD3940-0PE10-0
3KD4060-0PE20-0	–	3KD4120-0PE10-0	–	3KD4130-0PE10-0	–	3KD4140-0PE10-0
3KD4260-0PE20-0	–	3KD4320-0PE10-0	–	3KD4330-0PE10-0	–	3KD4340-0PE10-0
3KD4460-0QE20-0	–	3KD4520-0QE10-0	–	3KD4530-0QE10-0	–	3KD4540-0QE10-0
3KD4660-0QE20-0	–	3KD4720-0QE10-0	–	3KD4730-0QE10-0	–	3KD4740-0QE10-0
3KD4860-0QE20-0	–	3KD4920-0QE10-0	–	3KD4930-0QE10-0	–	3KD4940-0QE10-0
3KD5060-0RE20-0	–	3KD5120-0RE10-0	–	3KD5130-0RE10-0	–	3KD5140-0RE10-0
3KD5260-0RE20-0	–	3KD5320-0RE10-0	–	3KD5330-0RE10-0	–	3KD5340-0RE10-0
3KD5460-0RE20-0	–	3KD5520-0RE10-0	–	3KD5530-0RE10-0	–	3KD5540-0RE10-0

8

Quick selection guide, page 8/12

© Siemens 2025

3KD switch disconnectors

Accessories

Additional poles

Note:

- Additional poles (4th contact element, N or N/PE terminal) must always be mounted directly adjacent to the switch disconnector on the left or right. Accordingly, an auxiliary switch module must not be mounted between the basic unit and an additional pole on sizes 1 and 2.
- For installation, it is important to note that only a 3-pole 3KD switch disconnector may be retrofitted with an additional switching pole with contact system (4th contact element).

			Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
4th contact elements (switching pole)									
	• For upgrading a 3-pole to a 4-pole switch disconnector • For sizes 1 to 5, identical to the factory-fitted poles • For sizes 01 and 02, leading switch-on, lagging switch-off • For sizes 01 and 02 equipped at the factory with terminal covers for the input and output side								
	Connection	**Article No.**							
	Box terminals 	3KD9015-2	■						
		3KD9025-2		■					
		3KD9105-2			■				
		3KD9205-2				■			
	Flat terminals 	3KD9205-0				■			
		3KD9305-0					■		
		3KD9405-0						■	
		3KD9505-0							■
N terminals (neutral conductor terminal) with removable jumper									
	• A jumper can be removed in order to interrupt the electrical connection between the terminals								
	Connection	**Article No.**							
	Box terminals 	3KD9106-2			■				
		3KD9206-2				■			
	Flat terminals 	3KD9206-0				■			
		3KD9306-0					■		
		3KD9406-0						■	
		3KD9506-0							■
N/PE terminals with permanent jumper									
	• Permanent electrical connection between the terminals, cannot be broken								
	Connection	**Article No.**							
	Box terminals 	3KD9016-8	■						
		3KD9026-8		■					
		3KD9106-8			■				
		3KD9206-8				■			
	Flat terminals 	3KD9206-7				■			
		3KD9306-7					■		
		3KD9406-7						■	
		3KD9506-7							■

8

System overview, page 8/62

© Siemens 2025

Operating mechanisms

Direct operating mechanisms, standard version

- Can be locked with up to max. 3 padlocks
- Requires additional mounting depth in locked state
- Not suitable for basic units with a lateral operating mechanism

Inscription	Color	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
Test – O – I	Gray	3KD9101-1			■				
		3KD9201-1				■			
		3KD9301-1					■		
		3KD9401-1						■	
		3KD9501-1							■
	Red/yellow	3KD9101-2			■				
		3KD9201-2				■			
		3KD9301-2					■		
		3KD9401-2						■	
		3KD9501-2							■

Direct operating mechanisms, flat version

- Suitable for distribution boards and only basic units with a front operating mechanism
- Can be locked with one padlock
- No additional mounting depth in locked state

Inscription	Color	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
Test – O – I	Gray	3KD9101-0			■				
		3KD9201-0				■			
	Red/yellow	3KD9101-8			■				
		3KD9201-8				■			

Direct operating mechanisms, distribution board

- Not suitable for basic units without handle

Number of poles	Color	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
3-poles	Gray	3KD9011-0C	■						
	Red/yellow	3KD9011-8C	■						
4-poles	Gray	3KD9011-0D	■						
	Red/yellow	3KD9011-8D	■						

Door-coupling rotary operating mechanisms, complete

- **Scope of supply:**
  - Handle with masking plate (size 01 and 02 without test function)
  - Coupling driver
  - Shaft 300 mm
- Can be locked with up to max. 3 padlocks

Inscription	Tolerance compensation	Defeat function	Color	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
O – I	With	With	Gray	8UD1171-1AD21	■	■					
			Red/yellow	8UD1171-1AD25	■	■					
	Without	Without	Gray	3KD9001-5	■	■					
			Red/yellow	3KD9001-6	■	■					
		With	Gray	8UD1171-2AD11			■	■			
			Red/yellow	8UD1171-2AD15			■	■			
Test – O – I	With	With	Gray	8UD1171-2AF21			■	■			
				8UD1141-2AF21					■		
				8UD1151-3AF21						■	
				8UD1161-4AF21							■
			Red/yellow	8UD1171-2AF25			■	■			
				8UD1141-2AF25					■		
				8UD1151-3AF25						■	
				8UD1161-4AF25							■

Note:
- For 3KD switch disconnectors and lateral operating mechanism (left or right), only 8UD door-coupling rotary operating mechanisms without the test function can be used
- The door mounted rotary operators of type 3KD90 are mounted on the inside of the door by means of center-hole mounting

System overview, page 8/62

© Siemens 2025

3KD switch disconnectors

Accessories

Accessories for door-coupling rotary operating mechanisms

Handles

- Supplied with a masking plate, but without an extension shaft and without coupling driver
- Can be locked with up to max. 3 padlocks

Inscription	Lighting	Color	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
O – I	Without	Gray	8UD1771-2AD01	■	■	■	■			
			8UD1841-2AD01					■		
			8UD1851-3AD01						■	
			8UD1861-4AD01							■
		Red/yellow	8UD1771-2AD05	■	■	■	■			
			8UD1841-2AD05					■		
			8UD1851-3AD05						■	
			8UD1861-4AD05							■
	With	Gray	8UD1771-2CD01			■	■			
			8UD1841-2CD01					■		
			8UD1851-3CD01						■	
			8UD1861-4CD01							■
		Red/yellow	8UD1771-2CD05			■	■			
			8UD1841-2CD05					■		
			8UD1851-3CD05						■	
			8UD1861-4CD05							■
Test – O – I	Without	Gray	8UD1771-2AF01			■	■			
			8UD1841-2AF01					■		
			8UD1851-3AF01						■	
			8UD1861-4AF01							■
		Red/yellow	8UD1771-2AF05			■	■			
			8UD1841-2AF05					■		
			8UD1851-3AF05						■	
			8UD1861-4AF05							■
	With	Gray	8UD1771-2CF01			■	■			
			8UD1841-2CF01					■		
			8UD1851-3CF01						■	
			8UD1861-4CF01							■
		Red/yellow	8UD1771-2CF05			■	■			
			8UD1841-2CF05					■		
			8UD1851-3CF05						■	
			8UD1861-4CF05							■

Extension shafts

- A shaft jack is required for the 8UD1 handle when the 600 mm long shaft is used and for sizes 01, 02, 1 and 2

Length	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
300 mm	3KD9002-0	■	■					
	8UC6032			■	■	■		
	8UC6033						■	
	8UC6034							■
600 mm	3KD9002-1	■	■					
	8UC6082			■	■	■		
	8UC6083						■	
	8UC6084							■

Shaft jack for 8UD1 handle

Version	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
For shaft 600 mm	8UD1900-0FA00	■	■	■	■			

8

System overview, page 8/62

© Siemens 2025

Accessories for door-coupling rotary operating mechanisms

Coupling drivers

Version	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
With tolerance compensation	8UD1900-1GA00	■	■					
	8UD1900-2GA00			■	■			
	8UD1900-6GA00					■		
	8UD1900-3GA00						■	
	8UD1900-4GA00							■
Without tolerance compensation	8UD1900-1HA00	■	■					
	8UD1900-2HA00			■	■			
	8UD1900-6HA00					■		
	8UD1900-3HA00						■	
	8UD1900-4HA00							■

Adapters for shafts

Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
8UC6022			■	■	■		
8UC6023						■	
8UC6024							■

Further accessories and spare parts

Auxiliary switch modules

- Auxiliary switch modules are supplied without auxiliary switches. A maximum of 2 auxiliary switches can be installed per auxiliary module
- The 3KD9103-6 and 3KD9103-7 auxiliary switch modules can only be used with 3KD directly on the operating mechanism if the operating mechanism is on the front or on the left

Type	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
Standard version	3KD9103-5			■	■			
With test function	3KD9103-6			■	■			
With leading NO contact and test function	3KD9103-7			■	■			

Auxiliary switches

- Auxiliary switches for sizes 01 and 02 are snapped onto the side of the switches
- Auxiliary switches for sizes 3 to 5 have a screw terminal and are mounted on the 3KD operating mechanism module. Auxiliary switches with spring-type terminals from the 3SU1 program can also be used.
- All auxiliary switches for sizes 3 to 5 can be used as leading auxiliary switches, depending on the mounting position of the auxiliary switch (see operating instructions).

Type	Contacts	Contact surface	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
With connecting cables	1 CO	Standard	3KD9103-1			■	■			
		Solid-state compatible	3KD9103-3			■	■			
Without connecting cables	1 NO + 1 NC	Standard	3KD9003-2	■	■					
		Solid-state compatible	3KD9003-4	■	■					
	1 CO	Standard	3KD9103-2			■	■			
		Solid-state compatible	3KD9103-4			■	■			
	1 NO	Standard	3SU1400-1AA10-1BA0					■	■	■
		Gold-plated	3SU1400-1AA10-1LA0					■	■	■
	1 NC	Standard	3SU1400-1AA10-1CA0					■	■	■
		Gold-plated	3SU1400-1AA10-1MA0					■	■	■
	1 NO + 1 NC	Standard	3SU1400-1AA10-1FA0					■	■	■
		Gold-plated	3SU1400-1AA10-1QA0					■	■	■
	2 NO	Standard	3SU1400-1AA10-1DA0					■	■	■
		Gold-plated	3SU1400-1AA10-1NA0					■	■	■
	2 NC	Standard	3SU1400-1AA10-1EA0					■	■	■
		Gold-plated	3SU1400-1AA10-1PA0					■	■	■

System overview, page 8/62

© Siemens 2025

3KD switch disconnectors

Accessories

Further accessories and spare parts

Phase barriers

- For 3KD with flat terminals
- For 3KD size 2 with flat terminals, phase barriers are already contained in the scope of supply

Version	Scope of supply	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
For 3-pole devices	6 units	3KD9108-6				■			
		3KD9308-6					■		
		3KD9408-6						■	
		3KD9508-6							■
For 4-pole devices	8 units	3KD9108-8				■			
		3KD9308-8					■		
		3KD9408-8						■	
		3KD9508-8							■

Terminals

- For 3KD with flat terminals
- For 4 circular conductor cables
- For connecting CU cables up to 1600 A or Al cables up to 1260 A
- Terminal covers must be ordered separately

Scope of supply	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
1 unit	3KD9511-1							■

Terminal covers

- For sizes 01 and 02, terminal covers are already included in the scope of supply and should therefore only be used as a spare part
- For 3KD with flat terminals
- Not permissible for 2000 A devices

Version	Scope of supply	Type	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
For 1-pole devices	1 unit		3KD9014-1B	■						
			3KD9024-1B		■					
For 3-pole devices	1 unit		3KD9014-3B	■						■
	6 units	Standard version	3KD9504-6							■
			3KD9204-6				■			
		Short version	3KD9204-7				■			
	8 units	Standard version	3KD9304-6					■		
			3KD9404-6						■	
		Short version	3KD9304-7					■		
			3KD9404-7						■	
For 4-pole devices	8 units	Standard version	3KD9504-8							■
			3KD9204-8				■			
		Short version	3KD9204-5				■			
	10 units	Standard version	3KD9304-8					■		
			3KD9404-8						■	
		Short version	3KD9304-5					■		
			3KD9404-5						■	

Spare part for terminal covers

- Not permissible for 2000 A devices

Scope of supply	Type	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
1 unit	Standard version	3KD9504-1							■
	Short version	3KD9204-1				■			
		3KD9304-1					■		
		3KD9404-1						■	

Blocking pin test function



- Enables permanent deactivation of the test function for auxiliary switches
- It is installed in the operating mechanism module of the 3KD switch disconnector

Scope of supply	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
10 units	3KF9112-1AA00			■	■			
	3KF9412-1AA00					■	■	
	3KF9512-1AA00							■

8

System overview, page 8/62

© Siemens 2025

Further accessories and spare parts

		Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
Mounting brackets								
 • Spare part, included in the scope of supply of the 3KD								
Scope of supply	**Article No.**							
4 units	3KD9120-1			■	■			
	3KF9212-0AA00					■		
	3KF9412-0AA00						■	
	3KF9512-0AA00							■
Slide for mounting on a DIN rail								
• Spare part, included in the scope of supply of the 3KD								
Scope of supply	**Article No.**							
5 units	3KF9112-0BA00			■	■			
Label for AC-20/DC-20 applications								
• For 3KD AC/DC products in AC-20/DC-20 applications								
	Article No.							
	3KD9140-0			■	■	■	■	■

Accessories for DC applications

		Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
Connecting bridges								
• Suitable for connecting 2-poles								
Connection	**Article No.**							
Box terminals	3KD9118-1			■				
	3KD9218-1				■			
Flat terminals	3KD9218-0				■			
	3KD9318-0					■		
	3KD9418-0						■	
	3KD9518-0							■
Terminal covers for connecting bridges								
• For 3KD with flat terminals								
	Article No.							
	3KD9204-0				■			
	3KD9304-0					■		
	3KD9404-0						■	
	3KD9504-0							■

8

System overview, page 8/62

© Siemens 2025

Fuse switch disconnectors

Quick selection guide

3NP1

Size			000 narrow	000	00	1	2	3
General technical specifications acc. to IEC 60947-3								
Basic data								
Rated uninterrupted current I_u		A	125	125 [2]	160	250	400	630
For fuse links acc. to IEC 60269-2		Size	000	000	00 and 000	1 and 0	2 and 1	3 and 2
Rated operational voltage U_e	At 50/60 Hz AC	V	690	690	690			
	At DC (3 conducting paths in series)	V	–	440	440			
	At DC (2 conducting paths in series)	V	–	240	240			
	At DC	V	–	–	–			
	For utilization category AC-20B or DC-20B	V	–	690 [1]	690 [1]			
Operating and short-circuit behavior								
Rated operational current I_e	At AC-21B, 400 V AC	A	125	125 [2]	160	250	400	630
	At AC-22A, 400 V AC	A	–	–	–	–	–	–
	At AC-22B, 400 V AC	A	125	125 [2]	160	250	400	630
	At AC-23B, 400 V AC	A	63	125 [2]	160	250	400	630
	At AC-21B, 500 V AC	A	125	125 [2]	160	250	400	630
	At AC-22B, 500 V AC	A	125	125	160	250	400	630
	At AC-23B, 500 V AC	A	–	40	63	200	315	500
	At AC-21B, 690 V AC	A	80	125 [2]	160	250	400	630
	At AC-22B, 690 V AC	A	–	50	125	250	400	500
	At AC-23B, 690 V AC	A	–	25	35	100	125	200
	At DC-21B (2 conducting paths in series), 240 V DC	A	–	125 [2]	160	250	400	630
	At DC-22B (2 conducting paths in series), 240 V DC	A	–	100	160	250	400	630
	At DC-23B (2 conducting paths in series), 240 V DC	A	–	80	100	200	250	400
	At DC-21B (3 conducting paths in series), 440 V DC	A	–	100	160	250	400	630
	At DC-22B (3 conducting paths in series), 440 V DC	A	–	50	125	200	315	500
	At DC-23B (3 conducting paths in series), 440 V DC	A	–	25	63	100	160	250
Rated conditional short-circuit current with fuses (by fast switch on)	Rated current at 400 V/500 V/690 V	kA	80/80/80	80/80/80	80/80/80	80/80/50	80/80/50	50/50/50
	Permissible let-through current of the fuses, peak value	kA	10	10	15	25	40	50
Short-circuit strength with fuses (with closed disconnector)	Rated current at 500 V/690 V	kA	80/80	120/100	120/100	120/100	100/100	100/100
	Permissible let-through I^2t value of the fuses	kA^2s	59	223	223	780	2150	5400
	Permissible let-through current of the fuses, peak value	kA	10	15	23	32	40	60
Rated making capacity	With isolating blades at 500 V AC	kA	–	2	6	17	17	17
Rated short-time withstand current I_{cw}		kA	–	–	–	–	–	–
Rated insulation voltage U_i		V	690	690 [1]	690 [1]	690 [1]	690 [1]	690 [1]
Rated impulse withstand voltage U_{imp}		kV	6	8	8	8	8	8
Power loss per pole of the switch at I_{th} (without fuses)		W	4.6	5	5	8	14	30
Maximum power loss of the usable fuses (per fuse)		W	9	7.5 [3]	12	23	34	48
Mechanical endurance, operating cycles			2000	2000	2000	1600	1000	1000
Degree of protection, on the front								
Without masking plate or terminal cover – switch closed/open			IP30/IP10	IP30/IP20	IP30/IP20	IP30/IP20	IP30/IP20	IP30/IP20
With masking plate or terminal cover – switch closed/open			IP30/IP10	IP40/IP20	IP40/IP20	IP40/IP20	IP40/IP20	IP40/IP20
Certifications and approvals								
					VDE, CCC, LR, cULus [4]			
Further information								
					See page 8/82			

The technical specifications apply to the standard types stated below.
For the complete specifications for all versions, see the Online Support

3NP1: 3-pole and 4-pole devices without fuse monitoring
3NJ4/5: Disconnectors for cable and line protection without fuse monitoring, not for transformer protection

© Siemens 2025

	3NJ4/3NJ5				5SG76
00	**1**	**2**	**3**	**4a**	**D01**
160	250	400	630	1250	16
00 and 000	1 and 0	2 and 1	3 and 2	4a	D01
		690			400, 415
		–			–
		–			110
		–			48
		–			–
160	250	400	630	1250	16
–	–	–	–	–	16
160	250	400	630	1250	–
–	250	400	–	–	–
160	250	400	630	1250	–
160	250	400	630	1250	–
–	–	–	–	–	–
100	250	400	630	1250	–
100	250	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	50/–/–
–	–	–	–	–	–
80	120	120	120	80	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	14.5	14.5	14.5	35	–
800	1000	1000	1000	1000	400
8	12	12	12	12	2.5
18	23	54	115	190	–
12	32	45	48	110	2.5
1400	1400	800	800	500	–
IP00/IP00	IP00/IP00	IP00/IP00	IP00/IP00	IP00/IP00	IP20/IP20
IP30/IP10	IP30/IP10	IP30/IP10	IP30/IP10	IP10/IP00	IP20/IP20
		See page 8/96			See page 8/108

[1] Applies to degree of pollution 3 (for degree of pollution 2, use up to U_i 1000 V possible)
[2] If optional infeed terminal is used max. 160 A
[3] Max. 9 W for operation up to 160 A
[4] 3NP1 NH000 in narrow design only has IEC approval

© Siemens 2025

3NP1 fuse switch disconnectors

System overview

Basic units

1, 3, 4-pole for floor mounting

3 and 4-pole mounting on busbar systems

Connection parts

Terminals for retrofitting to 3NP1

Auxiliary conductor connections

3-phase busbars

Assembly kits

DIN-rail mounting

Mechanical connection

1/4-pole busbar mounting



Locking function



Protection against power theft

Masking frames and covers



Masking frames and supports

Cable connection covers

Reach-around protection for busbar

Further accessories

Auxiliary switches

Isolating blades

Fuse carriers with and without fuse monitoring

Note:
You will find a detailed range of accessories with the basic units.

© Siemens 2025

General information

3NA COM LV HRC fuse links

The new 3NA COM LV HRC fuse links with measuring and communication functions make your products communication-capable.

See Fuse Systems, page 7/52

Modular design

Directly to 3NP1 configurator under: sie.ag/3IlXQZH

The 3NP1 fuse switch disconnector has a modular design.
A wide variety of switch combinations can be created by connecting two devices or by subsequently fitting accessories. All common switch combinations are available from the factory ready for installation and can be found on the following ordering overviews. An overview of the possibilities offered by the modular design is provided on these information pages.

The fastest and simplest way to find the right switch combination is to use our 3NP1 configurator at **sie.ag/3IlXQZH**.

Number of poles

You will find further information under: sie.ag/2UlrAvy



3NP1 fuse switch disconnectors are available from the factory in 1, 3 and 4-pole device versions.
4-pole types are available in all common versions from the factory ready for installation (without fuse monitoring, N-pole on the right-hand side).

All other conceivable device combinations, such as 2-pole 3NP1s, 4-pole with fuse monitoring or with a neutral conductor on the left-hand side can simply be put together on site by combining two 3NP1s.
All that is needed for this in addition to the two 3NP1 basic units is the matching connection assembly kit (see accessories).

Floor mounting and DIN rail

You will find further information under: sie.ag/2UlrAvy



All sizes of the 3NP1 fuse switch disconnectors are available in floor mounting versions.

The 3NP1 is mounted on a mounting panel with screws.



The devices for floor mounting of sizes 000, 00 and 1 can also be mounted on a DIN rail using accessories. For this purpose, the assembly kit for mounting on a DIN rail is simply mounted on the rear panel of the 3NP1.

© Siemens 2025

3NP1 fuse switch disconnectors

General information

Mounting on busbar systems

You will find further information under: sie.ag/2UlrAvy



3-pole and 4-pole 3NP1 are available for mounting on busbar systems. In the case of 4-pole devices, the infeed for the fourth pole is supplied by the neutral conductor bar located above the 3 phases.



1-pole 3NP1 devices for wall mounting in sizes 000 and 00 can be adapted to the 8US 60 mm busbar system using the assembly kit for 1-pole busbar mounting. Due to the modular design of the assembly kit, any phase can be selected for the infeed.

Fuse monitoring

You will find further information under: sie.ag/2UlrAvy



MFM EFM10/15 EFM20/25

The fuse monitoring is used to detect, indicate and signal that a fuse has tripped.

The fuse monitors are permanently installed on the handle of the 3NP1. They have floating contacts for remote signaling of a tripped fuse and also indicate this locally.

Various versions of fuse monitors are available, which can be selected to suit the requirements of the application (functionality, see table).

MFM electromechanical fuse monitoring with an installed SIRIUS circuit breaker

EFM electronic fuse monitoring with evaluation electronics
The EFM15 series is a cost-optimized version of the EFM10. EFM20/25 are versions with additional functions (display indication, detection and signaling of overvoltage/undervoltage with adjustable limits, phase failure detection).

Common combinations of the 3NP1 basic unit and fuse monitoring are available from the factory ready for installation. A fuse monitor can also be easily retrofitted by replacing the fuse carrier. (Fuse carriers for all fuse monitoring versions are available as accessories.)

Note:
Fuses with insulated grip lugs cannot be used for 3NP1 with fuse monitoring.

		MFM 3-pole	EFM10 3-pole	EFM15					EFM20 3-pole	EFM25 3-pole
				1-pole			3-pole			
				AC/DC	AC	DC	AC	DC		
Local indication	Toggle switch position	■	–	–	–	–	–	–	–	–
	Indication via LEDs for each phase	–	■	■	■	■	■	■	–	–
	Indication via display for each phase	–	–	–	–	–	–	–	■	■
External power supply required		–	–	24 V DC	24 V DC	24 V DC	24 V DC	24 V DC	–	–
Permissible operational voltage	AC	Max. 690 V	230 ... 690 V	24 ... 230 V	110 ... 690 V	–	190 ... 690 V	–	230 ... 690 V	–
	DC	Max. 440 V	–	24 ... 250 V	–	120 ... 440 V	–	220 ... 440 V	–	220 ... 440 V
Detection and indication of	Overvoltage	–	–	–	–	–	–	–	■	■
	Undervoltage	–	–	–	–	–	–	–	■	■
	Phase failure	–	–	–	–	–	–	–	■	–

System overview, page 8/82

© Siemens 2025

Electrical connection

You will find further information under: sie.ag/2UlrAvy

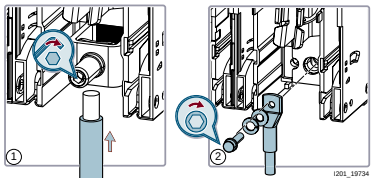

3NP1 are available in versions with box terminals (all sizes) or flat terminals (sizes 00 and larger).

Various additional types of terminal are available as accessories for adaptation to the respective wiring situation, e.g. prism, saddle or three-tier terminals.

Further accessories

You will find further information under: sie.ag/2UlrAvy

Auxiliary switches



Auxiliary switches enable remote querying of the switch position of the 3NP1. Up to two auxiliary switches can be installed.

Power theft



The assembly kit for protection from power theft seals the holes on the front of the 3NP1 (for voltage testing) permanently, which reliably prevents unauthorized access to live parts.

Isolating blades

4-pole 3NP1s are used in 3-phase AC systems with switched neutral conductors. They are supplied without an isolating blade for the N pole. The switching instant is selected by choosing the appropriate isolating blade.

Suitable fuses

You will find further information under: sie.ag/2UlrAvy



The 3NP5 fuse switch disconnector is suitable for all fuses with LV HRC design in sizes 000 to 3 that comply with IEC 60269-2, including fuses for cable and line protection and motor protection.
Fuses for semiconductor protection (Siemens trademark SITOR) can also be used. However, some of these fuses have substantially higher power losses than fuses according to IEC 60269-2. This means that the load current has to be reduced until the value that is permissible in the fuse switch disconnector is not exceeded.
For use of SITOR semiconductor fuses, ready-made derating tables are available in the linked document.

System overview, page 8/82

© Siemens 2025

3NP1 fuse switch disconnectors

For a complete and valid configuration of your fuse switch disconnectors, please use our online configurator at www.siemens.com/lowvoltage/3np1-configurator

		Flat terminals			
		NH00	NH1	NH2	NH3
Fuse monitoring	**Number of poles**	**I_u = 160 A**	**I_u = 250 A**	**I_u = 400 A**	**I_u = 630 A**
Floor mounting					
Without	1-pole	3NP1131-1CA10	3NP1141-1DA10	3NP1151-1DA10	3NP1161-1DA10
	3-pole	3NP1133-1CA10	3NP1143-1DA10	3NP1153-1DA10	3NP1163-1DA10
	4-pole	3NP1134-1CA10	3NP1144-1DA10	3NP1154-1DA10	3NP1164-1DA10
MFM	3-pole	3NP1133-1CA11	3NP1143-1DA11	3NP1153-1DA11	3NP1163-1DA11
EFM10	3-pole	3NP1133-1CA12	3NP1143-1DA12	3NP1153-1DA12	3NP1163-1DA12
EFM15	1-pole	3NP1131-1CA14	3NP1141-1DA14	3NP1151-1DA14	3NP1161-1DA14
	3-pole	3NP1133-1CA14	3NP1143-1DA14	3NP1153-1DA14	3NP1163-1DA14
EFM20	3-pole	3NP1133-1CA13	3NP1143-1DA13	3NP1153-1DA13	3NP1163-1DA13
Mounting on 60 mm busbar systems with reach-around protection for Siemens 8US					
Without FM	3-pole	3NP1133-1BC10	3NP1143-1BC10	3NP1153-1BC10	3NP1163-1BC10
	4-pole	3NP1134-1BC10	3NP1144-1BC10	3NP1154-1BC10	3NP1164-1BC10
MFM	3-pole	3NP1133-1BC11	3NP1143-1BC11	3NP1153-1BC11	3NP1163-1BC11
EFM10	3-pole	3NP1133-1BC12	3NP1143-1BC12	3NP1153-1BC12	3NP1163-1BC12
EFM15	3-pole	3NP1133-1BC14	3NP1143-1BC14	3NP1153-1BC14	3NP1163-1BC14
EFM20	3-pole	3NP1133-1BC13	3NP1143-1BC13	3NP1153-1BC13	3NP1163-1BC13
Mounting on 60 mm busbar systems with reach-around protection for Rittal					
Without FM	3-pole	3NP1133-1JC10	3NP1143-1JC10	3NP1153-1JC10	3NP1163-1JC10
MFM	3-pole	3NP1133-1JC11	3NP1143-1JC11	3NP1153-1JC11	3NP1163-1JC11
EFM10	3-pole	3NP1133-1JC12	3NP1143-1JC12	3NP1153-1JC12	3NP1163-1JC12
EFM20	3-pole	3NP1133-1JC13	3NP1143-1JC13	3NP1153-1JC13	3NP1163-1JC13
Mounting on 40 mm busbar systems with reach-around protection for Siemens 8US					
Without FM	3-pole	3NP1133-1BB10	–	–	–
MFM	3-pole	3NP1133-1BB11	–	–	–
EFM10	3-pole	3NP1133-1BB12	–	–	–
EFM20	3-pole	3NP1133-1BB13	–	–	–
Mounting on 40 mm busbar systems with reach-around protection for Rittal					
Without FM	3-pole	3NP1133-1JB10	–	–	–
MFM	3-pole	3NP1133-1JB11	–	–	–
EFM10	3-pole	3NP1133-1JB12	–	–	–
EFM20	3-pole	3NP1133-1JB13	–	–	–

Notes:
- On the 3NP1 with fuse monitoring, the permissible operational voltage is limited by the fuse monitoring
- Permissible operational voltage with fuse monitoring:
  - MFM AC max. 690 V (L – L)/max. 440 V (L+ – L–)
  - EFM10 230 ... 690 V AC (L – L)
  - EFM15 3-pole 190 ... 690 V AC (L – L)
  - EFM15 1-pole 24 ... 240 V AC (L – N)/24 ... 250 V DC (L+ – L–)
  - EFM20 230 ... 690 V AC (L – L)
- Additional variants are available as accessories:
  - EFM15 with further operational voltage ranges
  - EFM25 – DC version of the EFM20
- Devices for busbar mounting with reach-around protection
  - For Siemens 8US, mounting is possible on the Wöhner Classic and Rittal RiLine systems without a floor pan
  - For Rittal, mounting is possible on the RiLine60 system with a floor pan

8

Quick selection guide, page 8/80

© Siemens 2025

Box terminals

NH000 narrow	NH000	NH00	NH1	NH2	NH3
I_u = 125 A	I_u = 125 A [2]	I_u = 160 A	I_u = 250 A	I_u = 400 A	I_u = 630 A
–	3NP1121-1CA20	3NP1131-1CA20	3NP1141-1DA20	3NP1151-1DA20	3NP1161-1DA20
3NP1113-1CA20	3NP1123-1CA20	3NP1133-1CA20	3NP1143-1DA20	3NP1153-1DA20	3NP1163-1DA20
–	3NP1124-1CA20	3NP1134-1CA20	3NP1144-1DA20	3NP1154-1DA20	3NP1164-1DA20
–	–	3NP1133-1CA21	3NP1143-1DA21	3NP1153-1DA21	3NP1163-1DA21
–	3NP1123-1CA22	3NP1133-1CA22	3NP1143-1DA22	3NP1153-1DA22	3NP1163-1DA22
–	3NP1121-1CA24	3NP1131-1CA24	3NP1141-1DA24	3NP1151-1DA24	3NP1161-1DA24
–	3NP1123-1CA24	3NP1133-1CA24	3NP1143-1DA24	3NP1153-1DA24	3NP1163-1DA24
–	3NP1123-1CA23	3NP1133-1CA23	3NP1143-1DA23	3NP1153-1DA23	3NP1163-1DA23
3NP1113-1BC20 [1]	3NP1123-1BC20	3NP1133-1BC20	3NP1143-1BC20	3NP1153-1BC20	3NP1163-1BC20
–	3NP1124-1BC20	3NP1134-1BC20	3NP1144-1BC20	3NP1154-1BC20	3NP1164-1BC20
–	–	3NP1133-1BC21	3NP1143-1BC21	3NP1153-1BC21	3NP1163-1BC21
–	3NP1123-1BC22	3NP1133-1BC22	3NP1143-1BC22	3NP1153-1BC22	3NP1163-1BC22
–	3NP1123-1BC24	3NP1133-1BC24	3NP1143-1BC24	3NP1153-1BC24	3NP1163-1BC24
–	3NP1123-1BC23	3NP1133-1BC23	3NP1143-1BC23	3NP1153-1BC23	3NP1163-1BC23
3NP1113-1BC20 [1]	3NP1123-1JC20	3NP1133-1JC20	3NP1143-1JC20	3NP1153-1JC20	3NP1163-1JC20
–	–	3NP1133-1JC21	3NP1143-1JC21	3NP1153-1JC21	3NP1163-1JC21
–	3NP1123-1JC22	3NP1133-1JC22	3NP1143-1JC22	3NP1153-1JC22	3NP1163-1JC22
–	3NP1123-1JC23	3NP1133-1JC23	3NP1143-1JC23	3NP1153-1JC23	3NP1163-1JC23
–	3NP1123-1BB20	3NP1133-1BB20	–	–	–
–	–	3NP1133-1BB21	–	–	–
–	3NP1123-1BB22	3NP1133-1BB22	–	–	–
–	3NP1123-1BB23	3NP1133-1BB23	–	–	–
–	3NP1123-1JB20	3NP1133-1JB20	–	–	–
–	–	3NP1133-1JB21	–	–	–
–	3NP1123-1JB22	3NP1133-1JB22	–	–	–
–	3NP1123-1JB23	3NP1133-1JB23	–	–	–

[1] The direction of the cable outlet for the load side cannot be changed on size NH000, narrow design
3NP1113-1BC20 → Cable outlet at the bottom
3NP1113-2BC20 → Cable outlet at the top

[2] If optional infeed terminal is used max. 160 A

8

Quick selection guide, page 8/80

© Siemens 2025

3NP1 fuse switch disconnectors

Accessories

Connection technology – Terminals

- For adaptation to the respective wiring situation
- Contain enough parts to retrofit one side of a 3NP1 accordingly (three terminals for 3-pole 3NP1, one terminal for 1-pole unit)
- If the incoming cable and cable outlet are retrofitted, two packages must be ordered

Saddle terminals



- Allows connection of stripped circular conductors to 3NP1 with flat terminals

Connection	Conductor cross-section	1-pole Article No.	3-pole Article No.	NH000 narrow	NH000	NH00	NH1	NH2	NH3
	1.5 ... 70 mm²	3NP1931-1BA00	3NP1933-1BA00			■			
	70 ... 120 mm²	3NP1941-1BA00	3NP1943-1BA00				■		
	120 ... 240 mm²	3NP1951-1BA00	3NP1953-1BA00					■	
	150 ... 300 mm²	3NP1961-1BA00	3NP1963-1BA00						■

Prism terminals



- Allows connection of stripped circular conductors to 3NP1 with flat terminals
- Also approved for connection of aluminum conductors, available for one or two conductors

Type	Conductor cross-section	1-pole Article No.	3-pole Article No.	NH000 narrow	NH000	NH00	NH1	NH2	NH3
Single	35 ... 95 mm²	3NP1931-1BB10	3NP1933-1BB10			■			
	70 ... 150 mm²	3NP1941-1BB10	3NP1943-1BB10				■		
	120 ... 240 mm²	3NP1951-1BB10	3NP1953-1BB10					■	
	150 ... 300 mm²	3NP1961-1BB10	3NP1963-1BB10						■
Double	2 × 35 ... 70 mm²	3NP1941-1BB20	3NP1943-1BB20				■		
	2 × 70 ... 120 mm²	3NP1951-1BB20	3NP1953-1BB20					■	
	2 × 150 ... 185 mm²	3NP1961-1BB20	3NP1963-1BB20						■

Three-tier terminals



- Distributes one outgoing feeder directly to three smaller loads

Type	Conductor cross-section	1-pole Article No.	3-pole Article No.	NH000 narrow	NH000	NH00	NH1	NH2	NH3
For 3NP1 with flat terminals	3 × 1.5 ...16 mm²	3NP1931-1BE10	3NP1933-1BE10			■			
For 3NP1 with box terminals	3 × 1.5 ...16 mm²	3NP1921-1BE20	3NP1923-1BE20		■	■			

Connection module



- Used with a 3NP1 for busbar mounting if a masking frame is to be supported on the 32 mm cover plane (installation of the terminals under the masking frame)
- For 3NP1 with flat terminals

Type	Conductor cross-section	1-pole Article No.	3-pole Article No.	NH000 narrow	NH000	NH00	NH1	NH2	NH3
Connection module	3 × 6 ... 70 mm²	3NP1931-1BC00	3NP1933-1BC00			■			

Infeed terminal



- Extends the conductor cross-section of a 000 with box terminal to up to 95 mm²

Version	Conductor cross-section	1-pole Article No.	3-pole Article No.	NH000 narrow	NH000	NH00	NH1	NH2	NH3
Infeed terminal	16 ... 95 mm²	3NP1921-1BD00	3NP1923-1BD00		■				

8

System overview, page 8/82

© Siemens 2025

Connection technology

Auxiliary conductor connections



- For connecting small loads directly to the terminals of the 3NP1
- Connection via commercially available flat tab sleeves 6.3 × 0.8 mm, max. 5 A load
- Scope of supply: 3 units

3NP1 connection	Article No.	3-pole	NH000 narrow	NH000	NH00	NH1	NH2	NH3
With flat terminals	3NP1933-1BG10				■			
	3NP1943-1BG10					■		
	3NP1943-1BG10						■	
	3NP1943-1BG10							■
With box terminals	3NP1923-1BG40		■	■				
	3NP1933-1BG40				■			
	3NP1943-1BG40					■		
	3NP1953-1BG40						■	
	3NP1953-1BG40							■
With retrofitted prism and saddle terminals	3NP1933-1BG30				■			
	3NP1943-1BG30					■		
	3NP1953-1BG30						■	
	3NP1953-1BG30							■

3-phase busbar system



- For connection of up to 4 3NP1 NH000 for floor mounting on the infeed side
- Infeed is routed through infeed terminals
- With the connection bar, two blocks of bridged 3NP1 can be connected
- Using the cover cap, the connection tags of the busbar are covered on unused feeders to ensure they are safe to touch
- The maximum current-carrying capacity of the interconnected 3NP1 is 225 A in total for the 3-phase busbar system

Version	Scope of supply	Article No.	NH000
For 2 × 3NP1	1 pack = 5 units	3NP1923-1BF20	■
For 3 × 3NP1	1 pack = 5 units	3NP1923-1BF30	■
For 4 × 3NP1	1 pack = 3 units	3NP1923-1BF40	■
Connection bars	1 pack = 3 units	3NP1923-1BF50	■
Covering caps	1 pack = 20 units	3NP1923-1BF10	■
Infeed terminal	1 pack = 3 units	3NP1923-1BD00	■

System overview, page 8/82

© Siemens 2025

3NP1 fuse switch disconnectors

Accessories

Assembly kits

Retrofitting of locking function



- For all versions of the 3NP1
- If required for locking with a padlock (not necessary for the 1-pole 3NP1 and NH000, narrow design)

Scope of supply	Article No.	NH000 narrow	NH000	NH00	NH1	NH2	NH3
1 pack = 10 units	3NP1900-1HA00		■	■	■	■	■

Protection against power theft



- Closes the holes on the front of the 3NP1 (holes for voltage testing) and secures the front window such that power theft is not possible without visible damage to the 3NP1 (when the 3NP1 is locked or sealed)

Scope of supply	Article No.	NH000 narrow	NH000	NH00	NH1	NH2	NH3
1 pack is sufficient to equip 5 3NP1 units, 2.5 units for NH000, narrow design	3NP1900-1EF00	■	■	■	■	■	■

Mechanical connection of 1-pole and 3-pole 3NP1 devices



- For 3NP1 with floor mounting
- By combining two 3NP1s for floor mounting, any 2-pole and 4-pole devices can be created

	Article No.	NH000 narrow	NH000	NH00	NH1	NH2	NH3
	3NP1921-1EC00		■				
	3NP1931-1EC00			■			
	3NP1941-1EC00				■	■	■

4-pole connection assembly kit for mounting on a 8US 60-mm busbar



- Connects a 3-pole 3NP1 for busbar mounting 60 mm 8US to a 1-pole 3NP1 for floor mounting
- The 1-pole 3NP1 switches the neutral conductor of a 3P+N system in this combination

3NP1 connection	Article No.	NH000 narrow	NH000	NH00	NH1	NH2	NH3
With flat terminals	3NP1934-1ED20			■			
With box terminals	3NP1924-1ED10		■				
	3NP1934-1ED10			■			
With flat terminals or box terminals	3NP1944-1ED00				■		
	3NP1954-1ED00					■	■

1-pole connection assembly kit for mounting on a 8US 60-mm busbar



- Permits adaptation of a 1-pole 3NP1 for floor mounting to a 3-pole busbar system
- The feeding busbar (L1, L2 or L3) can be chosen freely
- If two such 3NP1 are combined by mechanical connection using the assembly kit, 2-pole 3NP1 for busbar mounting can also be assembled

3NP1 connection	Article No.	NH000 narrow	NH000	NH00	NH1	NH2	NH3
With box terminals	3NP1921-1EE10		■				
	3NP1931-1EE10			■			

8

System overview, page 8/82

© Siemens 2025

Assembly kits



- Must be mounted on the rear of a 3NP1 for floor mounting
- Mounting of the 3NP1 on a DIN rail is achieved for size NH000 by mounting on a DIN rail, and for sizes NH00 and NH1 between two DIN rails that are 125 or 150 mm apart

	1/2-pole	3-pole	4-pole	NH000 narrow	NH000	NH00	NH1	NH2	NH3
Assembly kits for mounting on DIN rail									
	Article No.	Article No.	Article No.						
	3NP1921-1EA00	3NP1923-1EA00	3NP1924-1EA00		■				
	–	3NP1913-1EB00	–	■					
	3NP1931-1EB00	3NP1933-1EB00	3NP1933-1EB00			■			
	3NP1943-1EB00	3NP1943-1EB00	3NP1943-1EB00				■		

8

System overview, page 8/82

© Siemens 2025

3NP1 fuse switch disconnectors

Accessories

Masking frames and covers

	1-pole	3-pole	NH000 narrow	NH000	NH00	NH1	NH2	NH3
Masking frames								
 • Used to cover an existing gap for a masking frame mounted on the application side								
Outer dimensions (H × W)	**Article No.**	**Article No.**						
215 × 130 mm	–	3NP1923-1DA00		■				
215 × 130 mm	–	3NP1933-1DA00			■			
375 × 220 mm	–	3NP1943-1DA00				■		
375 × 245 mm	–	3NP1953-1DA00					■	
375 × 290 mm	–	3NP1963-1DA00						■
Masking frame supports								
 • Are mounted on the side of the 3NP1 and prevent the supported masking frame from sagging (pack of 2 units)								
	Article No.	**Article No.**						
	3NP1923-1CF00	3NP1923-1CF00		■				
	–	3NP1913-1CF00 [1]	■					
	3NP1933-1CF00	3NP1933-1CF00			■			
	3NP1943-1CF00	3NP1943-1CF00				■	■	■
Cable connection covers								
 • Extends the terminal covers integrated in the 3NP1 • In the version with rear reach-around protection, the underside is also covered								
Version	**Article No.**	**Article No.**						
Without rear reach-around protection	3NP1921-1CB00	3NP1923-1CB00 [1]		■				
	–	3NP1913-1CB00	■					
	3NP1931-1CB00	3NP1933-1CB00 [2]			■			
	3NP1941-1CB00	3NP1943-1CB00				■		
	3NP1951-1CB00	3NP1953-1CB00					■	
	3NP1961-1CB00	3NP1963-1CB00						■
With rear reach-around protection	–	3NP1933-1CC00 [1]			■			
	3NP1931-1CD00	3NP1933-1CD00 [3]			■			
	3NP1941-1CD00	3NP1943-1CD00				■		
	3NP1951-1CD00	3NP1953-1CD00					■	
	3NP1961-1CD00	3NP1963-1CD00						■
Reach-around protection for busbar (spare part)								
 • Covers the busbar • For conversion of a 3NP1 to another busbar system								
For busbar systems	**Article No.**	**Article No.**						
Siemens 8US	–	3NP1923-1CA10		■				
	–	3NP1913-1CA10	■					
	–	3NP1933-1CA10			■			
	3NP1941-1CA10	–				■	■	■
	–	3NP1943-1CA10				■		
	–	3NP1953-1CA10					■	
	–	3NP1963-1CA10						■
Siemens 8US compact	–	3NP1923-1CA30		■				
Rittal	–	3NP1923-1CA20		■				
	–	3NP1913-1CA10						
	–	3NP1933-1CA20			■			
	–	3NP1943-1CA20				■		
	–	3NP1953-1CA20					■	
	–	3NP1963-1CA20						■

[1] Only for 3NP1 for mounting on busbar systems
[2] Only for 3NP1 with flat terminals
[3] Only for 3NP1 with flat terminals for floor mounting

System overview, page 8/82

© Siemens 2025

Further accessories

Auxiliary switches



- Up to 2 auxiliary switches can be mounted
- From size NH00, it is possible to choose whether the auxiliary switch will switch simultaneously with the fuses or leading on switch-on. (only leading possible for size NH000)

Contacts	Article No.	NH000 narrow	NH000	NH00	NH1	NH2	NH3
1 CO	3NP1920-1FA00		■				
	3NP1910-1FA00	■					
	3NP1930-1FA00			■			
	3NP1940-1FA00				■	■	■
1 CO, solid-state compatible	3NP1920-1FB00		■				
	3NP1930-1FB00			■			
	3NP1940-1FB00				■	■	■

Isolating blades



- Are used in a 3NP1 if only the isolating function of a 3NP1 is required and not protection with fuses or in the neutral conductor of a 4-pole 3NP1.
- The isolating blade, which is leading switch-on and lagging switch-off, is used in the neutral conductor of a 4-pole 3NP1 if shifting of the neutral point of the 3P+N system has to be avoided during switching.

Version	Article No.	NH000 narrow	NH000	NH00	NH1	NH2	NH3
Switching simultaneously with fuses	3NG1002		■	■			
	3NG1202				■		
	3NG1302					■	
	3NG1402						■
Leading switch-on, lagging switch-off	3NP1924-1MA20		■				
	3NP1934-1MA20			■			
	3NP1944-1MA20				■		
	3NP1954-1MA20					■	
	3NP1964-1MA20						■

System overview, page 8/82

© Siemens 2025

3NP1 fuse switch disconnectors

Accessories

Further accessories

		1-pole	3-pole	NH000 narrow	NH000	NH00	NH1	NH2	NH3
Fuse carriers (spare part)									
	• For retrofitting fuse monitoring on an existing 3NP1								
	Version	**Article No.**	**Article No.**						
	Standard – without fuse monitoring	3NP1921-1GA00	3NP1923-1GA00		■				
		–	3NP1913-1GA00	■					
		3NP1931-1GA00	3NP1933-1GA00			■			
		3NP1941-1GA00	3NP1943-1GA00				■		
		3NP1951-1GA00	3NP1953-1GA00					■	
		3NP1961-1GA00	3NP1963-1GA00						■
	MFM - for operational voltage 24 ... 690 V AC (L-L)/ 24 ... 240 V DC (L+ - L-)	–	3NP1923-1GB10		■				
		–	3NP1933-1GB10			■			
		–	3NP1943-1GB10				■		
		–	3NP1953-1GB10					■	
		–	3NP1963-1GB10						■
	EFM10 - for operational voltage 230 ... 690 V AC (L-L)	–	3NP1923-1GB20		■				
		–	3NP1933-1GB20			■			
		–	3NP1943-1GB20				■		
		–	3NP1953-1GB20					■	
		–	3NP1963-1GB20						■
	EFM15 - for operational voltage 24 ... 240 V AC (L - N)/ 24 ... 250 V DC (L+ - L-)	3NP1921-1GB43	–		■				
		3NP1931-1GB43	–			■			
		3NP1941-1GB43	–				■		
		3NP1951-1GB43	–					■	
		3NP1961-1GB43	–						■
	EFM15 - for operational voltage 110 ... 690 V AC (L - N)	3NP1921-1GB41	–		■				
		3NP1931-1GB41	–			■			
		3NP1941-1GB41	–				■		
		3NP1951-1GB41	–					■	
		3NP1961-1GB41	–						■
	EFM15 - for operational voltage 120 ... 440 V DC (L - N)	3NP1921-1GB44	–		■				
		3NP1931-1GB44	–			■			
		3NP1941-1GB44	–				■		
		3NP1951-1GB44	–					■	
		3NP1961-1GB44	–						■
	EFM15 - for operational voltage 190 ... 690 V AC (L - L)	–	3NP1923-1GB42		■				
		–	3NP1933-1GB42			■			
		–	3NP1943-1GB42				■		
		–	3NP1953-1GB42					■	
		–	3NP1963-1GB42						■
	EFM15 - for operational voltage 220 ... 440 V DC (L+ - L-)	–	3NP1923-1GB45		■				
		–	3NP1933-1GB45			■			
		–	3NP1943-1GB45				■		
		–	3NP1953-1GB45					■	
		–	3NP1963-1GB45						■
	EFM20 - for operational voltage 230 ... 690 V AC (L - L)	–	3NP1923-1GB30		■				
		–	3NP1933-1GB30			■			
		–	3NP1943-1GB30				■		
		–	3NP1953-1GB30					■	
		–	3NP1963-1GB30						■
	EFM25 - for operational voltage 220 ... 440 V DC (L+ - L-)	–	3NP1923-1GB50		■				
		–	3NP1933-1GB50			■			
		–	3NP1943-1GB50				■		
		–	3NP1953-1GB50					■	
		–	3NP1963-1GB50						■

8

System overview, page 8/82

© Siemens 2025

System overview, page 8/82

© Siemens 2025

3NJ4 fuse switch disconnectors

System overview

1-pole switchable

NH00/NH000 ... NH3 (690 V)

NH4a (690 V)

NH1 ... NH3 (690 V) for integratable current transformers

3-pole switchable

NH00/NH000 ... NH3 (690 V)

NH00/NH000 ... NH3 (690 V) for integra-table current transformers

NH00/NH000 ... NH3 (690 V) with electronic fuse monitoring EFM

NH00/NH000 ... NH3 (690 V) for integratable current transformers with electronic fuse monitoring EFM

NH3 (400 V) for secondary-side fusing of transformers and incoming block

NH00/NH000, NH1 and NH3 (800 V)

Accessories

Covers

Adapters on busbar systems

Mounting and assembly elements

Busbar connection assembly kits

Coupling of operating handles

Fuses

Current transfor-mers

Note:
You will find a detailed range of accessories with the basic units.

© Siemens 2025

General information

3NA COM LV HRC fuse links

The new the 3NA COM LV HRC fuse links with measuring and communication functions make your products communication-capable.

See Fuse Systems, page 7/52

Suitable fuses

You will find further information under:
sie.ag/2UlrAvy



The 3NJ4 fuse switch disconnector is suitable for all fuses with LV HRC design in sizes 000 to 3 that comply with IEC 60269-2, including fuses for cable and line protection.

© Siemens 2025

3NJ4 fuse switch disconnectors

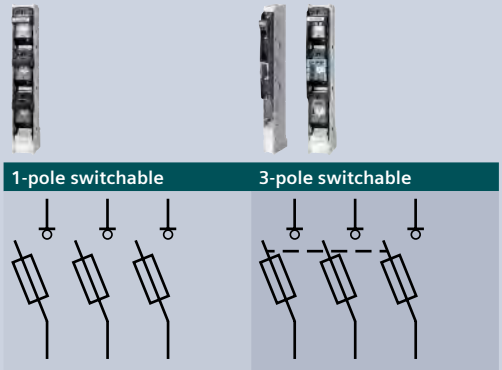

Rated operational current I_e	Busbar center-to-center spacing	Fuse size	Connection		
NH00/NH000 ... NH3 (690 V)					
160 A	100 mm	NH00/NH000	M8 flat terminal	–	3NJ4103-3BF02
		NH00/NH000	F70 box terminal	–	3NJ4103-3BR02
	185 mm	NH00/NH000 [1]	M8 flat terminal	3NJ4101-3BF01	3NJ4103-3BF01
250 A	185 mm	NH1	M10 flat terminal	3NJ4121-3BF01	3NJ4123-3BF01
			M12 stud terminal	–	3NJ4123-3BJ01
			V terminal	–	3NJ4123-3BT01
400 A	185 mm	NH2	M12 flat terminal	3NJ4131-3BF01	3NJ4133-3BF01
			M12 stud terminal	–	3NJ4133-3BJ01
			V terminal	–	3NJ4133-3BT01
630 A	185 mm	NH3	M12 flat terminal	3NJ4141-3BF01	3NJ4143-3BF01
			M12 stud terminal	–	3NJ4143-3BJ01
			V terminal	–	3NJ4143-3BT01
NH4a (690 V)					
1250 A	185 mm	NH4a	M16 × 60 stud terminal	3NJ5643-0BB00	–
NH00/NH000 ... NH3 (690 V) for integratable current transformers					
160 A	100 mm	NH00/NH000	M8 flat terminal [2]	–	3NJ4103-3BF12
250 A	185 mm	NH1	M10 flat terminal	3NJ4121-3BF11	3NJ4123-3BF11
400 A	185 mm	NH2	M12 flat terminal	3NJ4131-3BF11	3NJ4133-3BF11
630 A	185 mm	NH3	M12 flat terminal	3NJ4141-3BF11	3NJ4143-3BF11
NH00/NH000 ... NH3 (690 V) with electronic fuse monitoring EFM					
160 A	100 mm	NH00/NH000	M8 flat terminal	–	3NJ4103-3CF02
250 A	185 mm	NH1	M10 flat terminal	–	3NJ4123-3CF01
400 A	185 mm	NH2/NH1	M12 flat terminal	–	3NJ4133-3CF01
630 A	185 mm	NH3/NH2	M12 flat terminal	–	3NJ4143-3CF01
NH00/NH000 ... NH3 (690 V) for integratable current transformers, with electronic fuse monitoring EFM					
160 A	100 mm	NH00/NH000	M8 flat terminal [2]	–	3NJ4103-3CF12
250 A	185 mm	NH1	M10 flat terminal	–	3NJ4123-3CF11
400 A	185 mm	NH2/NH1	M12 flat terminal	–	3NJ4133-3CF11
630 A	185 mm	NH3/NH2	M12 flat terminal	–	3NJ4143-3CF11
NH3 (400 V) for secondary-side fusing of transformers and incoming block					
1000 A	185 mm	NH3	2 × M12 flat terminal	–	3NJ4153-3BF01
1250 A	185 mm	NH3	2 × M12 flat terminal	–	3NJ4183-3BF01
1600 A	185 mm	NH3	3 × M12 flat terminal	–	3NJ4163-3BF01
2000 A	185 mm	NH3	4 × M12 flat terminal	–	3NJ4173-3BF01
NH00/NH000, NH1 and NH3 (800 V)					
63 A	100 mm	NH00/NH000 [1]	M8 flat terminal	–	3NJ4103-3DF02
	185 mm	NH00/NH000	M8 flat terminal	–	3NJ4103-3DF01
160 A	185 mm	NH1	M10 flat terminal	–	3NJ4123-3DF01
315 A	185 mm	NH3	M12 flat terminal	–	3NJ4143-3DF01

[1] If mounted together with device sizes NH1 to NH3, a 3NJ5930-3BB adapter is required as an accessory to compensate for differences in height.
[2] The 3NJ4918-0DC02 fixing screws are required as accessories for mounting.

Note:
- Fixing screws for mounting on busbars must be ordered separately.

Quick selection guide, page 8/80

© Siemens 2025

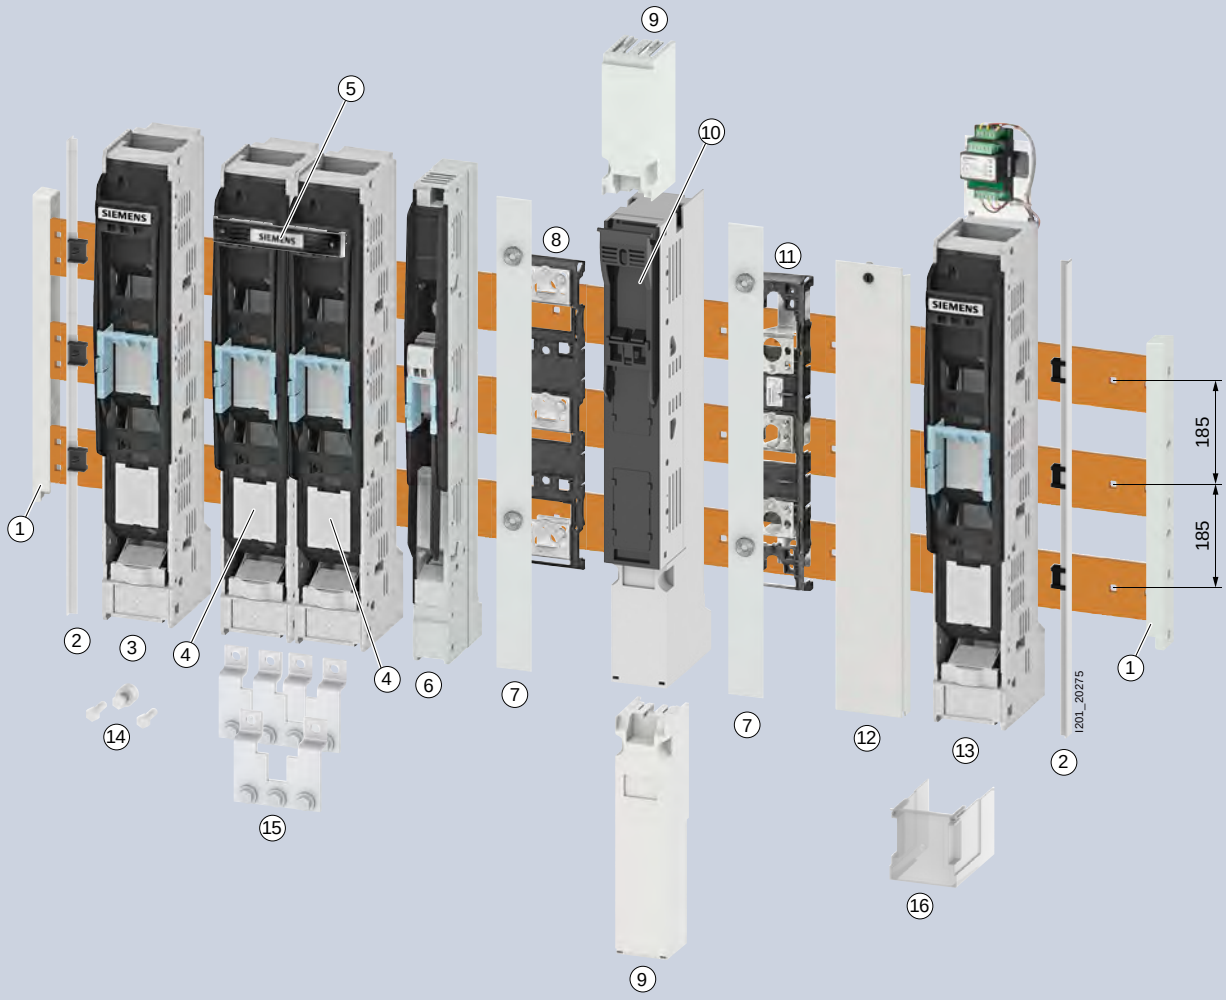

1 Busbar support
2 Lateral masking frame support
3 Switch disconnector, NH1
4 Switch disconnector, NH2
5 Coupling of operating handle
6 Switch disconnector, NH00, 185 mm
7 Unequipped section cover, 50 mm
8 Adapter, 185 mm to 185 mm
9 Cover, spacer
10 Switch disconnector, NH00, 100 mm
11 Adapter, 100 mm to 185 mm
12 Blanking cover, 633 x 100 mm
13 Switch disconnector, NH3, with EFM
14 Assembly kit, 2 x 240 mm²
15 Busbar connection assembly kit, 4 x 185 mm²
16 Cover, NH1-3

Quick selection guide, page 8/80

© Siemens 2025

3NJ4 fuse switch disconnectors

Accessories

❾ Covers

- Additional touch protection when using cable lugs and as spacer

Size	Busbar center-to-center spacing	Version	Article No.
NH00	100 mm	Top and bottom	3NJ4912-1DA02
	185 mm	100 mm for bottom	3NJ4912-1FA01
		132 mm for top	3NJ4912-1FA00
⑯ NH1 ... NH3	Connection for top and bottom		3NJ4912-1AA01
NH3	For double in-line disconnectors		3NJ4912-1EA00

⓬ Blanking covers

Version	Length	Width	Busbar center-to-center spacing	Article No.
For switchboard cutout	299 mm	50 mm	100 mm only	3NJ4912-2CA00
	633 mm	50 mm		3NJ4912-2AA00
	633 mm	100 mm		3NJ4912-2BA00

❷ Lateral masking frame supports

- 3 clips with T profile

Size	Article No.
NH00 ... NH3	3NJ4912-2DA00

Fixing clips

Scope of supply	Article No.
1 set = 4 units, including fixing accessories	3NJ4918-0AA00

❼ Unequipped section covers

Busbar center-to-center spacing	Width	Article No.
185 mm	50 mm	3NJ4912-3AA00
	100 mm	3NJ4912-3BA01
100 mm	50 mm	3NJ4912-3CA00

Adapter for mounting on 185 mm busbar system

- For mounting a maximum of two 3NJ4 of size NH00/000 on busbar systems with 185 mm center-to-center spacing
- For height adjustment from 3NJ4 of size NH00/000 to 3NJ4 of sizes NH1, NH2, NH3

Adaptation of fuse switch disconnectors	Adapter mounting on busbar system	Article No.
⑪ From 100 mm to 185 mm	Adapters with screw fixing	3NJ4918-0DA02
⑧ From 185 mm to 185 mm	Adapters with screw fixing	3NJ5930-3BB
From 100 mm to 185 mm busbar system	Adapters with clamp fixing	3NJ4918-0DB02

Adapter for mounting on 60 mm busbar system

- For mounting a 3NJ4 of size NH00/000, 690 V, on busbar systems with 60 mm busbar center-to-center spacing
- 1 set = 3 separate brackets

Adaptation of fuse switch disconnectors	Adapter mounting on busbar system	Article No.
From 100 mm to 60 mm busbar system	Adapters with screw fixing	3NJ4918-0EA00

Fixing screws

- For mounting 3NJ4103 switch disconnectors with integratable current transformers on a busbar or adapter

Scope of supply	Article No.
1 set = 3 units	3NJ4918-0DC02

[1] Touch protection only suitable for 3NJ4103-3BF02
[2] Touch protection only suitable for 3NJ4101-3BF01 and 3NJ4103-3BF01
[3] Adapter only suitable for 3NJ4103-3...2 (with 100 mm busbar center-to-center spacing)
[4] Screws are only suitable for 3NJ4103-3BF12 and 3NJ4103-3CF12 (with integrable current transformers, with 100 mm busbar center-to-center spacing)

System overview, page 8/96

© Siemens 2025

	3NJ4101	3NJ4103	3NJ412	3NJ413	3NJ414	3NJ415	3NJ416	3NJ417	3NJ418
		■ [1]							
	■ [2]	■ [2]							
	■ [2]	■ [2]							
			■	■	■	■			■
					■	■	■	■	■
		■							
	■	■							
	■	■	■	■	■	■	■	■	■
			■	■	■				
	■	■	■	■	■	■	■	■	■
	■	■	■	■	■	■	■	■	■
	■	■	■	■	■	■	■	■	■
	■	■	■	■	■	■	■	■	■
		■ [3]							
	■								
		■ [3]							
		■ [3]							
		■ [4]							

8

System overview, page 8/96

© Siemens 2025

3NJ4 fuse switch disconnectors

Accessories

❶ Busbar supports

- For screwing on the busbars

Version	Article No.
For 100 and 185 mm busbar center-to-center spacing	3NJ5974-0AB

Grounding kits

Version	Article No.
With connecting cable 25 mm²	3NJ4910-1AA00

Busbar terminals

- Not for devices with transformer installation
- For more rapid mounting of the switch disconnectors onto the busbars (1 set = 3 units)

Article No.
3NJ4911-3AA00
3NJ4911-3BA01

Saddle terminals

- 1 set = 3 units

Connection	Article No.
Cu 1.5 ... 70 mm²	3NJ4911-4AA00

Prism terminal assembly kits

- 1 set = 3 units

Connection	Article No.
Cu 10 ... 70 mm²	3NJ4911-1AA00

Box terminal assembly kits

- For connection to version with flat terminal
- 1 set = 3 units
- Not for devices with transformer installation

Connection	Article No.
Cu 70 ... 240 mm²	3NJ4911-2BQ00

Auxiliary switch mounting kits

- For 3-pole switchable switch disconnectors only

Version	Contacts	Article No.
For NH00 ... NH3 with connecting cables	1 CO	3NJ4913-1AA01

Mounting hook



- 1 per in-line disconnector required

Article No.
3NJ4918-1AA00

Distance compensation

Version	Article No.
For NH00	3NJ4915-1BA00
For fuse switch disconnectors, with integratable current transformers if no current transformer is built in	3NJ4915-2BA00

Terminal strips



- For switch disconnectors with integratable current transformers

Version	Article No.
For NH00	3NJ4915-1CA00
For NH1 ... NH3	3NJ4915-2CA00

8

System overview, page 8/96

© Siemens 2025

	3NJ4101	3NJ4103	3NJ412	3NJ413	3NJ414	3NJ415	3NJ416	3NJ417	3NJ418
	■	■	■	■	■	■	■	■	■
			■	■	■	■	■	■	■
	■	■							
			■	■	■				
	■	■							
	■	■							
			■	■	■				
	■	■	■	■	■	■	■	■	■
			■	■	■				
		■							
			■	■	■				
		■							
			■	■	■				

8

System overview, page 8/96

© Siemens 2025

3NJ4 fuse switch disconnectors

Accessories

Busbar connection assembly kits for NH2 and NH3

- Only for 3NJ41 with flat terminals

Screws	Conductor cross-section	Article No.
M12	2 × 240 mm²	3NJ4911-5AA00
	2 × 300 mm²/3 × 120 mm²	3NJ4911-5BA00
M16	1 × 400 mm²	3NJ4911-5CA00

Busbar connection assembly kits for NH2 and NH3

Version	Conductor cross-section	Article No.
For double in-line disconnectors	3 × 300 mm²/⑮ 4 × 185 mm²	3NJ4911-6AA00
	4 × 240 mm²	3NJ4911-6BA00

Coupling of operating handles

- For mechanical connection of the operating handles of two adjacent fuse switch disconnectors of size NH1, NH2 or NH3
- For 1-pole switchable fuse switch disconnectors, 3 units are required
- For 3-pole switchable fuse switch disconnectors, 1 unit is required

Version	Article No.
⑤ Mechanical coupling of operating handles	3NJ4911-6CA00

Fuses NH3

Version	Article No.
For protection of transformers, 630 kVA, 910 A, 400 V, operational class gTr	3NJ4914-8AA00

Isolating blades NH3

Rated operational current I_e	Article No.
1250 A	3NJ4914-8BA00

Current transformers .../1 A

Rated primary current I_{pr}	Accuracy class	Rated power P_n	Article No.
100/1 A	0.5	1.5 VA	3NJ4915-1EA10
	1	2.0 VA	3NJ4915-1EA20
150/1 A	0.5	2.5 VA	3NJ4915-1FA10
	0.5 calibrated	2.5 VA	3NJ4915-1FA11
	1	3.0 VA	3NJ4915-1FA20
75/1 A	1	1.5 VA	3NJ4915-2DA20
100/1 A	0.5	1.5 VA	3NJ4915-2EA10
	1	2.0 VA	3NJ4915-2EA20
150/1 A	1	2.5 VA	3NJ4915-2FA20
250/1 A	0.5	2.5 VA	3NJ4915-2GA10
	0.5 calibrated	2.5 VA	3NJ4915-2GA11
	1	5.0 VA	3NJ4915-2GA20
400/1 A	0.5	2.5 VA	3NJ4915-2HA10
	0.5 calibrated	2.5 VA	3NJ4915-2HA11
	1	5.0 VA	3NJ4915-2HA20
500/1 A	0.5	2.5 VA	3NJ4915-2JA10
	1	5.0 VA	3NJ4915-2JA20
600/1 A	0.5	2.5 VA	3NJ4915-2KA10
	0.5 calibrated	2.5 VA	3NJ4915-2KA11
	1	5.0 VA	3NJ4915-2KA20

8

System overview, page 8/96

© Siemens 2025

	3NJ4101	3NJ4103	3NJ412	3NJ413	3NJ414	3NJ415	3NJ416	3NJ417	3NJ418
				■	■				
					■				
					■				
				■	■				
					■				
			■	■	■				
									■
						■	■	■	■
		■							
		■							
		■							
		■							
		■							
			■	■	■				
			■	■	■				
			■	■	■				
			■	■	■				
			■	■	■				
			■	■	■				
			■	■	■				
			■	■	■				
			■	■	■				
			■	■	■				
			■	■	■				
			■	■	■				
			■	■	■				
			■	■	■				

8

System overview, page 8/96

© Siemens 2025

3NJ4 fuse switch disconnectors

Accessories

Current transformers .../5 A

Rated primary current I_{pr}	Accuracy class	Rated power P_n	Article No.
100/5 A	0.5	1.0 VA	3NJ4915-1EB10
	1	1.5 VA	3NJ4915-1EB20
150/5 A	0.5	1.5 VA	3NJ4915-1FB10
	0.5 calibrated	1.5 VA	3NJ4915-1FB11
	1	2.5 VA	3NJ4915-1FB20
75/5 A	1	1.5 VA	3NJ4915-2DB20
100/5 A	0.5	1.0 VA	3NJ4915-2EB10
	1	2.0 VA	3NJ4915-2EB20
150/5 A	0.5	1.5 VA	3NJ4915-2FB10
	1	2.5 VA	3NJ4915-2FB20
250/5 A	0.5	2.5 VA	3NJ4915-2GB10
	0.5 calibrated	2.5 VA	3NJ4915-2GB11
	1	3.75 VA	3NJ4915-2GB20
400/5 A	0.5	2.5 VA	3NJ4915-2HB10
	0.5 calibrated	2.5 VA	3NJ4915-2HB11
	1	3.75 VA	3NJ4915-2HB20
500/5 A	0.5	2.5 VA	3NJ4915-2JB10
	1	5.0 VA	3NJ4915-2JB20
600/5 A	0.5	2.5 VA	3NJ4915-2KB10
	0.5 calibrated	2.5 VA	3NJ4915-2KB11
	1	5.0 VA	3NJ4915-2KB20

System overview, page 8/96

© Siemens 2025

	3NJ4101	3NJ4103	3NJ412	3NJ413	3NJ414	3NJ415	3NJ416	3NJ417	3NJ418
		■							
		■							
		■							
		■							
		■							
			■	■	■				
			■	■	■				
			■	■	■				
			■	■	■				
			■	■	■				
			■	■	■				
			■	■	■				
			■	■	■				
			■	■	■				
			■	■	■				
			■	■	■				
			■	■	■				
			■	■	■				
			■	■	■				

8

System overview, page 8/96

© Siemens 2025

5SG76 fuse switch disconnectors

System overview

MINIZED fuse switch disconnectors

1P

1P+N

2P

3P

3P+N

© Siemens 2025

Number of poles	1P	1P+N	2P	3P	3P+N
	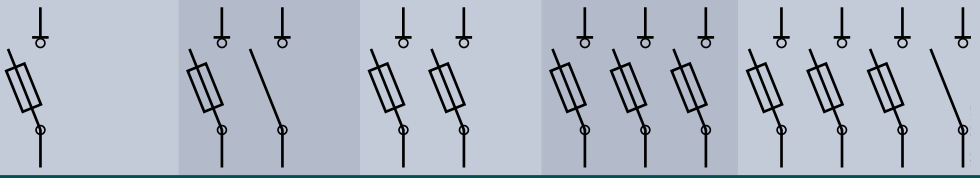				
Fuse size	**Rated current I_n**	**Mounting width 1 MW**	**Mounting width 2 MW**	**Mounting width 2 MW**	**Mounting width 3 MW**	**Mounting width 4 MW**
MINIZED fuse switch disconnectors						
D01	6 A [1]	5SG7611-0KK06	–	–	5SG7631-0KK06	–
	10 A	5SG7611-0KK10	–	–	5SG7631-0KK10	–
	16 A	5SG7611-0KK16	5SG7651-0KK16	5SG7621-0KK16	5SG7631-0KK16	5SG7661-0KK16

[1] For 2 A, 4 A, 6 A fuses

Note:
No NEOZED adapter sleeves are required for this type series

Quick selection guide, page 8/80

© Siemens 2025

Switch disconnectors with fuses

Quick selection guide

3KF LV HRC



Size			1	1	1	2	2	3	4	5	5
General technical specifications acc. to IEC 60947-3											
Basic data											
Rated uninterrupted current I_u		A	32	63	80	125	160	250	400	630	800
For fuse links acc. to IEC 60269-2			000 and 00					0 and 1	1 and 2	2 and 3	
Rated operational voltage U_e	At 50/60 Hz AC	V AC	690								
	At DC – 2 conducting paths in series	V DC	220								
	At DC – 3 conducting paths in series	V DC	440								
	At DC	V DC	–								
Operating and short-circuit behavior											
Rated operational current I_e [1]	At AC-21A | AC-21B at 400 V	A	32	63	80	125	160	250	400	630	800
	At AC-21A | AC-21B at 500 V	A	–	–	–	–	–	–	–	–	–
	At AC-21A | AC-21B at 690 V	A	32	63	80	125	160	250	400	630	800
	At AC-22A | AC-22B at 400 V	A	32	63	80	125	160	250	400	630	800
	At AC-22A | AC-22B at 500 V	A	–	–	–	–	–	–	–	–	–
	At AC-22A | AC-22B at 690 V	A	32	63	80	125	160	250	400	630	800
	At AC-23A | AC-23B at 400 V	A	32	63	80	125	160	250	400	630	800
	At AC-23A | AC-23B at 500 V	A	–	–	–	–	–	–	–	–	–
	At AC-23A | AC-23B at 690 V	A	32	63	80	125	160	250	400	630	800
	At DC-21A | DC-21B at 48 V	A	–	–	–	–	–	–	–	–	–
	At DC-21A | DC-21B at 65 V	A	–	–	–	–	–	–	–	–	–
	At DC-21A | DC-21B at 110 V	A	–	–	–	–	–	–	–	–	–
	At DC-21A | DC-21B at 130 V	A	–	–	–	–	–	–	–	–	–
	At DC-21A | DC-21B at 220 V	A	32	63	80	125	160	250	400	630	800
	At DC-21A | DC-21B at 400 V	A	–	–	–	–	–	–	–	–	–
	At DC-21A | DC-21B at 440 V	A	32	63	80	125	160	250	400	630	800
	At DC-22A | DC-22B at 48 V	A	–	–	–	–	–	–	–	–	–
	At DC-22A | DC-22B at 65 V	A	–	–	–	–	–	–	–	–	–
	At DC-22A | DC-22B at 110 V	A	–	–	–	–	–	–	–	–	–
	At DC-22A | DC-22B at 130 V	A	–	–	–	–	–	–	–	–	–
	At DC-22A | DC-22B at 220 V	A	32	63	80	125	160	250	400	630	800
	At DC-22A | DC-22B at 400 V	A	–	–	–	–	–	–	–	–	–
	At DC-22A | DC-22B at 440 V	A	32	63	80	125	160	250	400	630	800
	At DC-23A | DC-23B at 48 V	A	–	–	–	–	–	–	–	–	–
	At DC-23A | DC-23B at 110 V	A	–	–	–	–	–	–	–	–	–
	At DC-23A | DC-23B at 220 V	A	32	63	80	125	160	250	400	630	800
	At DC-23A | DC-23B at 400 V	A	–	–	–	–	–	–	–	–	–
	At DC-23A | DC-23B at 440 V	A	32	63	80	125	160	250	400	630	800
Motor switching capacity [2]	At AC-23A at 400 V	kW	15	30	37	55	90	132	220	355	400
	At AC-23A at 500 V	kW	18.5	37	55	75	110	160	280	400	560
	At AC-23A at 690 V	kW	30	55	75	110	132	250	400	630	800
Rated conditional short-circuit current with upstream fuse [3]	At 400/500 V AC	kA	100	100	100	100	100	100	100	100	100
	At 690 V AC	kA	100	100	100	100	100	100	100	80	80
Let-through current I_c of usable fuses, max. [3]	At 400/500 V AC	kA	11.8	11.8	11.8	18	18	33.7	37.1	77.4	77.4
	At 690 V AC	kA	11.5	11.5	11.5	25.5	25.5	37.7	47	65	65
Let-through current I^2t value of usable fuses, max. [3]	At 400/500 V AC	kA²s	34	34	34	223	223	1500	2150	10400	10400
	At 690 V AC	kA²s	55	55	55	360	360	940	2600	7000	7000
Maximum power loss of the usable fuses (per fuse)		W	6.5	7.5	8.5	11	12	25.5	34	48	60
Degree of protection											
Maximum IP degree of protection (with a rotary operating mechanism)			IP65								
Maximum IP degree of protection			–								

[1] Values valid even at +10% line voltage tolerance in case of AC
[2] Values are provided as a guide only and may vary depending on the make of motor
[3] Valid for combination of 3KF and fuse type 3NA/3ND, characteristic gG/aM

© Siemens 2025

3KF SITOR

3NJ63

5SG7



1	1	1	2	2	3	4	5	5	00	00	00	00	1	2	3	3	5SG71.	5SG7230	5SG7234.
32	63	80	125	160	250	400	630	800	–	–	–	–	–	–	–	–	63	63	63
000 and 00					0 and 1	1 and 2	2 and 3		000 and 00				1	1 and 2	2 and 3		D02	D02	D02
690									500 ... 690				690		230 ... 690		400, 415	400	400
220									230 ... 440				230 ... 440		–		130	110	–
440									–				–	–	–		–	–	–
–									–				–	–	–		65	–	–
32	63	80	125	160	250	400	630	800	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
32	63	80	125	160	250	400	630	800	–	–	–	–	–	–	–	–	–	–	–
32	63	80	125	160	250	400	630	800	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	160	–	–	–	630	–	–	–
32	63	80	125	160	250	400	630	800	–	–	125	–	250	400	500	–	– | 35	–	– | 63
32	63	80	125	160	250	400	630	800	–	–	–	–	–	–	–	–	–	63 | –	–
–	–	–	–	–	–	–	–	–	–	–	–	160	–	–	–	630	–	–	–
32	63	80	125	160	250	400	630	800	63	100	125	–	250	400	500	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	– | 63	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	63	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	63	–	–
32	63	80	125	160	250	400	630	800	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
32	63	80	125	160	250	400	630	800	–	–	–	–	250	400	–	630	–	– | 63	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	– | 63	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	– | 63	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	– | 63	–	–
32	63	80	125	160	250	400	630	800	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
32	63	80	125	160	250	400	630	800	–	–	–	–	–	–	–	–	– | 63	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
32	63	80	125	160	250	400	630	800	–	–	–	160	250	400	–	630	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
32	63	80	125	160	250	400	630	800	–	–	–	–	–	–	–	–	–	–	–
15	30	37	55	90	132	220	355	400	–	–	–	–	–	–	–	–	–	–	–
18.5	37	55	75	110	160	280	400	560	–	–	–	–	–	–	–	–	–	–	–
30	55	75	110	132	250	400	630	800	–	–	–	–	–	–	–	–	–	–	–
100	100	100	100	100	100	100	100	100	–								50 | –	50 | –	50 | –
100	100	100	100	100	100	100	80	80	60 ... 100 kA_{rms}								–	–	–
11.8	11.8	11.8	18	18	33.7	37.1	77.4	77.4	–								–	–	–
11.5	11.5	11.5	25.5	25.5	37.7	47	65	65	–								–	–	–
34	34	34	223	223	1500	2150	10400	10400	–								–	–	–
55	55	55	360	360	940	2600	7000	7000	–								–	–	–
7	8	12	20	26	36	55	68	85	–								5.5	5.5	5.5
IP65									IP41								–	–	–
–									–								IP20	–	–

8

© Siemens 2025

Switch disconnectors with fuses

Quick selection guide (continued)

3KF LV HRC



Size			1	1	1	2	2	3	4	5	5
General technical specifications acc. to UL											
Basic data											
Certification according to UL standard			–	–	–	–	–	–	–	–	–
I_n acc. to UL 508		A	–	–	–	–	–	–	–	–	–
U_e acc. to UL 508			–	–	–	–	–	–	–	–	–
Operating and short-circuit behavior											
Operational power, 3-phase	At 240 V	kA	–	–	–	–	–	–	–	–	–
	At 480 V	kA	–	–	–	–	–	–	–	–	–
	At 600 V	kA	–	–	–	–	–	–	–	–	–
Short circuit current rating (SCCR)			–	–	–	–	–	–	–	–	–
Fuse type			–	–	–	–	–	–	–	–	–
Further information											
			See page 8/122								
Technical specifications			Configuration in SIMARIS								

© Siemens 2025

3KF SITOR



3NJ63

5SG7



1	1	1	2	2	3	4	5	5	00	00	00	00	1	2	3	3	5SG71.	5SG7230	5SG7234.
UL 508									–	–	–	–	–	–	–	–	–	–	–
32	56	56	125	125	500	320	530	530	–	–	–	–	–	–	–	–	–	–	–
600									–	–	–	–	–	–	–	–	–	–	–
10	15	15	25	30	60	100	125	150	–	–	–	–	–	–	–	–	–	–	–
25	30	40	60	75	150	250	300	300	–	–	–	–	–	–	–	–	–	–	–
30	40	40	50	50	1255	250	300	350	–	–	–	–	–	–	–	–	–	–	–
100	100	100	100	100	100	100	100	100	–	–	–	–	–	–	–	–	–	–	–
K-1, RK1, CC, J, T	K-1, RK1, CC, J, T	K-1, RK1, CC, J, T	K-1, RK1, J, T	K-1, RK1, J, T	K-1, RK1, J, T	K-1, RK1, CC, J, T	K-1, RK1, J, T	K-1, RK1, J, T	–	–	–	–	–	–	–	–	–	–	–
See page 8/124									See page 8/130								See page 8/138		
Configuration in SIMARIS									Configuration in SIMARIS								Configuration in SIMARIS		

© Siemens 2025

3KF switch disconnectors with fuses

System overview

Complete units with direct operating mechanisms

Front operating mechanisms, 3-pole

Front operating mechanisms, 4-pole

Basic units

Front operating mechanisms, 3-pole

Front operating mechanisms, 4-pole

Lateral operating mechanisms, 3-pole

Lateral operating mechanisms, 4-pole

3KF SITOR

Additional poles

4th contact elements

N terminals

N/PE terminals

Auxiliary switch modules

Operating mechanisms

Direct operating mechanisms

Door-coupling rotary operating mechanisms

Handles for door-coupling rotary operating mechanisms

Further accessories for door-coupling rotary operating mechanisms

Further accessories and spare parts

Auxiliary switches

Fuse monitoring

Terminal covers

Mounting elements

Fuse covers

Note:
You will find a detailed range of accessories with the basic units.

© Siemens 2025

General information

3NA COM LV HRC fuse links

The new the 3NA COM LV HRC fuse links with measuring and communication functions make your products communication-capable.

See Fuse Systems, page 7/52

Suitable fuses

You will find further information under: sie.ag/2UlrAvy



The 3KF switch disconnector with fuses is suitable for all fuses with LV HRC design in sizes 000 to 3 that comply with IEC 60269-2. These include fuses for cable and line protection and motor protection.
Fuses for semiconductor protection (Siemens trademark SITOR) can also be used. However, some of these fuses have substantially higher power losses than fuses according to IEC 60269-2. This means that the load current has to be reduced until the value that is permissible in the switch disconnector with fuses is not exceeded.
For use of Siemens semiconductor fuses (SITOR), ready-made derating tables are available in the linked document.

Types of mounting

You will find further information under: sie.ag/2UlrAvy

Floor mounting



All 3KF switch disconnectors with fuses are designed for floor mounting.

DIN rail



Size 1 can be snapped onto a DIN rail (TH35 according to EN 60715) as an alternative mounting method.

© Siemens 2025

3KF switch disconnectors with fuses

General information

Electrical connection

You will find further information under: sie.ag/2UlrAvy

Box terminals



The box terminals for size 1 (32 A ... 80 A) are designed to allow the rapid connection of stripped conductors.

Flat terminals



Sizes 2 ... 5 are available with flat terminals, for the connection of cable lugs or busbar systems.

Flat terminals at rear



Sizes 1 and 2 (32 A, 63 A and 125 A) are available with rear flat terminals, for the connection of cable lugs or busbar systems.

Auxiliary switch modules and auxiliary switches

You will find further information under: sie.ag/2UlrAvy

Size 1



The auxiliary switches used for size 1 are microswitches (changeover contacts), which can be snapped into an auxiliary switch module. This auxiliary switch module is mounted on the side of the switch disconnector with fuses in the same way as an additional pole. A maximum of two microswitches can be installed in each auxiliary switch module.

Sizes 2 ... 5



1 Auxiliary switch, leading

2 Auxiliary switch, simultaneous

For sizes 2 ... 5, the auxiliary switches are directly attached to the operating mechanism module. The auxiliary switch with the leading switching function is always installed in the right-hand mounting location. The other locations are provided for simultaneously switching with the main contacts. Auxiliary switches with spring-type terminals from the 3SU1 program can also be used.

System overview, page 8/114

© Siemens 2025

Differentiation 3KF SITOR and derating tables for SITOR fuses

You will find further information under: sie.ag/2UlrAvy

Size 1

3KF SITOR is a variation of the proven switch disconnector with 3KF LV HRC fuses and provides optimized heat dissipation and permits the use of fuses with substantially higher power losses. All 3KF SITOR types are approved according to UL 508.

Sizes 2 ... 5

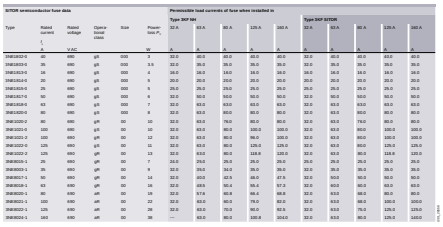

SITOR semiconductor fuse data						Permissible load currents of fuse when installed in										
						Type 3KF SH						Type 3KF SITOR				
Type	Rated current I_n	Rated voltage	Operational class	Size	Power-loss P_v	32 A	63 A	80 A	125 A	160 A	32 A	63 A	80 A	125 A	160 A
	A	V AC			W	A	A	A	A	A	A	A	A	A	A
3NE1802-0	20	690	gR	000	3	32.0	49.0	49.0	49.0	49.0	32.0	49.0	49.0	49.0	49.0
3NE1803-0	35	690	gR	000	3.5	32.0	35.0	35.0	35.0	35.0	32.0	35.0	35.0	35.0	35.0
3NE1814-0	16	690	gR	000	4	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0
3NE1814-0	20	690	gR	000	5	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0
3NE1815-0	25	690	gR	000	5	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
3NE1817-0	50	690	gR	000	6	32.0	50.0	50.0	50.0	50.0	32.0	50.0	50.0	50.0	50.0
3NE1818-0	63	690	gR	000	7	32.0	63.0	63.0	63.0	63.0	32.0	63.0	63.0	63.0	63.0
3NE1820-0	80	690	gR	000	8	32.0	63.0	80.0	80.0	80.0	32.0	63.0	80.0	80.0	80.0
3NE1020-2	80	690	gR	00	10	32.0	63.0	76.0	80.0	80.0	32.0	63.0	76.0	80.0	80.0
3NE1020-0	100	690	gR	00	10	32.0	63.0	80.0	100.0	100.0	32.0	63.0	80.0	100.0	100.0
3NE1021-2	100	690	gR	00	12	32.0	63.0	80.0	96.0	100.0	32.0	63.0	80.0	100.0	100.0
3NE1022-0	125	690	gR	00	11	32.0	63.0	80.0	125.0	125.0	32.0	63.0	80.0	125.0	125.0
3NE1022-2	125	690	gR	00	13	32.0	63.0	80.0	118.8	120.0	32.0	63.0	80.0	118.8	120.0
3NE8016-1	25	690	gR	00	7	24.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
3NE8003-1	35	690	gR	00	9	32.0	34.0	34.0	35.0	35.0	32.0	35.0	35.0	35.0	35.0
3NE8017-1	50	690	gR	00	14	32.0	49.0	42.9	46.0	47.5	32.0	50.0	50.0	50.0	50.0
3NE8018-1	63	690	gR	00	16	32.0	49.5	56.4	56.4	57.3	32.0	63.0	63.0	63.0	63.0
3NE8020-1	80	690	aR	00	19	32.0	57.6	80.8	96.4	98.8	32.0	63.0	80.0	80.0	80.0
3NE8021-1	100	690	aR	00	22	32.0	63.0	80.0	79.0	82.0	32.0	63.0	80.0	100.0	100.0
3NE8022-1	125	690	aR	00	28	32.0	63.0	75.0	90.0	92.0	32.0	63.0	75.0	125.0	125.0
3NE8024-1	160	690	aR	00	38	---	63.0	80.0	100.8	104.0	32.0	63.0	80.0	125.0	160.0

Sienens provides you with pretested load currents of the SITOR semiconductor fuses for installation in the 3KF SITOR. The derating tables are provided both for IEC constraints and for UL constraints and are intended to help you with selection. The permissible load faults for the 3KF LV HRC were calculated from the test results of the 3KF SITOR.

8

System overview, page 8/114

© Siemens 2025

3KF switch disconnectors with fuses

Mounting concept and accessories 3KF

Front operating mechanism left, size 1, 3/4-pole

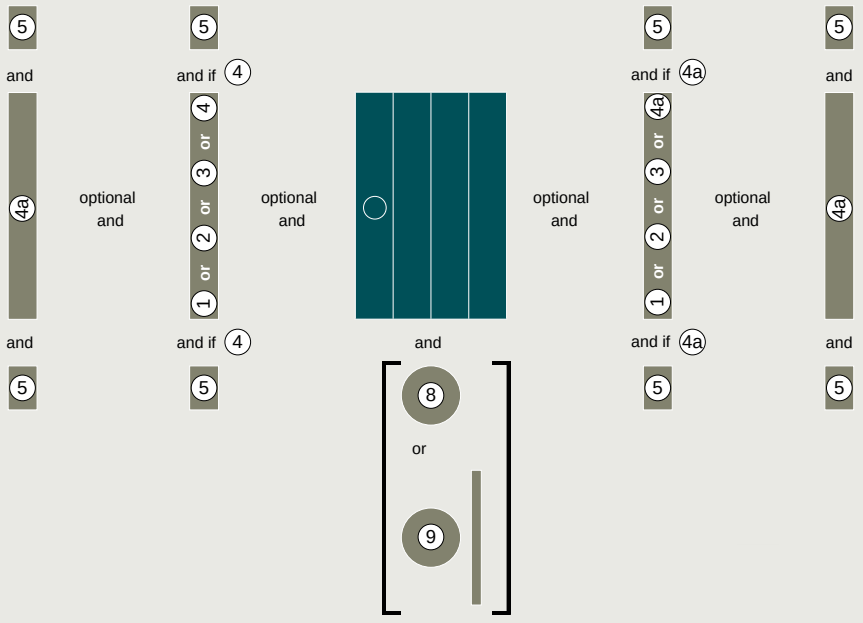

Legend

1 Neutral conductor terminal
2 N/PE terminal
3 4th contact element [1]
4 Auxiliary switch module, leading, with test function [2]
4a Auxiliary switch module for auxiliary switches [2]
5 Auxiliary switch
8 Direct operating mechanism
9 Door-coupling rotary operating mechanism

[1] Only for 3-pole 3K, max. 1×
[2] Max. 1×

I201_20494

Front operating mechanism center, size 1, 3/4-pole

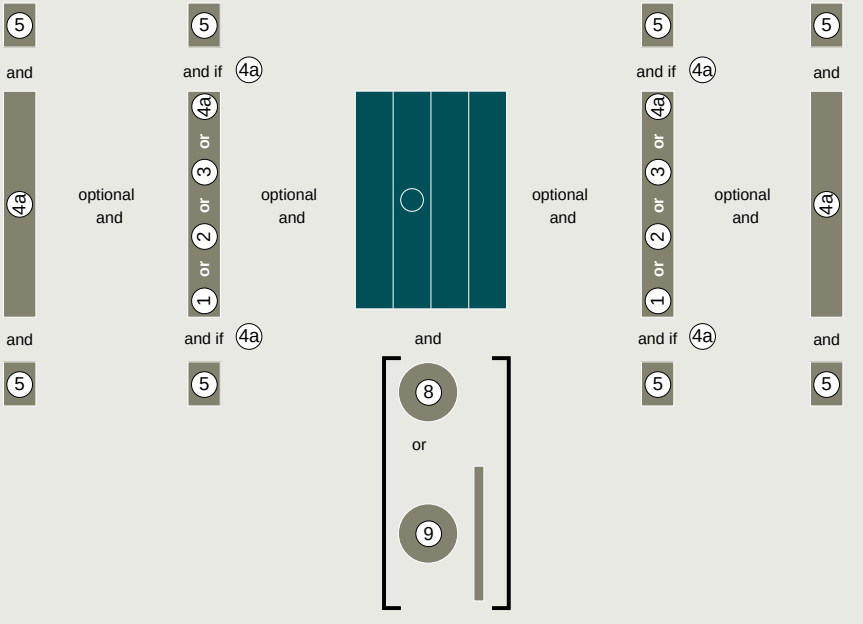

Legend

1 Neutral conductor terminal
2 N/PE terminal
3 4th contact element [1]
4a Auxiliary switch module for auxiliary switches [2]
5 Auxiliary switch
8 Direct operating mechanism
9 Door-coupling rotary operating mechanism

[1] Only for 3-pole 3K, max. 1x
[2] Max. 1x

I201_20495

System overview, page 8/114

© Siemens 2025

Front operating mechanism center or left, sizes 2 to 5, 3/4-pole

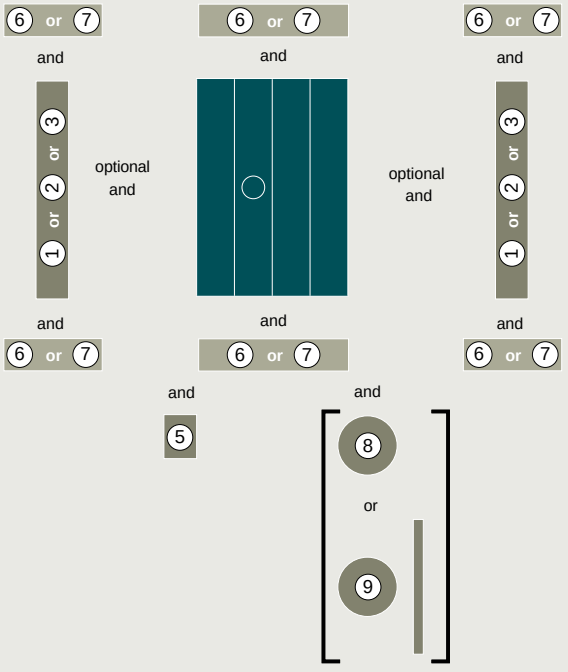

Legend

1. Neutral conductor terminal
2. N/PE terminal
3. 4th contact element [1]
5. Auxiliary switch [2]
6. Phase barrier
7. Terminal cover
8. Direct operating mechanism
9. Door-coupling rotary operating mechanism

[1] Only for 3-pole 3K, max. 1x
[2] Max. 4x

I201_20496

8

System overview, page 8/114

© Siemens 2025

3KF switch disconnectors with fuses

Mounting concept and accessories 3KF

Lateral operating mechanism left, size 1, 3/4-pole

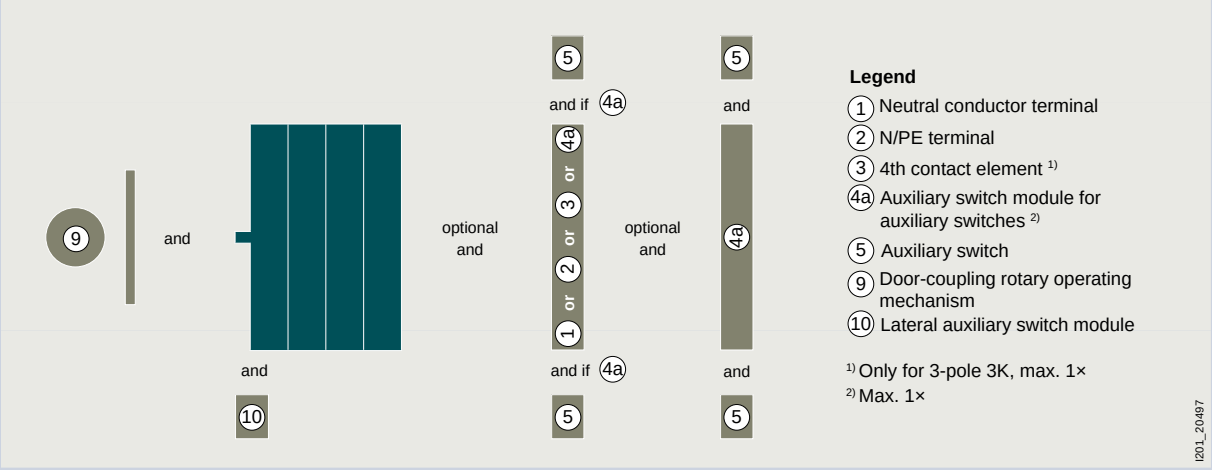

Lateral operating mechanism left, sizes 2 to 5, 3/4-pole

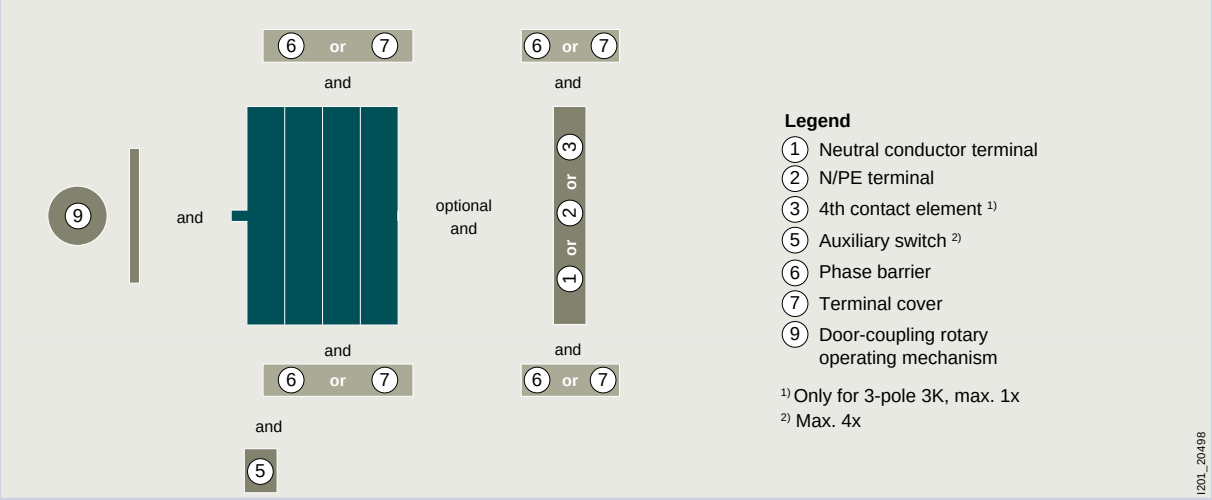

System overview, page 8/114

© Siemens 2025

Lateral operating mechanism right, size 1, 3/4-pole

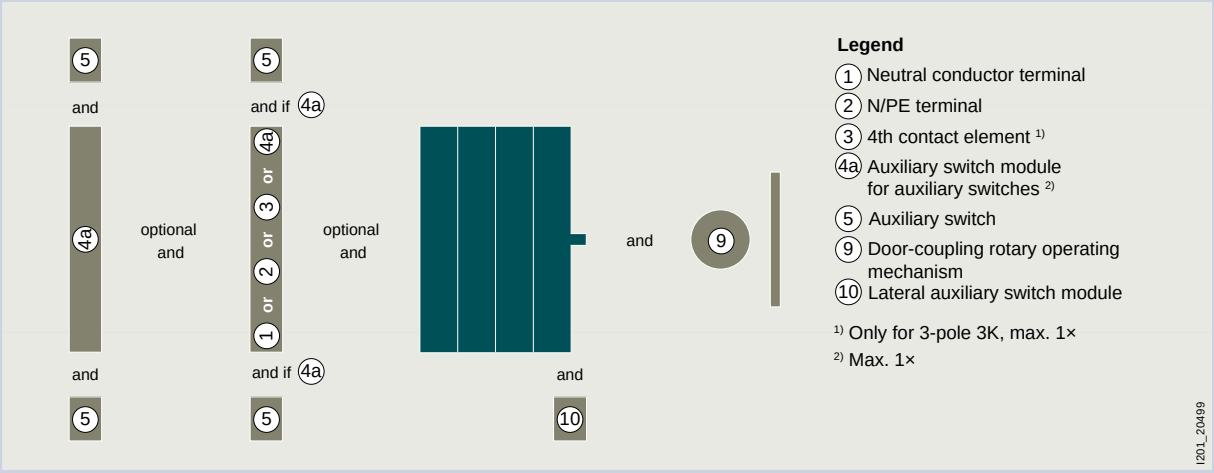

Lateral operating mechanism right, sizes 2 to 5, 3/4-pole

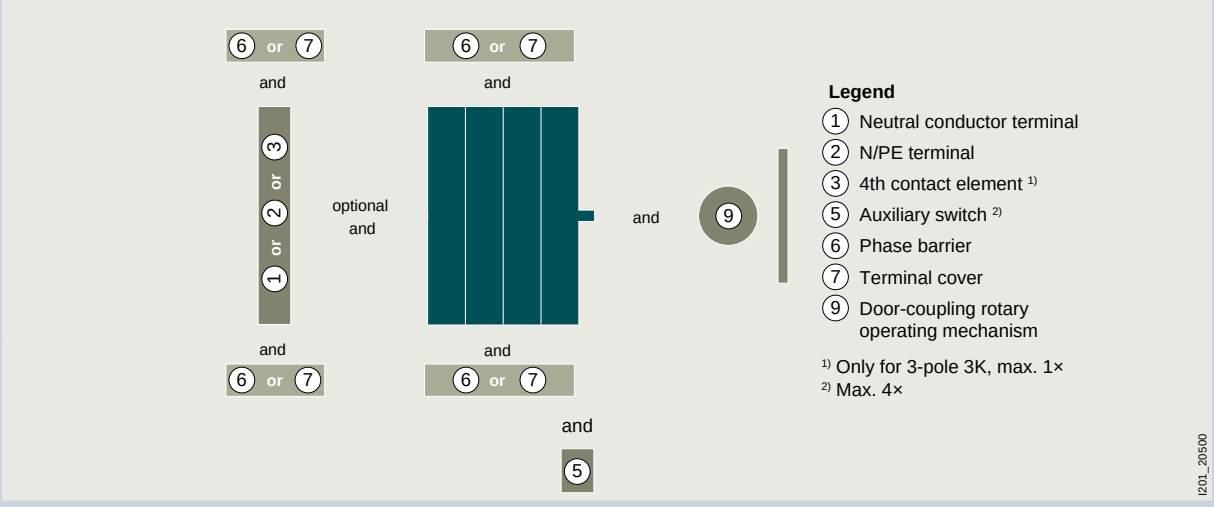

System overview, page 8/114

© Siemens 2025

3KF switch disconnectors with fuses

3KF LV HRC switch disconnectors

	Complete units with direct operating mechanisms Front operating mechanisms, left		Basic units without handle Front operating mechanisms, left		Front operating mechanism, center
Number of poles	3P	4P	3P	4P	3P
					

Size	Uninterrupted current I_u					
Box terminals						
1	32 A	3KF1303-2LB11	3KF1403-2LB11	3KF1303-0LB11	3KF1403-0LB11	3KF1303-0MB11
	63 A	3KF1306-2LB11	3KF1406-2LB11	3KF1306-0LB11	3KF1406-0LB11	3KF1306-0MB11
	80 A	3KF1308-2LB11	3KF1408-2LB11	3KF1308-0LB11	3KF1408-0LB11	3KF1308-0MB11
Flat terminals at rear						
1	32 A	–	–	–	–	3KF1303-0MR11
	63 A	–	–	–	–	3KF1306-0MR11
2	125 A	–	–	–	–	3KF2312-0MR11
Flat terminals						
2	125 A	3KF2312-2LF11	3KF2412-2LF11	3KF2312-0LF11	3KF2412-0LF11	3KF2312-0MF11
	160 A	3KF2316-2LF11	3KF2416-2LF11	3KF2316-0LF11	3KF2416-0LF11	3KF2316-0MF11
3	250 A	3KF3325-2LF11	3KF3425-2LF11	3KF3325-0LF11	3KF3425-0LF11	3KF3325-0MF11
4	400 A	3KF4340-2LF11	3KF4440-2LF11	3KF4340-0LF11	3KF4440-0LF11	3KF4340-0MF11
5	630 A	3KF5363-2LF11	3KF5463-2LF11	3KF5363-0LF11	3KF5463-0LF11	3KF5363-0MF11
	800 A	3KF5380-2LF11	3KF5480-2LF11	3KF5380-0LF11	3KF5480-0LF11	3KF5380-0MF11

Note:
- NH00 and NH000: For 3KF sizes 1 and 2
- NH1 and NH0: For 3KF size 3
- NH2 and NH1: For 3KF size 4
- NH3 and NH2: For 3KF size 5
- For 3KF with lateral operating mechanism (left or right), only door-coupling rotary operating mechanisms without "Test" can be used.
- The complete units with a direct operating mechanism are not suitable for conversion to door-coupling rotary operating mechanisms; the basic units are to be used for this purpose.

8

Quick selection guide, page 8/110

© Siemens 2025

	Lateral operating mechanism, left		Lateral operating mechanism, right	
4P	3P	4P	3P	4P
				
3KF1403-0MB11	3KF1303-4LB11	3KF1403-4LB11	3KF1303-4RB11	3KF1403-4RB11
3KF1406-0MB11	3KF1306-4LB11	3KF1406-4LB11	3KF1306-4RB11	3KF1406-4RB11
3KF1408-0MB11	3KF1308-4LB11	3KF1408-4LB11	3KF1308-4RB11	3KF1408-4RB11
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
3KF2412-0MF11	3KF2312-4LF11	3KF2412-4LF11	3KF2312-4RF11	3KF2412-4RF11
3KF2416-0MF11	3KF2316-4LF11	3KF2416-4LF11	3KF2316-4RF11	3KF2416-4RF11
3KF3425-0MF11	3KF3325-4LF11	3KF3425-4LF11	3KF3325-4RF11	3KF3425-4RF11
3KF4440-0MF11	3KF4340-4LF11	3KF4440-4LF11	3KF4340-4RF11	3KF4440-4RF11
3KF5463-0MF11	3KF5363-4LF11	3KF5463-4LF11	3KF5363-4RF11	3KF5463-4RF11
3KF5480-0MF11	3KF5380-4LF11	3KF5480-4LF11	3KF5380-4RF11	3KF5480-4RF11

Quick selection guide, page 8/110

© Siemens 2025

3KF switch disconnectors with fuses

3KF SITOR switch disconnectors

		Basic units without handle	
		Front operating mechanism Left	Front operating mechanism Center
Number of poles		3P	3P
			
Size	**Uninterrupted current I_u**		
Box terminals			
1	32 A	3KF1303-0LB51	–
	63 A	3KF1306-0LB51	–
	80 A	3KF1308-0LB51	–
Flat terminals			
2	125 A	–	3KF2312-0MF51
	160 A	–	3KF2316-0MF51
3	250 A	–	3KF3325-0MF51
4	400 A	–	3KF4340-0MF51
5	630 A	–	3KF5363-0MF51
	800 A	–	3KF5380-0MF51

Note:
- Use of standard LV HRC fuses gG, gL, aM in 3KF SITOR is possible without restriction

Quick selection guide, page 8/110

© Siemens 2025

Accessories for 3KF LV HRC and 3KF SITOR switch disconnectors

Additional poles

Note:

- Additional poles (4th contact element, N or N/PE terminal) must always be mounted directly adjacent to the switch disconnector on the left or right. Accordingly, an auxiliary switch module must not be mounted between the basic unit and an additional pole on size 1.
- For installation, it is important to note that only a 3-pole 3KF switch disconnector may be retrofitted with an additional switching pole with contact system (4th contact element).

4th contact element (switching pole) for 3KF LV HRC

Connection	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
Box terminals	3KF9105-2AA00	■				
Flat terminals at rear	3KF9105-1AA00	■				
	3KF9205-1AA00		■			
Flat terminals	3KF9205-0AA00		■			
	3KF9305-0AA00			■		
	3KF9405-0AA00				■	
	3KF9505-0AA00					■

4th contact element (switching pole) for 3KF SITOR

Connection	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
Box terminals	3KF9105-2BA00	■				
Flat terminals	3KF9205-0BA00		■			
	3KF9305-0BA00			■		
	3KF9405-0BA00				■	
	3KF9505-0BA00					■

Neutral conductor terminals with removable jumper, for 3KF LV HRC and 3KF SITOR

Connection	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
Box terminals	3KF9106-2AA00	■				
Flat terminals at rear	3KF9106-1AA00	■				
	3KF9206-1AA00		■			
Flat terminals	3KF9206-0AA00		■			
	3KF9306-0AA00			■		
	3KF9406-0AA00				■	
	3KF9506-0AA00					■

N/PE terminals with permanent jumper, for 3KF LV HRC and 3KF SITOR

Connection	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
Box terminals	3KF9106-8AA00	■				
Flat terminals at rear	3KF9106-6AA00	■				
	3KF9206-6AA00		■			
Flat terminals	3KF9206-7AA00		■			
	3KF9306-7AA00			■		
	3KF9406-7AA00				■	
	3KF9506-7AA00					■

Operating mechanisms

Direct operating mechanisms, for 3KF LV HRC

Version	Color	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
Can be locked with up to 3 padlocks	Gray	3KF9101-1AA00	■				
		3KF9201-1AA00		■			
		3KF9301-1AA00			■		
		3KF9401-1AA00				■	
		3KF9501-1AA00					■
	Red/yellow	3KF9101-2AA00	■				
		3KF9201-2AA00		■			
		3KF9301-2AA00			■		
		3KF9401-2AA00				■	
		3KF9501-2AA00					■

System overview, page 8/114

© Siemens 2025

3KF switch disconnectors with fuses

Accessories for 3KF LV HRC and 3KF SITOR switch disconnectors

Operating mechanisms

Door-coupling rotary operating mechanisms, for 3KF LV HRC and 3KF SITOR

- **Scope of supply**:
  - Handle with masking plate
  - Coupling driver with tolerance compensation
  - Shaft 300 mm
- Can be locked with up to max. 3 padlocks

Inscription	Color	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
Test – O – I	Gray	8UD1171-2AF21	■				
		8UD1141-2AF21		■			
		8UD1141-3AF21			■		
		8UD1151-3AF21				■	
		8UD1161-4AF21					■
	Red/yellow	8UD1171-2AF25	■				
		8UD1141-2AF25		■			
		8UD1141-3AF25			■		
		8UD1151-3AF25				■	
		8UD1161-4AF25					■

Handles, for 3KF LV HRC and 3KF SITOR

- With masking plate
- Can be locked with up to max. 3 padlocks

Inscription	Lighting	Color	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
O – I	Without	Gray	8UD1771-2AD01	■				
			8UD1841-2AD01		■	■		
			8UD1851-3AD01				■	
			8UD1861-4AD01					■
		Red/yellow	8UD1771-2AD05	■				
			8UD1841-2AD05		■	■		
			8UD1851-3AD05				■	
			8UD1861-4AD05					■
	With	Gray	8UD1771-2CD01	■				
			8UD1841-2CD01		■	■		
			8UD1851-3CD01				■	
			8UD1861-4CD01					■
		Red/yellow	8UD1771-2CD05	■				
			8UD1841-2CD05		■	■		
			8UD1851-3CD05				■	
			8UD1861-4CD05					■
Test – O – I	Without	Gray	8UD1771-2AF01	■				
			8UD1841-2AF01		■	■		
			8UD1851-3AF01				■	
			8UD1861-4AF01					■
		Red/yellow	8UD1771-2AF05	■				
			8UD1841-2AF05		■	■		
			8UD1851-3AF05				■	
			8UD1861-4AF05					■
	With	Gray	8UD1771-2CF01	■				
			8UD1841-2CF01		■	■		
			8UD1851-3CF01				■	
			8UD1861-4CF01					■
		Red/yellow	8UD1771-2CF05	■				
			8UD1841-2CF05		■	■		
			8UD1851-3CF05				■	
			8UD1861-4CF05					■

8

System overview, page 8/114

© Siemens 2025

Operating mechanisms

			Size 1	Size 2	Size 3	Size 4	Size 5
Extension shaft, for 3KF LV HRC and 3KF SITOR							
	• A shaft jack is required for the 8UD1 handle when the 600 mm long shaft is used and for sizes 1 and 2						
	Length	**Article No.**					
	300 mm	8UC6032	■	■			
		8UC6033			■	■	
		8UC6034					■
	600 mm	8UC6082	■	■			
		8UC6083			■	■	
		8UC6084					■
Shaft jack for 8UD1 handle, for 3KF LV HRC and 3KF SITOR							
	Version	**Article No.**					
	For shaft 600 mm	8UD1900-0FA00	■	■			
Coupling drivers, for 3KF LV HRC and 3KF SITOR							
	Version	**Article No.**					
	With tolerance compensation	8UD1900-2GA00	■				
		8UD1900-6GA00		■			
		8UD1900-3GA00			■	■	
		8UD1900-4GA00					■
	Without tolerance compensation	8UD1900-2HA00	■				
		8UD1900-6HA00		■			
		8UD1900-3HA00			■	■	
		8UD1900-4HA00					■
Adapters for shafts, for 3KF LV HRC and 3KF SITOR							
	Shaft size	**Article No.**					
	8 × 8 mm	8UC6022	■	■			
	10 × 10 mm	8UC6023			■	■	
	12 × 12 mm	8UC6024					■

Further accessories and spare parts

			Size 1	Size 2	Size 3	Size 4	Size 5
Auxiliary switch modules, for 3KF LV HRC and 3KF SITOR							
	• Auxiliary switch modules are supplied without auxiliary switches • The 3KF9112-0AB00 mounting bracket is additionally required for mounting the auxiliary switch modules with the rear terminal • The 3KD9103-6 and 3KD9103-7 auxiliary switch modules and those with a leading NO contact can only be used with 3KF if they have the operating mechanism on the front or on the left						
	Type	**Article No.**					
	Standard version	3KD9103-5	■				
	With test function	3KD9103-6	■				
	With leading NO and test function	3KD9103-7	■				
Mounting brackets for auxiliary switch modules, for 3KF size 1 with rear terminals							
	• For mounting auxiliary switch modules on 3KF switch disconnectors with rear terminal						
		Article No.					
		3KF9112-0AB00	■				

8

System overview, page 8/114

© Siemens 2025

3KF switch disconnectors with fuses

Accessories for 3KF LV HRC and 3KF SITOR switch disconnectors

Further accessories and spare parts

Auxiliary switches, for 3KF LV HRC and 3KF SITOR

- Auxiliary switches for sizes 2 to 5 have a screw terminal and are mounted on the 3KF operating mechanism module. Auxiliary switches with spring-type terminals from the 3SU1 program can also be used.
- All auxiliary switches for sizes 2 to 5 can be used as leading auxiliary switches, depending on the mounting position of the auxiliary switch (see operating instructions).

Type	Contacts	Contact surface	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
With connecting cables	1 CO	Standard	3KD9103-1	■				
		Solid-state compatible	3KD9103-3	■				
Without connecting cables	1 CO	Standard	3KD9103-2	■				
		Solid-state compatible	3KD9103-4	■				
	1 NO	Standard	3SU1400-1AA10-1BA0		■	■	■	■
		Gold-plated	3SU1400-1AA10-1LA0		■	■	■	■
	1 NC	Standard	3SU1400-1AA10-1CA0		■	■	■	■
		Gold-plated	3SU1400-1AA10-1MA0		■	■	■	■
	1 NO + 1 NC	Standard	3SU1400-1AA10-1FA0		■	■	■	■
		Gold-plated	3SU1400-1AA10-1QA0		■	■	■	■
	2 NO	Standard	3SU1400-1AA10-1DA0		■	■	■	■
		Gold-plated	3SU1400-1AA10-1NA0		■	■	■	■
	2 NC	Standard	3SU1400-1AA10-1EA0		■	■	■	■
		Gold-plated	3SU1400-1AA10-1PA0		■	■	■	■

Electronic fuse monitoring, for 3KF LV HRC and 3KF SITOR

Version	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
For remote display of tripped fuses	3KF9010-1AA00	■	■	■	■	■

Phase barriers, for 3KF LV HRC and 3KF SITOR

Version	Scope of supply	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
For 3-pole devices	6 units	3KD9308-6		■			
		3KD9408-6			■	■	
		3KD9508-6					■
For 4-pole devices	8 units	3KD9308-8		■			
		3KD9408-8			■	■	
		3KD9508-8					■

Terminal covers, for 3KF LV HRC

Version	Scope of supply	Type	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
For 3-pole devices	6 units	Standard version	3KF9204-6		■			
			3KF9304-6			■		
			3KF9404-6				■	
			3KD9504-6					■
		Short version	3KF9204-7		■			
			3KF9304-7			■		
			3KF9404-7				■	
For 4-pole devices	8 units	Standard version	3KF9204-8		■			
			3KF9304-8			■		
			3KF9404-8				■	
			3KD9504-8					■
		Short version	3KF9204-5		■			
			3KF9304-5			■		
			3KF9404-5				■	

Spare part for terminal covers (4th contact element), for 3KF LV HRC

Scope of supply	Type	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
1 unit	Standard version	3KD9504-1					■
	Short version	3KF9204-1		■			
		3KF9304-1			■		
		3KF9404-1				■	
6 units	Standard version	3KF9204-6		■			
		3KF9304-6			■		
		3KF9404-6				■	

Spare part for terminal covers (N and N/PE terminal), for 3KF LV HRC

Scope of supply	Type	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
1 unit	Standard version	3KD9504-1					■
	Short version	3KD9304-1		■			
		3KD9404-1			■	■	
8 units	Standard version	3KD9304-6		■			
		3KD9404-6			■	■	

System overview, page 8/114

© Siemens 2025

Further accessories and spare parts

Blocking pin test function, for 3KF LV HRC and 3KF SITOR



- Enables permanent deactivation of the test function for auxiliary switches
- It is installed in the operating mechanism module of the 3KF switch disconnector

Scope of supply	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
10 units	3KF9112-1AA00	■				
	3KF9412-1AA00		■		■	
	3KF9512-1AA00					■

Mounting brackets, for 3KF LV HRC

- The 3KF9112-0AB00 mounting bracket is needed if an auxiliary switch module is mounted on a 3KF1 with rear terminals

Connection	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
Box terminals, flat terminals	3KF9112-0AA00	■				
	3KF9212-0AA00		■			
Flat terminals at rear	3KF9212-0AB00	■	■			

Mounting brackets, for 3KF SITOR



Connection	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
Box terminals, flat terminals	3KF9112-0AA10	■				
	3KF9212-0AA10		■			

Mounting brackets, for 3KF LV HRC and 3KF SITOR

Connection	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
Flat terminals	3KF9412-0AA00			■	■	
	3KF9512-0AA00					■

Slides, for 3KF LV HRC and 3KF SITOR

Version	Scope of supply	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
For mounting on DIN rail	5 units	3KF9112-0BA00	■				

Fuse covers, for 3KF LV HRC

Connection	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
Box terminals, flat terminals	3KF9112-0CA00	■				
	3KF9212-0CA00		■			
	3KF9312-0CA00			■		
	3KF9412-0CA00				■	
	3KF9512-0CA00					■
Flat terminals at rear	3KF9212-0CB00		■			

LV HRC isolating blades, for 3KF LV HRC and 3KF SITOR

Version	Article No.	NH 000	NH 00	NH 1	NH 2	NH 3
With insulated grip lugs	3NG1002	■	■			
	3NG1202			■		
	3NG1302				■	
	3NG1402					■

System overview, page 8/114

© Siemens 2025

3NJ63 switch disconnectors with fuses

System overview

Fuse links

For LV HRC fuses

Accessories

Connection terminals and covers

Auxiliary switches

Current transformers

Ammeters

Guide rails

Note:
You will find a detailed range of accessories with the basic units.

© Siemens 2025

General information

3NA COM LV HRC fuse links

The new the 3NA COM LV HRC fuse links with measuring and communication function make your products communication-capable.

See Fuse Systems, page 7/52

Suitable fuses

You will find further information under: sie.ag/2UlrAvy

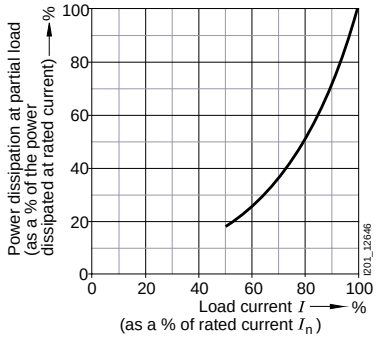

The 3NJ63 switch disconnector with fuses is suitable for all fuses with LV HRC design in sizes 000 to 3 that comply with IEC 60269-2, including fuses for cable and line protection.

System overview, page 8/130

© Siemens 2025

3NJ63 switch disconnectors with fuses

Configuration

For a complete and valid configuration of your switch disconnectors with fuses, please use our online configurator at www.siemens.com/lowvoltage/3nj63-configurator

	6	7	8	9	10	11	12	13	14	15	16
3NJ63			–	A		0		–			

Size and type of fuse	LV HRC fuse	00	160 A	0
		1	250 A	1
		2	400 A	2
		3	630 A	3
Number of poles	2-pole (DC-23B) [1]			2
	3-pole (AC-23A) [2]			3
	4-pole (AC-22B)			4
Switch operation	Manually operated			1
	Motorized operating mechanism			2
	Manually operated			3
	Motorized operating mechanism			4
Electronic fuse monitoring	Without			A
	≤ 690 V AC	Operate voltage < 20 V	EFM10	B
	≤ 690 V AC with line monitoring	Operate voltage < 13 V	EFM20	C
	≤ 440 V DC	Operate voltage < 20 V	EFM25	E
Auxiliary switches	Without			0
	1 NC			1
	1 NO			2
	1 NO + 1 NC			3

[1] 2-pole 500 V DC-21B
[2] 3-pole 800 V NH1 AC-22B

8

Quick selection guide, page 8/110

© Siemens 2025

3NJ63	6	7	8	9	10	11	12	13	14	15	16
			–					–			

Type of ammeter	Without							0			
	Moving iron							1			
	Bi-metal							2			
Wiring version of the current transformer	Without								A		
	1 current transformer to multi-function plug								B		
	3 current transformers to multi-function plug								C		
	1 current transformer to 1 ammeter								D		
	1 current transformer to 1 ammeter and multi-function plug								E		
	3 current transformers to 1 ammeter and multi-function plug								F		
Current transformer primary current	Without									A	
	50 A									B	
	100 A									D	
	150 A									E	
	200 A									F	
	250 A									G	
	300 A									H	
	400 A									J	
	500 A									K	
	600 A									L	
Current transformer secondary current	Without	Without accuracy class									0
	1 A	Accuracy class 1									1
	1 A	Accuracy class 0.5									2
	1 A	Accuracy class 0.5 calibrated									3
	5 A	Accuracy class 1									4
	5 A	Accuracy class 0.5									5
	5 A	Accuracy class 0.5 calibrated									6

Quick selection guide, page 8/110

© Siemens 2025

3NJ63 switch disconnectors with fuses

Accessories

				NH00	NH1	NH2	NH3
Terminals							
	Type		**Article No.**				
	For 2/3-pole devices		3NJ6923-1BA00	■			
			3NJ6933-1BA00		■		
			3NJ6943-1CA00			■	■
	For 4-pole devices		3NJ6924-1BA00	■			
			3NJ6934-1BA00		■		
			3NJ6944-1CA00			■	■
Terminal covers							
	Type	**Version**	**Article No.**				
	For 2/3-pole devices	–	3NJ6923-1DA00	■			
			3NJ6933-1DA01		■		
			3NJ6943-1DA00			■	■
		As an internal terminal cover	3NJ6933-1DB00		■		
	For 4-pole devices		3NJ6904-1DA00	■	■	■	■
Contact extensions							
	Number of poles		**Article No.**				
	3-pole		3NJ6923-1EB00	■			
			3NJ6933-1EB00		■		
			3NJ6943-1EB00			■	■
	4-pole		3NJ6924-1EB00	■			
			3NJ6934-1EB00		■		
			3NJ6944-1EB00			■	■
Electronic fuse monitoring and line monitoring devices							
	Type	**Version**	**Article No.**				
	EFM 10	With line monitoring for AC networks	3NJ6920-3FB00	■			
			3NJ6930-3FB00		■		
			3NJ6940-3FB00			■	■
	EFM 20	With line monitoring for AC networks	3NJ6920-3FC00	■			
			3NJ6930-3FC00		■		
			3NJ6940-3FC00			■	■
	EFM 25	With line monitoring for DC networks	3NJ6920-3FE00	■			
			3NJ6930-3FE00		■		
			3NJ6940-3FE00			■	■
Auxiliary switches							
	Contacts	**Version**	**Article No.**				
	1 NO	With cover	3NJ6920-2BB00	■			
			3NJ6930-2BB00		■		
			3NJ6940-2BB00			■	■
		Without cover	3NJ6900-2BC00	■	■	■	■
	1 NC	With cover	3NJ6920-2CB00	■			
			3NJ6930-2CB00		■		
			3NJ6940-2CB00			■	■
		Without cover	3NJ6900-2CC00	■	■	■	■

System overview, page 8/130

© Siemens 2025

Current transformers for main devices and contact extensions

Rated current I_{pr}	Class	Apparent power consumption	Feed-through opening diameter	Article No.	NH00	NH1	NH2	NH3
50 A/1 A	1	1 VA	Ø 21 mm	3NJ6920-3BB11	■	■		
50 A/5 A	1	1 VA	Ø 21 mm	3NJ6920-3BB21	■	■		
100 A/1 A	1	2.5 VA	Ø 21 mm	3NJ6920-3BD11	■	■		
	0.5	1.5 VA	Ø 21 mm	3NJ6920-3BD12	■	■		
	0.5 calibrated	1.5 VA	Ø 14 mm	3NJ6920-3BD13	■			
			Ø 15.2 mm	3NJ6930-3BD13		■		
100 A/5 A	1	2.5 VA	Ø 21 mm	3NJ6920-3BD21	■	■		
	0.5	1.5 VA	Ø 21 mm	3NJ6920-3BD22	■	■		
	0.5 calibrated	1.5 VA	Ø 14 mm	3NJ6920-3BD23	■			
			Ø 15.2 mm	3NJ6930-3BD23		■		
150 A/1 A	1	2.5 VA	Ø 21 mm	3NJ6920-3BE11	■	■		
	0.5	1.5 VA	Ø 21 mm	3NJ6920-3BE12	■	■		
	0.5 calibrated	1.5 VA	Ø 14 mm	3NJ6920-3BE13	■			
		2.5 VA	Ø 15.2 mm	3NJ6930-3BE13		■		
150 A/5 A	1	2.5 VA	Ø 21 mm	3NJ6920-3BE21	■	■		
	0.5	1.5 VA	Ø 21 mm	3NJ6920-3BE22	■	■		
	0.5 calibrated	1.5 VA	Ø 14 mm	3NJ6920-3BE23	■			
		2.5 VA	Ø 15.2 mm	3NJ6930-3BE23		■		
200 A/1 A	1	2.5 VA	Ø 21 mm	3NJ6930-3BF11		■		
	0.5	3.75 VA	Ø 21 mm	3NJ6930-3BF12		■		
	0.5 calibrated	2.5 VA	Ø 15.2 mm	3NJ6930-3BF13		■		
200 A/5 A	1	2.5 VA	Ø 21 mm	3NJ6930-3BF21		■		
	0.5	5 VA	Ø 21 mm	3NJ6930-3BF22		■		
	0.5 calibrated	2.5 VA	Ø 15.2 mm	3NJ6930-3BF23		■		
250 A/1 A	1	5 VA	Ø 21 mm	3NJ6930-3BG11		■		
	0.5	5 VA	Ø 21 mm	3NJ6930-3BG12		■		
	0.5 calibrated	2.5 VA	Ø 15.2 mm	3NJ6930-3BG13		■		
250 A/5 A	1	2.5 VA	Ø 21 mm	3NJ6930-3BG21		■		
	0.5	2.5 VA	Ø 21 mm	3NJ6930-3BG22		■		
	0.5 calibrated	2.5 VA	Ø 15.2 mm	3NJ6930-3BG23		■		
300 A/1 A	1	5 VA	Ø 32 mm	3NJ6940-3BH11			■	■
	0.5	5 VA	Ø 32 mm	3NJ6940-3BH12			■	■
	0.5 calibrated	5 VA	Ø 32 mm	3NJ6940-3BH13			■	■
300 A/5 A	1	5 VA	Ø 32 mm	3NJ6940-3BH21			■	■
	0.5	5 VA	Ø 32 mm	3NJ6940-3BH22			■	■
	0.5 calibrated	5 VA	Ø 32 mm	3NJ6940-3BH23			■	■
400 A/1 A	1	5 VA	Ø 32 mm	3NJ6940-3BJ11			■	■
	0.5	5 VA	Ø 32 mm	3NJ6940-3BJ12			■	■
	0.5 calibrated	5 VA	Ø 32 mm	3NJ6940-3BJ13			■	■
400 A/5 A	1	5 VA	Ø 32 mm	3NJ6940-3BJ21			■	■
	0.5	5 VA	Ø 32 mm	3NJ6940-3BJ22			■	■
	0.5 calibrated	5 VA	Ø 32 mm	3NJ6940-3BJ23			■	■
500 A/1 A	1	5 VA	Ø 32 mm	3NJ6940-3BK11			■	■
	0.5	5 VA	Ø 32 mm	3NJ6940-3BK12			■	■
	0.5 calibrated	5 VA	Ø 32 mm	3NJ6940-3BK13			■	■
500 A/5 A	1	5 VA	Ø 32 mm	3NJ6940-3BK21			■	■
	0.5	5 VA	Ø 32 mm	3NJ6940-3BK22			■	■
	0.5 calibrated	5 VA	Ø 32 mm	3NJ6940-3BK23			■	■
600 A/1 A	1	5 VA	Ø 32 mm	3NJ6940-3BL11			■	■
	0.5	5 VA	Ø 32 mm	3NJ6940-3BL12			■	■
	0.5 calibrated	5 VA	Ø 32 mm	3NJ6940-3BL13			■	■
600 A/5 A	1	5 VA	Ø 32 mm	3NJ6940-3BL21			■	■
	0.5	5 VA	Ø 32 mm	3NJ6940-3BL22			■	■
	0.5 calibrated	5 VA	Ø 32 mm	3NJ6940-3BL23			■	■

System overview, page 8/130

© Siemens 2025

3NJ63 switch disconnectors with fuses

Accessories

					NH00	NH1	NH2	NH3
Current transformer busbars								
	Type	**Version**		**Article No.**				
	For current transformers with feed-through opening diameter 21 mm	For 1 current transformer		3NJ6920-3DB00	■			
				3NJ6930-3DB00		■		
		For 3 current transformers		3NJ6920-3DC00	■			
				3NJ6930-3DC00		■		
		For 4 current transformers		3NJ6920-3DD00	■			
				3NJ6930-3DD00		■		
	For current transformers with feed-through opening diameter 14 mm	For 1 current transformer		3NJ6920-3DE00	■			
				3NJ6930-3DE00		■		
		For 3 current transformers		3NJ6920-3DF00	■			
				3NJ6930-3DF00		■		
		For 4 current transformers		3NJ6920-3DG00	■			
Holders								
	Version			**Article No.**				
	For ammeters			3NJ6900-4GA00	■	■	■	■
Amperemeter								
	Type	**Version**	**Rated current I_e**	**Article No.**				
	Moving-iron measuring instruments	For measurements on transformer x/1 A with double overload	50 A/1 A	3NJ6900-4HB11	■	■		
			100 A/1 A	3NJ6900-4HD11	■	■		
			150 A/1 A	3NJ6900-4HE11	■	■		
			200 A/1 A	3NJ6900-4HF11		■		
			250 A/1 A	3NJ6900-4HG11		■		
			300 A/1 A	3NJ6900-4HH11			■	■
			400 A/1 A	3NJ6900-4HJ11			■	■
			500 A/1 A	3NJ6900-4HK11			■	■
			600 A/1 A	3NJ6900-4HL11			■	■
		For measurements on transformer x/5 A with double overload	50 A/5 A	3NJ6900-4HB21	■	■		
			100 A/5 A	3NJ6900-4HD21	■	■		
			150 A/5 A	3NJ6900-4HE21	■	■		
			200 A/5 A	3NJ6900-4HF21		■		
			250 A/5 A	3NJ6900-4HG21		■		
			300 A/5 A	3NJ6900-4HH21			■	■
			400 A/5 A	3NJ6900-4HJ21			■	■
			500 A/5 A	3NJ6900-4HK21			■	■
			600 A/5 A	3NJ6900-4HL21			■	■
	Bi-metal measuring instruments	For measurements on transformer x/1 A with 1.2-times overload	50 A/1 A	3NJ6900-4HB12	■	■		
			100 A/1 A	3NJ6900-4HD12	■	■		
			150 A/1 A	3NJ6900-4HE12	■	■		
			200 A/1 A	3NJ6900-4HF12		■		
			250 A/1 A	3NJ6900-4HG12		■		
			300 A/1 A	3NJ6900-4HH12			■	■
			400 A/1 A	3NJ6900-4HJ12			■	■
			500 A/1 A	3NJ6900-4HK12			■	■
			600 A/1 A	3NJ6900-4HL12			■	■
		For measurements on transformer x/5 A with 1.2-times overload	50 A/5 A	3NJ6900-4HB22	■	■		
			100 A/5 A	3NJ6900-4HD22	■	■		
			150 A/5 A	3NJ6900-4HE22	■	■		
			200 A/5 A	3NJ6900-4HF22		■		
			250 A/5 A	3NJ6900-4HG22		■		
			300 A/5 A	3NJ6900-4HH22			■	■
			400 A/5 A	3NJ6900-4HJ22			■	■
			500 A/5 A	3NJ6900-4HK22			■	■
			600 A/5 A	3NJ6900-4HL22			■	■

System overview, page 8/130

© Siemens 2025

				NH00	NH1	NH2	NH3
Multi-function plugs							
	Version	**Dimensions**	**Article No.**				
	With fixing screws	6 × 2.5 mm²	3NJ6920-3EB01	■	■		
		8 × 2.5 mm²	3NJ6920-3ED01	■	■		
			3NJ6940-3EC00			■	■
	Without fixing screws	8 × 2.5 mm²	3NJ6940-3ED00			■	■
		10 × 1.5 mm² and 8 × 2.5 mm²	3NJ6920-3EE01	■	■		
		12 × 1.5 mm² and 8 × 2.5 mm²	3NJ6940-3EF00			■	■
Front panels							
	Use	**Version**	**Article No.**				
	3NJ6303-.....	With LV HRC fuse	3NJ6923-4BB00	■			
	3NJ6313-.....	With LV HRC fuse	3NJ6933-4BB00		■		
	3NJ6323-.....	With LV HRC fuse	3NJ6943-4BB00			■	■
	3NJ6333-.....	With LV HRC fuse	3NJ6953-4BB00			■	■
Busbar covers							
			**Article No.**				
			3NJ6916-4EA00	■	■	■	■
Blanking covers							
			Article No.				
			3NJ6900-4CB00	■	■	■	■
Connection modules							
			Article No.				
			3NJ6915-3BA00	■	■	■	■
Guide rails							
	Overall depth		**Article No.**				
	200 mm		3NJ6900-4FB00	■	■	■	■
	400 mm		3NJ6900-4FC00	■	■	■	■
LV HRC fuse puller tongs							
	Version		**Article No.**				
	For NH00		8PQ9400-1AA50	■			
	For NH1, NH2, NH3		8PQ9400-1AA51		■	■	■
Locking devices for padlocks							
			Article No.				
			3NJ6900-4LL	■	■	■	■

8

System overview, page 8/130

© Siemens 2025

5SG switch disconnectors with fuses

System overview

MINIZED switch disconnectors with fuses

1P

3P

NEOZED bus-mounting switch disconnectors

3P

3P, with terminals

Accessories

Auxiliary switches

Lateral modules

Reducers

Note:
You will find a detailed range of accessories with the basic units.

© Siemens 2025

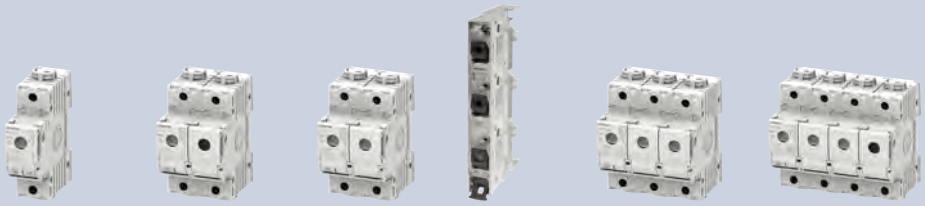

Number of poles	1P	1P+N	2P	3P		3P+N
						

Fuse size	Rated current I_n	Mounting width 1.5 MW	Mounting width 3 MW	Mounting width 3 MW	Mounting width 1.5 MW	Mounting width 4.5 MW	Mounting width 6 MW
MINIZED switch disconnectors with fuses [1] [3]							
D02	63 A	5SG7113	5SG7153	5SG7123	–	5SG7133	5SG7163
MINIZED switch disconnectors with fuses – version for Austria only [2] [3]							
D02	25 A	–	–	–	–	5SG7133-8BA25	–
	35 A	–	–	–	–	5SG7133-8BA35	–
	50 A	–	–	–	–	5SG7133-8BA50	–
NEOZED bus-mounting switch disconnectors							
D02	63 A	–	–	–	5SG7230 [4]	–	–
NEOZED bus-mounting switch disconnectors, without LED signal detector							
D02	63 A	–	–	–	5SG7234-1 [5]	–	–
NEOZED bus-mounting switch disconnectors, with LED signal detector							
D02	63 A	–	–	–	5SG7234-2 [5]	–	–

[1] Using withdrawable design with touch protection according to BGV A3, adapter sleeves not included in the scope of delivery
[2] With permanently fitted adapter sleeves, incl. fuse link
[3] Do not use fuse links with nickel-plated contact caps
[4] In the case of permanent load over 35 A, we recommend the use of 5SH5526 lateral modules. Please observe EN 60439-1, Table 1
[5] In the case of permanent load over 35 A, we recommend the use of 5SH5533 lateral modules. Please observe EN 60439-1, Table 1

Note:
NEOZED adapter sleeves are required for these devices

Accessories

Auxiliary switches

	Version	Type	Mounting width	Contacts	Article No.
	For MINIZED D02 switch disconnectors	Standard	0.5 MW	1 NO + 1 NC	5ST3010
				2 NO	5ST3011
				2 NC	5ST3012
		With test button	0.5 MW	1 NO + 1 NC	5ST3010-2
				2 NO	5ST3011-2
				2 NC	5ST3012-2
	For NEOZED bus-mounting switch disconnectors	Standard	0.5 MW	1 CO	5SH5525

Lateral modules

	Version	Type	Mounting width	Article No.
	For NEOZED bus-mounting switch disconnectors	5SG7230	0.5 MW	5SH5526
		5SG7234-1 and -2	0.5 MW	5SH5533

Reducers

	Version	Article No.
	For D01 fuse links	5SH5527

Quick selection guide, page 8/110

© Siemens 2025

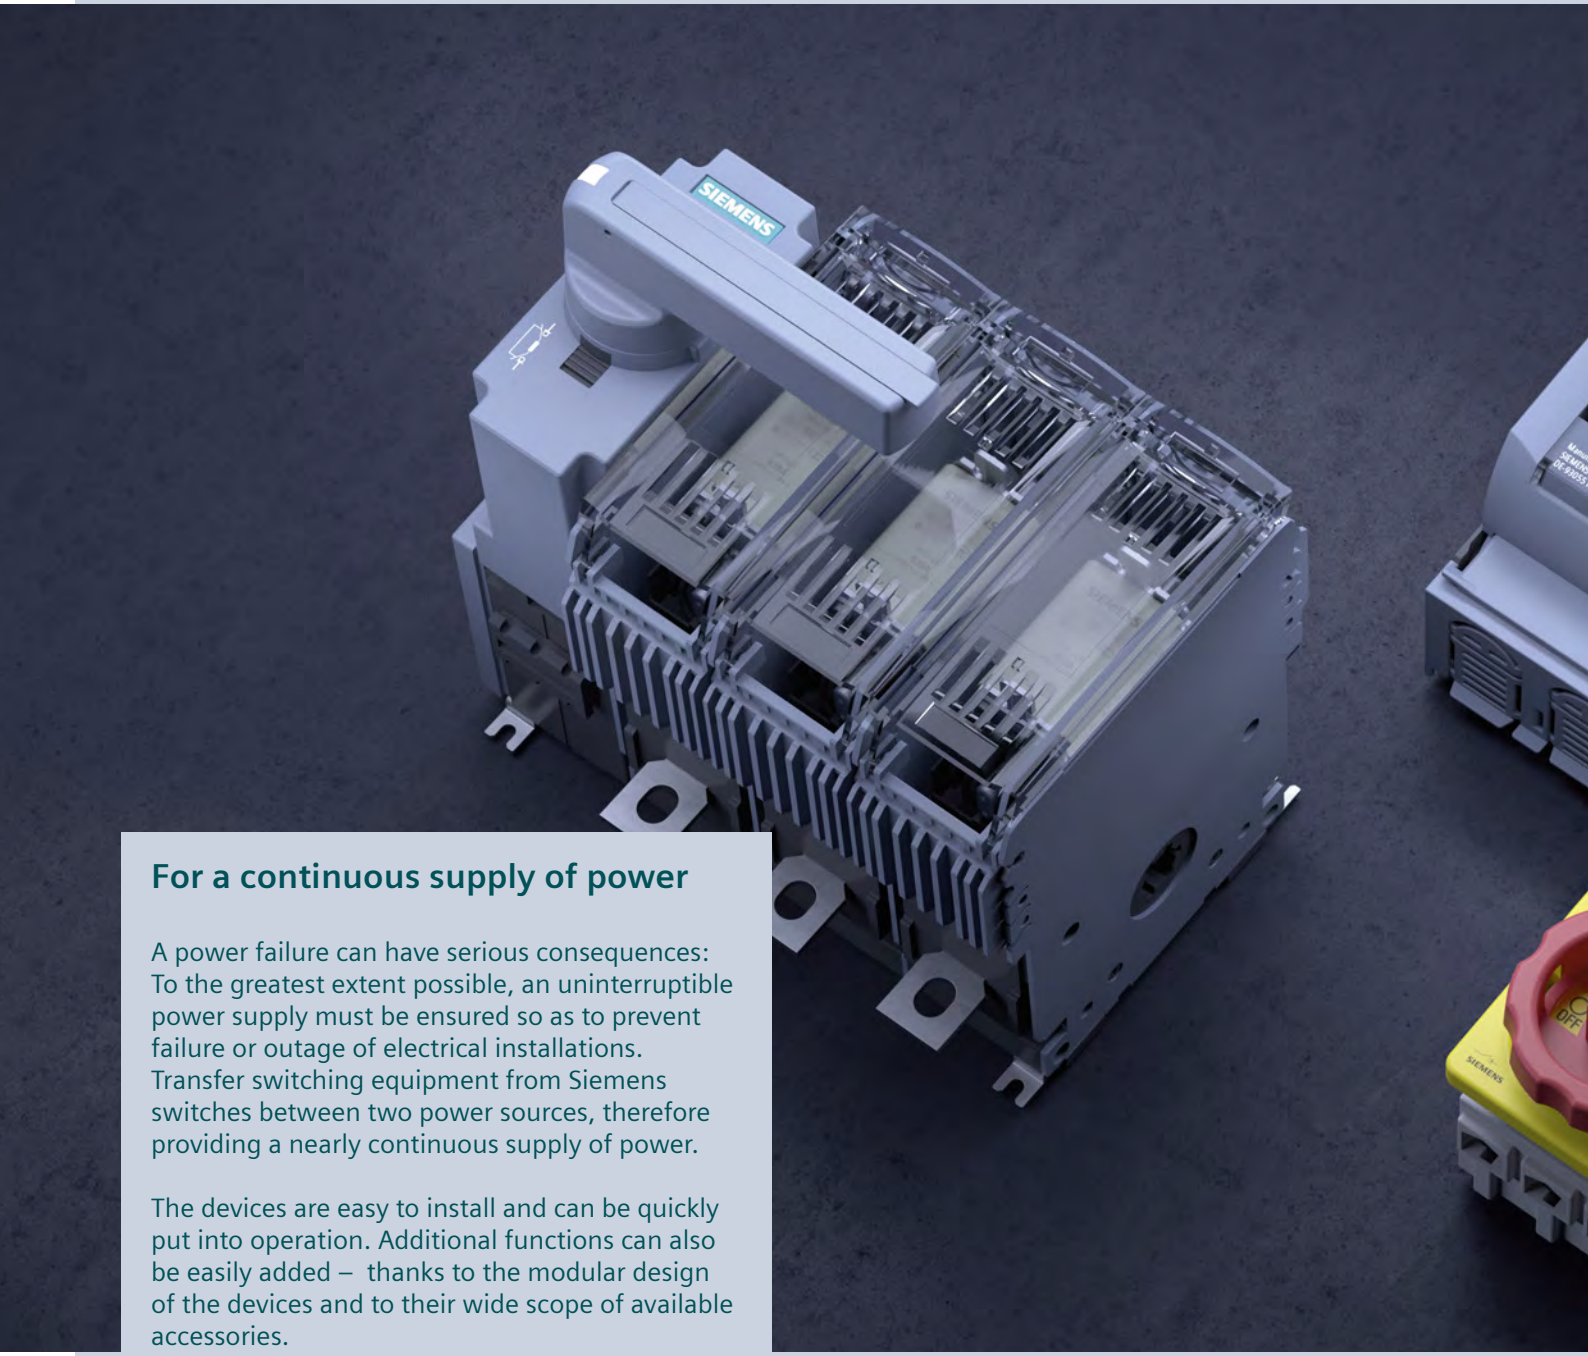

For a continuous supply of power

A power failure can have serious consequences: To the greatest extent possible, an uninterruptible power supply must be ensured so as to prevent failure or outage of electrical installations. Transfer switching equipment from Siemens switches between two power sources, therefore providing a nearly continuous supply of power.

The devices are easy to install and can be quickly put into operation. Additional functions can also be easily added – thanks to the modular design of the devices and to their wide scope of available accessories.

Convenient ordering processes and fast delivery optimize stock-keeping and save you time and money. You can also use our CAx data for automated and streamlined planning and configuration.

© Siemens 2025

Transfer Switching Equipment and Load Transfer Switches

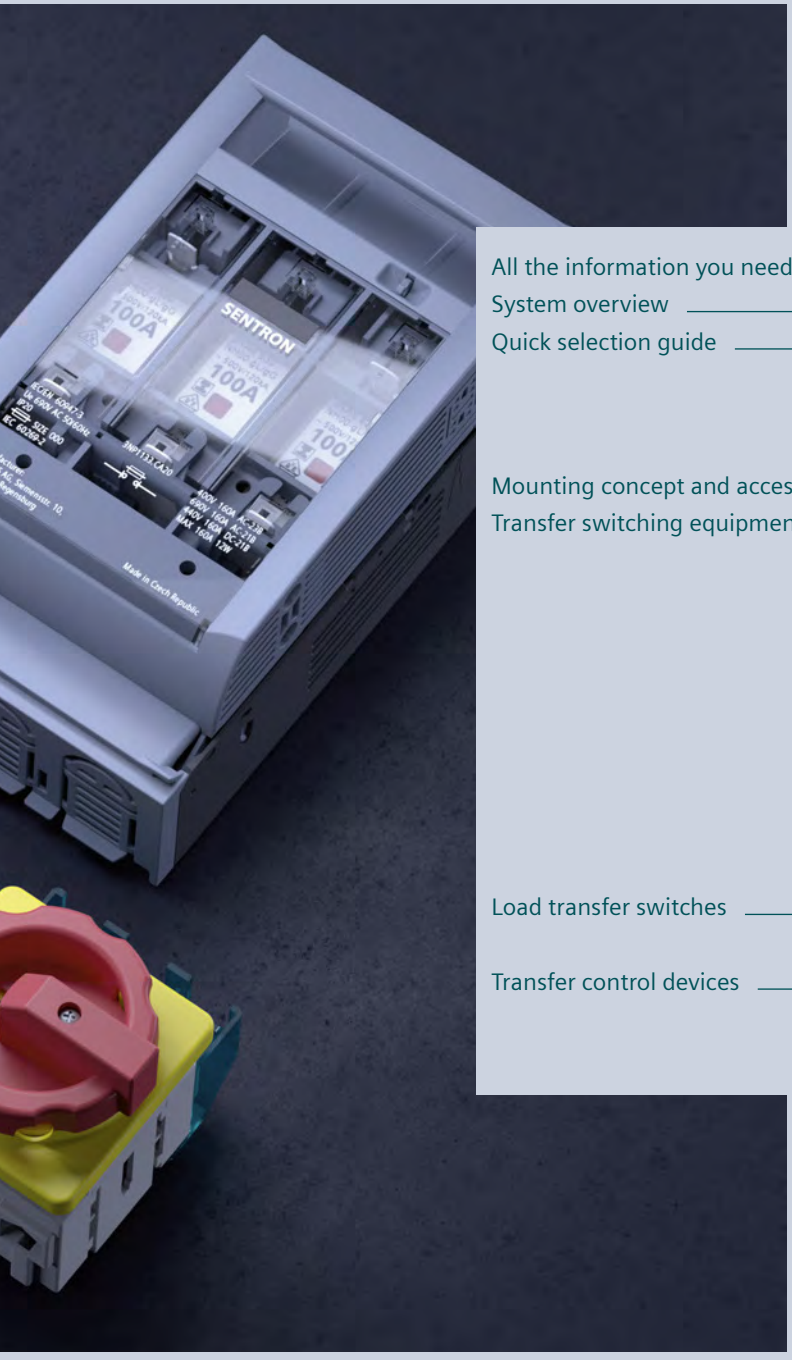

All the information you need 9/2
System overview 9/4
Quick selection guide 9/6
Applications 9/6
Transfer switching equipment and load transfer switches 9/8
Mounting concept and accessories 9/12
Transfer switching equipment 9/16
3KC3 and 3KC4 remote transfer switching equipment (RTSE) 9/16
3KC6 and 3KC8 automatic transfer switching equipment (ATSE) 9/17
Accessories for remote transfer switching equipment (RTSE) and automatic transfer switching equipment (ATSE) 9/18
3KC0 manual transfer switching equipment (MTSE) 9/24
Accessories for manual transfer switching equipment (MTSE) 9/26
Load transfer switches 9/30
3LD2 load transfer switches 9/30
Transfer control devices 9/32
3KC ATC transfer control devices 9/32
Accessories for transfer control devices 9/34

© Siemens 2025

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about transfer switching equipment and load transfer switches, please visit our website **www.siemens.com/switching-devices**

Our white paper provides you with a good overview of the transfer switching equipment **sie.ag/2XBonIi**

Your product in detail

The relevant tender specifications can be found at **www.siemens.com/tenderspecifications**

Use our conversion tool for quick and easy conversion to Siemens products **www.siemens.com/conversion-tool**

Everything you need for your order

Refer to SiePortal to find an overview of your products (product catalog)

- Transfer switching equipment and load transfer switches **sie.ag/2mmMw6g**

Direct forwarding to the individual products in SiePortal by clicking on the article number in the catalog or entering this web address incl. article number **www.siemens.com/product_catalog_SIEP?Article No.**

You will find order support in SiePortal under **www.siemens.com/lowvoltage/product-support**

- Order Support
  - 3KC automatic transfer switching equipment (ATSE) – End-to-end safety for user and systems **(109755620)**
  - 3KC remotely operated transfer switching equipment (RTSE) – End-to-end safety for user and systems **(109755627)**
  - 3KC manual transfer switching equipment (MTSE) – End-to-end safety for user and systems **(109750227)**

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services.
You can find your local contacts at
www.siemens.com/lowvoltage/components/contact

You will find further information on services at
www.siemens.com/service-offers

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at
www.siemens.com/support-request

© Siemens 2025

… can be found in our online services

Commissioning + operation

Your product in detail

The SiePortal platform (knowledge base) provides detailed technical information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Certificates

Online Support app available for download from the **App Store** and **Play Store**
You will find further information at
www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)

- SiePortal (product catalog)
  www.siemens.com/lowvoltage/product-catalog
- Image database
  www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAx Download Manager at
www.siemens.com/cax

Manuals

Manuals can be found in SiePortal at
www.siemens.com/lowvoltage/manuals

- Configuration Manual
  - Transfer switching equipment and load transfer switches **(109769745)**
- Equipment Manual
  - 3KC3 and 3KC6 transfer switching equipment **(109754954)**
  - 3KC0 manual transfer switching equipment **(109763232)**
  - 3KC4 and 3KC8 transfer switching equipment **(109738725)**
  - 3KC ATC3100 transfer control device **(100341671)**
  - 3KC ATC6300 transfer control device **(109755149)**
  - 3KC ATC6500 transfer control device **(109758018)**

Technical overview – Transfer switching equipment and load transfer switches

The fast way to get you to our online services

This page provides you with comprehensive information and links on transfer switching equipment and load transfer switches

www.siemens.com/lowvoltage/product-support (109770919)

© Siemens 2025

System overview

Remote (RTSE) and automatic (ATSE) transfer switching equipment

3KC3 (RTSE), 4-pole


3KC4 (RTSE), 3 and 4-pole

3KC6 (ATSE), 4-pole

3KC8 (ATSE), 3 and 4-pole

Accessories, RTSE and ATSE


Bridging bars

Auxiliary switches

Terminal covers

Autotransformers

Dual power supply


Power supply and voltage sensing cables

Manual transfer switching equipment (MTSE)

3KC0 (MTSE), 3 and 4-pole

Accessories, MTSE

Bridging bars

4th contact element

Auxiliary switches

Direct operating mechanisms

Door-coupling rotary operating mechanisms

Phase barriers

Terminal covers

Note:
You will find a detailed range of accessories in the Accessories section.

© Siemens 2025

Load transfer switches

Front mounting 3LD2

Floor mounting 3LD2

Molded-plastic enclosures 3LD2

Accessories

4th contact element

N/PE terminal

Auxiliary switches

Terminal covers

Transfer control devices

3KC ATC3100

3KC ATC6300

3KC ATC6500

Accessories

Expansion modules

Front interface

Protective seal

Note:
You will find a detailed range of accessories in the Accessories section.

9

© Siemens 2025

Applications

Switching with switch disconnectors (without protection function)

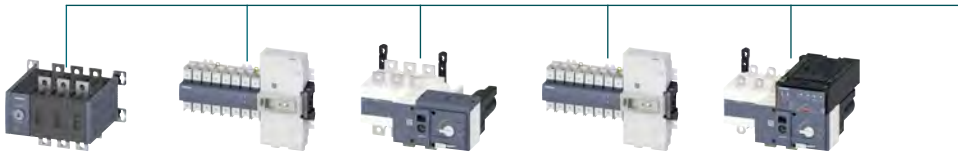

3KC0 3KC3 3KC4 3KC6 3KC8

			3KC0	3KC3	3KC4	3KC6	3KC8
Transfer types	Load transfer	AC	■	■	■	–	–
		DC	–	–	■	–	–
	Transfer control	AC	■	■	■	■	■
Method of operation	Manual (MTSE)		■	■	■	■	■
	Remote (RTSE)		–	■	■	–	■
	Automatic (ATSE)		–	With ATC6300	With ATC6300	■	■
Transfer control	Network/network	AC	■	■	■	■	■
	Network/generator	AC	■	■	■	–	■
	Generator/generator	AC	■	■	■	–	–
Rated operating current			16 ... 1600 A	40 ... 160 A	250 ... 3200 A	40 ... 160 A	250 ... 3200 A
Number of poles			3 and 4	4	3 and 4	4	3 and 4
Communication			–	With ATC6300	With ATC6300	–	–
Automatic load shedding			–	–	–	–	–
Further information			From page 9/24 onwards	From page 9/16 onwards	From page 9/16 onwards	From page 9/17 onwards	From page 9/17 onwards

[1] Manual load transfer switch, not an MTSE

Transfer control



With switch disconnectors



With circuit breakers



With circuit breakers and automatic load shedding

Load transfer



With switch disconnectors

System overview, page 9/4

© Siemens 2025

Switching with circuit breakers (with protection function)

3LD2

3KC ATC3100 (+ 3VA/3WA/3WL)

3KC ATC6300 (+ 3VA/3WA/3WL)

3KC ATC6500 (+ 3VA/3WA/3WL)

■	–	–	–
–	–	–	–
–	■	■	■
■ [1)]	–	–	–
–	■	■	■
–	■	■	■
–	■	■	■
–	■	■	■
–	–	■	■
25 ... 250 A	3VA: 16 ... 630 A, 3WA/3WL: 630 ... 6300 A	3VA: 16 ... 630 A, 3WA/3WL: 630 ... 6300 A	3VA: 16 ... 1600 A, 3WA/3WL: 630 ... 6300 A
3 and 4	3 and 4	3 and 4	3 and 4
–	–	■	■
–	–	–	■
From page 9/30 onwards	**From page 9/32 onwards**	**From page 9/32 onwards**	**From page 9/32 onwards**

System overview, page 9/4

© Siemens 2025

Transfer switching equipment and load transfer switches

Remote transfer switching equipment (RTSE), automatic transfer switching equipment (ATSE)

			3KC3424 3KC6424	3KC3426 3KC6426	3KC3428 3KC6428	3KC3430 3KC6430	3KC3432 3KC6432	3KC3434 3KC6434
Rated uninterrupted current I_u			**40 A**	**63 A**	**80 A**	**100 A**	**125 A**	**160 A**
Connection			Box terminal					
Switch positions			I – O – II					
Number of poles			4					
Size			–					
General technical specifications								
Operational voltage at 50/60 Hz AC acc. to IEC 60947-6-1		V	415					
Operational voltage at 50/60 Hz AC acc. to IEC 60947-3 (load transfer switch)		V	415					
Impulse withstand voltage (U_{imp}) for main circuit		kV	6					
Impulse withstand voltage (U_{imp}) for control circuit (RTSE/ATSE)		kV	4 (RTSE)/2.5 (ATSE)					
Operational current in acc. to IEC 60947-6-1	AC-31 A/B, at 415 V	A	40	63	80	100	100/125	100/160
	AC-32 A/B, at 415 V	A	40	63	80	100	100/125	100/160
	AC-33 B, at 415 V	A	40	63	80	100	125	125
Operational current in acc. to IEC 60947-3 (load transfer switch)	AC-21 A/B, at 415 V	A	40	63	80	100	125	125/160
	AC-21 A/B, at 690 V	A	40	63	80	100	125	125
	AC-22 A/B, at 415 V	A	40	63	80	100	125	125/160
	AC-22 A/B, at 690 V	A	40	63	80	80	100/125	100/125
	AC-23 A/B, at 415 V	A	40	63	80	100	125	125/160
	AC-23 A/B, at 690 V	A	40	63	63	80	80	80
Operational power in acc. to IEC 60947-3 (load transfer switch)	AC-23 A/B, at 415 V [1]	kW	22	37	45	55	60	75
	AC-23 A/B, at 690 V [2]	kW	37	55	55	75	75	75
	AC-3 motor load switch at 380 ... 440 V	kW	–					
	AC-3 motor load switch at 660 ... 690 V	kW	–					
Short-circuit behavior								
Short-circuit current ratings in acc. to IEC 60947-6-1	Conditional short-circuit current with gG fuse (415 V)	kA	50	50	50	50	50	40
Short-circuit current ratings in acc. to IEC 60947-3 (load transfer switch)	Conditional short-circuit current with gG fuse (415 V)	kA	50	50	50	50	50	40
	Conditional short-circuit current with gG fuse (690 V)	kA	–					
Transfer switching properties (in acc. to IEC 60947-6-1)								
Switching time I – O and II – O		s	0.045					
Switch-off time I – O – II and II – O – I		s	0.15					
Transfer time I – O – II and II – O – I without/with line monitoring		s	0.18/1.4					
Degree of protection								
IP maximum degree of protection			IP20					
Standards UL/CSA, in acc. to UL 508								
Rated operational voltage U_e AC		V	–					
Rated uninterrupted current I_u		A	–					
Maximum rated power (AC-3), 3-phase, 40 ... 60 Hz	480 V	hp	–					
	600 V	hp	–					
Further information								
			From page 9/16 onwards					

[1] For 3LD2 at 380 ... 440 V [2] For 3LD2 at 660 ... 690 V

9

System overview, page 9/4

© Siemens 2025

Remote transfer switching equipment (RTSE), automatic transfer switching equipment (ATSE)



3KC4.38 3KC8.38	3KC4.42 3KC8.42	3KC4.46 3KC8.46	3KC4.48 3KC8.48	3KC4.50 3KC8.50	3KC4.52 3KC8.52	3KC4.54 3KC8.54	3KC4.56 3KC8.56	3KC4.58 3KC8.58	3KC4.60 3KC8.60
250 A	**400 A**	**630 A**	**800 A**	**1000 A**	**1250 A**	**1600 A**	**2000 A**	**2500 A**	**3200 A**
Flat terminal									
I – O – II									
3 and 4									
–									
415									
690									
12									
4									
–/250	–/400	–/630	–/800	–/1000	–/1250	–/1600	–/2000	–/2500	–/3200
–/200	–/400	–/500	–/800	–/1000	–/1250	–/1250	–/2000	–/2000	–/2000
200	200	400	800	1000	1000	1000	1250	1250	1250
250	400	630	800	1000	1250	1600	–/2000	–/2500	–/3200
200	200	500	800	1000	1250	1600	–/2000	–/2000	–/2000
250	400	630	800	1000	1250	1600	–/2000	–/2500	–/3200
160	160	400	630	800	1000	1000	–	–	–
200	400	500/630	800	1000	1250	1250	–/1600	–/1600	–/1600
125	125	400	630	630	800	800	–	–	–
110	220	335	450	700	800	900	–	–	–
110	110	400	400	630	800	800	–	–	–
–									
–									
50	50	50	50	50	100	100	–	–	–
–									
50	50	50	50	50	100	100	–	–	–
0.5	0.5	0.6	1.4	1.4	1.4	1.4	1.6	1.6	1.6
0.4	0.4	0.4	1.4	1.4	1.4	1.5	1.2	1.2	1.2
0.9/1.0	0.9/1.0	1.0/1.1	2.8/3.1	2.8/3.1	2.8/3.1	2.9/3.3	2.8/2.8	2.8/2.8	2.8/2.8
IP20									
–									
–									
–									
–									
From page 9/16 onwards									

9

System overview, page 9/4

© Siemens 2025

Transfer switching equipment and load transfer switches

Manual transfer switching equipment (MTSE)

			3KC0.16	3KC0.22	3KC0.26	3KC0.28	3KC0.30	3KC0.32	3KC0.34
Rated uninterrupted current I_u			**16 A**	**32 A**	**63 A**	**80 A**	**100 A**	**125 A**	**160 A**
Connection			Box terminal			Box terminal			
Switch positions			I – O – II			I – O – II			
Number of poles			3 and 4			3 and 4			
Size			1			2			
General technical specifications									
Operational voltage at 50/60 Hz AC acc. to IEC 60947-6-1		V	415			415			
Operational voltage at 50/60 Hz AC acc. to IEC 60947-3 (load transfer switch)		V	690			690			
Impulse withstand voltage (U_{imp}) for main circuit		kV	8			8			
Impulse withstand voltage (U_{imp}) for control circuit (RTSE/ATSE)		kV	–			–			
Operational current in acc. to IEC 60947-6-1	AC-31 A/B, at 415 V	A	–/16	–/32	–/63	–/80	–/100	–/125	–/160
	AC-32 A/B, at 415 V	A	–/16	–/32	–/63	–/80	–/100	–/125	–/160
	AC-33 B, at 415 V	A	16	32	63	80	100	125	160
Operational current in acc. to IEC 60947-3 (load transfer switch)	AC-21 A/B, at 415 V	A	16/16	32/32	63/63	80/80	100/100	125/125	160/160
	AC-21 A/B, at 690 V	A	16/16	32/32	63/63	80/80	100/100	125/125	160/160
	AC-22 A/B, at 415 V	A	16/16	32/32	63/63	80/80	100/100	125/125	160/160
	AC-22 A/B, at 690 V	A	16/16	32/32	63/63	80/80	100/100	125/125	160/160
	AC-23 A/B, at 415 V	A	16/16	32/32	63/63	80/80	100/100	125/125	160/160
	AC-23 A/B, at 690 V	A	16/16	32/32	63/63	80/80	100/100	125/125	160/160
Operational power in acc. to IEC 60947-3 (load transfer switch)	AC-23 A/B, at 415 V [1]	kW	7.5/7.5	15/15	30/30	37/37	55/55	55/55	90/90
	AC-23 A/B, at 690 V [2]	kW	11/11	30/30	55/55	75/75	90/90	110/110	110/110
	AC-3 motor load switch at 380 ... 440 V	kW	–			–			
	AC-3 motor load switch at 660 ... 690 V	kW	–			–			
Short-circuit behavior									
Short-circuit current ratings in acc. to IEC 60947-6-1	Conditional short-circuit current with gG fuse (415 V)	kA	100			100			
Short-circuit current ratings in acc. to IEC 60947-3 (load transfer switch)	Conditional short-circuit current with gG fuse (415 V)	kA	100			100			
	Conditional short-circuit current with gG fuse (690 V)	kA	100			65			
Transfer switching properties (in acc. to IEC 60947-6-1)									
Switching time I – O and II – O		s	–			–			
Switch-off time I – O – II and II – O – I		s	–			–			
Transfer time I – O – II and II – O – I without/with line monitoring		s	–			–			
Degree of protection									
IP maximum degree of protection			IP20			IP20			
Standards UL/CSA, in acc. to UL 508									
Rated operational voltage U_e AC		V	–			–			
Rated uninterrupted current I_u		A	–			–			
Maximum rated power (AC-3), 3-phase, 40 ... 60 Hz	480 V	hp	–			–			
	600 V	hp	–			–			
Further information									
			From page 9/24 onwards			From page 9/24 onwards			

[1] For 3LD2 at 380 ... 440 V [2] For 3LD2 at 660 ... 690 V

9

System overview, page 9/4

© Siemens 2025

Manual transfer switching equipment (MTSE)



Load transfer switches

3KC0.36	3KC0.38	3KC0.40	3KC0.42	3KC0.44	3KC0.46	3KC0.48	3KC0.50	3KC0.52	3KC0.54	3LD21	3LD22	3LD25	3LD27	3LD23	3LD24
200 A	250 A	315 A	400 A	500 A	630 A	800 A	1000 A	1250 A	1600 A	25 A	32 A	63 A	100 A	160 A	250 A
Flat terminal				Flat terminal			Flat terminal			Box terminal				Box terminal	
I – O – II				I – O – II			I – O – II			I – O – II				I – O – II	
3 and 4				3 and 4			3 and 4			3				3 and 4	
3				4			5			–				–	
415				415			415			–				–	
690				690			690			690				690	
12				12			12			6				6	
–				–			–			–				–	
–/200	–/250	–/315	–/400	–/500	–/630	–/800	–/1000	–/1250	–/1600	–				–	
–/200	–/250	–/315	–/350	–/500	–/630	–/800	–/1000	–/1250	–/1250	–				–	
200	250	315	315	500	500	500	800	800	800	–				–	
200/200	250/250	315/315	400/400	500/500	630/630	800/800	1000/1000	1250/1250	1600/1600	25	32	63	100	160	250
200/200	250/250	315/315	400/400	500/500	630/630	800/800	1000/1000	1250/1250	1600/1600	25	32	63	100	160	250
200/200	250/250	315/315	400/400	500/500	630/630	800/800	1000/1000	1250/1250	1600/1600	25	32	63	100	140	230
200/200	250/250	315/315	400/400	500/500	630/630	800/800	1000/1000	1250/1250	1600/1600	25	32	63	100	140	230
200/200	250/250	315/315	400/400	500/500	630/630	670/670	800/800	800/800	800/800	20	22	43	70	132	224
200/200	250/250	315/315	315/315	500/500	500/500	500/500	800/800	800/800	800/800	11.5	13.5	22	34	47	58
110/110	132/132	160/160	220/220	280/280	355/355	355/355	400/400	400/400	400/400	9.5	11.5	22	37	75	132
185/185	220/220	280/280	355/355	500/500	500/500	500/500	800/800	800/800	800/800	9.5	11.5	18.5	30	45	55
–				–			–			7.5	9.5	18.5	30	50	110
–				–			–			7.5	9.5	15	22	37	45
100	100	65	65	100	100	65	100	80	80	–				–	
100	100	65	65	100	100	65	100	80	80	50	50	50	50	50	50
65	65	35	35	65	65	50	–			50	50	50	50	50	50
–				–			–			–				–	
–				–			–			–				–	
–				–			–			–				–	
IP20				IP20			IP20			IP65					
–				–			–			600	600	600	600	600	600
–				–			–			20	30	60	100	160	250
–				–			–			10	20 (15) [3]	40	60	75	100
–				–			–			15	30 (20) [3]	50	75	75	75
From page 9/24 onwards				From page 9/24 onwards			From page 9/24 onwards			From page 9/30 onwards					

[3] Values in brackets apply to devices in molded-plastic enclosure.

9

System overview, page 9/4

© Siemens 2025

Mounting concept and accessories

3KC3 (RTSE) 4-pole

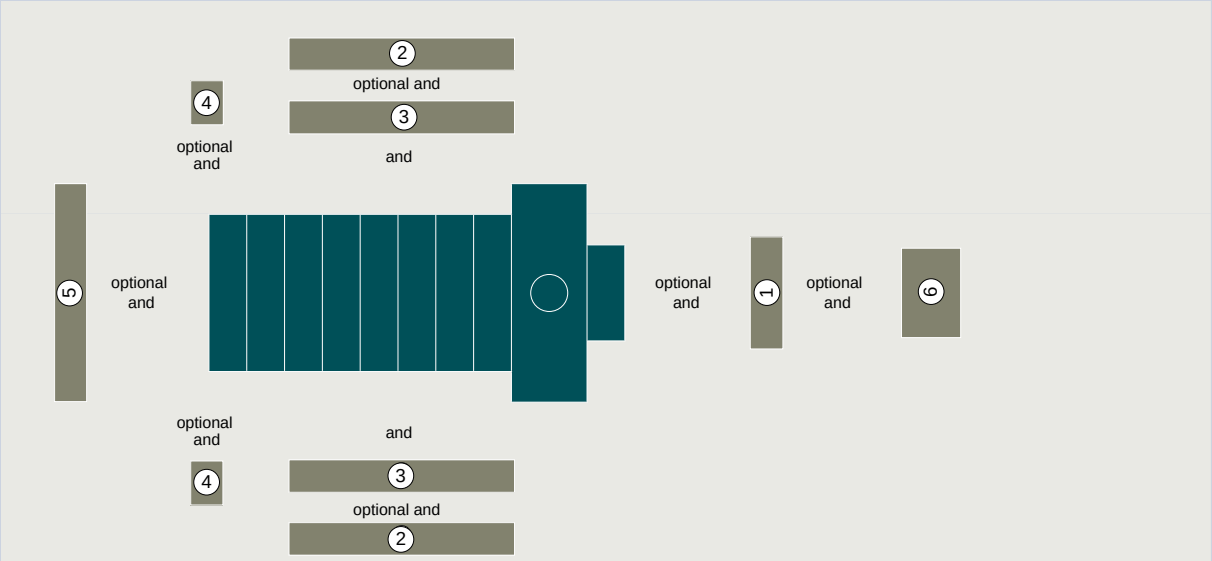

Legend

1 Auxiliary switch
2 Terminal cover
3 Bridging bar [1)]
4 Control wire tap
5 Autotransformer
6 Dual power supply

[1)] 1× per change-over switch

I201_20552

3KC6 (ATSE) 4-pole

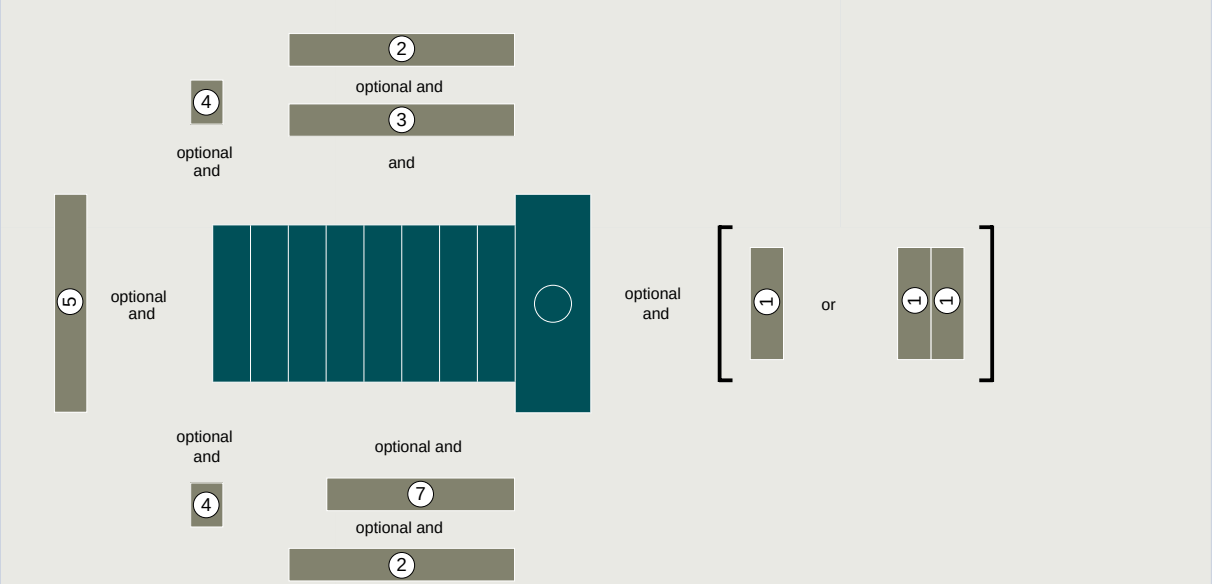

Legend

1 Auxiliary switch
2 Terminal cover
3 Bridging bar
4 Aux. conductor terminal
5 Autotransformer
6 Dual power supply
7 Sealable cover

I201_20553

System overview, page 9/4

© Siemens 2025

3KC4 (RTSE) 3-pole or 4-pole

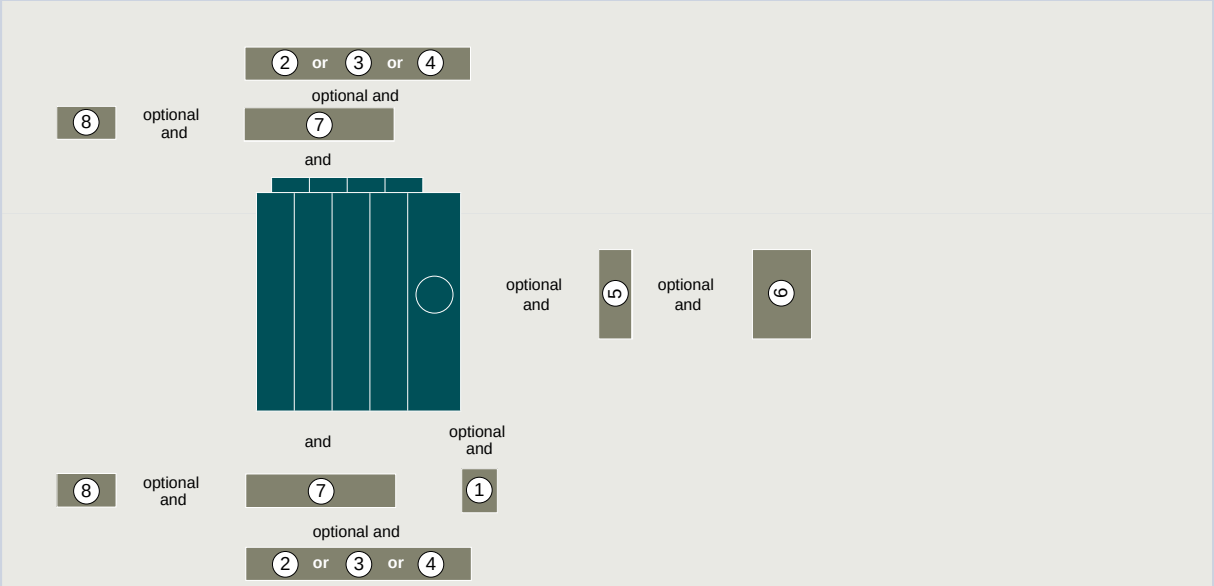

Legend

(1) Auxiliary switch
(2) Phase barrier
(3) Terminal cover
(4) Terminal plate
(5) Autotransformer
(6) Dual power supply
(7) Bridging bar
(8) Copper bar connection kit [1)]

[1)] 3× with 3-pole change-over switch, 4× with 4-pole change-over switch

I201_20554

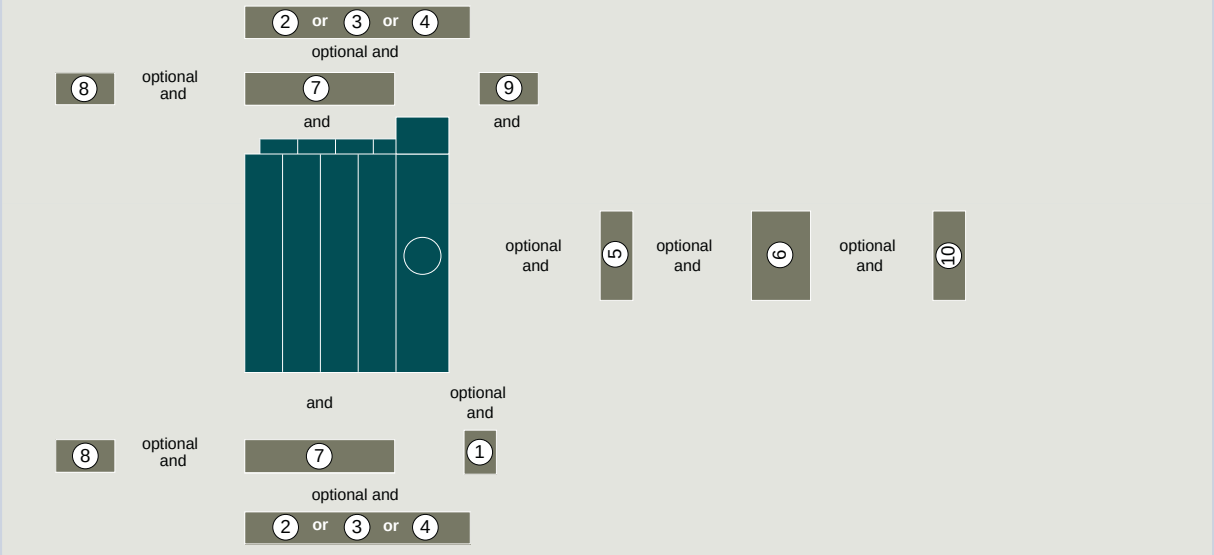

Legend

(1) Auxiliary switch
(2) Phase barrier
(3) Terminal cover
(4) Terminal plate
(5) Autotransformer
(6) Dual power supply
(7) Bridging bar
(8) Copper bar connection kit [1)]
(9) Power supply cable
(10) External display

[1)] 3× with 3-pole change-over switch, 4× with 4-pole change-over switch

I201_20555

9

System overview, page 9/4

© Siemens 2025

Mounting concept and accessories

3KC0 (MTSE) front operating mechanism on left, 3-pole or 4-pole, sizes 3 to 5

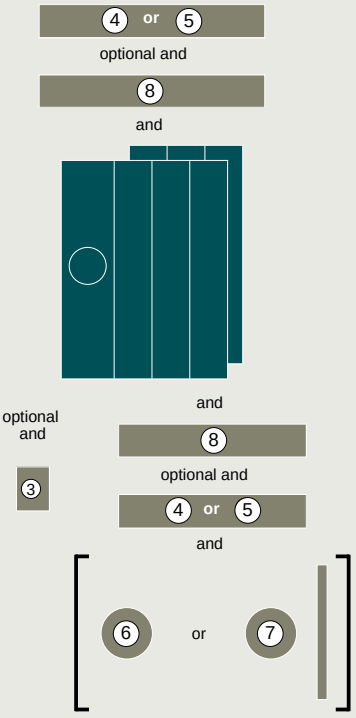

Legend

3 Auxiliary switch [1)]
4 Phase barrier
5 Side plate cover and terminal cover [2)]
6 Direct operating mechanism
7 Door-coupling rotary operating mechanism
8 Bridging bar [3)]

[1)] Up to 4 auxiliary switches
[2)] Side plate cover must be ordered separately from the terminal cover
[3)] 3× with 3-pole change-over switch, 4× with 4-pole change-over switch

I201_20556

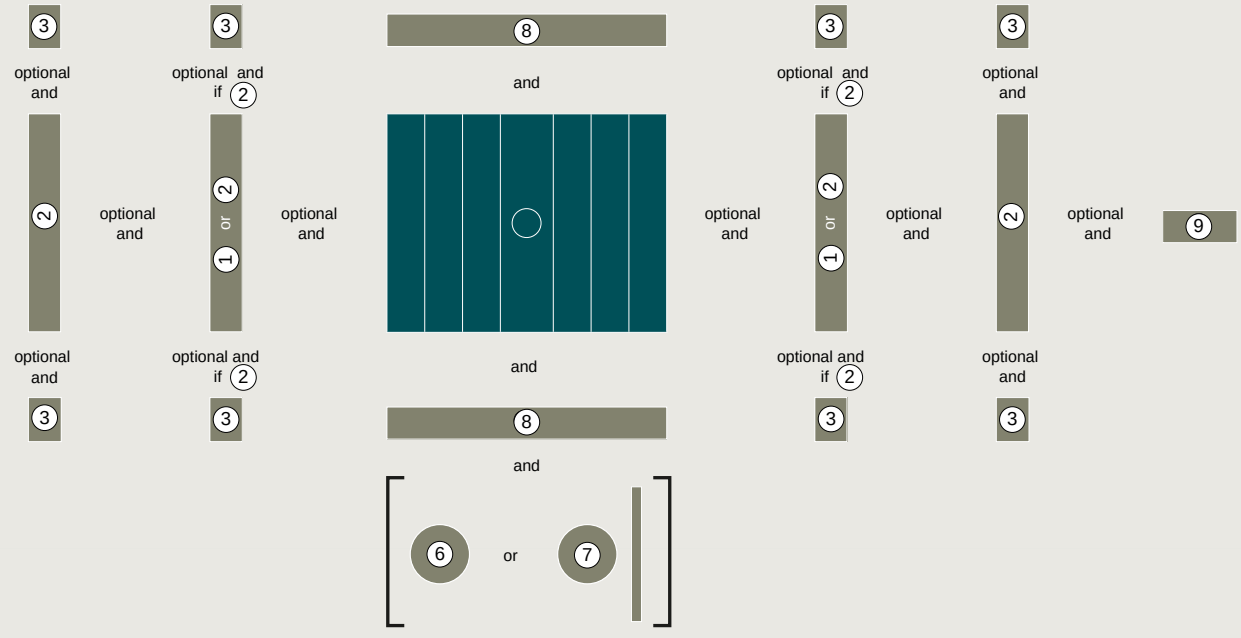

Legend

1 4th contact element [1)]
2 Auxiliary switch module, standard version [2)]
3 Auxiliary switch
6 Direct operating mechanism
7 Door-coupling rotary operating mechanism
8 Bridging bar [3)]
9 Assembly kit for floor mounting

[1)] Only for 3-pole 3K, max. 1×
[2)] Max. 1× for each side of the switch, requires at least 1× auxiliary switch 3
[3)] Only 1× per change-over switch

I201_20557

System overview, page 9/4

© Siemens 2025

3LD2 load transfer switch mounting concept

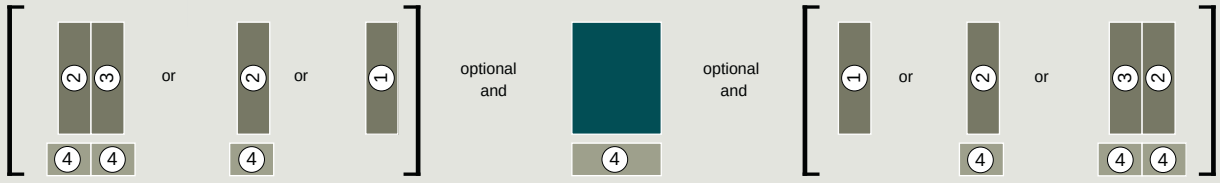

Legend

(1) Auxiliary switch
(2) N/PE terminal
(3) N switching contact [1)]
(4) Terminal cover

[1)] N switching (3) contact must first be installed on the basic unit

I201_20558

9

System overview, page 9/4

© Siemens 2025

3KC3 and 3KC4 remote transfer switching equipment (RTSE)

40 to 3200 A

	Box terminal 3KC3 (RTSE)	Flat terminal 3KC4 (RTSE)
Version	With motorized operating mechanism and additional handle	With motorized operating mechanism and additional handle
Operating mechanism	Operating mechanism on right	Operating mechanism on right
Mounting	Floor and DIN-rail mounting	Floor mounting
Bridging bars	Additionally required for connection side	Additionally required for connection side
Scope of supply	Including 3KC9603 auxiliary switches	







Rated uninterrupted current I_u	4-pole	3-pole	4-pole
Box terminal			
40 A	3KC3424-2AA22-0AA3	–	–
63 A	3KC3426-2AA22-0AA3	–	–
80 A	3KC3428-2AA22-0AA3	–	–
100 A	3KC3430-2AA22-0AA3	–	–
125 A	3KC3432-2AA22-0AA3	–	–
160 A	3KC3434-2AA22-0AA3	–	–
Flat terminal			
250 A	–	3KC4338-0CA21-0AA3	3KC4438-0CA21-0AA3
400 A	–	3KC4342-0DA21-0AA3	3KC4442-0DA21-0AA3
630 A	–	3KC4346-0EA21-0AA3	3KC4446-0EA21-0AA3
800 A	–	3KC4348-0FA21-0AA3	3KC4448-0FA21-0AA3
1000 A	–	3KC4350-0FA21-0AA3	3KC4450-0FA21-0AA3
1250 A	–	3KC4352-0GA21-0AA3	3KC4452-0GA21-0AA3
1600 A	–	3KC4354-0HA21-0AA3	3KC4454-0HA21-0AA3
2000 A	–	3KC4356-0JA21-0AA3	3KC4456-0JA21-0AA3
2500 A	–	3KC4358-0JA21-0AA3	3KC4458-0JA21-0AA3
3200 A	–	3KC4360-0JA21-0AA3	3KC4460-0JA21-0AA3

Quick selection guide, page 9/8

© Siemens 2025

3KC6 and 3KC8 automatic transfer switching equipment (ATSE)

40 to 3200 A

	Box terminal 3KC6 (ATSE)	Flat terminal 3KC8 (ATSE)
Version	With motorized operating mechanism, integrated controller and additional handle	With motorized operating mechanism, integrated controller and additional handle
Operating mechanism	Operating mechanism on right	Operating mechanism on right
Mounting	Floor and DIN-rail mounting	Floor mounting
Bridging bars	Additionally required for connection side	Additionally required for connection side
Scope of supply	Wired ready for operation (including power supply)	Without power supply and voltage sensing cables







Rated uninterrupted current I_u	4-pole	3-pole	4-pole
Box terminal			
40 A	3KC6424-2TA20-0TA3	–	–
63 A	3KC6426-2TA20-0TA3	–	–
80 A	3KC6428-2TA20-0TA3	–	–
100 A	3KC6430-2TA20-0TA3	–	–
125 A	3KC6432-2TA20-0TA3	–	–
160 A	3KC6434-2TA20-0TA3	–	–
Flat terminal			
250 A	–	3KC8338-0CA22-0GA3	3KC8438-0CA22-0GA3
400 A	–	3KC8342-0DA22-0GA3	3KC8442-0DA22-0GA3
630 A	–	3KC8346-0EA22-0GA3	3KC8446-0EA22-0GA3
800 A	–	3KC8348-0FA22-0GA3	3KC8448-0FA22-0GA3
1000 A	–	3KC8350-0FA22-0GA3	3KC8450-0FA22-0GA3
1250 A	–	3KC8352-0GA22-0GA3	3KC8452-0GA22-0GA3
1600 A	–	3KC8354-0HA22-0GA3	3KC8454-0HA22-0GA3
2000 A	–	3KC8356-0JA22-0GA3	3KC8456-0JA22-0GA3
2500 A	–	3KC8358-0JA22-0GA3	3KC8458-0JA22-0GA3
3200 A	–	3KC8360-0JA22-0GA3	3KC8460-0JA22-0GA3

Quick selection guide, page 9/8

© Siemens 2025

Accessories

For remote transfer switching equipment (RTSE) and automatic transfer switching equipment (ATSE)

Bridging bar



- For load-side connection
- For 3KC4/3KC8 3-pole transfer switches 3 units, for 3KC4/3KC8 4-pole transfer switches 4 units are required

Version	Number of poles	Scope of supply	Article No.	RTSE	ATSE
For 40 ... 125 A	4-pole	1 unit	3KC9618-2	■	■
For 160 A	4-pole	1 unit	3KC9618-3	■	■

For 250 A	1-pole	1 unit	3KC9818-2	■	■
For 400 A	1-pole	1 unit	3KC9818-3	■	■
For 630 A	1-pole	1 unit	3KC9818-4	■	■
For 800 ... 1000 A	1-pole	1 unit	3KC9818-5	■	■
For 1250 A	1-pole	1 unit	3KC9818-6	■	■
For 1600 A	1-pole	1 unit	3KC9818-7	■	■
For 2000 ... 3200 A	1-pole	1 unit	3KC9818-8	■	■

Control wire tap

Version	Scope of supply	Article No.	RTSE	ATSE
For 40 ... 160 A	2 units	3KC9622-2	■	■

Auxiliary switches for 40 ... 160 A

- For 250 V AC/5 A or for 24 V DC/2 A
- 1 changeover contact for each position O, I, II
- Max. 2 auxiliary switches can be installed per transfer switching equipment unit

Version	Contact configuration	Article No.	RTSE	ATSE
For 40 ... 160 A	With separate contacts	3KC9603-1	■	■
	With linked common contacts	3KC9603-2	■	■

Auxiliary switches for 250 ... 1600 A



- One auxiliary switch contains 2 leading changeover contacts, one changeover contact for position I and one changeover contact for position II (incl. bolt set)
- Max. two auxiliary switches can be installed per transfer switching equipment unit
- For 2000 ... 3200 A transfer switching equipment the auxiliary switch is included in the basic unit
- 250 V AC/12 A (AC-13), 24 V DC/14 A (DC-13)

Version	Article No.	RTSE	ATSE
For 250 ... 630 A	3KC9803-1	■	■
For 800 ... 1600 A	3KC9803-2	■	■
For 2000 ... 2500 A (included in the basic unit)	–	■	■

9

System overview, page 9/4

© Siemens 2025

Terminal covers

Version	Number of poles	Scope of supply	Article No.	RTSE	ATSE
For 40 ... 160 A	4-pole	2 units (1 unit covers 4-poles)	3KC9604-2	■	■
For 250 ... 400 A	3-pole	3 units (1 unit covers 1-pole)	3KC9804-1	■	■
	4-pole	4 units (1 unit covers 1-pole)	3KC9804-2	■	■
For 630 A	3-pole	3 units (1 unit covers 1-pole)	3KC9804-3	■	■
	4-pole	4 units (1 unit covers 1-pole)	3KC9804-4	■	■

Sealable cover

Version	Scope of supply	Article No.	RTSE	ATSE
For 3KC6 (ATSE) 40 ... 160 A	Incl. bolt set and sealing ribbons	3KC9721-1	–	■
For 3KC8 (ATSE) 250 ... 3200 A	Incl. bolt set and sealing ribbons	3KC9821-0	–	■

Sealing ribbon

- Also as spare part for sealable cover

Version	Scope of supply	Article No.	RTSE	ATSE
For 40 ... 3200 A	10 units	3KC9621-2	–	■

Autotransformers

Version	Technical specifications	Article No.	RTSE	ATSE
For 40 ... 160 A	400 V/230 V AC; 400 VA	3KC9624-1	■	■
 For 250 ... 3200 A, 3-pole	400 V/230 V AC; 200 VA	3KC9824-1	■	■

9

System overview, page 9/4

© Siemens 2025

Accessories

For remote transfer switching equipment (RTSE) and automatic transfer switching equipment (ATSE)

Power supply and voltage sensing cables for ATSE

	Application	Infeed	Switches	Version	Article No.	RTSE	ATSE
 For 250 ... 630 A	2-pole	From below, with power supply	3-pole	For 250 A	3KC9833-1	–	■
				For 400 A	3KC9833-2	–	■
				For 630 A	3KC9833-3	–	■
				For 800 ... 1000 A	3KC9833-4	–	■
				For 1250 A	3KC9833-5	–	■
				For 1600 A	3KC9833-6	–	■
				For 2000 ... 3200 A	3KC9833-7	–	■
 For 800 ... 3200 A		From above, with power supply	3-pole	For 250 A	3KC9834-1	–	■
				For 400 A	3KC9834-2	–	■
				For 630 A	3KC9834-3	–	■
				For 800 ... 1000 A	3KC9834-4	–	■
				For 1250 A	3KC9834-5	–	■
				For 1600 A	3KC9834-6	–	■
				For 2000 ... 3200 A	3KC9834-7	–	■
 For 250 ... 630 A	3-pole	From below, without power supply	3-pole	For 250 A	3KC9822-1	–	■
				For 400 A	3KC9822-2	–	■
				For 630 A	3KC9822-3	–	■
				For 800 ... 1000 A	3KC9822-4	–	■
				For 1250 A	3KC9822-5	–	■
				For 1600 A	3KC9822-6	–	■
				For 2000 ... 3200 A	3KC9822-7	–	■
 For 800 ... 3200 A		From above, without power supply	3-pole	For 250 A	3KC9832-1	–	■
				For 400 A	3KC9832-2	–	■
				For 630 A	3KC9832-3	–	■
				For 800 ... 1000 A	3KC9832-4	–	■
				For 1250 A	3KC9832-5	–	■
				For 1600 A	3KC9832-6	–	■
				For 2000 ... 3200 A	3KC9832-7	–	■
 For 250 ... 630 A	4-pole	From below, with power supply	4-pole	For 250 A	3KC9830-1	–	■
				For 400 A	3KC9830-2	–	■
				For 630 A	3KC9830-3	–	■
				For 800 ... 1000 A	3KC9830-4	–	■
				For 1250 A	3KC9830-5	–	■
				For 1600 A	3KC9830-6	–	■
				For 2000 ... 3200 A	3KC9830-7	–	■
For 800 ... 3200 A		From above, with power supply	4-pole	For 250 A	3KC9831-1	–	■
				For 400 A	3KC9831-2	–	■
				For 630 A	3KC9831-3	–	■
				For 800 ... 1000 A	3KC9831-4	–	■
				For 1250 A	3KC9831-5	–	■
				For 1600 A	3KC9831-6	–	■
				For 2000 ... 3200 A	3KC9831-7	–	■

9

System overview, page 9/4

© Siemens 2025

Dual power supply

Version	Technical specifications	Article No.	RTSE	ATSE
For 3KC3 and 3KC4 (RTSE) 40 ... 3200 A	240 V AC, 3 A	3KC9625-1	■	–

External display

- For installing in the control cabinet door

Version	Article No.	RTSE	ATSE
For 3KC8 (ATSE) 250 ... 3200 A	3KC9823-0	–	■

Connection cable

- 3 m RJ45 cable for external display

Version	Article No.	RTSE	ATSE
For 250 ... 3200 A	3KC9823-2	–	■

Phase barrier

- For 800 ... 3200 A transfer switching equipment included in the scope of supply of the basic unit

Version	Number of poles	Scope of supply	Article No.	RTSE	ATSE
For 250 ... 400 A	3-pole	2 units	3KC9808-1	■	■
	4-pole	3 units	3KC9808-6	■	■
For 630 A	3-pole	2 units	3KC9808-2	■	■
	4-pole	3 units	3KC9808-7	■	■

Cover frame for ATSE

- For a clean and safe door cut-out
- To enable access to the front of the 3KC8 transfer switching equipment (electronic module and operation of the motorized operating mechanism)

Version	Article No.	RTSE	ATSE
250 ... 630 A	3KC9820-4	–	■
800 ... 3200 A	3KC9820-5	–	■

9

System overview, page 9/4

© Siemens 2025

Accessories

For remote transfer switching equipment (RTSE) and automatic transfer switching equipment (ATSE)

Copper bar connection kit

Version	Designation	Scope of supply	Article No.	RTSE	ATSE
For 2000 ... 2500 A	C-bracket, part A	1 unit	3KC9811-0	■	■
For 2000 ... 3200 A	Bolt set, part B	1 unit	3KC9811-1	■	■
			3KC9811-2	■	■
	T-bracket, part C	1 unit	3KC9811-3	■	■
	L-bracket, part D	2 units	3KC9811-4	■	■
	Bridging bars, part E	1 unit	3KC9818-8	■	■

Terminal plates

- For protecting the front side at the upper and lower connecting terminals

Version	Number of poles	Article No.	RTSE	ATSE
For 250 ... 400 A	3-pole	3KC9827-1	■	■
	4-pole	3KC9828-1	■	■
For 630 A	3-pole	3KC9827-2	■	■
	4-pole	3KC9828-2	■	■
For 800 ... 1250 A	3-pole	3KC9827-3	■	■
	4-pole	3KC9828-3	■	■
For 1600 A	3-pole	3KC9827-4	■	■
	4-pole	3KC9828-4	■	■
For 2000 ... 3200 A	3-pole	3KC9827-5	■	■
	4-pole	3KC9828-5	■	■

9

System overview, page 9/4

© Siemens 2025

			RTSE	ATSE
Motorized operating mechanism as spare part				
	Version	**Article No.**		
	For 250 ... 400 A	3KC9826-1	■	■
	For 630 A	3KC9826-2	■	■
	For 800 ... 1250 A	3KC9826-3	■	■
	For 1600 A	3KC9826-4	■	■
	For 2000 ... 3200 A	3KC9826-5	■	■
Controller (electronic module) as spare part				
	Version	**Article No.**		
	For 250 ... 3200 A	3KC9826-0	–	■
Mounting kit as spare part				
	• Comprising two device holders, each with two plastic covers			
	Version	**Article No.**		
	For 250 ... 630 A	3KC9820-6	■	■

9

Copper bar connection kit

You will find further information at: sie.ag/36U7MCb

System overview, page 9/4

© Siemens 2025

3KC0 manual transfer switching equipment (MTSE)

16 to 1600 A

	Box terminal			
	Size 1		Size 2	
Version	Basic unit without handle		Basic unit without handle	
Operating mechanism	Front operating mechanism		Front operating mechanism	
Mounting	DIN-rail and floor mounting [1]		DIN-rail and floor mounting [1]	
Bridging bars	Additionally required for connection side		Additionally required for connection side	
				

Rated uninterrupted current I_u	3-pole	4-pole	3-pole	4-pole
Box terminal				
16 A	3KC0316-2ME00-0AA0	3KC0416-2ME00-0AA0	–	–
32 A	3KC0322-2ME00-0AA0	3KC0422-2ME00-0AA0	–	–
63 A	3KC0326-2ME00-0AA0	3KC0426-2ME00-0AA0	–	–
80 A	–	–	3KC0328-2NE00-0AA0	3KC0428-2NE00-0AA0
100 A	–	–	3KC0330-2NE00-0AA0	3KC0430-2NE00-0AA0
125 A	–	–	3KC0332-2NE00-0AA0	3KC0432-2NE00-0AA0
160 A	–	–	3KC0334-2NE00-0AA0	3KC0434-2NE00-0AA0
Flat terminal				
200 A	–	–	–	–
250 A	–	–	–	–
315 A	–	–	–	–
400 A	–	–	–	–
500 A	–	–	–	–
630 A	–	–	–	–
800 A	–	–	–	–
1000 A	–	–	–	–
1250 A	–	–	–	–
1600 A	–	–	–	–

[1] An assembly kit is required for floor mounting

Quick selection guide, page 9/10

© Siemens 2025

Flat terminal					
Size 3		**Size 4**		**Size 5**	
Basic unit without handle		Basic unit without handle		Basic unit without handle	
Front operating mechanism		Front operating mechanism		Front operating mechanism	
Floor mounting		Floor mounting		Floor mounting	
Additionally required for connection side		Additionally required for connection side		Additionally required for connection side	
					
3-pole	**4-pole**	**3-pole**	**4-pole**	**3-pole**	**4-pole**
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
3KC0336-0PE00-0AA0	3KC0436-0PE00-0AA0	–	–	–	–
3KC0338-0PE00-0AA0	3KC0438-0PE00-0AA0	–	–	–	–
3KC0340-0PE00-0AA0	3KC0440-0PE00-0AA0	–	–	–	–
3KC0342-0PE00-0AA0	3KC0442-0PE00-0AA0	–	–	–	–
–	–	3KC0344-0QE00-0AA0	3KC0444-0QE00-0AA0	–	–
–	–	3KC0346-0QE00-0AA0	3KC0446-0QE00-0AA0	–	–
–	–	3KC0348-0QE00-0AA0	3KC0448-0QE00-0AA0	–	–
–	–	–	–	3KC0350-0RE00-0AA0	3KC0450-0RE00-0AA0
–	–	–	–	3KC0352-0RE00-0AA0	3KC0452-0RE00-0AA0
–	–	–	–	3KC0354-0RE00-0AA0	3KC0454-0RE00-0AA0

Quick selection guide, page 9/10

© Siemens 2025

Accessories

For manual transfer switching equipment (MTSE)

Box terminal (4th contact element, switching pole)

Connection	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
	3KD9105-2	■				
	3KD9205-2		■			

Auxiliary switch module

- **Delivery:** Does not include auxiliary switch
- A maximum of 2 auxiliary switches can be installed per auxiliary switch module.
- The auxiliary switches indicate the switch position of the respective switching equipment (I or II) to which the auxiliary switch module is connected.

Type	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
Standard version	3KD9103-5	■	■			

Auxiliary switches

- Auxiliary switches for sizes 3 to 5 have a screw terminal and are mounted on the 3K operating mechanism module. Auxiliary switches with spring-loaded terminals from the 3SU1 program can also be used.
- All auxiliary switches for sizes 3 to 5 can be used as leading auxiliary switches, depending on the mounting position of the auxiliary switch (see operating instructions).

Type	Contacts	Contact surface	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
With connecting cables	1 CO	Standard	3KD9103-1	■	■			
		Solid-state compatible	3KD9103-3	■	■			
Without connecting cables	1 CO	Standard	3KD9103-2	■	■			
		Solid-state compatible	3KD9103-4	■	■			
	1 NO	Standard	3SU1400-1AA10-1BA0			■	■	■
		Gold-plated	3SU1400-1AA10-1LA0			■	■	■
	1 NC	Standard	3SU1400-1AA10-1CA0			■	■	■
		Gold-plated	3SU1400-1AA10-1MA0			■	■	■
	1 NO + 1 NC	Standard	3SU1400-1AA10-1FA0			■	■	■
		Gold-plated	3SU1400-1AA10-1QA0			■	■	■
	2 NO	Standard	3SU1400-1AA10-1DA0			■	■	■
		Gold-plated	3SU1400-1AA10-1NA0			■	■	■
	2 NC	Standard	3SU1400-1AA10-1EA0			■	■	■
		Gold-plated	3SU1400-1AA10-1PA0			■	■	■

Bridging bars

- For load-side connection
- For 3-pole transfer switches (sizes 3 to 5) 3 units, for 4-pole transfer switches (sizes 3 to 5) 4 units are required

Number of poles		Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
1-pole	1 unit	3KC9318-0			■		
		3KC9418-0				■	
		3KC9518-0					■
3-pole	1 unit	3KC9118-1	■				
		3KC9218-1		■			
4-pole	1 unit	3KC9118-2	■				
		3KC9218-2		■			

System overview, page 9/4

© Siemens 2025

				Size 1	Size 2	Size 3	Size 4	Size 5
Direct operating mechanism standard version								
• Can be locked with up to max. 3 padlocks • Requires additional mounting depth in locked state								
Color			**Article No.**					
Gray			3KC9201-3	■	■			
			3KC9301-1			■		
			3KC9401-1				■	
			3KC9501-1					■
Red/yellow			3KC9301-2			■		
			3KC9401-2				■	
			3KC9501-2					■
Flat direct operating mechanism for distribution boards								
• Can be locked with one padlock • No additional mounting depth in locked state								
Color			**Article No.**					
Gray			3KC9101-4	■				
Door-coupling rotary operating mechanism, 8UD1 series								
• Handle with masking plate • Coupling driver with tolerance compensation • Shaft 300 mm • Can be locked with up to max. 3 padlocks • Labeling I – O – II								
Color	**Handle length**	**Shaft**	**Article No.**					
Gray	55 mm	8 × 8 mm	8UD1131-2AE21	■	■			
	100 mm	8 × 8 mm	8UD1141-2AE21			■		
	140 mm	10 × 10 mm	8UD1151-3AE21				■	
	200 mm	12 × 12 mm	8UD1161-4AE21					■
Handles for door-coupling rotary operating mechanisms, 8UD1 series								
• Without extension shaft and coupling driver • With masking plate • Can be locked with up to max. 3 padlocks • Labeling I – O – II								
Color	**Handle length**	**Shaft**	**Article No.**					
Gray	55 mm	8 × 8 mm	8UD1731-2AE01	■	■			
	100 mm	8 × 8 mm	8UD1841-2AE01			■		
	140 mm	10 × 10 mm	8UD1851-3AE01				■	
	200 mm	12 × 12 mm	8UD1861-4AE01					■
Red/yellow	55 mm	8 × 8 mm	8UD1731-2AE05	■	■			
	100 mm	8 × 8 mm	8UD1841-2AE05			■		
	140 mm	10 × 10 mm	8UD1851-3AE05				■	
	200 mm	12 × 12 mm	8UD1861-4AE05					■

9

System overview, page 9/4

© Siemens 2025

Accessories

For manual transfer switching equipment (MTSE)

				Size 1	Size 2	Size 3	Size 4	Size 5
Extension shaft for door-coupling rotary operating mechanism, 8UD1 series								
	• A shaft jack is required for the 8UD1 handle when the 600 mm long shaft is used and for sizes 1/2.							
	Length	**Cross-section**	**Article No.**					
	300 mm	8 × 8 mm	8UC6032	■	■	■		
		10 × 10 mm	8UC6033				■	
		12 × 12 mm	8UC6034					■
	600 mm	8 × 8 mm	8UC6082	■	■	■		
		10 × 10 mm	8UC6083				■	
		12 × 12 mm	8UC6084					■
Shaft jack for 8UD1 handle for shaft, 600 mm								
	Shaft		**Article No.**					
	8 × 8 mm		8UD1900-0FA00	■	■			
Coupling drivers								
	Type	**Shaft**	**Article No.**					
	With tolerance compensation	8 × 8 mm	8UD1900-2GA00	■	■			
		8 × 8 mm	8UD1900-6GA00			■		
		10 × 10 mm	8UD1900-3GA00				■	
		12 × 12 mm	8UD1900-4GA00					■
	Without tolerance compensation	8 × 8 mm	8UD1900-2HA00	■	■			
		8 × 8 mm	8UD1900-6HA00			■		
		10 × 10 mm	8UD1900-3HA00				■	
		12 × 12 mm	8UD1900-4HA00					■
Adapters for shafts								
	• Non-interchangeability features (rivet and lug)							
	Shaft		**Article No.**					
	8 × 8 mm		8UC6022	■	■			
	8 × 8 mm		8UC6022			■		
	10 × 10 mm		8UC6023				■	
	12 × 12 mm		8UC6024					■
Phase barriers								
	• For manual transfer switching equipment (MTSE) with flat terminals • One pack (6 or 8 units) is required for the infeed side and the load side							
	Number of poles, switch	**Scope of supply**	**Article No.**					
	3-pole	6 units	3KD9308-6			■		
		6 units	3KD9408-6				■	
		6 units	3KD9508-6					■
	4-pole	8 units	3KD9308-8			■		
		8 units	3KD9408-8				■	
		8 units	3KD9508-8					■

9

System overview, page 9/4

© Siemens 2025

Terminal covers

- For manual transfer switching equipment (MTSE) with flat terminals
- One pack (6 or 8 units) is required for the infeed side and the load side
- Additional side plate covers are required for terminal covers on the terminal side, where bridging bars are used (normally the load side)

Length	Number of poles, switch	Scope of supply	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
Standard length	3-pole	6 units	3KD9504-6					■
		8 units	3KD9304-6			■		
			3KD9404-6				■	
	4-pole	8 units	3KD9504-8					■
		10 units	3KD9304-8			■		
			3KD9404-8				■	
Short version	3-pole	8 units	3KD9304-7			■		
			3KD9404-7				■	
	4-pole	10 units	3KD9304-5			■		
			3KD9404-5				■	

Terminal covers as spare parts

Length	Scope of supply	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
Standard length	1 unit	3KD9504-1					■
Short version	1 unit	3KD9304-1			■		
		3KD9404-1				■	

Side plate covers

- For lateral touch protection on the terminal side, where bridging bars are used (normally the load side)
- Suitable for terminal covers in standard length

Length	Scope of supply	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
Standard length	2 units	3KC9304-0			■		
		3KC9404-0				■	
		3KC9504-0					■

Assembly kit for floor mounting

- For floor mounting of sizes 1 and 2
- Contains 4 mounting brackets and 2 mounting plates for 3-pole and 4-pole devices

Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
3KC9120-1	■	■			

Mounting bracket as spare part



- Spare part for mounting brackets included in the assembly kit for 3-pole and 4-pole devices

Scope of supply	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
4 units	3KD9120-1	■	■			

Slide for mounting on DIN rail as spare part

- Spare part included in the scope of supply for the 3KC0 slide for DIN-rail mounting

Scope of supply	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
5 units	3KF9112-0BA00	■	■			

9

System overview, page 9/4

© Siemens 2025

3LD2 load transfer switches

Up to 250 A

	Front mounting Direct operating mechanism (knob-operated mechanism)
Actuator color	Black
Locking device	3LD23 and 3LD24 lockable with up to 3 padlocks with a hasp thickness of 4 to 6 mm (all other versions non-lockable)
Mounting	Four-hole mounting
Bridging bars	Pre-assembled

Rated uninterrupted current I_u (AC-21A, 380 ... 440 V)	Rated operational power (50/60 Hz, 380 ... 440 V)		3P	3P+N
	At AC-23A	At AC-3		
25 A	9.5 kW	7.5 kW	3LD2123-7UK01	–
32 A	11.5 kW	9.5 kW	3LD2223-7UK01	–
63 A	22.0 kW	18.5 kW	3LD2524-7UK01	–
100 A	37.0 kW	30.0 kW	3LD2724-7UK01	–
160 A	75 kW	50 kW	3LD2305-7UK01	3LD2305-7UL01
250 A	132 kW	110 kW	3LD2405-7UK01	3LD2405-7UL01

9

Accessories

4th contact (N conductor)

- Leading switch-on, lagging switch-off
- Bridging bars for the switchable N pole are not included in the scope of supply

Load transfer switch design	Article No.	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD23 (160 A)	3LD24 (250 A)
Front mounting	3LD9220-0B	■	■				
	3LD9250-0BA			■			
	3LD9280-0B				■		
	3LD9240-0B					■	■
Floor mounting	3LD9240-0C					■	■
Molded-plastic enclosures	3LD9220-0C	■	■				
	3LD9250-0CA [1]			■			
	3LD9280-0C [1]				■		

N or PE terminals

- Through-type

Load transfer switch design	Article No.	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD23 (160 A)	3LD24 (250 A)
Front mounting	3LD9220-2B	■	■				
	3LD9250-2BA			■			
	3LD9280-2B				■		
	3LD9240-2B					■	■
Floor mounting	3LD9240-2C					■	■

[1] Can only be used as a spare part, as no additional poles can be installed in the enclosure.

Quick selection guide, page 9/10

© Siemens 2025

Floor mounting **Door-coupling rotary operating mechanism (knob-operated mechanism)**		**Molded-plastic enclosures** **Direct operating mechanism (knob-operated mechanism)**
Black		Black
Lockable in O position with up to 3 padlocks with a hasp thickness of 4 to 6 mm		3LD21 and 3LD22 lockable in O position with up to 3 padlocks with a hasp thickness of 4 to 6 mm (all other versions non-lockable)
Four-hole mounting		Metric screw connection
Pre-assembled		Pre-assembled
3P	**3P+N**	**3P** **with N and PE base terminal**
–	–	3LD2165-7UB01
–	–	3LD2265-7UB01
–	–	3LD2566-7UB01
–	–	3LD2766-7UB01
3LD2318-7UK01	3LD2318-7UL01	–
3LD2418-7UK01	3LD2418-7UL01	–

9

				3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD23 (160 A)	3LD24 (250 A)
Auxiliary switches									
	• For mounting on the left and/or right • NO contact: lagging on closing, leading on opening the 3LD switch disconnector • NC contact: leading on closing, lagging on opening the 3LD switch disconnector • Indicate the switch position of the respective switch disconnector (I or II) to which the auxiliary switch module is connected • For 3-pole load transfer switches only								
Load transfer switch design	**Contacts**	**Type of contact**	**Article No.**						
Front mounting	1 NO + 1 NC	Standard	3LD9200-5B	■	■	■	■	■	■
		Gold-plated	3LD9200-5BF	■	■	■	■	■	■
Floor mounting and molded-plastic enclosure	1 NO + 1 NC	Standard	3LD9200-5C	■	■	■	■	■	■
		Gold-plated	3LD9200-5CF	■	■	■	■	■	■
	2 NO	Standard	3LD9200-6C	■	■	■	■	■	■
Terminal covers as additional touch protection									
	• For mounting on load side only								
Number of poles		**Scope of supply**	**Article No.**						
1-pole		4 units	3LD9221-2A	■	■				
			3LD9251-2A			■			
			3LD9281-2A				■		
			3LD9241-2A					■	■
3-pole		4 units	3LD9221-0A	■	■				
			3LD9251-0A			■			
Shaft coupling									
	• No ON-lock								
Load transfer switch design			**Article No.**						
Floor mounting			3LD9242-4F					■	■

Quick selection guide, page 9/10

© Siemens 2025

3KC ATC transfer control devices

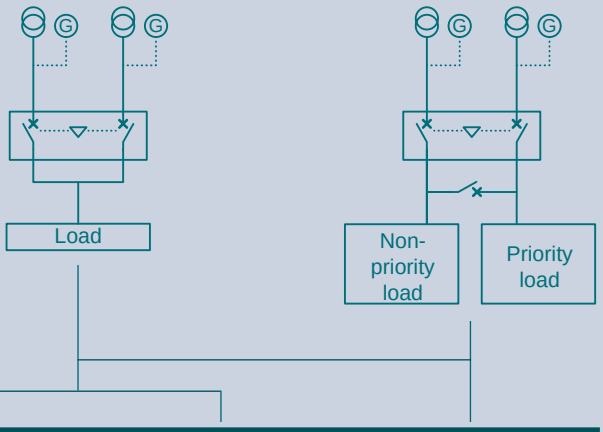

Version	Controllable switching devices	Interfaces	ATC3100	ATC6300	ATC6500
For fast parameterization without software	2	–	3KC9000-8EL10	–	–
For programming with user-friendly software, with programmable inputs and outputs	2	Optional communications interface and LCD display	–	3KC9000-8TL40	–
	3	Integrated RS485 interface and LCD display	–	–	3KC9000-8TL50

Quick selection guide, page 9/6

© Siemens 2025

Further technical specifications

		ATC3100	ATC6300	ATC6500
Application				
Transfer between		Network/network, network/generator	Network/network, network/generator, generator/generator	
Controllable switching devices		2		3
In-phase transition		–		Yes
Implementation of transfer with		3VA, 3VL, 3VT, 3WA/3WL, 3WT	3WA/3WL FSI-III, 3WT, 3KC3, 3KC4, 3VA, 3VL	3WA/3WL FSI-III, 3WL10, 3WT, 3VA
Measuring inputs				
Max. rated operational voltage U_e	Phase-phase	400 V AC	480 V AC	600 V AC
	Phase-neutral conductor	230 V AC	277 V AC	346 V AC
Measuring range	Phase-phase	–	50 ... 576 V AC	50 ... 720 V AC
	Phase-neutral conductor	161 ... 264 V AC	50 ... 333 V AC	30 ... 415 V AC
Frequency range		50/60 Hz	45 ... 65 Hz	
Relative error of measurement method		±5%	±0.25%	
Communication				
Integrated RS485 interface (Modbus RTU)		–		Yes
Optional RS485 interface (Modbus RTU)		–	Yes	Ready-integrated
Optional Ethernet interface (Modbus TCP)		–	Yes	
Power supply				
Auxiliary power supply	Rated operational voltage U_e AC	220 ... 240 V	100 ... 240 V	
	Rated operational voltage U_e DC	–	110 ... 250 V	
	Frequency range	50/60 Hz	45 ... 65 Hz	
Battery power supply	Rated operational voltage U_e DC	12/24 V		12/24/48 V
Digital inputs				
Number of inputs		5	6	8
Freely programmable		–	All	
Relay outputs				
Number of outputs		7	7	
Freely programmable		–	All	
Contact configuration		–	6 × 1 NO, 8 A, 250 V AC (AC-1) 1 × 1 CO, 8 A, 250 V AC (AC-1)	2 × 1 NO, 12 A, 250 V AC (AC-1) 2 × 1 NO, 8 A, 250 V AC (AC-1) 3 × 1 CO, 8 A, 250 V AC (AC-1)
Real time clock and event log				
ATC component		No	Yes	
Operating time without voltage		–	300 s	14 days
Max. number of events that can be stored		–	100	250
Connections				
Terminal type		Removable/plug-in		
Cable cross-section	IEC	0.5 ... 2.5 mm²	0.2 ... 2.5 mm²	
Enclosures				
Version		Door installation, DIN-rail mounting, floor mounting	Door installation	
Degree of protection		IP41 on the front, IP20 on the rear side	IP40 on the front, IP20 on the rear side	

Quick selection guide, page 9/6

© Siemens 2025

Accessories for transfer control devices

For 3KC ATC3100 transfer switching equipment

Connecting cable for 3KC ATC3100

- Measurement and control cable for connection of 3KC ATC3100 to 3VL or 3WA/3WL

Cable length	Article No.
1.8 m	3KC9000-8EL62

For 3KC ATC6300 and 3KC ATC6500 transfer switching equipment

Expansion modules with digital inputs and outputs

ATC6 expansion module	Features	Article No.
4DI	• 4 digital inputs • Including insulated 24 V DC/1 W power supply for digital inputs and sensors	3KC9000-8TL60
4DO, SSR	• 4 solid-state-compatible digital outputs • 4 NO at the solid-state-compatible output max. 55 mA at 30 V AC or 40 V DC	3KC9000-8TL61
2DI/2DO, SSR	• 2 digital inputs and 2 solid-state compatible digital outputs • Including insulated 24 V DC/1 W power supply for digital inputs and sensors • 2 NO at the solid-state-compatible output max. 55 mA at 30 V AC or 40 V DC	3KC9000-8TL62
2DO, relay	• 2 relay outputs • 2 CO at relay output, 5 A, 250 V AC (AC-1)	3KC9000-8TL63
2DI/2DO, relay	• 2 digital inputs and 2 relay outputs • 2 NO at relay output, 5 A, 250 V AC (AC-1)	3KC9000-8TL64

Expansion modules with communications interfaces

- **Note:** The 3KC ATC6500 transfer switching equipment comes with an integrated RS485 interface

ATC6 expansion module	Features	Article No.
RS485	• RS485 interface, Modbus RTU	3KC9000-8TL74
Ethernet	• Ethernet interface, Modbus TCP	3KC9000-8TL75

Front interface

- For parameterization on the front using software

ATC6 front interface	Features	Article No.
USB	• Mini-USB cable, 1.8 m	3KC9000-8TL73

Protective seal

- For front IP65 protection

Suitable for	Version	Article No.
3KC ATC6300	144 × 144 mm	3KC9000-8TL67
3KC ATC6500	240 × 180 mm	3KC9000-8TL68

9

Quick selection guide, page 9/6

© Siemens 2025

Quick selection guide, page 9/6

© Siemens 2025

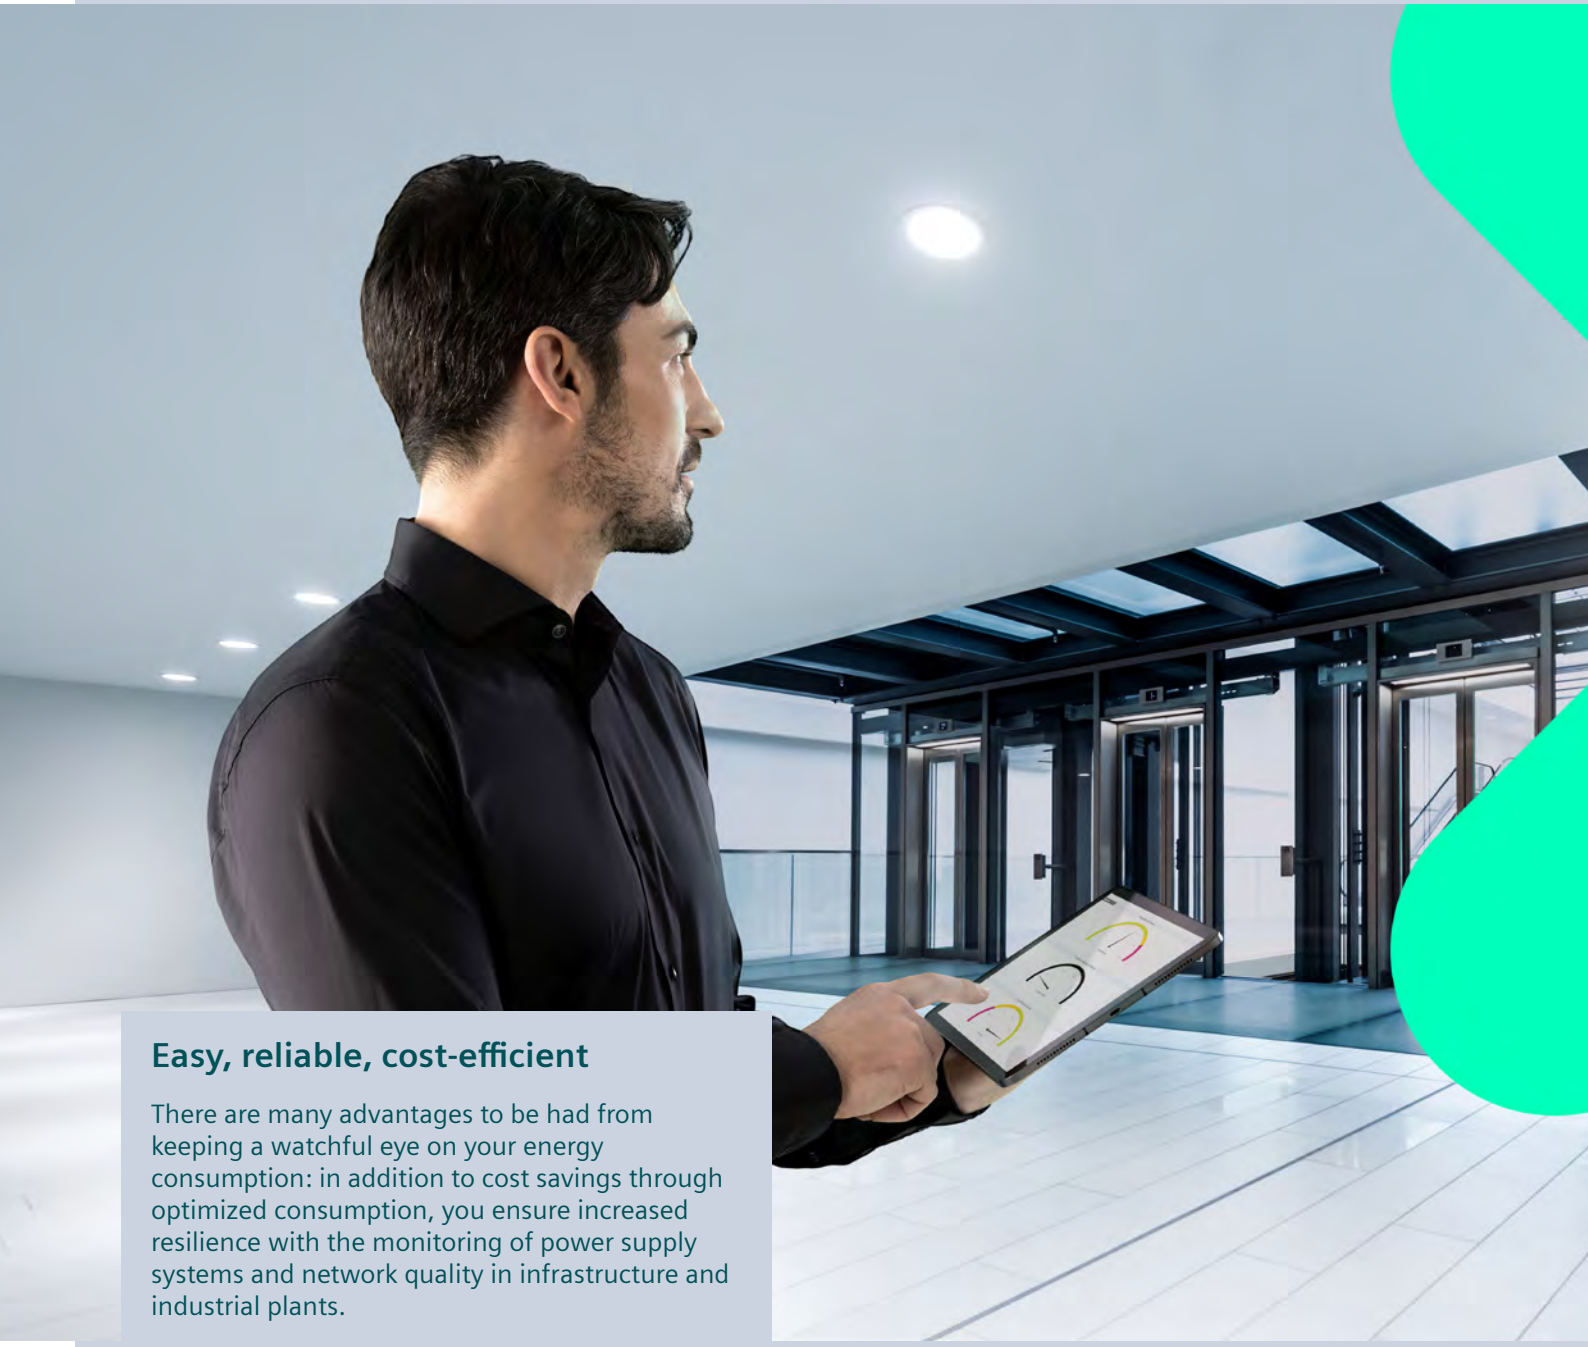

Easy, reliable, cost-efficient

There are many advantages to be had from keeping a watchful eye on your energy consumption: in addition to cost savings through optimized consumption, you ensure increased resilience with the monitoring of power supply systems and network quality in infrastructure and industrial plants.

At the same time, systematic power monitoring increases your awareness of actual energy consumption, making it a key prerequisite for greater energy efficiency.

What is more, with a power monitoring system you lay the foundation for regular energy audits and a corporate energy management system according to ISO 50001 and ISO 50003.

Note:
Products bearing our Siemens EcoTech label are identified by this clickable symbol in the catalog:

Siemens EcoTech

www.siemens.com/lowvoltage/SiemensEcoTech

© Siemens 2025

Measuring Devices, Power Monitoring and Digitalization Solutions

All the information you need 10/2
Quick selection guide 10/4
Power monitoring 10/4
Hardware components 10/6
Accessories 10/12
Software and digitalization solutions 10/14
SENTRON Powerconfig 10/14
SENTRON Powermanager 10/16
SENTRON Powercenter 10/22
PAC/3WL/3VA SIMATIC PCS 7 library 10/30
Measuring devices 10/32
7KM PAC measuring devices 10/32
7KT PAC measuring devices 10/36
SEM3 multichannel current measuring system 10/38
SEM3T multichannel temperature measuring system 10/40
Time and pulse counters 10/42
Current transformers 10/44
Bushing-type current transformers for measurement purposes 10/44

© Siemens 2025

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about measuring devices, power monitoring and digitalization solutions, please visit our websites
www.siemens.com/sentron-measuring-devices

Your product in detail

The SiePortal platform (knowledge base) provides comprehensive information
www.siemens.com/lowvoltage/product-support

- Quick Selection Guide
  - SENTRON components for increased energy efficiency **(109744725)**
- Brochure
  - SENTRON Powermanager – update and benefit **(109805178)**

The relevant tender specifications can be found at
www.siemens.com/tenderspecifications

Siemens YouTube channel

- Power monitoring (general) **sie.ag/7N6g4g**

Everything you need for your order

Refer to SiePortal to find an overview of your products (product catalog)

- Measuring devices and power monitoring **sie.ag/2kTH9Lz**
- Digitalization solutions **sie.ag/2olIiNi**
- Configuring and visualizing for SIMATIC **sie.ag/2kpbwcs**
- Software and apps **sie.ag/2kTJjuF**

Direct forwarding to the individual products in SiePortal by clicking on the article number in the catalog or entering this web address incl. article number
www.siemens.com/product_catalog_SIEP?Article No.

Configurators

The configurator reduces the time and effort required in the planning and ordering process, and allows for individual adaptations.
Configure your 7KM PAC and 7KT PAC measuring device at **www.siemens.com/lowvoltage/pac-configurator**

10

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services.
You can find your local contacts at
www.siemens.com/lowvoltage/components/contact

You will find further information on services at
www.siemens.com/service-offers

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at
www.siemens.com/support-request

© Siemens 2025

… can be found in our online services

Commissioning + operation

Your product in detail

The SiePortal platform (knowledge base) provides detailed technical information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Certificates

Online Support app available for download from the **App Store** and **Play Store**
You will find further information at
www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)

- SiePortal (product catalog)
  www.siemens.com/lowvoltage/product-catalog
- Image database
  www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAx Download Manager at
www.siemens.com/cax

Face-to-face or online training

Our training courses can be found at
www.siemens.com/sitrain-lowvoltage

- Digitalization in power distribution boards (WT-LVDIGI)
- SENTRON circuit protection devices with measuring and communication function (WT-LVBCOM)
- Power Monitoring with SENTRON (WT-LVAEM)
- Energy Management with SENTRON Powermanager – User training (LV-PM)

SENTRON Powerconfig

The combined commissioning and service tool SENTRON Powerconfig for communication-capable measuring devices, circuit protection devices and circuit breakers.

Free download **SENTRON Powerconfig**

Free download SENTRON Powerconfig mobile via **App Store** and **Play Store**

Manuals

Manuals can be found in SiePortal at
www.siemens.com/lowvoltage/manuals

- Configuration Manual
  - Measuring devices and power monitoring **(45315973)**
- Equipment Manual
  - 7KT PAC1600 energy meter **(109759827)**
  - 7KT PAC1600 multimeter **(109760293)**
  - 7KM PAC2200 power monitoring device **(109746835)**
  - 7KM PAC2200CLP power monitoring device **(109783220)**
  - 7KM PAC3200T power monitoring device **(109746833)**
  - 7KM PAC3120 and 7KM PAC3220 **(109767307)**
  - SENTRON Powercenter 3000 **(109763838)**
- System Manual
  - 7KT1261 PAC1200 multichannel current measuring system **(109963296)**
  - 7KT multichannel current measuring system **(109483442)**
  - SENTRON power monitoring device PAC4220 **(109823026)**
  - SENTRON circuit protection devices with communication and measuring function **(109791806)**
- Communication Manual
  - 3VA molded case circuit breakers with IEC and UL certification **(98746267)**
- SEM3™
  - Embedded Micro Metering Module™ **(109748928)**
- Quick Installation Guide
  - SENTRON POWERCENTER 3000 **(109766001)**
- Installation Manual
  - Circuit protection devices with communication and measuring function **(109791805)**

Technical overview – Measuring devices, power monitoring and digitalization solutions

The fast way to get you to our online services

This page provides you with comprehensive information and links on measuring devices, power monitoring and digitalization solutions

www.siemens.com/lowvoltage/product-support (109764480)

© Siemens 2025

Power monitoring

Software

Local monitoring systems

Web	Mobile App
	
Web interface integrated	**SENTRON Powerconfig**

Functions for power monitoring

Commissioning of measuring devices and circuit breakers	–	■
Displaying current data	■	■
Displaying/evaluating current/historical values	■	■
Prepared analyses/reports	–	–
Customized reporting	–	–
Data analysis in the cloud	–	–
Additionally for energy management		
Switching loads on and off	–	–
Operating environment		
Use	Free of charge	Free of charge
System requirements	Browser	Android, iOS
Suitable according to ISO 50001	–	–
Connection of non-Siemens devices	–	–
Integrated cloud interface	–	–
Further information		from page 10/14

Measuring devices, circuit breakers and circuit protection devices

Measuring devices for industrial applications	7KM PAC1020	–	–
	7KM PAC2200, PAC2200CLP	■	■ [1]
	7KM PAC3200T	■	■
	7KM PAC3120	–	■ [1]
	7KM PAC3220	■	■
	7KM PAC4220	■	■
Measuring devices for buildings and infrastructure	7KT PAC1200	■	–
	7KT PAC1600	–	–
	SEM3, SEM3T	■	–
Circuit breakers	3WA	–	■
	3WL	–	■
	3WL10, 3VA27	–	–
	3VA ETU5/8	–	■
Communication-capable circuit protection devices	SENTRON Powercenter 1000/1100 5ST3 COM AS/FC, 5ST3 COM RCA, 5SL6 COM MCB, 5SL6 COM RCM MCB, 5SV6 COM AFDD/MCB, 5SV8 COM RCM, 5TY1 COM ECPD, 5TT4 COM DI/DO, 3NA COM Fuse	–	■
	SENTRON Powercenter 2000	■	■
Other Modbus devices		–	–

■ Function available – Function not available

[1] Via gateway (PAC4200) [2] Incl. module for Desigo CC building management [3] Via XML/JSON [4] Via SPP2000 [5] Via Modbus TCP

© Siemens 2025

	PC-based			World of SIMATIC TIA Portal	
					
	SENTRON Powerconfig	**SENTRON Powermanager** [2]	**SENTRON Powercenter 3000**	**SIMATIC TIA Portal integrated**	**SIMATIC TIA Portal capable**
	■	–	–	■	–
	■	■	■	■	■
	■	■	■	■	■
	–	■	–	■	–
	–	■	–	–	–
	–	–	–	–	–
	–	■	–	■	■
	Free of charge	License and trial license	–	–	–
	Windows X64	Windows X64	–	–	–
	–	■ (TÜV)	■	–	–
	–	■	■	–	–
	–	■	■	–	–
	from page 10/14	**from page 10/18**	**from page 10/22**		
	■	■ [3]	■	–	–
	■	■	■	–	■ [4]
	■	■	■	–	■ [4]
	■	■	■	–	–
	■	■	■	■	■
	■	■	■	■	■
	■	■	–	–	–
	■	■	■	–	–
	–	■ | ■ [3]	–	–	–
	■	■	■	–	■
	■	■	■	■	■
	■	■	–	–	■
	■	■	■	■	■
	■	■	■	–	■ [5]
	■	■	–	–	■ [5]
	■	■	■	–	–

10

© Siemens 2025

Hardware components

Industry

	7KM PAC1020	7KM PAC2200	7KM PAC2200CLP	7KM PAC3200T
Type of mounting				
Front mounting | DIN rail | Screw mounting	■ | – | –	– | ■ | –	– | ■ | –	– | ■ | –
Withdrawable | Fixed-mounted	– | –	– | –	– | –	– | –
Measuring connection				
Direct measurement	–	■	■	–
Transformer measurement	■	■	■	■
Multichannel measuring system	–	–	–	–
Suitable transformers				
Window-type current transformers	■	■	■	■
Folding transformer	■	■	■	■
Integrated transformer	–	–	–	–
Commissioning				
MID version | Load profile (PTB) | PTB firmware update	– | – | –	■ | – | –	■ | ■ | –	– | – | –
Hardware write protection	–	■	■	■
Max. input voltage L-L/L-N	400 V/ 230 V	400 V/ 230 V	400 V/ 230 V	400 V/ 230 V
Transformer connection version	x/1 A or x/5 A	x/1 A or x/5 A	x/1 A or x/5 A	x/1 A or x/5 A
Direct connection version	–	65 A	65 A	–
DC power supply unit with extra-low voltage version	–	–	–	–
1-phase counter version	–	■	■	–
Electrically isolated voltage inputs	–	–	–	–
Version without display (for web interface)	–	–	–	■
Evaluation				
Measured quantities				
Average value of measured values	–	■	■	■
Voltage, current, frequency	■	■	■	■
Power, power factor	■	■	■	■
Energy measurement				
Daily energy storage	■	> 221 days	> 10 years	> 221 days
Monthly energy storage	■	> 25 months	> 10 years	> 25 months
Yearly energy storage	■	> 7 years	> 10 years	> 7 years
Apparent | Active | Reactive energy | p.f. | power factor	■ | ■ | ■ | – | ■	■ | ■ | ■ | – | ■	■ | ■ | ■ | – | ■	■ | ■ | ■ | – | ■
Distortion factor THD (voltage, current)	–	–	–	■
Harmonics (voltage, current)	–	–	–	–
Phase angle/phase chart	–	–	–	–
Load profile recording	–	–	■	–
Flicker acc. to IEC 61000-4-15	–	–	–	–
Monitoring functions				
Operating hours counter	–	–	–	■
Limit monitoring	–	–	–	■
Logic functions	–	–	–	■
Event log	–	–	–	–
Gateway function	–	–	–	–
Reporting acc. to EN 50160	–	–	–	–
Integrated fault recorder	–	–	–	–
Integrated communications interfaces				
Digital inputs/digital outputs	1/1	1/1	1/1	1/1
S0 interface	■	■	■	■
M-Bus	–	■	–	–
RS485 (Modbus RTU)	■	■	–	–
Ethernet with Modbus TCP	–	■	■	■
BACnet	–	–	–	–
Further information				
	See page 10/32	See page 10/32	See page 10/32	See page 10/32

[1] From 06/2025 universal power supply unit

© Siemens 2025

Industry

7KM PAC3120 Standard | MID		7KM PAC3220 Standard | MID		7KM PAC4220	SICAM Q100	SICAM Q200
■ | – | –		■ | – | –		■ | – | –	■ | ■ | –	■ | – | –
– | –		– | –		– | –	– | –	– | –
–		–		–	–	–
■		■		■	■	■
–		–		–	–	–
■		■		■	■	■
■		■		■	■	■
–		–		–	–	–
– | – | –	■ | – | ■	– | – | –	■ | – | ■	– | – | –	– | – | –	– | – | –
■		■		■	–	–
690 V/ 400 V	400 V/ 230 V	690 V/ 400 V	400 V/ 230 V	690 V/ 400 V	690 V/ 400 V	690 V/ 400 V
x/1 A or x/5 A		x/1 A or x/5 A		x/1 A or x/5 A	x/1 A or x/5 A	x/1 A or x/5 A
–		–		–	–	–
24 ... 60 V DC ±20%	–	24 ... 60 V DC ±20%	–	24 ... 48 V DC ±25%	24 ... 250 V DC	110 ... 250 V D [1]
–		–		–	–	–
–		–		–	■	■
–		–		–	■	–
■		■		■	■	■
■		■		■	■	■
■		■		■	■	■
> 221 days		> 221 days		> 10 years	■	■
> 25 months		> 25 months		> 10 years	■	■
> 7 years		> 7 years		> 10 years	■	■
■ | ■ | ■ | ■ | ■		■ | ■ | ■ | ■ | ■		■ | ■ | ■ | ■ | ■	■ | ■ | ■ | ■ | ■	■ | ■ | ■ | ■ | ■
■		■		■	■	■
–		–		2. bis 64.	■	■
–		–		■	■	■
–		–		■	■	■
–		–		–	■	■
■		■		■	–	–
■		■		■	■	■
■		■		■	■	■
–		–		> 4000 events	■	■
–		–		■	■	■
–		–		–	■	■
–		–		–	■	■
2/2		2/2		2/2	2/2	6/6
■		■		■	–	–
–		–		–	–	–
■		–		–	■	■
–		■		■	■	■
–		–		–	–	–
See page 10/32		See page 10/32		See page 10/32	See page 10/32	See page 10/32

[1] 24 ... 48 V DC ±25%

© Siemens 2025

Hardware components

Buildings and infrastructure

	7KT PAC1200	7KT PAC1600	SEM3
Type of mounting			
Front mounting | DIN rail | Screw mounting	– |■| –	– |■| –	– | – |■
Withdrawable | Fixed-mounted	– | –	– | –	– | –
Measuring connection			
Direct measurement	■	■	–
Transformer measurement	■	■	–
Multichannel measuring system	■	–	■
Suitable transformers			
Window-type current transformers	■	■	■
Folding transformer	■	■	■
Integrated transformer	■	–	■
Commissioning			
MID version | PTB-A50.7 | PTB firmware update	– | – | –	■| – | –	– | – | –
Max. input voltage L-L/L-N	400 V/230 V	400 V/230 V	480 V/277 V
Transformer connection version	x/5 A	x/5 A	50 ... 1200 A/0.1 A
Direct connection version	40/63 A	63/80 A	–
DC power supply unit with extra-low voltage version	–	–	–
1-phase counter version	■	■	■
Electrically isolated voltage inputs	–	–	–
Version without display (for web interface)	■	–	■
Evaluation			
Measured quantities			
Average value of measured values	–	–	–
Voltage, current, frequency	■	■	■
Power, power factor	■	■	■
Energy measurement			
Daily energy storage	■	–	–
Monthly energy storage	■	–	–
Yearly energy storage	■	–	–
Apparent | Active | Reactive energy | p.f. | power factor	– |■|■| – | –	■|■|■| – | –	■|■|■|■|■
Distortion factor THD (voltage, current)	–	–	–
Harmonics (voltage, current)	–	–	–
Phase angle/phase chart	–	–	–
Load profile recording	–	–	■
Flicker acc. to IEC 61000-4-15	–	–	–
Monitoring functions			
Operating hours counter	–	■	–
Limit monitoring	–	■	–
Logic functions	–	–	■
Event log	–	–	■
Gateway function	–	–	–
Reporting acc. to EN 50160	–	–	–
Integrated fault recorder	–	–	–
Integrated communications interfaces			
Digital inputs/digital outputs	–	1/1	2/1
S0 interface	–	■	–
M-Bus	–	■	–
RS485 (Modbus RTU)	–	■	■
Ethernet with Modbus TCP	■	–	■
BACnet	–	–	■
Further information			
	See page 10/37	See page 10/36	See page 10/38

© Siemens 2025

Circuit breakers

3WA	3WL	3WL10/3VA27	3VA ETU8
– | – | –	– | – | –	– | – | –	– | – | –
■|■	■|■	■|■	– |■
–	–	–	–
■	■	■	■
–	–	–	–
–	–	–	–
–	–	–	–
■	■	■	■
– | – | –	– | – | –	– | – | –	– | – | –
1000 V/577 V	690 V/400 V	690 V/400 V	690 V/400 V
integrated	integrated	integrated	integrated
–	–	–	–
24 V DC	24 V DC	24 V DC	24 V DC
–	–	–	–
–	–	–	–
–	–	–	–
■	■	–	–
■	■	■	■
■	■	■	■
–	–	–	–
–	–	–	–
–	–	–	–
■|■|■|■|■	■|■|■|■|■	■|■|■|■| –	■|■|■|■|■
■	■	–	■
2nd to 31st	2nd to 29th	–	–
–	–	–	–
■	■	■	■
–	–	–	–
■	■	–	■
–	■	■	■
–	–	–	–
–	■	■	■
–	–	–	–
–	–	–	–
–	–	–	–
■	■	■	■
■	–	■	■
–	–	–	–
–	■	■	■
■	■	■	■
–	–	–	–
See page 1/4	See page 1/76	See page 1/76 and page 2/17	See page 2/18

© Siemens 2025

Hardware components

Circuit protection devices

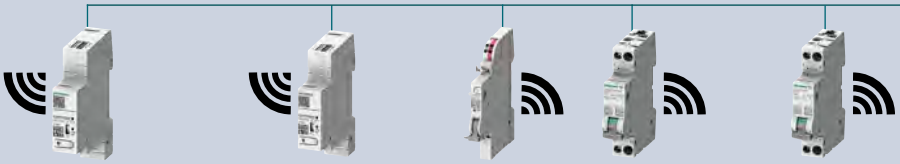

	SENTRON Powercenter 1100	SENTRON Powercenter 2000 new	5ST3 COM AS/FC	5SV6 COM AFDD	5SL6 COM MCB EM | RCM/EM
Communications interfaces					
Radio link	■	■	■	■	■
Modbus TCP	■	■	–	–	–
Bluetooth	■	■	–	–	–
Gateway function	■	■	–	–	–
Secure protocol (https)	■	■	–	–	–
Login (role-based)	■	■	–	–	–
Web server	–	■	–	–	–
Cloud (MQTT)	–	■	–	–	
Compatible with SENTRON Powercenter 1000	–	–	■	■	■
Type of mounting					
DIN rail	■	■	■	■	■
Busbar	–	–	–	–	–
Evaluation					
Switching state	–	–	■	■	■
Temperature	■	■	■	■	■
Current	–	–	–	■	■
Residual current (in various frequency ranges)	–	–	–	–	– ■
Voltage	–	–	–	■	■
Frequency	–	–	–	■	■
Apparent, reactive and active power, power factor	–	–	–	■	■
Reactive and active energy	–	–	–	■	■
THD	–	–	–	–	■
Monitoring functions					
Operating hours counter	■	■	■	■	■
Operating hours counter with load current	–	–	–	■	■
Operating cycles counter	–	–	■	■	■
Trip counter	–	–	■	■	■
Short-circuit trip counter	–	–	–	■	■
Alarms for limit monitoring	■	■	■	■	■
Detection of overload and short circuit	–	–	–	■	■
Detection of arcing faults	–	–	–	■	–
Switching function					
Remote switching	–	–	–	–	–
RCCB test function	–	–	–	–	–
Digital input/output	–	–	–	–	–
Time delay	–	–	–	–	–
Timing function	–	–	–	–	–
Configuration of protective function	–	–	–	–	–
Further information					
	See page 10/28	See page 10/26	See page 3/58 and 4/68	See page 4/58	See page 3/42

[1] Protection function provided, but tripping is not communicated

© Siemens 2025

Circuit protection devices

3NA3 COM | 3NA6 COM fuses new	5ST3 COM remote control auxiliaries	5SV8 COM RCM new	5TT4 COM DI/DO new	5TY1 COM ECPD
■	■	■	■	■
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
■	■	–	–	–
–	■	■	■	■
■	–	–	–	–
–	■	–	–	■
■	■	■	■	■
■	–	–	–	■
–	–	■	–	■
–	–	–	–	■
–	–	–	–	■
–	–	–	–	■
– ■	–	–	–	–
■	■	■	■	■
■	–	–	–	■
–	■	■	■	■
–	■	–	–	■
–	–	–	–	■
■	■	■	■	■
– [1]	–	–	–	■
–	–	–	–	–
–	■	–	■	■
–	■	–	–	■
–	–	■	■	■
–	–	–	■	–
–	■	–	■	■
–	–	–	–	■
See page 7/52 and 7/54	See page 3/63 and 4/73	See page 11/16	See page 5/26	See page 4/54

10

© Siemens 2025

Accessories

Communication modules

		7KM Switched Ethernet PROFINET/Modbus TCP	7KM PROFIBUS DP	7KM RS485 Modbus RTU	SENTRON PROFINET Proxy SPP2000
Industry					
	7KM PAC1020	–	–	–	–
	7KM PAC2200	–	–	–	■
	7KM PAC2200CLP	–	–	–	■
	7KM PAC3200T	–	–	–	■
	7KM PAC3120/ 7KM PAC3120 MID	–	–	–	–
	7KM PAC3220/ 7KM PAC3220 MID	■	■	■	–
	7KM PAC4220	■	■	■	–
Buildings and infrastructure					
	7KT PAC1200	–	–	–	–
	7KT PAC1600	–	–	–	–
	SEM3	–	–	–	–
Circuit breakers					
	3WA/3WL	–	–	–	–
	3WL10/3VA27	–	–	–	–
	3VA ETU5/8	■	■	■	–

[1] Current transformers must be used for rated operational currents above 63 A

© Siemens 2025

Expansion modules		Current transformers		
7KM PAC 4DI/2DO	**7KM PAC I(N), I(Diff), analog**	**4NC**	**7KT**	**3NJ calibrated**
–	–	■	■	■
–	–	■	■	■
–	–	–	–	■
–	–	■	■	■
–	–	■	■	■
■	■	■	■	■
■	■	■	■	■
–	–	■ [1)]	■ [1)]	■ [1)]
–	–	■	■	■
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–

10

© Siemens 2025

SENTRON Powerconfig

Configuration software for commissioning and maintenance

Free download **SENTRON Powerconfig**

You will find further information on the internet at **www.siemens.com/sentron**

Free download SENTRON Powerconfig mobile via:

App Store **Play Store**

- Software tool for the efficient commissioning and diagnostics of communication-capable SENTRON components
- Supports all electronic SENTRON devices, e.g. 3WA, 3WL, 3VA, SENTRON Powercenter 3000 and SENTRON Powercenter 1000, with 5ST3 AS+FC COM, 5ST3 RCA COM, 5SL6 MCB COM, 5SV6 AFDD COM and 3NA Fuse COM
- General range of functions:
  - User-friendly parameter assignment even for complex devices such as the 3WA
  - Fast, optical detection of communication and measuring-capable circuit protection devices, such as SENTRON Powercenter 1000
  - Saving and printing of device settings
  - Testing the 3WA and archiving the test results
  - Monitoring, saving and printing of instantaneous measured quantities
  - Execution of specific device functions, such as resetting of devices and setting of energy meters
- Service functions:
  - Detection of devices and acquisition of measured quantities and status information via different networks, e.g. via Ethernet
  - Device and status acquisition via local interfaces, such as Bluetooth and USB
  - Acquisition and archiving of historic records, such as load profiles and events
  - Firmware updates
  - Switching of language packs for 7KM PAC measuring devices
- Cooperative interaction between SENTRON Powerconfig mobile and SENTRON Powerconfig on the PC:
  - SENTRON Powerconfig mobile offers a high degree of mobile versatility, e.g. to scan codes on the circuit protection devices
  - SENTRON Powerconfig on the PC can be used for subsequent editing and archiving of the system configuration

Quick selection guide, page 10/4

© Siemens 2025

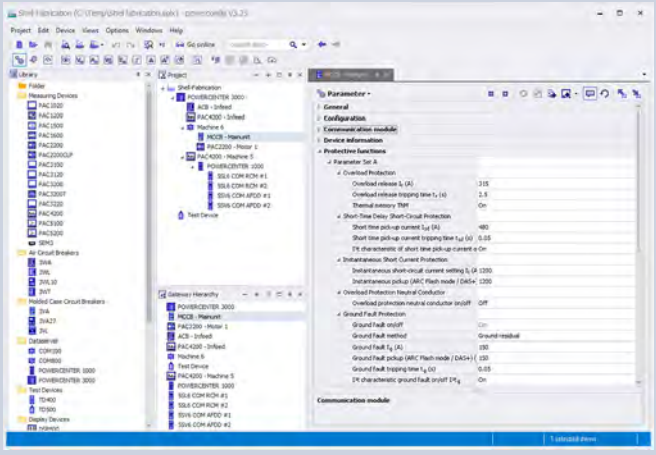

Setting of parameter values

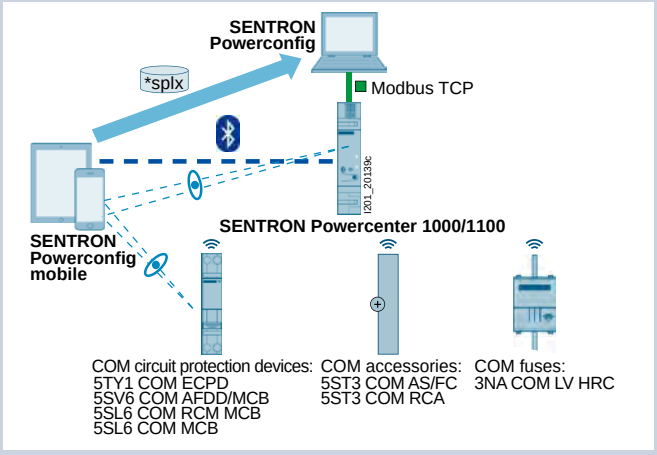

Scanning of circuit protection devices

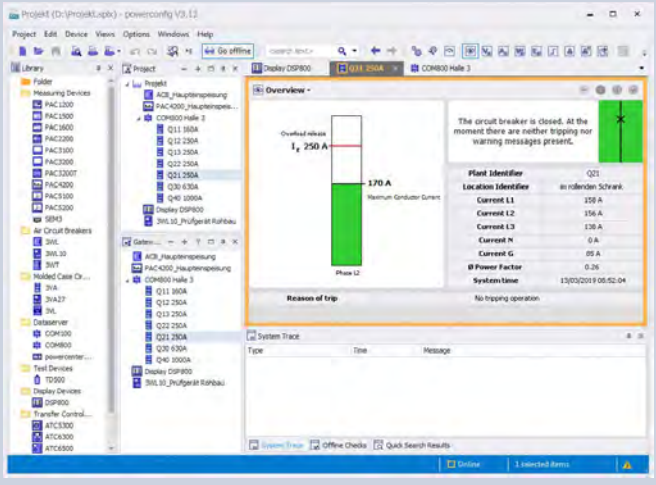

Display of the circuit breaker status

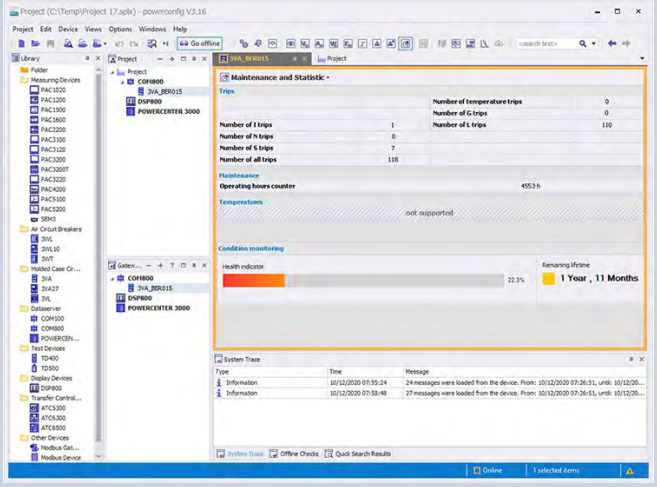

Display of the state of health of the 3VA

10

Quick selection guide, page 10/4

© Siemens 2025

SENTRON Powermanager

PC-based power monitoring software

SENTRON Powermanager

SENTRON Powermanager is the power monitoring software for Smart Infrastructure. Together with the latest protection/ switching devices and measuring instruments from the SENTRON portfolio, SENTRON Powermanager increases the energy transparency and availability of your energy infrastructure in the building, in the plant or in your factory. This contributes significantly to improving your energy efficiency in accordance with national and international norms and standards. SENTRON Powermanager supports all media (water, compressed air, gas, electrical power, etc.) and can integrate devices with various protocols (Modbus, BACnet, IEC 61850) and visualize them in ready-made or user-specific dashboards. In addition, SENTRON Powermanager offers alarm and event management, predefined and freely configurable reporting systems and an optional graphics editor for dedicated workflows and views.

SENTRON Powermanager is based on the Desigo CC building management system and is also available as an expansion module.

You can find the latest download of the standalone power monitoring software and change information at **www.siemens.com/lowvoltage/product-support (109771760)**

If you wish to migrate from classic Powermanager (3.6) to the current version, please get in touch with your local Siemens contact.

You will find further information on the internet at **www.siemens.com/powermanager**

You will find training courses on the internet at **www.siemens.com/sitrain-lowvoltage**

SENTRON Powermanager – measuring device diagram

Quick selection guide, page 10/4

© Siemens 2025

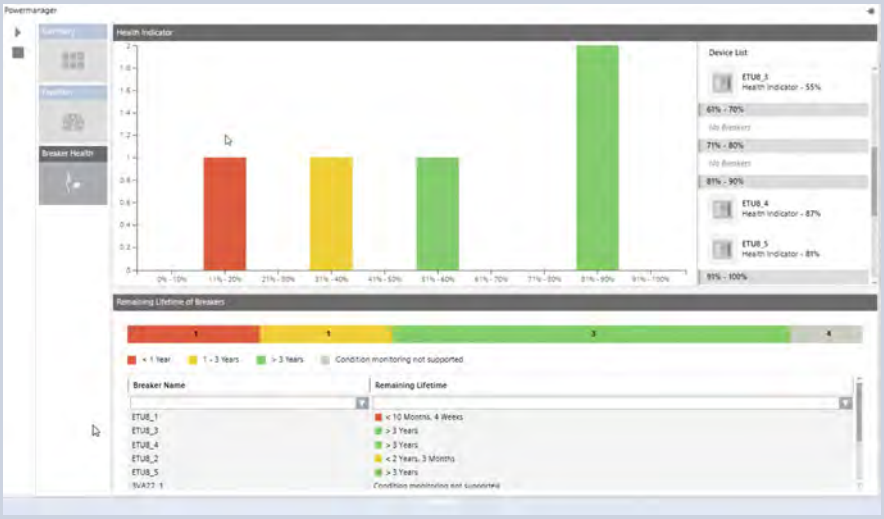

Health Dashboard

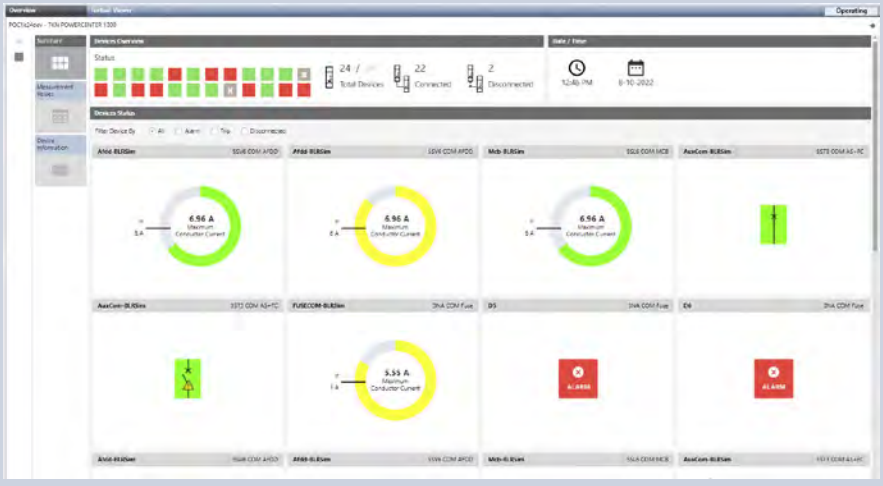

SENTRON Powercenter 1000 Dashboard

10

Quick selection guide, page 10/4

© Siemens 2025

SENTRON Powermanager

PC-based power monitoring software

SENTRON Powermanager PQ Advisor

The Power Quality Advisor in the SENTRON Powermanager enables the automatic evaluation and archiving of power quality information from the SICAM Q100 and Q200 devices in the SENTRON Powermanager. Dashboards and reports in accordance with EN 50160 as well as higher-level area and system dashboards make it easier to localize power quality events.

The integrated and dedicated assessment of the waveform enables a detailed evaluation of the cause of the power quality event.

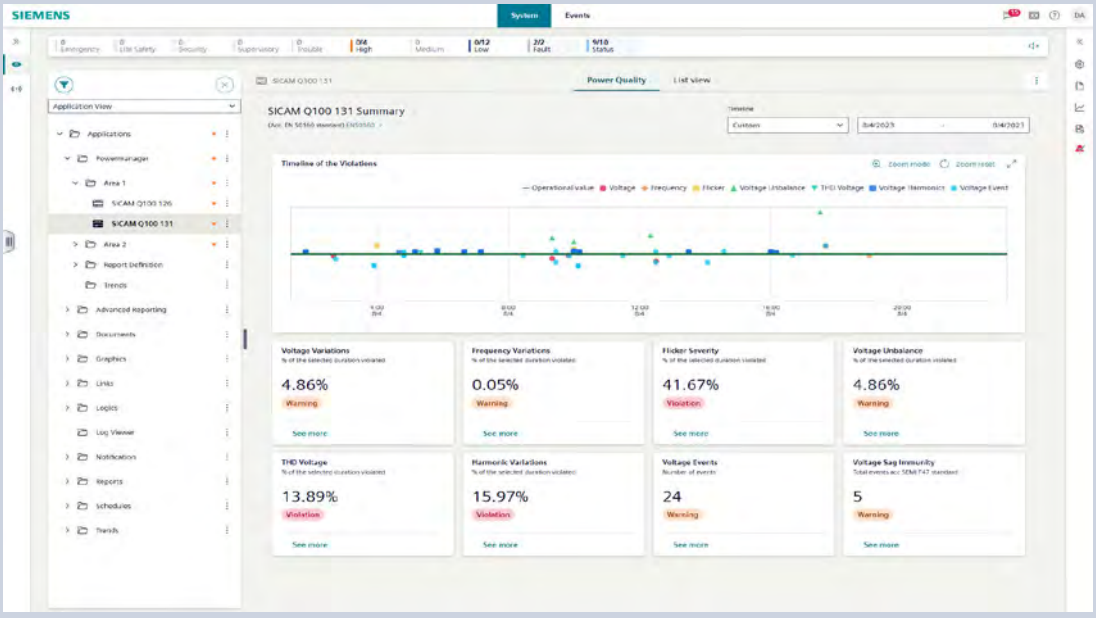

PQ overview – all events at a glance according to EN 50160

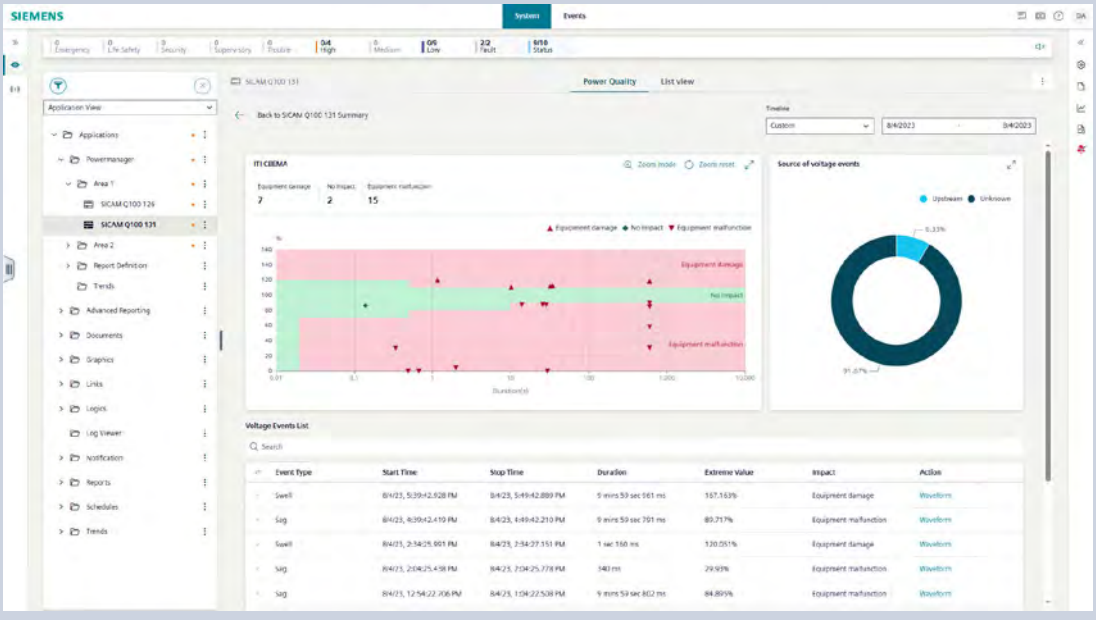

Interpretation of the voltage events and their effects using the ITIC diagram

Quick selection guide, page 10/4

© Siemens 2025

Voltage events – detailed voltage curve for detailed evaluation

10

Quick selection guide, page 10/4

© Siemens 2025

SENTRON Powermanager

PC-based power monitoring software

Version	Description	Article No.
SENTRON Powermanager		
Extended Package	Full product license for up to 10 devices (including 2 clients), installation for client/server, web access via Windows App Client	7KN2710-2CE40-0YC0
Trial license	Full product license limited to 60 days for up to 10 devices, incl. all functions; software download via SIOS Portal www.siemens.com/lowvoltage/product-support (109771760) A free license for one-time use (trial license limited to 60 days) must also be requested via www.siemens.com/sentron-powermanager-trialversion	
Device expansions		
Device Pack (20)	Device expansion license for up to 20 devices	7KN2711-1CE40-0YC0
Device Pack (50)	Device expansion license for up to 50 devices	7KN2711-2CE40-0YC0
Device Pack (100)	Device expansion license for up to 100 devices	7KN2711-3CE40-0YC0
Device Pack (200)	Device expansion license for up to 200 devices	7KN2711-4CE40-0YC0
Device Pack (500)	Device expansion license for up to 500 devices	7KN2711-5CE40-0YC0
Device Pack (1000)	Device expansion license for up to 1000 devices	7KN2711-6CE40-0YC0
Option packs		
"Graphics Editor 60 Days" option pack	Option for creating any number of freely configured graphics, validity period limited to 60 days	7KN2712-0CE40-0YC0
"Graphics Editor Unlimited" option pack	Option for creating custom-made SENTRON Powermanager applications, e.g. graphics; especially suitable for partners such as Solution Providers, control cabinet builders, etc.	7KN2712-0CE40-0YC1
"Client (2)" option pack	Expansion for up to 2 clients	7KN2712-1CE40-0YC0
"Client (5)" option pack	Expansion for up to 5 clients	7KN2712-2CE40-0YC0
"SENTRON Powermanager OPC UA/DA Client (100)" option pack	100 data points for OPC client configuration	7KN2712-3CE40-0YC0
"SENTRON Powermanager OPC UA Server" option pack	OPC server configuration	7KN2712-3CE40-0YC2
"SENTRON Powermanager Server" option pack	Additionally, SENTRON Powermanager server license for distributed systems without devices, web, etc.	7KN2712-4CE40-0YC0
"SENTRON logics" option pack	Extended logic function for status or event-based response	7KN2712-6CE40-0YC0
SENTRON Powermanager SUR-Unit	Update – Extend subscription period by 12 months	7KN2713-7CE40-0YC0
SENTRON Powermanager SUS-Unit	Update – Start new 12-month subscription period	7KN2713-8CE40-0YC0
"SENTRON Powermanager BACnet protocoll" option pack	Creating, evaluating and managing devices with BACnet communication in SENTRON Powermanager	7KN2712-3CE40-1YC0
"SENTRON Powermanager IEC 61850 protocol " option pack	Creating, evaluating and managing devices with IEC 61850 communication in SENTRON Powermanager	7KN2712-3CE40-1YC1
"SENTRON Powermanager PQ Advisor" option pack	Power Quality Advisor extension requires IEC 61850 protocol. Evaluation and archiving of power quality information from SICAM Q100/Q200 in EN 50160 dashboards and reports.	7KN2712-5CE40-0YC0
System packages		
System 3	Package comprising 1 × SENTRON Powermanager Extended 3 × PAC3220	7KN2715-3CE40-0YC0
System 5	Package comprising 1 × SENTRON Powermanager Extended 5 × PAC2200 transformer measurement Modbus TCP	7KN2715-5CE40-0YC0

Quick selection guide, page 10/4

© Siemens 2025

Quick selection guide, page 10/4

© Siemens 2025

SENTRON Powercenter

Edge/IoT-based data acquisition and visualization for low-voltage power distribution

SENTRON Powercenter 3000

Areas of use and applications
- Basis for certified energy management according to ISO 50001 to improve energy efficiency and optimize maintenance management
- Transparency and fault localization in single and distributed locations
- Future-proof foundation for expanding data analysis from on-site analysis to cloud-based analysis

Features
- Simple and fast commissioning via
  - Reuse of the configuration data from SENTRON Powerconfig or
  - An integrated network scan with automatic device recognition and dashboard selection in accordance with the device type
- Data acquisition, storage and provision
  - All key data of lower-level devices and energy/demand values, breaker status, signals etc.
  - The 15min energy values as a basis for energy reporting as part of ISO 50001 certification
  - Export in form of CSV file (once, periodically, send e.g. by email
- Visualization/data analysis
  - Analysis of the data in graphical form, e.g. lines, bars, diagrams, and also in tabular form
  - In the web interface of the SENTRON Powercenter 3000 via the predefined device dashboards and the customer-specific dashboards
  - Can also be output as a report
- Interfaces for the digitalization of low-voltage
  - Integrated and easy-to-configure communication with Siemens Xcelerator (e.g. Building X, Electrification X)
  - To other cloud applications, e.g. based on AWS, Azure, AliCloud, etc.
  - Via Modbus TCP for other applications, e.g. SENTRON Powermanager
- General:
  - Energy and status data from infeed to the final circuit of up to 32 SENTRON protection, switching, measuring and monitoring devices (expandable to up to 212 devices with license-based extensions – subject to fee)
  - Non-Siemens devices are created via SENTRON Power Device Engineer and treated like any other device
  - Compact design, Web interface in 10 languages
  - Flexible IT security features for protection against unauthorized access

More information:
www.siemens.com/sentron-powercenter3000

Version	Description	Article No.
SENTRON Powercenter 3000	Basic – The SENTRON Powercenter 3000 product, incl. handling of up to 32 devices	7KN1310-0MC00-0AA8
SENTRON Powercenter 3000 device expansion (10)	License for an additional 10 devices [1]	7KN1300-1AA00-0YA0
SENTRON Powercenter 3000 device expansion (20)	License for an additional 20 devices [1]	7KN1300-2AA00-0YA0
SENTRON Powercenter 3000 device expansion (50)	License for an additional 50 devices [1]	7KN1300-3AA00-0YA0
SENTRON Powercenter 3000 device expansion (100)	License for an additional 100 devices [1]	7KN1300-4AA00-0YA0

[1] Please note that each "device expansion" license can only be executed once on a SENTRON Powercenter 3000. You can add each "device expansion" license type once to your SENTRON Powercenter 3000, which increases the number of devices to a total number of 212 (32 Basic plus 180 via additional licenses).

Note:
Certified energy data management system for use with EN ISO 50001:
www.siemens.com/lowvoltage/produkt-support (109976080)

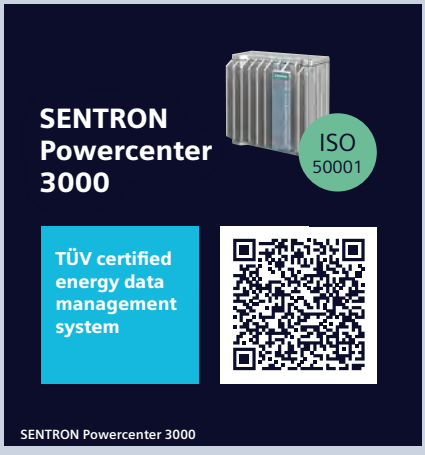

Quick selection guide, page 10/4

© Siemens 2025

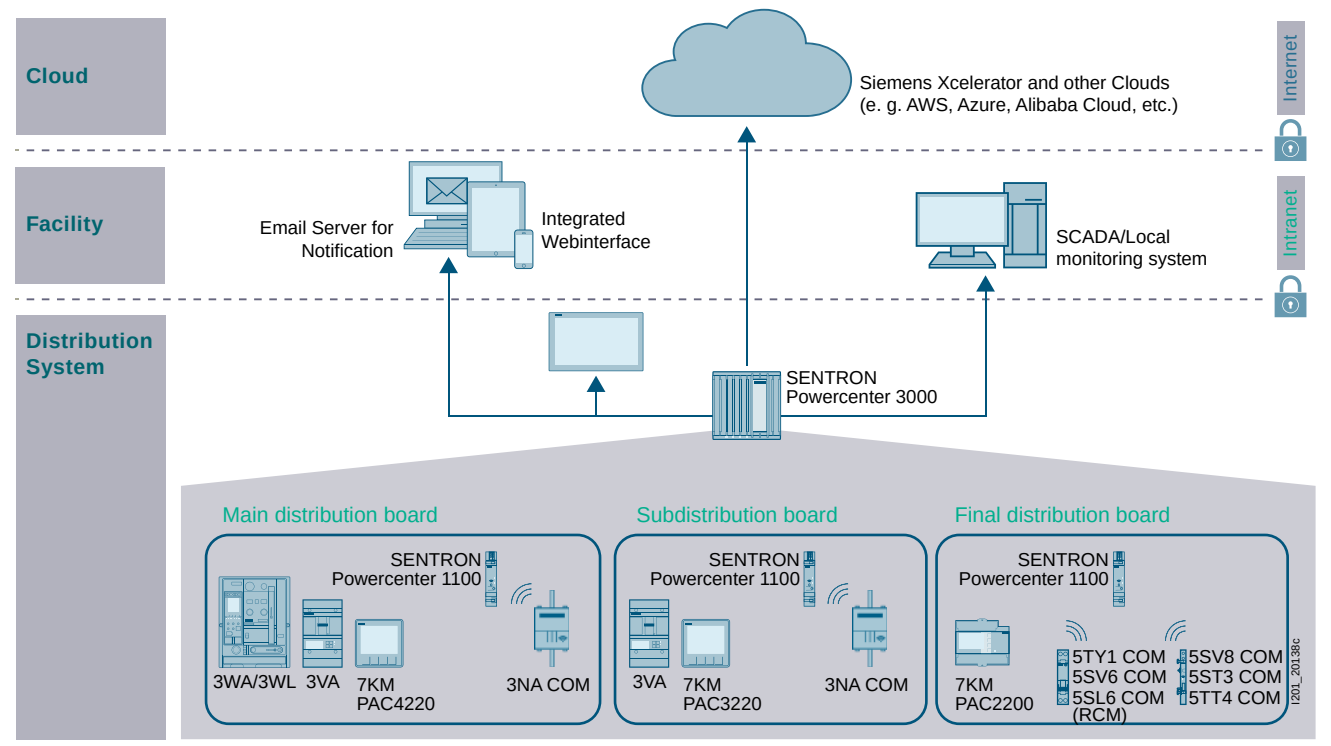

Areas of use and applications for SENTRON Powercenter 3000

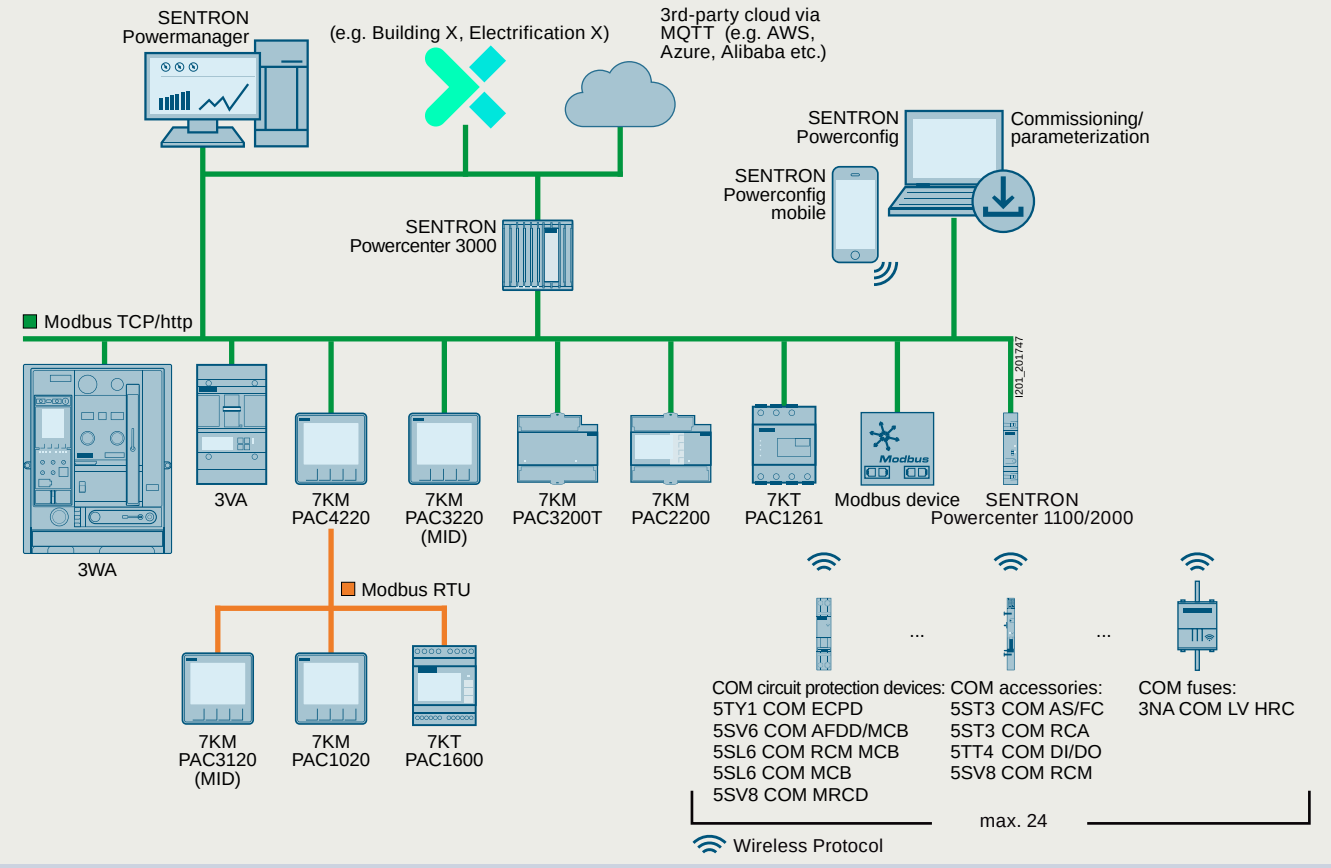

Quick selection guide, page 10/4

© Siemens 2025

SENTRON Powercenter

Edge/IoT-based data acquisition and visualization for low-voltage power distribution

The following examples give an impression of the diverse functions of the SENTRON Powercenter 3000. These are aimed at different customer groups, such as energy managers and maintenance personnel, but also electricians. All information is available via a web browser on a standard PC, but also on mobile devices, such as tablets and smartphones. The information is therefore also available remotely within the company network.

Predefined dashboards

These are automatically selected according to the configuration of the SENTRON Powercenter 3000 and show the most important data of SENTRON protection, switching and measuring devices.

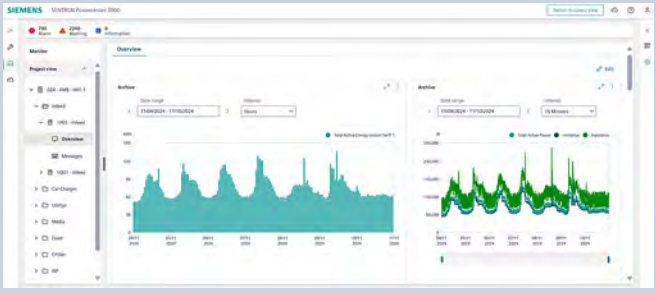

Data visualization based on the example of a measuring device

- Key data points such as active energy or active power are displayed in the form of a curve (time range can be altered by scrolling).
- Further instantaneous values or device information are available in tabular form.

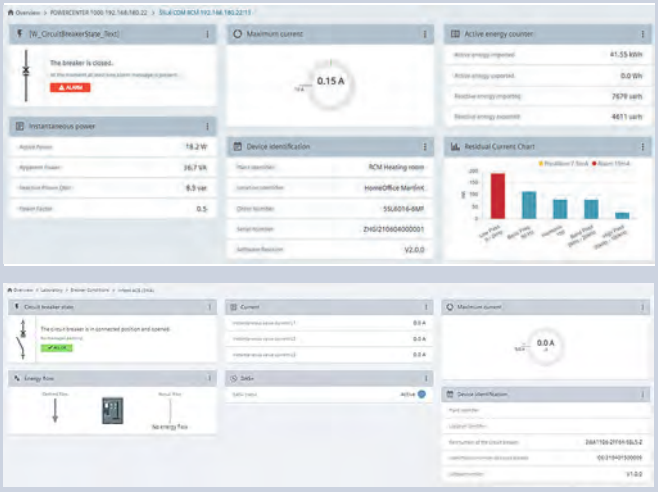

Information on the status of protection and switching devices

- Representation of the device status, e.g. open, closed, tripped and relevant measured quantities, such as maximum phase current, total power ...
- Condition monitoring information is used to assess the state of health and predict the remaining service life

Creation of customer-specific dashboards

Users can create their own dashboards (in addition to the standard "Overview" dashboard) by using widgets from the library to compile their own views of the most important information.

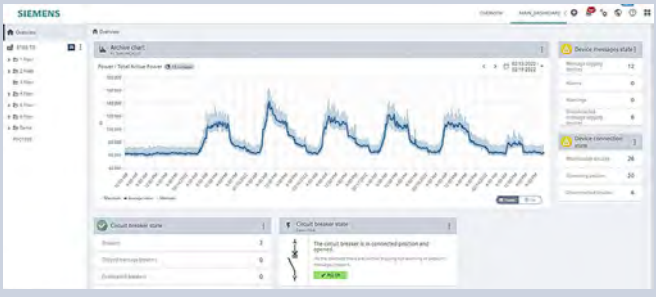

Example of a customer-specific dashboard

Several examples of the UI elements

Easy-to-operate user interface

Further UI elements provide additional operating convenience and more in-depth views of the collected data.

- The alarm widget serves as a convenient tool to obtain an overview of the active limit monitoring and any alarms that may be triggered.
  - In the archive graph widget, the 15min energy values (kWh) are displayed as a bar chart
  - The detailed display on "mouse over" shows the individual values in the bar chart with the corresponding date/time stamp
- Dashboards and their contents, e.g. results of data analysis can be printed using the web browser print function

Quick selection guide, page 10/4

© Siemens 2025

Reporting

Version V1.10 substantially expands the reporting functionality. Reports can be created manually or automatically. Manually created reports are available for download, automatically created reports can be sent via e-mail or saved on an SFTP server. Reports can be created in Excel or PDF file format.

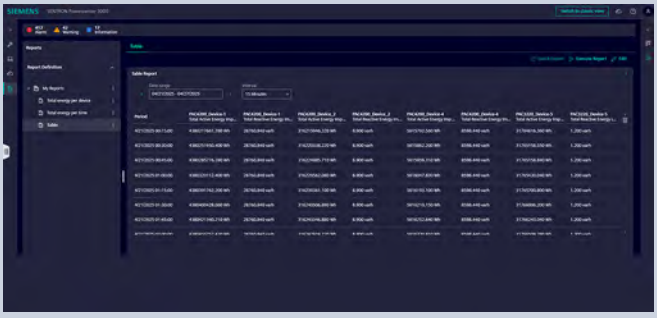

Table report

- The table report can be used to present all available metering values for any time range at a desired interval as a table
- Measuring instruments and measuring points can be added individually to the report templates

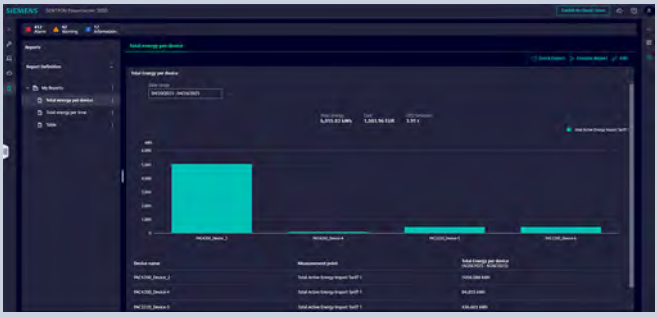

Total energy per device

- This report shows the energy consumption of each load, both as a graphic and as a table, for the selected time range
- All available energy values can be added to the report template

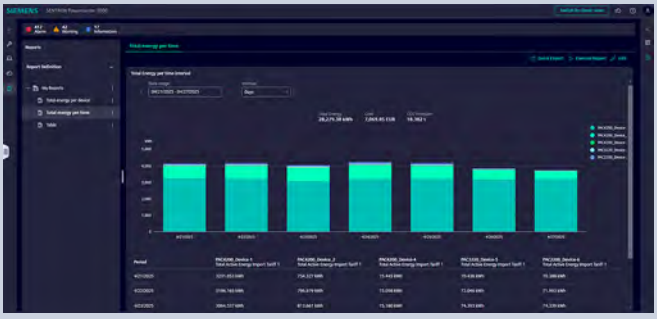

Total energy per time interval

- This report shows the energy consumption of each load, both as a graphic and as a table, for the selected time range and interval
- All available energy values can be added to the report template

Quick selection guide, page 10/4

© Siemens 2025

SENTRON Powercenter

Data acquisition and visualization in the final circuit directly to the cloud

SENTRON Powercenter 2000 new

The SENTRON Powercenter 2000 data transceiver is designed to enable comprehensive data acquisition of communication and measuring-capable SENTRON COM circuit protection devices. This increases transparency in the final circuit, through which optimization measures can be derived to increase system availability.

The measured values of the 24 subordinate circuit protection devices can be easily visualized via the web server. Via the integrated cloud connection, the data is transferred directly to customer-specific cloud solutions without any additional gateway. This ensures location-independent availability, as well as active alerting in the event of an error and long-term storage of historical measured values.

As for the Powercenter 1100, only radio-capable circuit protection devices are connected. The compact design allows for the greatest possible space savings for a cloud gateway.

The Powercenter 2000 is subject to the highest possible cybersecurity requirements via secure protocols (https, MQTT) and limited access rights using a login and password. All unused protocols (e.g. Bluetooth or Modbus TCP) can be deactivated.

Size	Power supply	Other interfaces	Subordinate devices (radio)	Article No.
1 TE	24 V DC SELV	2 × Ethernet (https/Modbus TCP/MQTT) web server, Bluetooth	24	7KN1210-0MC00

Note:
Please note the country-specific radio licenses of the products at
www.siemens.com/lowvoltage/certificates (109801197)

For more information, refer to the System Manual –
Circuit protection devices with communication and measuring function **(109791806)**

Quick selection guide, page 10/4

© Siemens 2025

SENTRON COM System

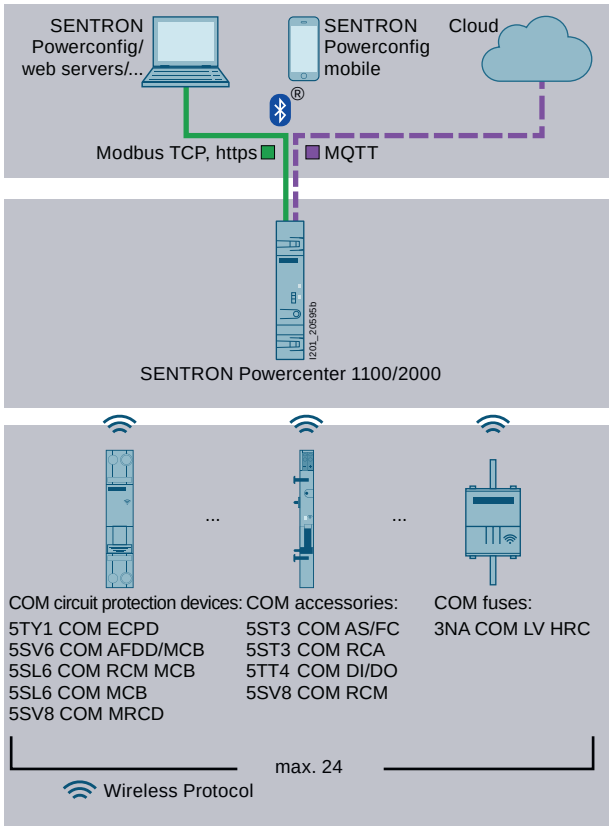

Web server device overview

10

Quick selection guide, page 10/4

© Siemens 2025

SENTRON Powercenter

Wireless data acquisition and visualization in the final circuit

SENTRON Powercenter 1100

The SENTRON Powercenter 1100 data transceiver is designed to enable comprehensive data acquisition of communication and measuring-capable SENTRON COM circuit protection devices. This increases transparency in the final circuit, through which optimization measures can be derived to increase system availability.

Up to 24 (or 64) devices can communicate wirelessly with SENTRON Powercenter 1100 via radio link. This means that no increased installation effort is required for communication. Selected measured values of the circuit protection devices are stored in the data transceiver for up to 30 days. These can be visualized to ensure extensive data availability.

The compact design of the SENTRON Powercenter 1100, in a single modular width, results in an extremely small footprint in the distribution board so as to enable wireless, comprehensive data acquisition.

This is complemented by easy mounting on a 35 mm DIN rail and plug-in terminals for a 24 V DC power supply, which can be immediately looped through (daisy chain) to supply other devices. The device also features two Ethernet ports that provide a switch function.

The integrated Bluetooth interface enables simple on-site communication and commissioning via the SENTRON Powerconfig mobile app. With the REST API via https, which is integrated by default, and the access authorization of various roles via login and password, the power center is well protected in terms of cybersecurity. Moreover, communication via the Modbus TCP interface can still be activated so that a further option for connection to various configuration or energy monitoring systems, even customer-specific systems, can be ensured.

Version	Power supply	Other interfaces	Subordinate devices (radio)	Article No.
SENTRON Powercenter 1000	24 V DC SELV	1 × Ethernet (Modbus TCP) Bluetooth	24 (up to firmware V4.0)	7KN1110-0MC00
SENTRON Powercenter 1100	24 V DC SELV	2 × Ethernet (Modbus TCP/https) Bluetooth	24	7KN1111-0MC00

10

Note:
Please note the country-specific radio licenses of the products at
www.siemens.com/lowvoltage/certificates (109801197)

Bundles	Scope of supply	Article No.
Bundle 1		
	2 × MCB 5SL6 COM B16 1 × RCBO 5SV1 B16 1 × AS/FC 5ST3 COM 1 × SENTRON Powercenter 1000	7KN1110-0XC01
Bundle 2		
	2 × MCB 5SL6 COM C16 1 × RCBO 5SV1 B16 1 × AS/FC 5ST3 COM 1 × SENTRON Powercenter 1000	7KN1110-0XC02
Bundle 3		
	3 × 3NA COM LV HRC fuse links 250 A gG 1 × SENTRON Powercenter 1000 1 × 3NP1 fuse switch disconnectors	7KN1110-0XC03
Bundle 4		
	9 × 3NA COM LV HRC fuse links 250 A gG 1 × SENTRON Powercenter 1000 1 × SENTRON Powercenter 3000	7KN1110-0XC04
Bundle 5		
	9 × 3NA COM LV HRC fuse links 250 A gG 1 × SENTRON Powercenter 1000	7KN1110-0XC05
Bundle 6		
	1 × MCB 5SL6 COM B10 1 × MCB 5SL6 COM B13 1 × RCBO 5SV1 B13, short-time delayed G 1 × AS/FC 5ST3 COM 1 × SENTRON Powercenter 1000	7KN1110-0XC06

Quick selection guide, page 10/4

© Siemens 2025

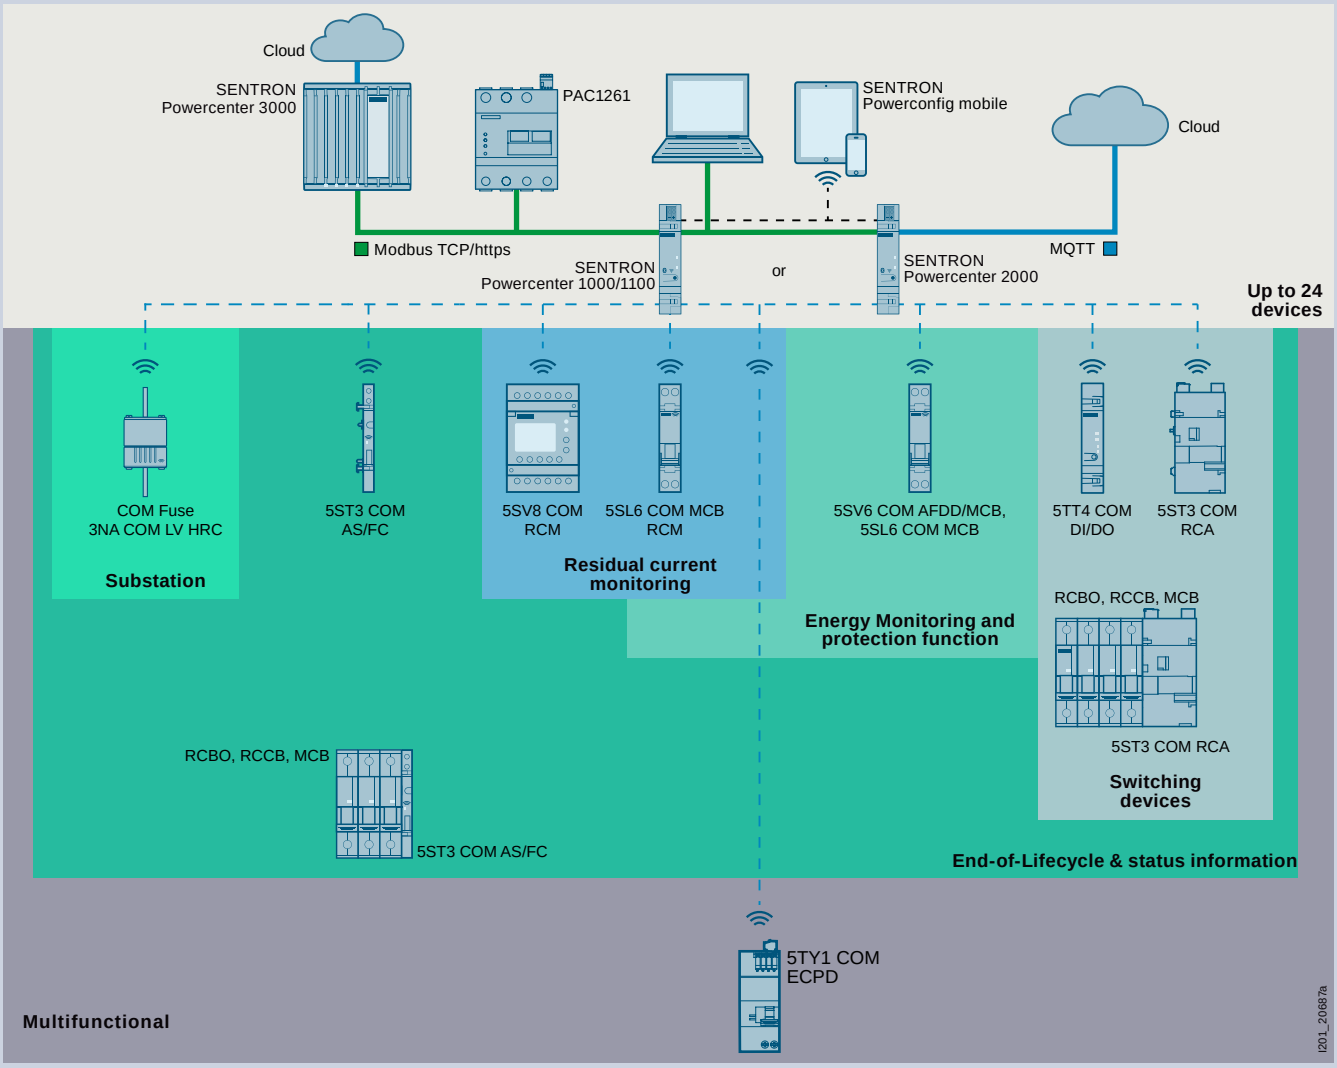

Application areas and system topology with SENTRON Powercenter 1000/1100/2000

10

SENTRON Powercenter 1100/2000 data transceiver

- Acquisition and storage of data and measured values from up to 24 communication-capable circuit protection devices via radio link
- Parameterization, visualization and further processing of the data in higher-level applications via Bluetooth and Modbus TCP

You will find further information under:
www.siemens.com/lowvoltage/manuals

Installation Manual – Circuit protection devices with communication and measuring function **(109791805)**

System Manual – Circuit protection devices with communication and measuring function **(109791806)**

Quick selection guide, page 10/4

© Siemens 2025

PAC/3WL/3VA SIMATIC PCS 7 library

For 7KM PAC3200/3220/4200/4220 measuring devices and 3WL/3VA/3VL circuit breakers

Use	Version	Type of delivery	Article No.
PAC/3WL/3VA SIMATIC PCS 7 library			
• AS blocks and faceplates for integrating the 3WL/3VA/3VL circuit breakers into SIMATIC PCS 7, V8.x, V9.0 SP2 or V9.1 • For each SIMATIC PCS 7 Operator Station of the single station/server version, a license containing the following is required: – Engineering license for one SIMATIC PCS 7 Operator Station of the single station/server version – Runtime license for one automation system (1 required per automation system, further AS runtime licenses can be ordered separately)	Engineering and runtime software, software class A, 2-language (English, German), single license for one installation	Software and electronic documentation as a software download, engineering and runtime license as Certificate of License	7KN2780-0CE24-0YA0
AS runtime license for PAC/3WL/3VA library for SIMATIC PCS 7			
License for one automation system in each case	Runtime software, software class A, 2-language (English, German), single license for one installation	Runtime license as Certificate of License without software and documentation	7KN2780-0CE00-0YC0

Quick selection guide, page 10/4

© Siemens 2025

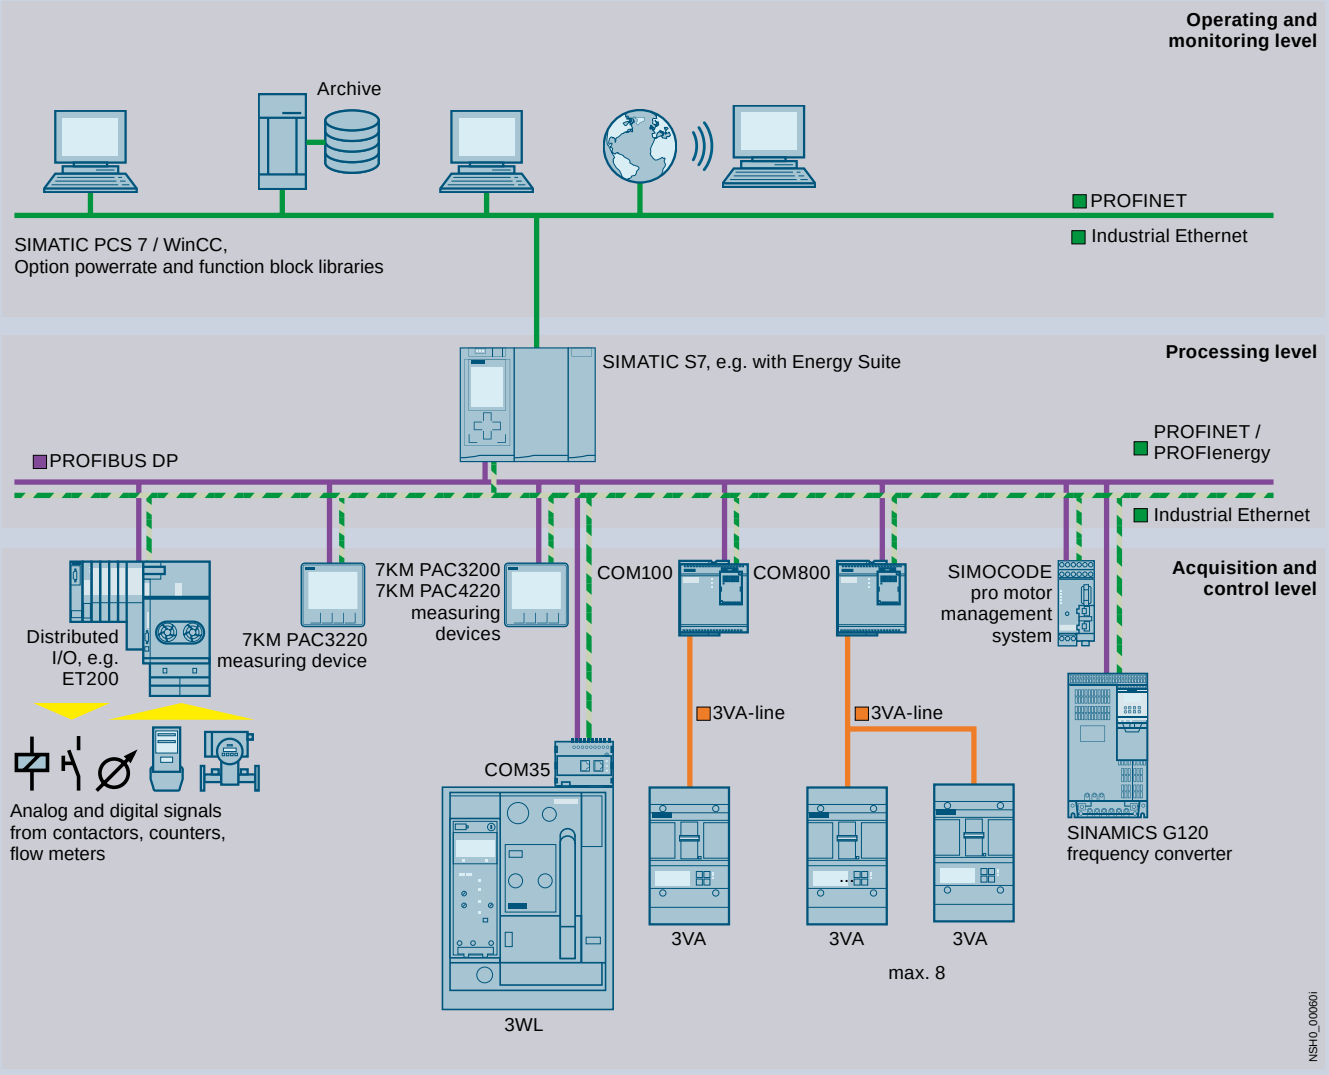

10

Quick selection guide, page 10/4

© Siemens 2025

7KM PAC measuring devices

Siemens EcoTech

Basic units

Connections	Power supply	Display	Interface	MID	PTB	7KM PAC1020	7KM PAC2200/ PAC2200CLP	7KM PAC3200T
Transformer measurement								
Screw terminals	Self-powered	With	M-Bus	With	Without	–	7KM2200-2EA30-1GA1	–
				Without	Without	–	7KM2200-2EA30-1CA1	–
			Modbus RTU	With	Without	–	7KM2200-2EA30-1HA1	–
				Without	Without	–	7KM2200-2EA30-1DA1	–
				With	With (FW update)	–	–	–
			Modbus TCP	With	With (load profile)	–	7KM2200-2EA00-1JB1	–
					With (FW update)	–	–	–
					Without	–	7KM2200-2EA30-1JA1	–
				Without	Without	–	7KM2200-2EA30-1EA1	–
	AC/DC wide-range power supply unit	With	Modbus RTU	Without	Without	7KM1020-0BA01-1DA0	–	–
			Modbus TCP	Without	Without	–	–	–
			Modbus TCP/RTU	Without	Without	–	–	–
		Without	Modbus TCP	Without	Without	–	–	7KM3200-0CA01-1AA0
	DC power supply unit with extra-low voltage	With	Modbus TCP	Without	Without	–	–	–
			Modbus RTU	Without	Without	–	–	–
Ring cable lug connection	AC/DC wide-range power supply unit	With	Modbus TCP	Without	Without	–	–	–
Direct measurement								
Screw terminals	Self-powered	With	M-Bus	With	Without	–	7KM2200-2EA40-1GA1	–
				Without	Without	–	7KM2200-2EA40-1CA1	–
			Modbus RTU	With	Without	–	7KM2200-2EA40-1HA1	–
				Without	Without	–	7KM2200-2EA40-1DA1	–
			Modbus TCP	With	With (load profile)	–	7KM2200-2EA40-1JB1	–
					Without	–	7KM2200-2EA40-1JA1	–
				Without	Without	–	7KM2200-2EA40-1EA1	–

10

Further technical specifications

		7KM1020-..	7KM2200-..	7KM3200-..	7KM3120-0..	7KM3120-1..	7KM3120-2..
Basic data							
Installation		Front mounting	DIN rail		Front mounting		
Mounting width		–	6 MV		–		
Control panel instrument		96 × 96 mm	–		96 × 96 mm		
External auxiliary voltage	50/60 Hz AC	100 … 250 V	–	90 … 276 V	100 … 250 V ±10%	–	100 … 250 V ±10%
	DC	110 … 250 V ±10%	–	110 … 275 V	110 … 250 V ±10%	24 … 60 V ±20%	–
Measuring inputs							
Transformer connection	Secondary input current I_e	x/1 A or x/5 A					
Direct connection	Input voltage U_e 3 50/60 Hz AC	400/230 V			690/400 V		400/230 V
	Rated current I_n	–	65 A	–			

[1] Additional AC/DC wide-range power supply as an auxiliary power supply

[2] From 06/2025 universal power supply unit

[3] Without binary modules

Quick selection guide, page 10/12

© Siemens 2025

7KM PAC3120	7KM PAC3220	7KM PAC4220	SICAM Q100	SICAM Q200
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
7KM3120-2BA01-1HA0 [1]	–	–	–	–
–	–	–	–	–
–	7KM3220-2BA01-1JA0 [1]	–	–	–
–	–	–	–	–
–	–	–	–	–
7KM3120-0BA01-1DA0	–	–	–	–
–	7KM3220-0BA01-1DA0	7KM4220-0BA01-1EA0	7KG9501-0AA01-2AA1	–
–	–	–	7KG9501-0AA31-2AA1	7KG9711-0AA10-0BB0 [2] [3] 7KG9711-0JJ10-0BB0 [2]
–	–	–	–	–
–	7KM3220-1BA01-1EA0	7KM4220-1BA01-1EA0	–	–
7KM3120-1BA01-1EA0	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–

10

7KM3220-0..	7KM3220-1..	7KM3220-2..	7KM4220-0..	7KM4220-1..	Q100	Q200
Front mounting					Front mounting/DIN rail (optional)	Front mounting
–					96 mm	192 mm
96 × 96 mm						96 × 192 mm
100 ... 250 V ±10%	–	100 ... 250 V ±10%	95 ... 240 V ±10%	–	24 ... 240 V	100 ... 240 V
100 ... 250 V ±10%	24 ... 60 V ±20%	–	110 ... 340 V ±10%	24 ... 48 V ±25%	24 ... 240 V	100 ... 240 V
x/1 A or x/5 A						
690/400 V		400/230 V	690/400 V			
–						

Quick selection guide, page 10/12

© Siemens 2025

7KM PAC measuring devices

Accessories

		7KM PAC1020 7KM PAC3100 7KM PAC3120 7KM PAC3200 7KM PAC3220 7KM PAC4220
7KM PAC TMP2 DIN-rail adapter		
	• Two-tier adapter for mounting a measuring device on a DIN rail • Front display • For manual intervention	7KM9900-0XA00-0AA0
7KM PAC TMP mounting plate		
	• Adapter for mounting a measuring device on DIN rail • Display faces backwards towards DIN rail • Readout and evaluation of measurements solely via mains operation	7KM9900-0YA00-0AA0
Compact holder		
	• Device holder for 7KM PAC1020/3100/3120/3200/3220/4220 • 10 holders for 5 PAC devices • For seamless side-by-side mounting of the devices (without spaces)	7KM9900-0GA00-0AA0

		7KM PAC3100 7KM PAC3200	7KM PAC3120 7KM PAC3220 7KM PAC4220
Spare parts for 7KM PAC			
	• Spare parts comprising: – Device holders for panel mounting (2X) **Note:** can also be used for 7KM PAC3120/3220 – Screw terminal for connection of voltage inputs – Screw terminal for connection of current inputs – Terminal block inputs/outputs for 7KM PAC3100 – Terminal block inputs/outputs for 7KM PAC3200 – RS485 terminal blocks for 7KM PAC3100	7KM9900-0SA00-0AA0	–
	• Spare part package comprising: – Device holders for panel mounting (4 ×)	–	7KM9900-0SA00-0AA0

		7KM PAC2200 7KM PAC2200CLP 7KM PAC2200 MID 7KM PAC3200T
SENTRON PROFINET Proxy SPP2000		
	• Proxy for transition from Modbus TCP-capable measuring devices to PROFINET IO. Connection of up to 8 devices from the PAC2200, PAC2200CLP, PAC2200 MID and PAC3200T product ranges • PROFINET Conformance Class C • Two switched ports • Integration in TIA by means of GSDML file	7KM9300-0PP20-0AA0

10

Quick selection guide, page 10/12

© Siemens 2025

Expansion and communication modules

		7KM PAC3220 7KM PAC4220	COM100/800 (3VA)
7KM Switched Ethernet PROFINET communication module			
	• Latest PROFINET switching properties • S2 system redundancy for operation in H systems • CiR Configuration in Run • Firmware update via the modules for PAC3220	7KM9300-0AE02-0AA0	
7KM PROFIBUS DP communication module			
		7KM9300-0AB01-0AA0	
7KM RS485 communication module			
		7KM9300-0AM00-0AA0 [1]	
7KM PAC 4DI/2DO expansion module			
		7KM9200-0AB00-0AA0	–
7KM PAC I(N), I(Diff), analog expansion module			
	• To add the following functions to the measuring inputs: – N conductor measurement – Two analog inputs, also for measuring non-electrical quantities such as temperature, water or air pressure – Residual current measurement via type A or type B summation current transformers	7KM9200-0AD00-0AA0	–

[1] Suitable for 7KM PAC4220 (especially for the Modbus TCP/RTU Gateway)

Residual-current transformers for 7KM PAC I(N), I(Diff), analog expansion module, **from page 11/1**

Quick selection guide, page 10/12

© Siemens 2025

7KT PAC measuring devices

PAC1600 basic unit

Connections	Version	Power supply	Display	Interface	MID	7KT PAC1600
Transformer measurement						
Screw terminals	3-phase	Self-powered	With	Modbus RTU	Without	7KT1661
					With	7KT1662
				M-Bus	Without	7KT1663
					With	7KT1664
				S0 interface	Without	7KT1672
					With	7KT1673
	3-phase, universal	Auxiliary power: 100 ... 240 V AC, 110 ... 250 V DC 50/60Hz	With	–	Without	7KT1681
				Modbus RTU	Without	7KT1682
Direct measurement						
Screw terminals	1-phase	Self-powered	With	Modbus RTU	Without	7KT1651
					With	7KT1652
				M-Bus	Without	7KT1653
					With	7KT1654
				S0 interface	Without	7KT1655
					With	7KT1656
	3-phase	Self-powered	With	Modbus RTU	Without	7KT1665
					With	7KT1666
				M-Bus	Without	7KT1667
					With	7KT1668
				S0 interface	Without	7KT1670
					With	7KT1671

Quick selection guide, page 10/8

© Siemens 2025

PAC1200 multichannel current measuring system, data manager

With the new 7KT1261 data manager, systems such as the POC1000/1100 can also be connected and visualized with the communicative circuit protection devices, and their measurement data can be stored and evaluated. In addition, the data manager supports the connection and charging control of the VersiCharge wallbox.

Connections	Version	Power supply	Display	Interface	MID	7KT PAC1200
Direct measurement						
Screw terminals	3-phase	Self-powered	Without	Modbus TCP	Without	7KT1261

PAC1200

7KT PAC1200

Sensor bars

Number of connections	Article No.
3	7KT1233
6	7KT1236
9	7KT1238
12	7KT1242

Sensors

Current I_e	Article No.
63 A	7KT1255

Sensors multipack new

Current I_e	Sensors	Article No.
63 A	24 × sensors 63 A 7KT1255	7KT1247
	48 × sensors 63 A 7KT1255	7KT1248

10

PAC1200 bundles



Data manager	Sensor bars	Sensors	18 bundle	24 bundle
1 × data manager 7KT1261	2 × 9-sensor bar 7KT1238	18 × sensors 63 A 7KT1255	7KT1224	–
	2 × 12-sensor bar 7KT1242	24 × sensors 63 A 7KT1255	–	7KT1225

Quick selection guide, page 10/8

© Siemens 2025

SEM3 multichannel current measuring system

Data manager

Connections	Version	Power supply	Display	Interface	MID	
Transformer measurement						
Screw terminals	3-phase	Self-powered	Without	Modbus TCP RS485 Modbus RTU	Without	US2:SEM3CONTROLLER

Further technical specifications	SEM3
Basic data	
Installation	Screw mounting
Measuring inputs	
Max. input voltage 50/60 Hz AC	480 V/277 V
Standard current transformers	50 ... 1200 A/0.1 A
Folding transformer	50 ... 2000 A/0.1 A

Quick selection guide, page 10/8

© Siemens 2025

Accessories

Metering modules

- For recording measured values
- Accuracy of 0.2% or 1% for the entire measurement including current transformer
- Simple setting of phase configuration by means of slide switch
- Connection of a current transformer for measuring a phase
- Metering module is plugged into meter rack

Measuring accuracy	Article No.
0.2%	US2:SEM3PHAMETER
1%	US2:SEM3PLAMETER

Meter racks



Version	Article No.
For 3 metering modules	US2:SEM3RACK3
For 9 metering modules	US2:SEM3RACK9
For 15 metering modules	US2:SEM3RACK15
For 21 metering modules	US2:SEM3RACK21

Connecting cables

- 600 V insulated special cable for connecting meter racks to the data manager

Length	Article No.
0.3 m	US2:SEM3CAB12INCH
0.6 m	US2:SEM3CAB24INCH
0.9 m	US2:SEM3CAB36INCH

Standard current transformers

- Standard power cable brown and yellow, 1.82 m long
- Can be extended up to 100 m while still maintaining accuracy
- Transformer configuration is carried out in the data manager

Output signal	Transformer transmission ratio	Article No.
100 mA	50 : 0.1	US2:SEM3SCCT50
	125 : 0.1	US2:SEM3SCCT125
	250 : 0.1	US2:SEM3SCCT250
	400 : 0.1	US2:SEM3SCCT400
	600 : 0.1	US2:SEM3SCCT600
	800 : 0.1	US2:SEM3SCCT800
	1200 : 0.1	US2:SEM3SCCT1200

Folding transformers



- Standard power cable brown and yellow, 1.82 m long
- Can be extended up to 100 m while still maintaining accuracy
- Transformer configuration is carried out in the data manager

Output signal	Transformer transmission ratio	Article No.
100 mA	50 : 0.1	7KT1280-5MA00
	125 : 0.1	7KT1280-5MA01
	250 : 0.1	7KT1280-5MA02
	400 : 0.1	7KT1280-5MA03
	600 : 0.1	7KT1280-5MA04
	800 : 0.1	7KT1280-5MA05
	1200 : 0.1	7KT1280-5MA06
	1600 : 0.1	7KT1280-5MA07
	2000 : 0.1	7KT1280-5MA08

DIN-rail adapters

- 5 adapters for snapping onto DIN rail
- 1 adapter each for data manager and for meter racks with 3, 9, 15 and 21 metering modules
- Adapters are screwed onto the data manager or the meter racks

	Article No.
	US2:SEM3DINKIT

10

Quick selection guide, page 10/8

© Siemens 2025

SEM3T multichannel temperature measuring system

Data manager for thermal monitoring in electrical systems

Connections	Version	Power supply	Display	Interface	
Plug-in connectors	Temperature measurement	24 V DC	Without	Modbus TCP	7KT1281-0AA00
				Modbus TCP/Wi-Fi	7KT1281-0AA10

Further technical specifications	SEM3T
Basic data	
Installation	DIN-rail mounting
Measuring inputs	
Temperature sensors	0 to 130 °C

Quick selection guide, page 10/8

© Siemens 2025

Accessories

Metering module

- For recording measured values
- No configuration necessary for modules
- Connection of a temperature sensor
- Metering module is plugged into meter rack

Article No.
7KT1281-1AA00

Meter racks



Version	Article No.
For 3 metering modules	US2:SEM3RACK3
For 9 metering modules	US2:SEM3RACK9
For 15 metering modules	US2:SEM3RACK15
For 21 metering modules	US2:SEM3RACK21

Connecting cables

- 600 V insulated special cable for connecting meter racks to the data manager

Length	Article No.
0.3 m	US2:SEM3CAB12INCH
0.6 m	US2:SEM3CAB24INCH
0.9 m	US2:SEM3CAB36INCH

Temperature sensors

- Standard connection cable, brown and yellow, 3 m long
- Can be extended up to 15 m while still maintaining accuracy
- Configuration is carried out in the data manager

Version	Size	Article No.
Sensors with ring cable lugs	Sensor 1/4"	7KT1281-2SA00
	Sensor 5/16"	7KT1281-2SA01
	Sensor 3/8"	7KT1281-2SA02
	Sensor 1/2"	7KT1281-2SA03
Cylindrical sensor		7KT1281-2CA00

Quick selection guide, page 10/8

© Siemens 2025

Time and pulse counters

Mechanical counting mechanisms

Display	Resetting	Rated frequency	Rated control supply voltage U_c	48 × 48 mm	72 × 72 mm	–
Time counter						
00000.00 h	Without	–	10 ... 80 V DC	7KT5500	–	–
			10 ... 50 V DC	–	7KT5600	–
			12 ... 24 V DC	–	–	7KT5801
		50 Hz	24 V AC	7KT5505	–	7KT5802
			115 V AC	7KT5501	7KT5601	7KT5803
			230 V AC	7KT5502	7KT5602	7KT5804
		60 Hz	115 V AC	7KT5503	7KT5603	7KT5806
			230 V AC	7KT5504	7KT5604	7KT5807
Pulse counter						
0000000	Without	–	12 ... 24 V DC	–	–	7KT5811
		50/60 Hz	24 V AC	–	–	7KT5812
			230 V AC	–	–	7KT5814

Further technical specifications

	7KT55..	7KT56..	7KT58..
Basic data			
Installation	Front mounting		DIN-rail mounting
Mounting width	–		2 MW
Front frame	48 × 48 mm	72 × 72 mm	–
Display	Drum-type register		
Version	–	With narrow frame according to DIN 43700	–

Accessories

			7KT55..	7KT56..	7KT58..
Cover					
	Size		**Article No.**	**Article No.**	**Article No.**
	55 × 55 mm		7KT9020	–	–
Sealing ring for cover					
	Degree of protection	**Scope of supply**	**Article No.**	**Article No.**	**Article No.**
	IP43 (in control panels with smooth surfaces)	1 set = 5 units	7KT9000	–	–
Terminal cover					
	Degree of protection		**Article No.**	**Article No.**	**Article No.**
	IP20 (with connected conductors)		–	7KT9021	–

10

Quick selection guide, page 10/8

© Siemens 2025

Electronic counting mechanisms

Display	Resetting	Rated frequency	Rated control supply voltage U_c	
Time counter				
000000.0 h	Without	50/60 Hz	24 ... 240 V AC, 12 ... 150 V DC	7KT5821
	Electrical	50/60 Hz	24 ... 240 V AC, 12 ... 150 V DC	7KT5822
	Electrical and mechanical	50/60 Hz	24 ... 240 V AC, 12 ... 150 V DC	7KT5823
Pulse counter				
0000000	Electrical and mechanical	50/60 Hz	24 ... 240 V AC, 12 ... 150 V DC	7KT5833

Further technical specifications

	7KT58..
Basic data	
Installation	DIN-rail mounting
Mounting width	2 MW
Display	LCD display

10

Quick selection guide, page 10/8

© Siemens 2025

Current transformers

Bushing-type current transformers for measurement purposes

				4NC [1]		7KT	3NJ [1]	
				1-phase		3-phase	1-phase	
Size	**Internal diameter**	**Rated primary current I_{pr}**	**Rated power P_n**	**Secondary rated current I_{sr}**				
				5 A	**1 A**	**5 A**	**5 A**	**1 A**
Accuracy class 0.2s								
1	19 mm	150 A	1 VA	4NC5121-2FA21	–	–	–	–
		200 A	2.5 VA	4NC5122-2FC21	–	–	–	–
		250 A	2.5 VA	4NC5123-2FC21	–	–	–	–
		300 A	5 VA	4NC5124-2FE21	–	–	–	–
		400 A	5 VA	4NC5125-2FE21	–	–	–	–
		500 A	5 VA	4NC5126-2FE21	–	–	–	–
5	26 mm	600 A	5 VA	4NC5227-2FE21	–	–	–	–
		700 A	5 VA	4NC5228-2FE21	–	–	–	–
		800 A	5 VA	4NC5231-2FE21	–	–	–	–
		1000 A	5 VA	4NC5232-2FE21	–	–	–	–
Accuracy class 0.5								
1	19 mm	100 A	1 VA	4NC5117-2DA21	4NC5117-0DA21	–	–	–
		150 A	2.5 VA	4NC5121-2DC21	4NC5121-0DC21	–	–	–
		200 A	5 VA	4NC5122-2DE21	4NC5122-0DE21	–	–	–
		250 A	5 VA	4NC5123-2DE21	4NC5123-0DE21	–	–	–
2	28 mm	200 A	5 VA	4NC5222-2DE21	4NC5222-0DE21	–	–	–
		250 A	5 VA	4NC5223-2DE21	4NC5223-0DE21	–	–	–
		300 A	5 VA	4NC5224-2DE21	4NC5224-0DE21	–	–	–
		400 A	5 VA	4NC5225-2DE21	4NC5225-0DE21	–	–	–
3	36 mm	400 A	5 VA	4NC5325-2DE21	4NC5325-0DE21	–	–	–
		500 A	5 VA	4NC5326-2DE21	4NC5326-0DE21	–	–	–
		600 A	5 VA	4NC5327-2DE21	4NC5327-0DE21	–	–	–
		750 A	5 VA	4NC5330-2DE21	4NC5330-0DE21	–	–	–
		800 A	5 VA	4NC5331-2DE21	–	–	–	–
4	41 mm	800 A	10 VA	4NC5431-2DH21	4NC5431-0DH21	–	–	–
		1000 A	10 VA	4NC5432-2DH21	4NC5432-0DH21	–	–	–
		1200 A	10 VA	4NC5433-2DH21	4NC5433-0DH21	–	–	–
		1500 A	10 VA	4NC5435-2DH21	4NC5435-0DH21	–	–	–
		1600 A	15 VA	4NC5436-2DK21	–	–	–	–
		2000 A	20 VA	4NC5438-2DL21	–	–	–	–
		2500 A	25 VA	4NC5440-2DM21	–	–	–	–
		3000 A	30 VA	4NC5441-2DN21	–	–	–	–
Accuracy class 0.5 calibrated								
–	14 mm	100 A	1.5 VA	–	–	–	3NJ6920-3BD23	3NJ6920-3BD13
		150 A	2.5 VA	–	–	–	3NJ6920-3BE23	3NJ6920-3BE13
	15 mm	200 A	2.5 VA	–	–	–	–	3NJ6930-3BF13
		200 A	2.5 VA	–	–	–	3NJ6930-3BF23	–
		250 A	2.5 VA	–	–	–	–	3NJ6930-3BG13
		250 A	2.5 VA	–	–	–	3NJ6930-3BG23	–
	32 mm	300 A	5 VA	–	–	–	3NJ6940-3BH23	3NJ6940-3BH13
		400 A	5 VA	–	–	–	3NJ6940-3BJ23	3NJ6940-3BJ13
		500 A	5 VA	–	–	–	3NJ6940-3BK23	3NJ6940-3BK13
		600 A	5 VA	–	–	–	3NJ6940-3BL23	3NJ6940-3BL13

[1] Overcurrent limiting factor FS5

Note:
Maximum voltage for equipment (rms value) U_m = 720 V

10

Quick selection guide, page 10/12

© Siemens 2025

				4NC [1]		7KT	3NJ [1]	
				1-phase		3-phase	1-phase	
Size	Internal diameter	Rated primary current I_{pr}	Rated power P_n	Secondary rated current I_{sr}				
				5 A	1 A	5 A	5 A	1 A
Accuracy class 1.0								
1	19 mm	50 A	1.2 VA	4NC5112-2CB21	4NC5112-0CB21	–	–	–
		60 A	1.2 VA	4NC5113-2CB21	4NC5113-0CB21	–	–	–
	13 mm	60 A	1.25 VA	–	–	7KT1200	–	–
	19 mm	75 A	2.5 VA	4NC5115-2CC21	4NC5115-0CC21	–	–	–
		100 A	2.5 VA	4NC5117-2CC21	4NC5117-0CC21	–	–	–
	13 mm	100 A	2.5 VA	–	–	7KT1200	–	–
	19 mm	150 A	2.5 VA	4NC5121-2CC21	4NC5121-0CC21	–	–	–
	13 mm	150 A	3.75 VA	–	–	7KT1202	–	–
	19 mm	200 A	5 VA	4NC5122-2CE21	4NC5122-0CE21	–	–	–
		250 A	5 VA	4NC5123-2CE21	4NC5123-0CE21	–	–	–
2	28 mm	200 A	5 VA	4NC5222-2CE21	4NC5222-0CE21	–	–	–
		250 A	5 VA	4NC5223-2CE21	4NC5223-0CE21	–	–	–
		300 A	5 VA	4NC5224-2CE21	4NC5224-0CE21	–	–	–
		400 A	5 VA	4NC5225-2CE21	4NC5225-0CE21	–	–	–
3	36 mm	400 A	5 VA	4NC5325-2CE21	4NC5325-0CE21	–	–	–
		500 A	5 VA	4NC5326-2CE21	4NC5326-0CE21	–	–	–
		600 A	5 VA	4NC5327-2CE21	4NC5327-0CE21	–	–	–
		750 A	5 VA	4NC5330-2CE21	4NC5330-0CE21	–	–	–
4	41 mm	800 A	10 VA	4NC5431-2CH21	4NC5431-0CH21	–	–	–
		1000 A	10 VA	4NC5432-2CH21	4NC5432-0CH21	–	–	–
		1250 A	10 VA	4NC5434-2CH21	4NC5434-0CH21	–	–	–
		1500 A	10 VA	4NC5435-2CH21	4NC5435-0CH21	–	–	–
		2000 A	12.5 VA	4NC5438-2CJ21	4NC5438-0CJ21	–	–	–
		2500 A	12.5 VA	4NC5440-2CJ21	4NC5440-0CJ21	–	–	–
		3000 A	30 VA	4NC5441-2CN21	–	–	–	–

[1] Overcurrent limiting factor FS5

Note:
Maximum voltage for equipment (rms value) U_m = 720 V

Accessories

DIN-rail mounting



For transformer size	Article No.	Article No.	Article No.	Article No.	Article No.
1 and 5	4NC5923-5LT21	4NC5923-5LT21	–	–	–
2	4NC5925-5LT21	4NC5925-5LT21	–	–	–
3	4NC5930-5LT21	4NC5930-5LT21	–	–	–
4	4NC5940-5LT21	4NC5940-5LT21	–	–	–

10

Quick selection guide, page 10/12

© Siemens 2025

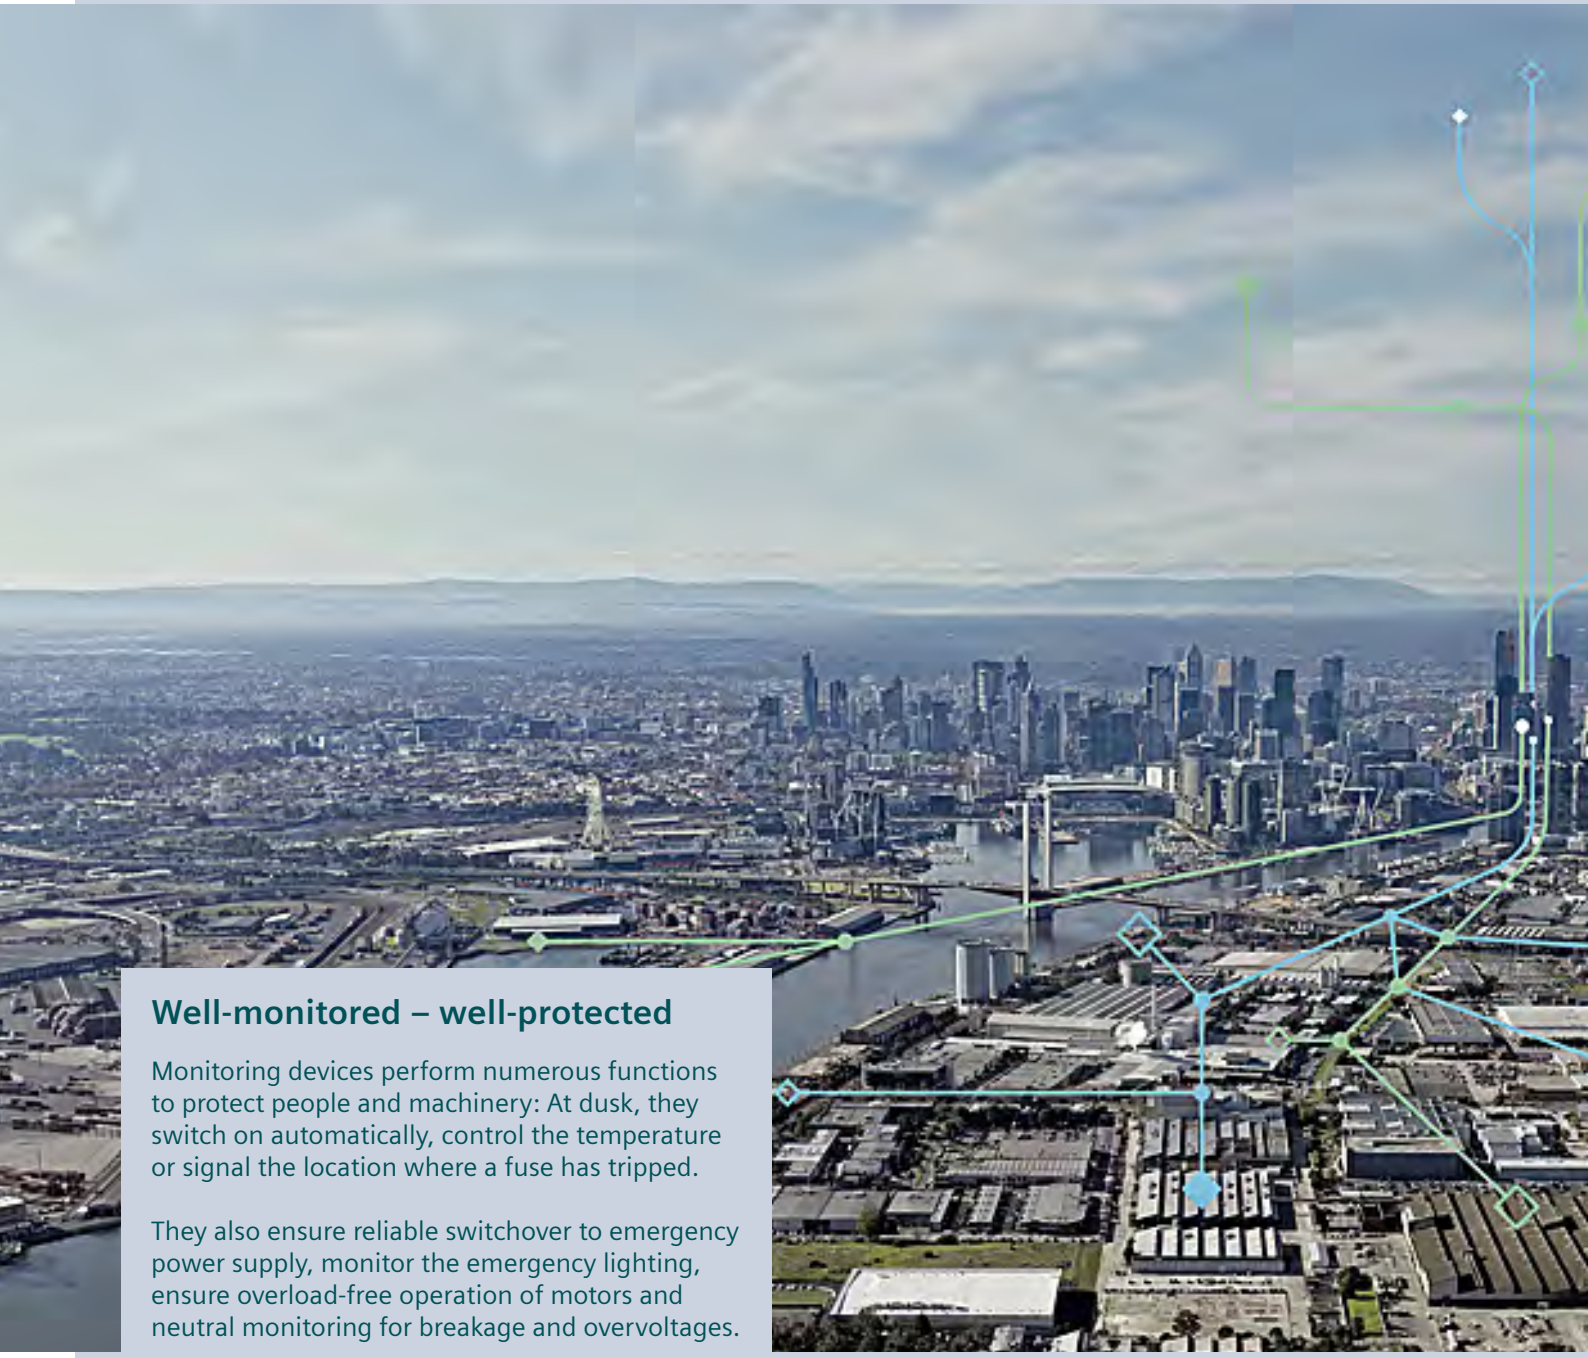

Well-monitored – well-protected

Monitoring devices perform numerous functions to protect people and machinery: At dusk, they switch on automatically, control the temperature or signal the location where a fuse has tripped.

They also ensure reliable switchover to emergency power supply, monitor the emergency lighting, ensure overload-free operation of motors and neutral monitoring for breakage and overvoltages.

Monitoring devices can do even more, e.g., underload monitoring of asynchronous motors in no-load operation.

© Siemens 2025

Monitoring Devices

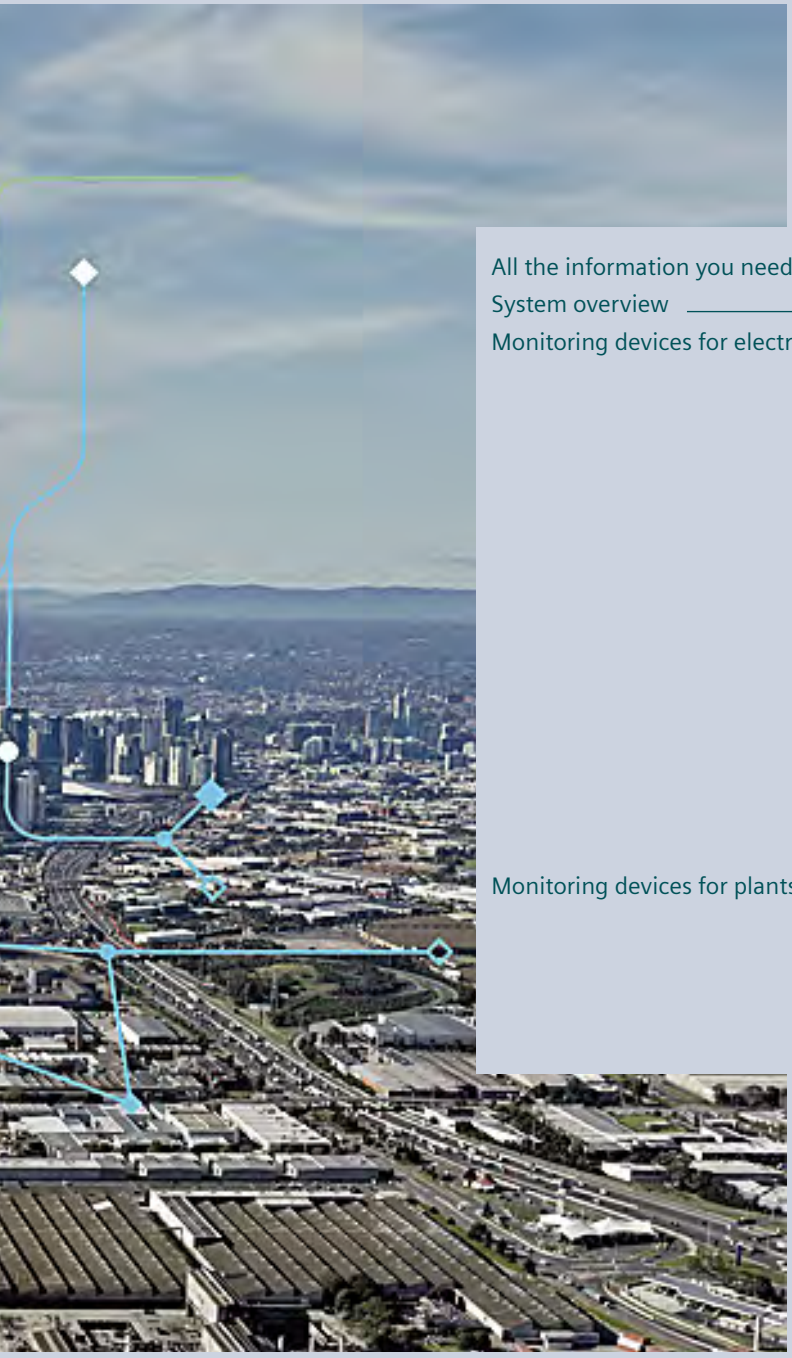

All the information you need 11/2
System overview 11/4
Monitoring devices for electrical values 11/6
5SV8 residual current monitors 11/6
5SV8 COM residual current monitors with communication and measuring function new 11/8
5SV8 modular residual current device 11/14
5SV8 COM modular residual current device with communication and measuring function new 11/16
5TT3 undervoltage relays 11/22
5TT3 short-time voltage relay 11/24
5TT3 undervoltage and overvoltage relays 11/25
5TT6 current relays 11/26
5TT3 fuse monitors 11/27
5TT3 phase monitors 11/28
5TT3 phase sequence monitors 11/29
5TT3 insulation monitors for industrial applications 11/30
Monitoring devices for plants and equipment 11/31
5TT5 EMERGENCY STOP modules 11/31
5TT3 level relays 11/32
5TT3 line circuit relays 11/33
7LQ2 twilight switches 11/34

© Siemens 2025

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about monitoring devices, please visit our website **www.siemens.com/lowvoltage**

Your product in detail

The relevant tender specifications can be found at **www.siemens.com/tenderspecifications**

Use our conversion tool for quick and easy conversion to Siemens products **www.siemens.com/conversion-tool**

Everything you need for your order

Refer to SiePortal to find an overview of your products (product catalog)

- Monitoring devices **sie.ag/2m3no4A**

Direct forwarding to the individual products in SiePortal by clicking on the article number in the catalog or entering this web address incl. article number **www.siemens.com/product_catalog_SIEP?Article No.**

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services. You can find your local contacts at **www.siemens.com/lowvoltage/components/contact**

You will find further information on services at **www.siemens.com/service-offers**

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at **www.siemens.com/support-request**

© Siemens 2025

… can be found in our online services

Commissioning + operation

Your product in detail

The SiePortal platform (knowledge base) provides detailed technical information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Characteristic curves
- Certificates

Online Support app available for download from the **App Store** and **Play Store**
You will find further information at
www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)

- SiePortal (product catalog)
  www.siemens.com/lowvoltage/product-catalog
- Image database
  www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAx Download Manager at
www.siemens.com/cax

Manuals

Manuals can be found in SiePortal at
www.siemens.com/lowvoltage/manuals

- Configuration Manual
  – Monitoring devices **(45316099)**

Technical overview – Monitoring devices

The fast way to get you to our online services

This page provides you with comprehensive information and links on monitoring devices
www.siemens.com/lowvoltage/product-support (109769086)

© Siemens 2025

System overview

Monitoring devices for electrical values

5SV8/5SV8 COM new
residual current monitor

5SV8/5SV8 COM new
modular residual current device

5TT3 and 5TT6 relay

5TT3 monitors

Accessories

Summation current transformer

Holders for DIN rails

Magnetic field centering sleeves

Monitoring devices for plants and equipment

5TT5 EMERGENCY STOP modules

5TT3 relay

7LQ2 twilight switches

11

Accessories

Immersion electrodes

Note:
You will find a detailed range of accessories with the basic units.

© Siemens 2025

© Siemens 2025

5SV8 residual current monitors

Type A and type AC

				RCM analog	RCM digital	
			Mounting width	2 MW	3 MW	3 MW
Rated operational voltage U_e	**Rated residual current $I_{\Delta n}$**		**Response time Δt**		**1 channel**	**4 channels**
	Type A	**Type AC**				
230 V AC	0.03 ... 5 A	> 3 A	0.02 ... 5 s	5SV8000-6KK	–	–
	0.03 ... 3 A	5 ... 30 A	0.02 ... 10 s, INS, SEL [1]	–	5SV8001-6KK	5SV8200-6KK

Further technical specifications

		5SV8000-6KK	5SV8001-6KK	5SV8200-6KK
Standards				
Standards		EN 62020, IEC 62020		
Approvals		–	UL	
Supply				
Rated operational voltage U_e		230 V AC		
Frequency		50/60 Hz		
Rated residual current $I_{\Delta n}$	Type A	0.03 ... 3 A		
	Type AC	> 3 A	5 ... 30 A	
Response time Δt		0.02 ... 5 s	0.02 ... 10 s, INS, SEL [1]	
Relay contacts				
Relay contacts		1 × alarm	1 × pre-alarm, 1 × alarm	1 × pre-alarm, 4 × alarm
Rated voltage		230 V AC		
Rated current		6 A		
Summation current transformer				
Diameter		20 ... 210 mm		
Equipment				
Maximum cable length RCM/CT		10 m (shielded cable)		
Conductor cross-section		1.5 mm²		
Test/reset		Yes/Yes		
External tripping operation/external reset		–/Yes	Yes/Yes	
Safety				
Degree of protection	Contacts	IP20		
	Front	IP41		
Ambient conditions				
Operating temperature		–10 ... +50 °C		

[1] INS: Instantaneous, SEL: Selective

System overview, page 11/4

© Siemens 2025

Accessories

Summation current transformers





- Including holder for DIN rail or wall mounting
- Standard ®

Mounting options	Lowest measurable residual current $I_{\Delta n\ min}$	Rated current I_n	Maximum current [2] I_{max}	Internal diameter	Article No.
DIN rail	30 mA	≤ 40 A	240 A	20 mm	5SV8700-0KK
		≤ 63 A	380 A	30 mm	5SV8701-0KK
Wall mounting, DIN rail[1]	30 mA	≤ 80 A	480 A	35 mm	5SV8702-0KK
		≤ 200 A	1200 A	70 mm	5SV8703-0KK
Wall mounting	100 mA	≤ 250 A	1500 A	105 mm	5SV8704-0KK
	300 mA	≤ 500 A	3000 A	140 mm	5SV8705-0KK
		≤ 600 A	3600 A	210 mm	5SV8706-0KK

Holders for DIN rails

- Suitable for summation current transformers with internal diameter of 20 mm, 30 mm, 35 mm, 70 mm
- Cannot be used together with magnetic field centering sleeves

Article No.
5SV8900-1KK

Magnetic field centering sleeves

Internal diameter	Article No.
35 mm	5SV8902-1KK
70 mm	5SV8903-1KK
105 mm	5SV8904-1KK
140 mm	5SV8905-1KK
210 mm	5SV8906-1KK

[1] The holder for DIN rails is additionally required for mounting onto the DIN rail.
[2] Short-time starting current, up to 2 s

System overview, page 11/4

© Siemens 2025

5SV8 COM residual current monitors with communication and measuring function new

Type A

			RCM analog	RCM analog with COM	RCM digital with COM
		Mounting width	1MW	1 MW	2 MW
Rated operational voltage U_e	**Rated residual current $I_{\Delta n}$**		**1 channel**	**1 channel**	**4 channels, display**
	Typ A	**Typ A/F**			
100 ... 240 V AC/DC	0.01 .... 30 A	0.006 ... 30 A	5SV8020-6KK	5SV8022-6MP	5SV8223-6MP

Further technical specifications

		5SV8020-6KK	5SV8022-6MP	5SV8223-6MP
Standards				
Standards		DIN EN 62020-1, IEC 62020-1		
Approvals		UL 508, UL 1053		UL 508
Supply				
Rated operational voltage U_e		100 ... 240 V AC/DC, 24 V DC		
Frequency		47 ... 63 Hz		47 ... 460 Hz
Rated residual current $I_{\Delta n}$	Type A	0.01 ... 30 A		0.006 ... 30 A
	Type A/F	–		0.006 ... 30 A
Response time t_{ae}	1 × $I_{\Delta n}$	≤ 250 ms		
	5 × $I_{\Delta n}$	≤ 100 ms		
Response delay t_{on} (adjustable)		0 ... 10 s		
Relay contacts				
Relay contacts		1 × pre-alarm/alarm		1 ×pre-alarm, 1 × alarm
Rated voltage		230 V AC		
Rated current		5 A		
Summation current transformer				
Diameter		20 ... 210 mm		
Equipment				
Maximum cable length RCM/CT		40 m (shielded cable)	40 m (shielded cable)	40 m (shielded cable)
Test/reset		Yes/Yes		
External tripping operation/external reset		No/No		No/Yes
Communication		No	Radio link to SENTRON Powercenter 1100/2000	
Safety				
Degree of protection	Contacts	IP20		
	Front	IP30		
Ambient conditions				
Operating temperature		–25 ... +60 °C		–25 ... +55 °C

System overview, page 11/4

© Siemens 2025

Accessories

Summation current transformers

Mounting options	Lowest measurable residual current $I_{\Delta n\ min}$	Lowest adjustable response value	Rated current I_n	Internal diameter	Article No.
Screw fixing/rail DIN	1 mA	10 mA	63 A	20 mm	5SV8710-0KK [1]
		30 mA	125 A	35 mm	5SV8711-0KK [1]
			200 A	60 mm	5SV8712-0KK [1]
Screw fixing	4 mA	100 mA	400 A	120 mm	5SV8713-0KK
	8 mA	300 mA	630 A	210 mm	5SV8714-0KK

[1] DIN-rail mounting clip included in the scope of supply

System overview, page 11/4

© Siemens 2025

5SV8 COM residual current monitors with communication and measuring function new

Type B

		RCM COM	
	Mounting width	2 MW	2 MW
Rated operational voltage U_e	**Rated residual current $I_{\Delta n}$ Type B**	**1 channel**	**4 channels, display**
100 ... 240 V AC/DC	0.01 ... 8 A	5SV8022-4MR	5SV8223-4MR

Further technical specifications		5SV8022-4MR	5SV8223-4MR
Standards			
Standards		DIN EN 62020-1, IEC 62020-1	
Approvals		UL 508	
Supply			
Rated operational voltage U_e		100 ... 240 V AC/DC, 24 V DC	
Frequency		47 ... 63 Hz	
Rated residual current $I_{\Delta n}$	Type B	0.01 ... 8 A	
Response time t_{ae}	1 × $I_{\Delta n}$	≤ 250 ms	
	5 × $I_{\Delta n}$	≤ 100 ms	
Response delay t_{on} (adjustable)		0 ... 10 s	
Relay contacts			
Relay contacts		1 × pre-alarm, 1 × alarm	
Rated voltage		230 V AC	
Rated current		5 A	
Summation current transformer			
Diameter		35 ... 210 mm	
Equipment			
Maximum cable length RCM/CT		10 m	
Test/reset		Yes/Yes	
External tripping operation/external reset		No/Yes	
Communication		Radio link to SENTRON Powercenter 1100/2000	
Safety			
Degree of protection	Contacts	IP20	
	Front	IP30	
Ambient conditions			
Operating temperature		–25 ... +60 °C	–25 ... +55 °C

System overview, page 11/4

© Siemens 2025

Accessories

Summation current transformers

- Operational voltage 24 V DC

Shielded	Lowest measurable residual current $I_{\Delta n\ min}$	Lowest adjustable response value	Rated current I_n	Internal diameter	Article No.
No	1 mA	30 mA	125 A	35 mm	5SV8711-2KK [1]
Yes	1 mA	30 mA	160 A	35 mm	5SV8711-2KP [1]
No	1 mA	30 mA	200 A	60 mm	5SV8712-2KK [1]
Yes	1 mA	30 mA	400 A	60 mm	5SV8712-2KP [1]
No	4 mA	100 mA	400 A	120 mm	5SV8713-2KK
No	8 mA	300 mA	630 A	210 mm	5SV8714-2KK

[1] DIN-rail mounting clip included in the scope of supply

11

System overview, page 11/4

© Siemens 2025

5SV8 COM residual current monitors with communication and measuring function new

Type A and B

SENTRON Powercenter 1100/2000 data transceiver

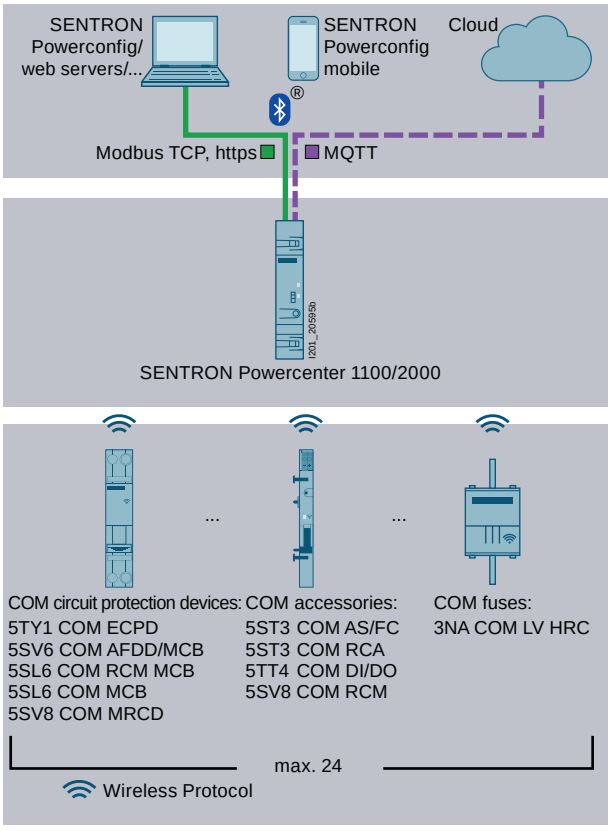

- Wireless radio transmission of measured values to the SENTRON Powercenter 1000/1100/2000 data transceiver
- Commissioning, parameter assignment, firmware updates and further processing of the data via the SENTRON Powercenter 1000/1100/2000 data transceiver

SENTRON Powercenter	Article No.
SENTRON Powercenter 1000	7KN1110-0MC00
SENTRON Powercenter 1100	7KN1111-0MC00
SENTRON Powercenter 2000	7KN1210-0MC00

See page 10/28

You will find further information at www.siemens.com/lowvoltage/manuals

Installation Manual – Circuit protection devices with communication and measuring function (109791805)

System Manual – Circuit protection devices with communication and measuring function (109791806)

System overview, page 11/4

© Siemens 2025

System overview, page 11/4

© Siemens 2025

5SV8 modular residual current device

Type B

	MRCD digital
Mounting width	2 MW

Rated operational voltage U_e	Rated residual current $I_{\Delta n}$ Type B	Response time Δt	
230 V AC	0.03 ... 1 A	0 ... 10 s	5SV8101-4KK
24 V DC	0.03 ... 1 A	0 ... 10 s	5SV8111-4KK

Further technical specifications

		5SV8101-4KK	5SV8111-4KK
Standards			
Standards		EN 60947-2 (Annex M), IEC 60947-2 (Annex M)	
Supply			
Supply voltage U_s		230 V AC (70 ... 300 V AC)	24 V DC (9.6 ... 94 V DC)
Frequency		50/60 Hz	–
Power consumption		< 6.5 VA	
Relay contacts			
Relay contacts		1 × alarm, 1 × tripping operation	
Rated voltage		250 V AC	
Rated current		5 A	
External summation current transformer			
Internal diameter		35 ... 210 mm (5SV8701-2KK, 5SV8701-2KP, 5SV8702-2KK, 5SV8702-2KP, 5SV8703-2KK, 5SV8704-2KK)	
Rated voltage	(Summation current transformers)	690 V	
Response characteristic	Acc. to IEC 60947-2 (M)	Type B	
Rated frequency		0 ... 2 kHz	
Response residual current	$I_{\Delta n}1$ (AL1 alarm)	50 ... 100% of $I_{\Delta n}2$ (factory setting: 50%)	
	$I_{\Delta n}2$ (TP2 tripping)	30 mA ... 1 A (factory setting: 30 mA)	
Response delay	$t_{on}1$ (alarm)	0 ... 10 s (factory setting: 1 s)	
	$t_{on}2$ (tripping)	0 ... 10 s (factory setting: 0 s)	
Equipment			
Maximum cable length MRCD/converter		10 m (6 × 0.75 mm²)	
Password		Off/0 ... 999 (factory setting: 0)	
Safety			
Degree of protection	Components (IEC 60529)	IP30	
	Terminals (IEC 60529)	IP20	
EMC		IEC 60947-2 (M)	
Overvoltage category		III	
Pollution degree		3	
Mechanical data			
Width		36 mm (2 MW)	
Depth		64 mm	
Height		85 mm	
Weight		150 g	
Mounting		DIN rail	
Enclosure material		Polycarbonate	
Electrical connection		Screw terminals	
Conductor cross-section	Rigid	0.2 ... 4 mm²	
	Flexible, with end sleeve	0.2 ... 2.5 mm² (AWG 24 ... 12)	
Stripped length		8 ... 9 mm	
Tightening torque		0.5 ... 0.6 Nm	
Ambient conditions			
Operating temperature		–25 ... +55 °C	

11

System overview, page 11/4

© Siemens 2025

Accessories

Summation current transformers

	Lowest measurable residual current $I_{\Delta n\ min}$	Rated current I_n	Maximum current [1] I_{max}	Internal diameter	Version	Article No.
	10 mA	≤ 80 A	500 A	35 mm	Standard	5SV8701-2KK
					With shield	5SV8701-2KP
		≤ 160 A	1000 A	60 mm	Standard	5SV8702-2KK
					With shield	5SV8702-2KP
	100 mA	≤ 330 A	2000 A	120 mm	Standard	5SV8703-2KK
	300 mA	≤ 630 A	3800 A	210 mm	Standard	5SV8704-2KK

Holders for DIN rails

	Suitable for summation current transformers	Article No.
	5SV8701-2KK, 5SV8701-2KP	5SV8900-2KK
	5SV8702-2KK, 5SV8702-2KP	5SV8900-3KK

[1] Short-time starting current, up to 2 s

Tested combination options

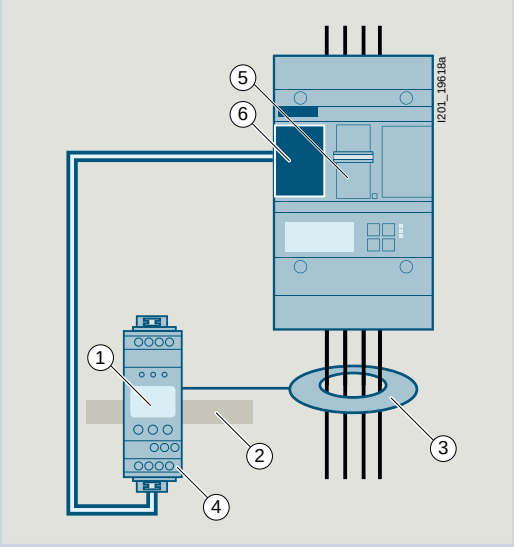

5SV8101-4KK/5SV8111-4KK (tested combinations)

❶ Modular residual current device	
5SV8101-4KK/5SV8111-4KK	
❷ DIN rail	
EN 60715 – TH35 – 7,5 35 – 15	
❸ Summation current transformers	
Ø 35 mm	5SV8701-2KK/5SV8701-2KP
Ø 60 mm	5SV8702-2KK/5SV8702-2KP
Ø 120 mm	5SV8703-2KK
Ø 210 mm	5SV8704-2KK
❹ Relay contacts	

DC:



AC: max. 230 V, 5 A

❺ Molded case circuit breakers	❻ Trip unit
3VA1..	3VA9908-0BB11
3VA20..	3VA9908-0BB24
3VA21..	3VA9908-0BB25
3VA22..	
3VA23..	3VA9908-0BB11
3VA24..	3VA9908-0BB25

11

System overview, page 11/4

© Siemens 2025

5SV8 COM modular residual current device with communication and measuring function new

Type A

	MRCD COM
Mounting width	1 MW

Rated operational voltage U_e	Rated residual current $I_{\Delta n}$ Type A	
100 ... 240 V AC/DC	0.01 ... 30 A	5SV8122-6MP

Further technical specifications

			5SV8122-6MP
Standards			
Standards			IEC 60947-2 (Annex M)
Approvals			UL 508
Supply			
Rated operational voltage U_e			100 ... 240 V AC/DC, 24 V DC
Frequency			47 ... 63 Hz
Rated residual current $I_{\Delta n}$	Type A		0.01 ... 30 A
Response time t_{ae}	$I_{\Delta n}$ = 30 mA (t_{on} = 0 s)	1 × $I_{\Delta n}$	≤ 250 ms
		2 × $I_{\Delta n}$	≤ 130 ms
		5 × $I_{\Delta n}$	≤ 20 ms
	$I_{\Delta n}$ > 30 mA	1 × $I_{\Delta n}$	≤ 250 ms + t_{on}
		2 × $I_{\Delta n}$	≤ 130 ms + t_{on}
		5 × $I_{\Delta n}$	≤ 40 ms + t_{on}
Response delay t_{on} (adjustable)			0 ... 10 s
Relay contacts			
Relay contacts			1 × alarm
Rated voltage			230 V AC
Rated current			5 A
Summation current transformer			
Diameter			20 ... 210 mm
Equipment			
Maximum cable length RCM/CT			40 m (shielded cable)
Test/reset			Yes/Yes
External tripping operation/external reset			No/No
Communication			Radio link to SENTRON Powercenter 1100/2000
Safety			
Degree of protection	Contacts		IP20
	Front		IP30
Ambient conditions			
Operating temperature			–25 ... +60 °C

System overview, page 11/4

© Siemens 2025

Accessories

Summation current transformers

Mounting options	Lowest measurable residual current $I_{\Delta n\,min}$	Lowest adjustable response value	Rated current I_n	Maximum current I_{max}	Internal diameter	Article No.
Screw fixing/DIN rail	1 mA	10 mA	63 A	125 A	20 mm	5SV8710-0KK [1]
		30 mA	125 A	125 A	35 mm	5SV8711-0KK [1]
			200 A	125 A	60 mm	5SV8712-0KK [1]
Screw fixing	4 mA	100 mA	400 A	125 A	120 mm	5SV8713-0KK
	8 mA	300 mA	630 A	125 A	210 mm	5SV8714-0KK

[1] DIN-rail mounting clip included in the scope of supply

Tested combination options

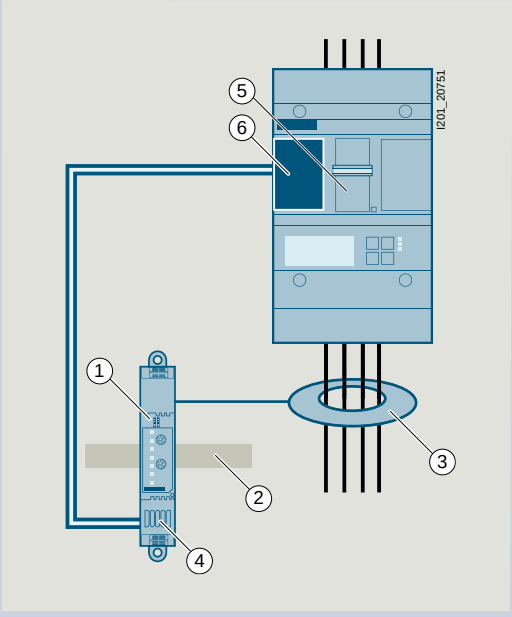

5SV8122-6MP (tested combinations)

❶ Modular residual current device	
5SV8122-6MP	
❷ DIN rail	
DIN EN 60715	
❸ Summation current transformers	
Ø 20 mm	5SV8710-0KK
Ø 35 mm	5SV8711-0KK
Ø 60 mm	5SV8712-0KK
Ø 120 mm	5SV8713-0KK
Ø 210 mm	5SV8714-0KK
❹ Relay contacts	
AC: max. 230 V, 5 A	
❺ Molded case circuit breakers	**❻ Trip unit**
3VA10..	3VA9908-0BB11
3VA11..	3VA9908-0BB23
3VA12..	3VA9908-0BB25
3VA13..	
3VA14..	
3VA20..	
3VA21..	
3VA22..	
3VA23..	
3VA24..	

11

System overview, page 11/4

© Siemens 2025

5SV8 COM modular residual current device with communication and measuring function new

Type B

	MRCD digital with COM
Mounting width	2 MW

Rated operational voltage U_e	Rated residual current $I_{\Delta n}$ Type B	
100 ... 240 V AC/DC	0.03 ... 3 A	5SV8122-4MR

Further technical specifications

			5SV8122-4MR
Standards			
Standards			IEC 60947-2 (Annex M)
Approvals			UL 508
Supply			
Rated operational voltage U_e			100 ... 240 V AC/DC, 24 V DC
Frequency			47 ... 63 Hz
Rated residual current $I_{\Delta n}$	Type B		0.03 ... 3 A
Response time t_{ae}	$I_{\Delta n}$ = 30 mA (t_{on} = 0 s)	1 × $I_{\Delta n}$	≤ 250 ms
		2 × $I_{\Delta n}$	≤ 130 ms
		5 × $I_{\Delta n}$	≤ 20 ms
	$I_{\Delta n}$ > 30 mA	1 × $I_{\Delta n}$	≤ 250 ms + t_{on}
		2 × $I_{\Delta n}$	≤ 130 ms + t_{on}
		5 × $I_{\Delta n}$	≤ 40 ms + t_{on}
Response delay t_{on} (adjustable)			0 ... 10 s
Relay contacts			
Relay contacts			1 × pre-alarm, 1 × alarm
Rated voltage			230 V AC
Rated current			5 A
External summation current transformer			
Diameter			35 ... 210 mm
Equipment			
Maximum cable length MRCM/CT			10 m
Communication			Radio link to SENTRON Powercenter 1100/2000
Safety			
Degree of protection	Contacts		IP20
	Front		IP30
Overvoltage protection			III
Pollution degree			2
Ambient conditions			
Operating temperature			–25 ... +60 °C

System overview, page 11/4

© Siemens 2025

Accessories

Summation current transformers

- Operational voltage 24 V DC

Shielded	Lowest measurable residual current $I_{\Delta n\ min}$	Lowest adjustable response value	Rated current I_n	Maximum current I_{max}	Internal diameter	Article No.
No	1 mA	30 mA	125 A	2400 A	35 mm	5SV8711-2KK [1]
Yes	1 mA	30 mA	160 A	2400 A	35 mm	5SV8711-2KP [1]
No	1 mA	30 mA	200 A	2400 A	60 mm	5SV8712-2KK [1]
Yes	1 mA	30 mA	400 A	2400 A	60 mm	5SV8712-2KP [1]
No	4 mA	100 mA	400 A	2400 A	120 mm	5SV8713-2KK
No	8 mA	300 mA	630 A	2400 A	210 mm	5SV8714-2KK

[1] DIN-rail mounting clip included in the scope of supply

Tested combination options

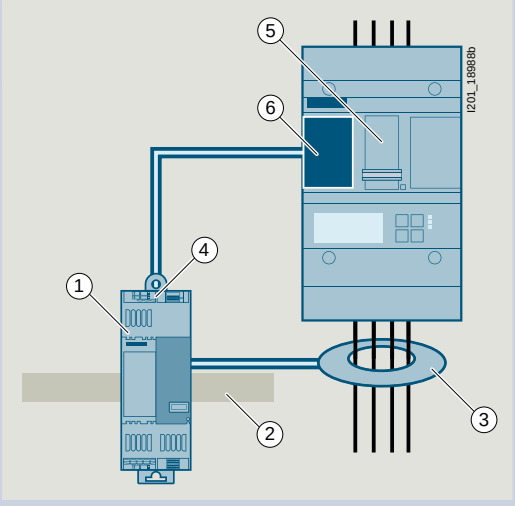

5SV8122-4MR (tested combinations)

❶ Modular residual current device	
5SV8122-4MR	
❷ DIN rail	
DIN EN 60715	
❸ Summation current transformers	
Ø 35 mm	5SV8711-2KK
	5SV8711-2KP
Ø 60 mm	5SV8712-2KK
	5SV8712-2KP
Ø 120 mm	5SV8713-2KK
Ø 210 mm	5SV8714-2KK
❹ Relay contacts	
AC: max. 230 V, 5 A	

❺ Molded case circuit breakers	❻ Trip unit
3VA10..	3VA9908-0BB11
3VA11..	3VA9908-0BB23
3VA12..	3VA9908-0BB25
3VA13..	
3VA14..	
3VA20..	
3VA21..	
3VA22..	
3VA23..	
3VA24..	

11

System overview, page 11/4

© Siemens 2025

5SV8 COM modular residual current device with communication and measuring function new

Type A and B

SENTRON Powercenter 1100/2000 data transceiver

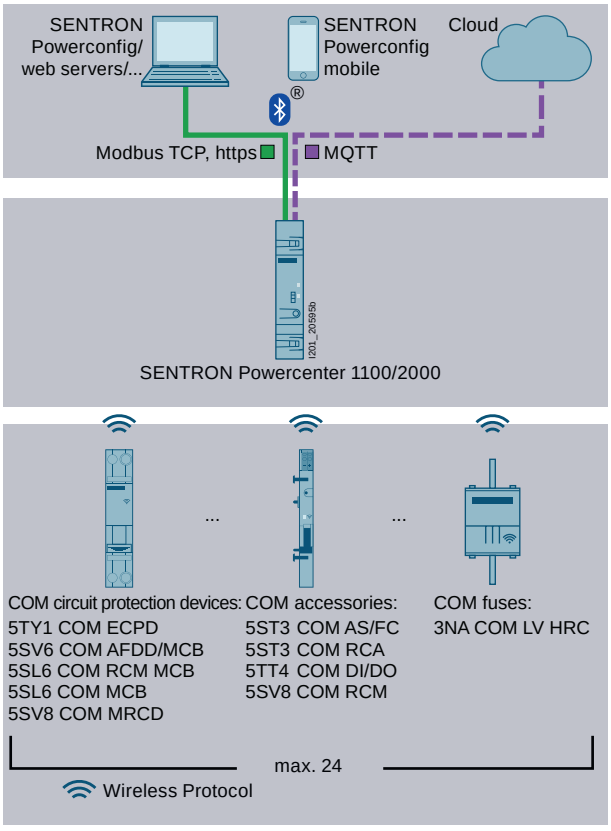

- Wireless radio transmission of measured values to the SENTRON Powercenter 1000/1100/2000 data transceiver
- Commissioning, parameter assignment, firmware updates and further processing of the data via the SENTRON Powercenter 1000/1100/2000 data transceiver

SENTRON Powercenter	Article No.
SENTRON Powercenter 1000	7KN1110-0MC00
SENTRON Powercenter 1100	7KN1111-0MC00
SENTRON Powercenter 2000	7KN1210-0MC00

See page 10/28

You will find further information at www.siemens.com/lowvoltage/manuals

Installation Manual – Circuit protection devices with communication and measuring function (109791805)

System Manual – Circuit protection devices with communication and measuring function (109791806)

System overview, page 11/4

© Siemens 2025

System overview, page 11/4

© Siemens 2025

5TT3 undervoltage relays

Without response delay

				For the monitoring of		
				1, 2 or 3 phases against N		3 phases against N
			Contacts	1 CO	2 CO	2 CO
			Mounting width	1 MW	2 MW	2 MW
Rated operational voltage U_e	**Rated operational current I_e**	**Switching thresholds**	**Hysteresis**			
Not adjustable						
230 V AC	4 A	0.7 and 0.9 × U_c	–	5TT3400	5TT3402	5TT3404
		0.85 and 0.95 × U_c	–	5TT3401	–	5TT3405
Adjustable						
230 V AC	4 A	0.7 ... 0.95 × U_c	5%	–	–	5TT3406
		0.9 ... 0.95 × U_c	–	–	5TT3403	–

Further technical specifications

		5TT3400 5TT3401 5TT3402 5TT3403	5TT3404 5TT3405	5TT3406
Standards				
Standards		IEC 60255, DIN VDE 0435-110, DIN VDE 0435-303		
Supply				
Rated control circuit voltage U_c		230/400 V AC		
Primary operating range (overload capability)		1.1 × U_c		
Rated frequency		50/60 Hz		
Contacts				
µ contact	AC-11	4 A		
Response values	ON-switching	0.9/0.95 × U_c		4% hysteresis
	OFF-switching	0.7/0.85 × U_c		0.7 ... 0.95 × U_c
Minimum contact load		10 V/100 mA		
Safety				
Rated insulation voltage U_i	Between coil/contact	4 kV		
Electrical isolation, creepage distances and clearances	Actuator/contact	3 mm	5.5 mm	
Rated impulse withstand voltage U_{imp}	Actuator/contact	> 2.5 kV	> 4 kV	
Functions				
Phase asymmetry	Setting accuracy	–	Approx. 5 ... 10%	
	Repeat accuracy	–	1	
Phase failure detection	At L1 or L2 or L3	100 ms		
Functions	Monitoring of 1/2 phases against N	Yes	–	
	Monitoring of 3 phases against N	Yes		
	Asymmetry (failure) detection	–	Yes	
	Reverse (failure) detection	–	Yes	
	Phase failure detection	Yes		
	N-conductor monitoring	–	Yes	
Connection				
Terminals	± Screw (Pozidriv)	PZ 1		
Conductor cross-sections	Rigid	Max. 2 × 2.5 mm²		
	Flexible, with end sleeve	Min. 1 × 0.5 mm²		
Ambient conditions				
Permissible ambient temperature		–20 ... +60 °C		
Resistance to climate	Acc. to EN 60068-1	20/60/4		

System overview, page 11/4

© Siemens 2025

5TT3 undervoltage relays

With response delay

	For the monitoring of 1, 2 or 3 phases against N	
Contacts	1 CO	2 CO
Mounting width	1 MW	1 MW

Rated operational voltage U_e	Rated operational current I_e	Switching thresholds	Hysteresis	Standard	With TEST pushbutton
Not adjustable					
230 V AC	4 A	0.85 × U_c	5%	5TT3414	5TT3415

Further technical specifications

		5TT3414	5TT3415
Supply			
Rated control circuit voltage U_c		230/400 V AC	
Primary operating range (overload capability)		1.15 × U_c	
Rated frequency		50/60 Hz	
Contacts			
Contacts	AC-15	1 CO	2 CO
Response values	ON-switching	5% hysteresis	
	OFF-switching	0.85 × U_c	
Response delay		0.5 s	
Return transfer delay		60 s	
Minimum contact load		10 V/100 mA	
Electrical endurance in operating cycles	AC-15 (1 A, 230 V AC)	1 × 10^5	
Safety			
Rated insulation voltage U_i	Between coil/contact	–	
Rated impulse withstand voltage	Acc. to IEC 60664-1	6 kV	
Pollution degree		2	
Functions			
Phase failure detection	At L1 or L2 or L3	500 ms	
Functions	Monitoring of 1 or 2 phases against N	Yes	
	Monitoring of 3 phases against N	Yes	
	Phase failure detection	Yes	
Connection			
Terminals	– Screw (slot)	3.5 mm	
Conductor cross-sections	Rigid	1 × 4 mm^2	
	Flexible, with end sleeve	1 × 2.5 mm^2	
Ambient conditions			
Permissible ambient temperature		–25 ... +60 °C	
Resistance to climate	Acc. to EN 60068-1	20/060/04	

System overview, page 11/4

© Siemens 2025

5TT3 short-time voltage relay

Without response delay

	For the monitoring of 1, 2 or 3 phases against N
Contacts	2 CO
Mounting width	2 MW

Rated operational voltage U_e	Rated operational current I_e	Switching thresholds	
Not adjustable			
230 V AC	4 A	0.8 ... 0.85 × U_c	5TT3407

Further technical specifications

			5TT3407
Standards			
Standards			IEC 60255, DIN VDE 0435-303
Supply			
Rated control circuit voltage U_c			230/400 V AC
Primary operating range (overload capability)			1.1 × U_c
Rated frequency			50/60 Hz
Rated operational power P_s	AC operation:	230 V and p.f. = 1	2000 VA
		230 V and p.f. = 0.4	1250 VA
	DC operation:	U_e = 24 V and I_e = 6 A	Max. 100 W
		U_e = 60 V and I_e = 1 A	Max. 100 W
		U_e = 110 V and I_e = 0.6 A	Max. 100 W
		U_e = 220 V and I_e = 0.5 A	Max. 100 W
Back-up fuse	Terminals L1/L2/L3		2 A
Contacts			
µ contact	AC-11		3 A
Response values	ON-switching		0.85 × U_c
	OFF-switching		0.8 × U_c
Automatic reclosing delay (return transfer delay)			0.2 ... 2 s
Minimum contact load			10 V/100 mA
Safety			
Rated insulation voltage U_i	Between coil/contact		4 kV
Electrical isolation, creepage distances and clearances	Actuator/contact		4 mm
Rated impulse withstand voltage U_{imp}	Actuator/contact		> 4 kV
Functions			
Phase failure detection	At L1 or L2 or L3		≥ 20 ms
Phase asymmetry	Setting accuracy		Approx. 5 ... 10%
	Repeat accuracy		1
Functions	Monitoring of 1 or 2 phases against N		Yes
	Monitoring of 3 phases against N		Yes
	Phase failure detection		Yes
	N-conductor monitoring		Yes
Connection			
Terminals	± Screw (Pozidriv)		PZ 1
Conductor cross-sections	Rigid		Max. 2 × 2.5 mm²
	Flexible, with end sleeve		Min. 1 × 0.5 mm²
Ambient conditions			
Permissible ambient temperature			–20 ... +60 °C
Humidity class	Acc. to IEC 60068-2-30		F

System overview, page 11/4

© Siemens 2025

5TT3 undervoltage and overvoltage relays

With adjustable response delay

	For the monitoring of 3 phases against N
Contacts	2 CO
Mounting width	2 MW

Rated operational voltage U_e	Rated operational current I_e	Switching thresholds	Hysteresis	
Adjustable				
230 V AC	4 A	0.7 and 1.1 × U_c 0.9 and 1.3 × U_c	4% 4%	5TT3408

Further technical specifications

			5TT3408
Standards			
Standards			IEC 60255, DIN VDE 0435-303
Supply			
Rated control circuit voltage U_c			230/400 V AC
Primary operating range (overload capability)			1.35 × U_c
Rated frequency			50/60 Hz
Back-up fuse	Terminals L1/L2/L3		2 A
Contacts			
µ contact	AC-11		1 A
Response values	Overvoltage:	ON-switching	4% hysteresis
		OFF-switching	0.9 ... 1.3 × U_c
	Undervoltage:	ON-switching	4% hysteresis
		OFF-switching	0.7 ... 1.1 × U_c
OFF-delay (response delay)			0.1 ... 20 s
Automatic reclosing delay (return transfer delay)			–
Minimum contact load			10 V/100 mA
Safety			
Rated insulation voltage U_i	Between coil/contact		4 kV
Electrical isolation, creepage distances and clearances	Contact/contact		4 mm
	Actuator/contact		4 mm
Rated impulse withstand voltage U_{imp}	Actuator/contact		> 4 kV
Functions			
Phase failure detection	At L1 or L2 or L3		100 ms
Phase asymmetry	Setting accuracy		Approx. 5 ... 10%
	Repeat accuracy		1
Functions	Monitoring of 1 or 2 phases against N		–
	Monitoring of 3 phases against N		Yes
	Asymmetry detection		Yes
	Reverse voltage detection		Yes
	Phase failure detection		Yes
	N-conductor monitoring		Yes
Connection			
Terminals	± Screw (Pozidriv)		PZ 1
Conductor cross-sections	Rigid		Max. 2 × 2.5 mm²
	Flexible, with end sleeve		Min. 1 × 0.5 mm²
Ambient conditions			
Permissible ambient temperature			–20 ... +60 °C
Humidity class	Acc. to IEC 60068-2-30		F

System overview, page 11/4

© Siemens 2025

5TT6 current relays

For 1-phase loads up to 230 V AC

				Auxiliary voltage and load voltage				
				Not isolated		Electrically isolated		
			Mounting width	1 MW	1 MW	2 MW	2 MW	2 MW
Rated operational voltage U_e	Rated operational current I_e	Contacts	Rated control current I_c	Monitoring Undercurrent	Overcurrent	Monitoring Undercurrent	Overcurrent	Overcurrent/ undercurrent
230 V AC	5 A	1 CO	1 ... 10 A	5TT6111	5TT6112	–	–	–
		2 CO	0.1 ... 1 A, 0.5 ... 5 A, 1 ... 10 A, 1.5 ... 15 A	–	–	5TT6113	5TT6114	5TT6115

Further technical specifications

		5TT6111 5TT6112	5TT6113 5TT6114 5TT6115
Standards			
Standards		IEC 60255	IEC 60255 DIN VDE 0435-303
Supply			
Rated control current I_c		1 ... 10 A	0.1 ... 1 A, 0.5 ... 5 A, 1 ... 10 A, 1.5 ... 15 A
Rated control circuit voltage U_c		230 V AC	
Primary operating range		0.9 ... 1.1 × U_c	
Overload capability	Continuous	15 A	20 A
	At 50 °C ambient temperature max. 3 s	20 A	–
	Independent of measuring range, max. 3 s	–	30 A
Rated frequency		50/60 Hz	
Contacts			
µ contact (AC-15)	NO	3 A	5 A
	NC	1 A	
Response values	ON-switching	Infinitely variable	
	OFF-switching	Permanent, 4% hysteresis	
Switching delay t_v		0.1 ... 20 s, continuously adjustable	
Response time	Non-adjustable	Current corresponds to the rated operational power of the continuous-flow heater	See Siemens Service and Support Portal, search term "Article No.", e.g. "5TT6113"
Minimum contact load		10 V/100 mA	
Safety			
Rated insulation voltage U_i	Between coil/contact	2.5 kV	
Electrical isolation, creepage distances and clearances	Actuator/contact	3 mm	
Rated impulse withstand voltage U_{imp}	Actuator/contact	> 4 kV	
Connection			
Terminals	± Screw (Pozidriv)	PZ 1	
Conductor cross-sections	Rigid	Max. 2 × 2.5 mm²	
	Flexible, with end sleeve	Min. 1 × 0.5 mm²	
Ambient conditions			
Permissible ambient temperature		–20 ... +60 °C	
Resistance to climate	Acc. to EN 60068-1	20/60/4	

11

System overview, page 11/4

© Siemens 2025

5TT3 fuse monitors

For all low-voltage fuse systems

Mounting width	2 MW

Rated operational voltage U_e	Rated operational current I_e	Rated control circuit voltage U_c	
Adjustable			
250 V AC	4 A	380 ... 415 V AC	5TT3170

Further technical specifications

		5TT3170
Standards		
Standards		IEC 60255, DIN VDE 0435-110
Supply		
Rated operational voltage U_e		250 V AC
Rated operational current I_e	AC-1	4 A
Rated control circuit voltage U_c	3 AC	380 ... 415 V
Primary operating range		0.8 ... 1.1 × U_c
Rated frequency		50 ... 400 Hz
Contacts		
Internal resistance of measuring paths		> 1000 Ω/V
Max. permissible rear feed		90%
Response/release time		< 50 ms
Electrical endurance AC-11	In switching cycles at 1 A	1.5×10^5
Safety		
Rated impulse withstand voltage U_{imp}	Input/output	> 4 kV
Application		
Area of application		Asymmetric, systems afflicted with harmonics, regenerative motors
Message		Also for disconnected loads
Connection		
Terminals	± Screw (Pozidriv)	PZ 1
Conductor cross-sections	Rigid	Max. 2 × 2.5 mm²
	Flexible, with end sleeve	Min. 1 × 0.5 mm²
Ambient conditions		
Permissible ambient temperature		–20 ... +45 °C
Resistance to climate	Acc. to EN 60068-1	20/45/4

System overview, page 11/4

© Siemens 2025

5TT3 phase monitors

For monitoring of voltages in a three-phase system

Mounting width	1 MW

Rated operational voltage U_e	Rated operational current I_e	Contacts	Rated control circuit voltage U_c	With 3 green LEDs for 3 phases
250 V AC	4 A	1 CO	230/400 V	5TT3421

Further technical specifications

		5TT3421
Standards		
Standards		IEC 60255, DIN VDE 0435
Supply		
Rated operational voltage U_e		250 V AC
Rated operational current I_e		4 A
Rated control circuit voltage U_c		230/400 V AC
Primary operating range		0.8 ... 1.1 × U_c
Rated frequency		50/60 Hz
Rated power dissipation P_v	Electronics	9 VA
	Contacts	0.2 VA
Contacts		
µ contact	AC-11	3 A
Minimum contact load		10 V/100 mA
Safety		
Rated insulation voltage U_i	Between coil/contact	4 kV
Electrical isolation, creepage distances and clearances	Actuator/contact	4 mm
Rated impulse withstand voltage U_{imp}	Actuator/contact	> 2.5 kV
Degree of protection	Acc. to EN 60529	IP20, with connected conductors
Protection class	Acc. to EN 61140/VDE 0140-1	II
Connection		
Terminals	± Screw (Pozidriv)	PZ 1
Conductor cross-sections	Rigid	Max. 2 × 2.5 mm²
	Flexible, with end sleeve	–
Ambient conditions		
Permissible ambient temperature		–20 ... +60 °C
Resistance to climate	Acc. to EN 60068-1	20/60/4

System overview, page 11/4

© Siemens 2025

5TT3 phase sequence monitors

For monitoring of phase sequence in a three-phase system

Mounting width	1 MW

Rated operational voltage U_e	Rated operational current I_e	Contacts	Rated control circuit voltage U_c	With one green LED, which lights up for right-rotating field
250 V AC	4 A	1 CO	400 V	5TT3423

Further technical specifications

		5TT3423
Standards		
Standards		IEC 60255, DIN VDE 0435
Supply		
Rated operational voltage U_e		250 V AC
Rated operational current I_e		4 A
Rated control circuit voltage U_c		400 V AC
Primary operating range		0.8 ... 1.1 × U_c
Rated frequency		50/60 Hz
Rated power dissipation P_v	Electronics	9 VA
	Contacts	0.2 VA
Contacts		
µ contact	AC-11	3 A
Minimum contact load		10 V/100 mA
Safety		
Rated insulation voltage U_i	Between coil/contact	4 kV
Electrical isolation, creepage distances and clearances	Actuator/contact	4 mm
Rated impulse withstand voltage U_{imp}	Actuator/contact	> 2.5 kV
Degree of protection	Acc. to EN 60529	IP20, with connected conductors
Protection class	Acc. to EN 61140/VDE 0140-1	II
Connection		
Terminals	± Screw (Pozidriv)	PZ 1
Conductor cross-sections	Rigid	Max. 2 × 2.5 mm²
	Flexible, with end sleeve	–
Ambient conditions		
Permissible ambient temperature		–20 ... +60 °C
Resistance to climate	Acc. to EN 60068-1	20/60/4

System overview, page 11/4

© Siemens 2025

5TT3 insulation monitors for industrial applications

Are used for protection of persons and against fire in non-grounded systems (IT systems)

Mounting width	2 MW

Measurement voltage range U_{meas}	Measuring range	Contacts	Rated control circuit voltage U_c	
0 ... 500 V AC	5 ... 100 kΩ	2 CO	230 V AC	5TT3470
12 ... 280 V DC	5 ... 200 kΩ	2 CO	–	5TT3471

Further technical specifications

		5TT3470	5TT3471
Supply			
Rated operational voltage U_e		230 V AC	12 ... 280 V DC
Rated operational current I_s	Thermal current I_{th}	4 A	
	DC-13 at 24 V DC	–	2 A
	DC-13 at 250 V DC	–	0.2 A
	AC-15	–	3 A
	AC-15 NO	5 A	–
	AC-15 NC	2 A	–
Supply voltage U_c	For AC supply	220 ... 240 V AC	–
Primary operating range	For AC supply	0.8 ... 1.1 × U_c	–
Frequency range for U_c		45 ... 400 Hz	–
Rated power dissipation P_v	For AC supply	Approx. 2 VA	–
	For DC supply	–	Approx. 1 W
Contacts			
µ contact		2 CO	
Switching hysteresis	At R_{meas} 50 kΩ	15%	10 ... 15%
Measuring circuit			
Measuring circuit		For 3-phase and AC systems	For direct voltage systems
Measurement voltage range *Umeas*		0 ... 500 V AC	12 ... 280 V DC
Measurement voltage *Umeas*	Internal	Approx. 15 V DC	–
Primary operating range		0 ... 1.1 × *Umeas*	0.9 ... 1.1 × *Umeas*
Frequency range for *Umeas*		10 ... 10000 Hz	–
Alarm values	Measuring shunt R_{AL}	5 ... 100 kΩ	5 ... 200 kΩ
Setting of alarm value	On absolute scale	Infinitely variable	Infinitely variable
Alternating current internal resistance	Internal testing resistance	> 250 kΩ	–
Direct current internal resistance	Internal testing resistance	> 250 kΩ	–
	L+ and L- to PE	–	75 kΩ each
Max. measurement current I_{meas}	Short circuit	< 0.1 mA	0.2 ... 4 mA, depending on the voltage
Direct interference voltage	Max. permissible	500 V DC	–
Response delay at R_{AL} 50 kΩ and 1 µF	∞ to 0.9 × R_{meas}	< 1.3 s	0.8 s
	R_{meas} from ∞ to 0 Ω	< 0.7 s	0.4 s
Safety			
Rated impulse withstand voltage U_{imp}	Terminals A1 to A2	< 4 kV	
	Terminals L to PE	< 4 kV	
	Terminals A1, A2 to L, PE	< 4 kV	< 3 kV
	Terminals against contacts	< 6 kV	
Degree of protection	Terminals (according to EN 60529)	IP20	
	Enclosure (according to EN 60529)	IP40	
Connection			
Terminals	± Screw (Pozidriv)	PZ 2	
Conductor cross-sections	Rigid	Max. 2 × 2.5 mm²	
	Flexible, with end sleeve	Min. 1 × 0.50 mm²	
Ambient conditions			
Permissible ambient temperature		–20 ... +60 °C	
Resistance to climate	Acc. to EN 60068-1	20/060/04	

System overview, page 11/4

© Siemens 2025

5TT5 EMERGENCY STOP modules

Efficient personal and machine protection in small units

Mounting width	4 MW

Rated operational voltage U_e	Rated operational current I_e	Rated control circuit voltage U_c	
400 V AC	5 A	230 V AC	5TT5200

Further technical specifications

		5TT5200
Standards		
Standards		ISO 13849-1: 2015; EN 62061: 2005 + AC: 2010 + A1: 2013 + A2: 2015; ISO 13850: 2015; EN 60204-1: 2006 + A1: 2009 + AC: 2010 (in extracts); EN 60947-5: 2004 + A1: 2009; EN 50178: 1997; EN 61508 Parts 1-7: 2010; EN 50156-1: 2005 (in extracts)
Certification		German Technical Inspectorate Rheinland
Supply		
Primary operating range		0.8 ... 1.1 × U_c
Rated frequency f_n		50 Hz
Rated power dissipation P_v	Coil/drive	3.5 VA
	Contact per pole	0.8 VA
Control voltage	Terminal Y1	24 V AC/DC
Control current	Terminal Y1	45 mA
Contacts		
Contacts	NO AC-15	3 A
	NC AC-15	2 A
	NO/NC AC-1	5 A
Contact gap		> 1 mm
Electrical endurance	AC-15 (2 A, 230 V AC)	10^5 operating cycles
Reliable switching frequency		600 operating cycles/h
Recovery time		500 ms
Safety		
Rated impulse withstand voltage U_{imp}	Actuator/contact	> 4 kV
Electrical isolation, creepage distances and clearances	Actuator/contact	3 mm
Vibration resistance	Amplitude acc. to EN 60068-2-610 (up to 55 Hz)	0.35 mm
Connection		
Terminals	± Screw (Pozidriv)	PZ 1
Conductor cross-sections of main current paths	Rigid	Max. 2 × 2.5 mm²
	Flexible, with end sleeve	Min. 1 × 0.50 mm²
Ambient conditions		
Permissible ambient temperature		0 ... +50 °C
Resistance to climate	Acc. to EN 60068-1	0/55/04

System overview, page 11/4

© Siemens 2025

5TT3 level relays

For level monitoring and control

Mounting width	2 MW

Rated operational voltage U_e	Rated operational current I_e	Rated control circuit voltage U_c	
250 V AC	5 A	230 V AC	5TT3435

Further technical specifications

		5TT3435
Standards		
Standards		IEC 60255; DIN VDE 0435-110
Supply		
Rated operational voltage U_e		250 V AC
Rated operational current I_e		5 A
Rated control circuit voltage U_c		230 V AC
Primary operating range		0.8 ... 1.1 × U_c
Rated frequency f_n		50/60 Hz
Measuring circuit		
Setting range of the liquid level		2 ... 450 kΩ
Switching point hysteresis of setting value	At 450 kΩ	3%
	At 2 kΩ	6%
Electrode voltage		Max. approx. 10 V AC
Electrode current		Max. approx. 1.5 mA AC
Response delay	Adjustable	0.2 ... 20 s
OFF-delay	Adjustable	0.2 ... 20 s
Test voltage	Input/auxiliary circuit	4 kV
	Input/output circuit	4 kV
	Auxiliary/output circuit	4 kV
Voltage temperature influence	From setting value	< 2%
Max. cable length to the electrodes at 100 µF/km	Setting value 450 kΩ	50 m
	Setting value 100 kΩ	200 m
	Setting value 35 kΩ	500 m
	Setting value 10 kΩ	1500 m
	Setting value 5 kΩ	3000 m
Connection		
Terminals	± Screw (Pozidriv)	PZ 2
Conductor cross-sections	Rigid, max.	Max. 2 × 2.5 mm²
	Flexible, with end sleeve	Min. 1 × 0.50 mm²
Ambient conditions		
Permissible ambient temperature		–20 ... +60 °C
Resistance to climate	Acc. to EN 60068-1	20/60/4

Accessories

Immersion electrodes

- Made of stainless steel, with PG13 sealing cap
- Suitable for pure water in open containers

Temperature range	Connection	Article No.
0 ... 60 °C	Terminal connection	5TG8223

11

System overview, page 11/4

© Siemens 2025

5TT3 line circuit relays

To interrupt circuits where there are no active loads

Mounting width	1 MW

Rated operational voltage U_e	Rated operational current I_e	Contacts	Rated control circuit voltage U_c	
250 V AC	16 A	1 NC	230 V AC	5TT3171

Further technical specifications

		5TT3171
Standards		
Standards		IEC 60255; DIN VDE 0435-110
Supply		
Rated operational voltage U_e		250 V AC
Rated operational current I_e	AC-1	16 A
Rated control circuit voltage U_c		230 V AC
Primary operating range		0.85 ... 1.15 × U_c
Rated frequency		50/60 Hz
Rated power dissipation P_v	Electronics	5 VA
	Contacts	2.6 VA
Contacts		
Response value	Adjustable	2 ... 20 VA
Release value	% of the response value	70%
Electrical endurance	In switching cycles at 3 A (AC-11)	5 × 10^5
Safety		
Rated impulse withstand voltage U_{imp}	Input/output	> 4 V
Degree of protection	Acc. to IEC/EN 60529	IP20, with connected conductors
Protection class	Acc. to EN 61140/VDE 0140-1	II
Monitoring voltage		3 V
Connection		
Terminals	± Screw (Pozidriv)	PZ 1
Conductor cross-sections	Rigid	Max. 2 × 2.5 mm^2
	Flexible, with end sleeve	Min. 1 × 0.50 mm^2
Ambient conditions		
Permissible ambient temperature		–20 ... +45 °C
Humidity class	Acc. to IEC 60068-2-30	F

Accessories

Base load resistors for electronic devices

- With 15 cm connection wires, end sleeves and shrink sleeving

Article No.
5TG8222

System overview, page 11/4

© Siemens 2025

7LQ2 twilight switches

For lighting system monitoring and control

Mounting width	1 MW

Rated operational voltage U_e	Rated operational current I_e	Contacts	Rated control circuit voltage U_c	
230 V AC	16 A	1 NO	250 V AC	7LQ2300

Further technical specifications

		7LQ2300
Standards		
Standards		EN 60669-1
Supply		
Rated operational voltage U_e		230 V AC
Rated frequency f_n		50/60 Hz
Safety		
Degree of protection		IP30
Contacts		
Incandescent lamp/halogen lamp load		2000 W
Energy-saving lamp load		1000 W
Fluorescent lamp load	Series corrected	2000 W
	Parallel corrected (at max. 70 µF)	1000 W
LV halogen lamp load ECG		2000 W
Luminosity setting		1 ... 100000 Lux
Measuring circuit		
ON/OFF-delay		Approx. 90 s
Connection		
Terminals	± Screw (Pozidriv)	PZ1
Conductor cross-sections	Rigid	Max. 2 × 1.5 mm²
Mechanical data		
Width		17.5 mm (1 MW)
Mounting		DIN rail
Ambient conditions		
Permissible ambient temperature		–20 ... +55 °C

Spare part

Light sensor

- Included in the 7LQ2300 package
- Degree of protection IP65

Temperature range	Mounting	Article No.
–20 ... +70 °C	Surface mounting	7LQ2920

System overview, page 11/4

© Siemens 2025

System overview, page 11/4

© Siemens 2025

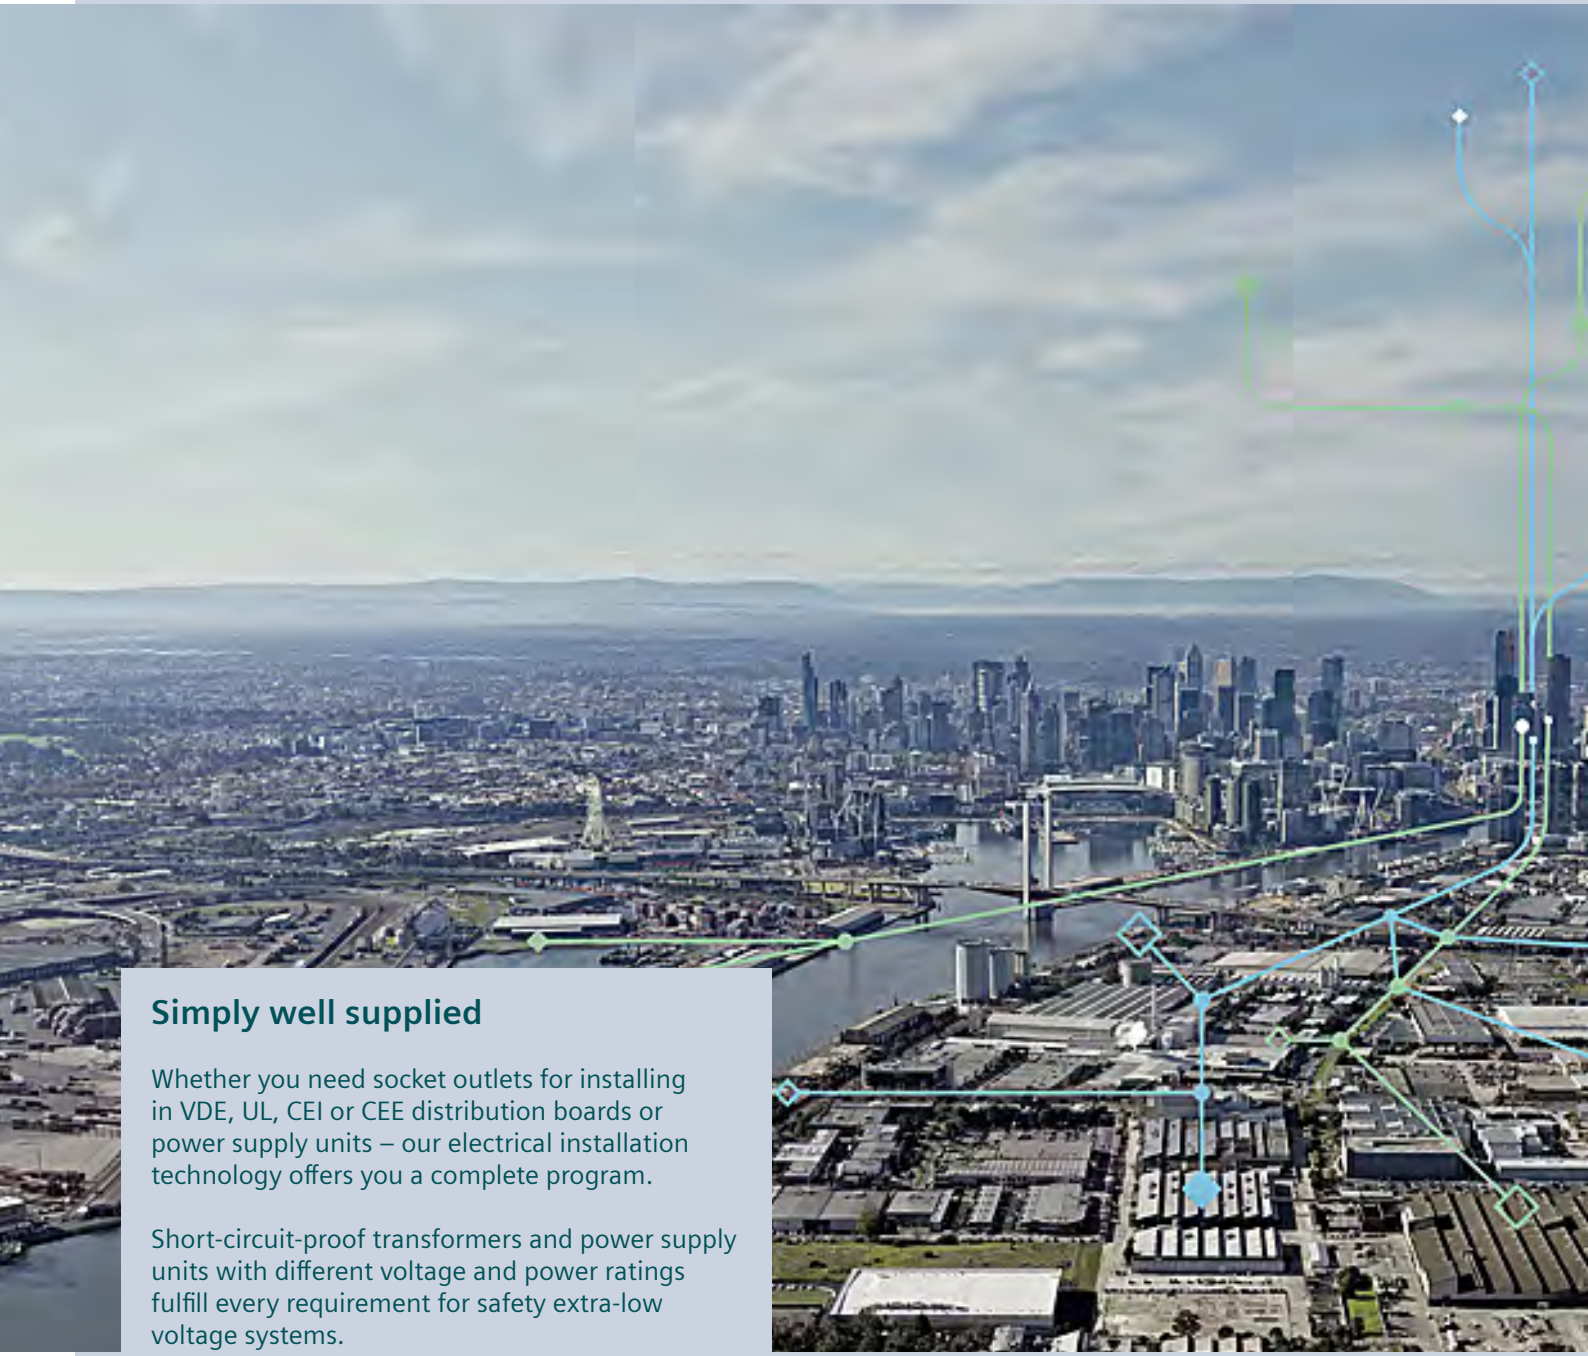

Simply well supplied

Whether you need socket outlets for installing in VDE, UL, CEI or CEE distribution boards or power supply units – our electrical installation technology offers you a complete program.

Short-circuit-proof transformers and power supply units with different voltage and power ratings fulfill every requirement for safety extra-low voltage systems.

© Siemens 2025

Transformers, Power Supply Units and Socket Outlets

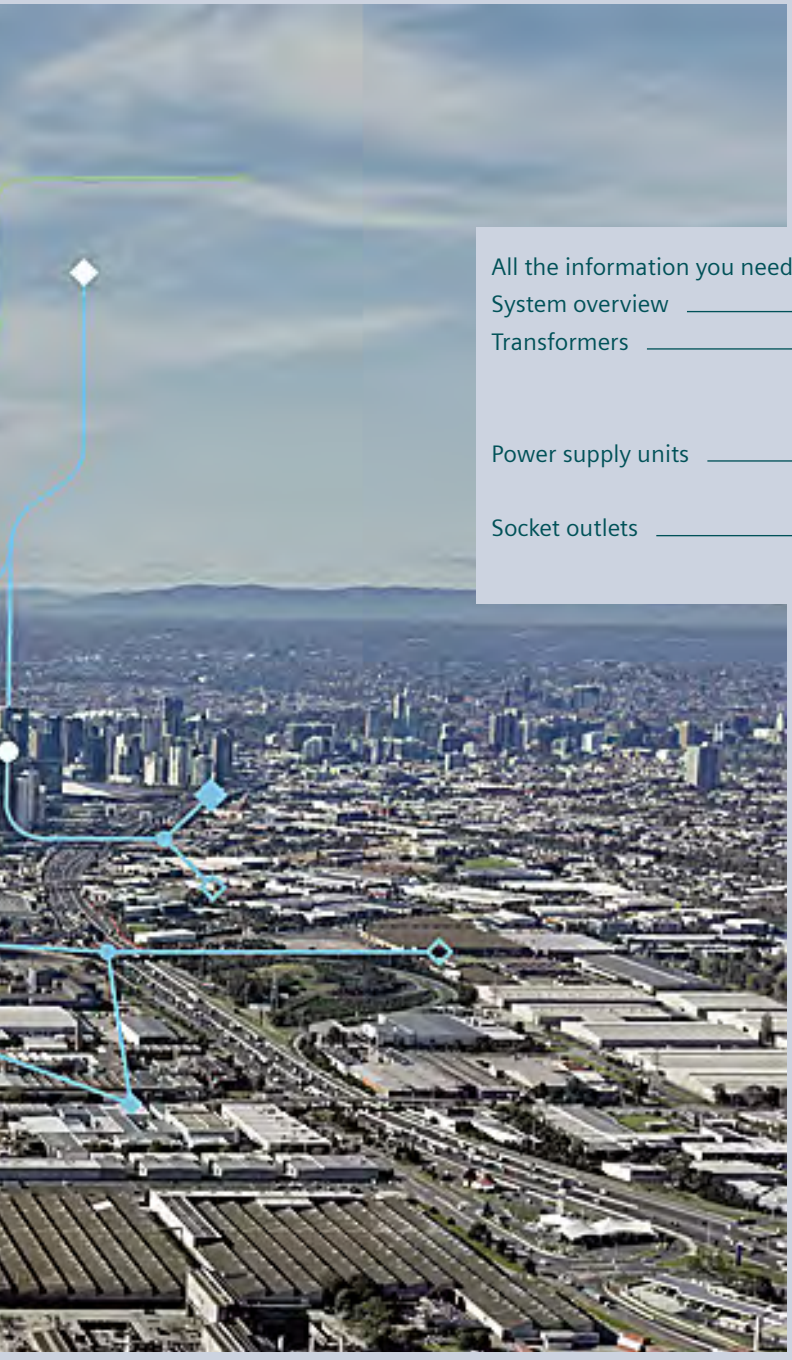

All the information you need 12/2
System overview 12/4
Transformers 12/6
4AC32 bell transformer 12/6
4AC37 safety transformer 12/8
Power supply units 12/10
4AC2 electronic power supply unit 12/10
Socket outlets 12/12
5TE6 socket outlet for modular installation devices 12/12

© Siemens 2025

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about transformers, power supply units and socket outlets, please visit our website
www.siemens.com/switching-devices

Your product in detail

The relevant tender specifications can be found at
www.siemens.com/tenderspecifications

Use our conversion tool for quick and easy conversion to Siemens products **www.siemens.com/conversion-tool**

Everything you need for your order

Refer to SiePortal to find an overview of your products (product catalog)

- Transformers, power supply units and socket outlets
  sie.ag/2PxFgh

Direct forwarding to the individual products in SiePortal by clicking on the article number in the catalog or entering this web address incl. article number
www.siemens.com/product_catalog_SIEP?Article No.

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services.
You can find your local contacts at
www.siemens.com/lowvoltage/components/contact

You will find further information on services at
www.siemens.com/service-offers

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at
www.siemens.com/support-request

© Siemens 2025

… can be found in our online services

Commissioning + operation

Your product in detail

The SiePortal platform (knowledge base) provides detailed technical information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Certificates

Online Support app available for download from the **App Store** and **Play Store**
You will find further information at
www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)

- SiePortal (product catalog)
  www.siemens.com/lowvoltage/product-catalog
- Image database
  www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAx Download Manager at
www.siemens.com/cax

Manuals

Manuals can be found in SiePortal at
www.siemens.com/lowvoltage/manuals

- Configuration Manual
  – Transformers, power supply units and socket outlets **(45315886)**

Technical overview – Transformers, power supply units and socket outlets

The fast way to get you to our online services

This page provides you with comprehensive information and links on transformers, power supply units and socket outlets

www.siemens.com/lowvoltage/product-support (109778781)

© Siemens 2025

System overview

Transformers

4AC32 bell transformers

4AC37 safety transformers

Power supply units

4AC2 electronic power supply units

Socket outlets

5TE6 socket outlet for modular installation devices

Accessories

Hinged cover

Note:
You will find a detailed range of accessories with the basic units.

© Siemens 2025

© Siemens 2025

4AC32 bell transformer

U_e 230 V AC

Mounting width	2 MW	2 MW
		

Rated secondary current I_{sec} AC at rated secondary voltage U_{sec} AC			**Rated operational power P_s**	
8 V	**12 V**	**24 V**	**8 VA**	**8 VA**
1.0 A	–	–	4AC3208-0	–
	0.6 A	–	–	4AC3208-1
2.0 A	1.3 A	0.6 A	–	–
	1.5 A	–	–	–

Further technical specifications

		4AC3208-0	4AC3208-1	4AC3214-0	4AC3218-0
Standards					
Standards		EN 61558-1, EN 61558-2-8			
Supply					
Rated operational voltage U_e		230 V AC			
Primary operating range at 50 Hz		1.04 × U_e			
Rated frequency		50 Hz			
Rated power dissipation P_V	In no-load operation	1.2 W		1.3 W	
	At a rated voltage of 8 V	5.7 W		10.5 W	8.1 W
	At a rated voltage of 12 V	–	3.8 W	7.4 W	8.4 W
	At a rated voltage of 24 V	–		4.2 W	–
Safety					
Safe separation	Creepage distances and clearances	> 6 mm			
Insulation class		E			
Test voltage (50 Hz, 1 s)	Primary against secondary winding	4 kV			
Connection					
Conductor cross-section	Rigid	1 × 4 mm² or 2 × 2.5 mm²			
	Flexible, with end sleeve	1 × 2.5 mm² or 2 × 1.5 mm²			
Ambient conditions					
Permissible ambient temperature		40 °C	35 °C	40 °C	
Permissible humidity		91%			
Degree of protection	Acc. to EN 60629	IP20			
Protection class	Acc. to EN 61140 (VDE 0140-1)	II			

System overview, page 12/4

© Siemens 2025

2 MW	2 MW
	
14 VA	**18 VA**
–	–
–	–
4AC3214-0	–
–	4AC3218-0

12

System overview, page 12/4

© Siemens 2025

4AC37 safety transformer

U_e 230 V AC

Mounting width	2 MW	3 MW
		

Rated secondary current I_{sec} AC at rated secondary voltage U_{sec} AC					Rated operational power P_s	
8 V	12 V	16 V	24 V	32 V	16 VA	24 VA
2.0 A	–	–	–	–	4AC3716-0	–
	2.0 A	–	–	–	–	4AC3724-0
–	3.3 A	2.5 A	1.6 A	1.2 A	–	–
		–	1.6 A	–	–	–
	5.2 A	–	2.6 A	–	–	–

Further technical specifications

		4AC3716-0	4AC3724-0	4AC3740-0	4AC3740-1	4AC3763-0
Standards						
Standards		EN 61558-1, EN 61558-2-6				
Supply						
Rated operational voltage U_e		230 V AC				
Primary operating range at 50 Hz		1.04 × U_e				
Rated frequency		50 Hz				
Rated power dissipation P_V	In no-load operation	1.1 W		3.5 W	3.9 W	
	At a rated voltage of 8 V	6.8 W	4.6 W	–		
	At a rated voltage of 12 V	–	7.6 W	7.1 W	7.5 W	13.2 W
	At a rated voltage of 16 V	–			7.7 W	–
	At a rated voltage of 24 V	–		7.7 W	8.1 W	13.5 W
	At a rated voltage of 32 V	–			7.6 W	–
Safety						
Safe separation	Creepage distances and clearances	> 6 mm				
Insulation class		E		F		
Test voltage (50 Hz, 1 s)	Primary against secondary winding	4 kV				
Connection						
Conductor cross-section	Rigid	1 × 4 mm² or 2 × 2.5 mm²				
	Flexible, with end sleeve	1 × 2.5 mm² or 2 × 1.5 mm²				
Ambient conditions						
Permissible ambient temperature		25 °C				
Permissible humidity		91%				
Degree of protection	Acc. to EN 60629	IP20				
Protection class	Acc. to EN 61140 (VDE 0140-1)	II				

System overview, page 12/4

© Siemens 2025

5 MW	5 MW	5 MW
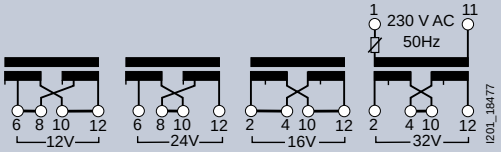		
40 VA	**40 VA**	**63 VA**
–	–	–
–	–	–
4AC3740-1	–	–
–	4AC3740-0	–
–	–	4AC3763-0

12

System overview, page 12/4

© Siemens 2025

4AC2 electronic power supply unit

SELV, short-circuit-proof

Mounting width 2 MW



Rated operational voltage U_e		Rated secondary voltage U_{sec}	Rated secondary current I_{sec}	Rated operational power P_s	
AC	DC	DC	DC		
85 ... 265 V	85 ... 300 V	24 ±5% V	0.35 A	8.4 W	4AC2402

12

System overview, page 12/4

© Siemens 2025

Further technical specifications

Standards		
Standards		EN 60068-2, EN 61558-1, EN 61000-4
Approvals		–
Supply		
Primary operating range	At 50/60 Hz	–
Rated frequency		50/60 Hz
Operating frequency range		–
Rated power dissipation P_v	In no-load operation	–
	At rated load	–
Safety		
Current limitation		Electronic overload protection
Residual ripple		< 100 mV
Hum-free	Core molded	–
Safe separation, creepage distances and clearances		> 5.5 mm
Insulation class		–
Test voltage (50 Hz, 1 min)	Primary against secondary winding	–
Insulation resistance		4 kV
Rated impulse withstand voltage/Degree of pollution	Acc. to IEC 60664-1	6 kV/2
Static discharge	Acc. to IEC/EN 61000-4-2	8 kV
RF irradiation	Acc. to IEC/EN 61000-4-3	10 V/m
Transient overvoltage (burst)	Acc. to IEC/EN 61000-4-4	4 kV
Transient overvoltage (surge)	Acc. to IEC/EN 61000-4-5	–
	Supply lines A1, A2	1 kV
	A1/A2 and ground	2 kV
RF, conducted disturbance	Acc. to IEC/EN 61000-4-6	10 V
Interference suppression to lower limit class	Acc. to EN 61000-6-3	Complied with
Connection		
Terminals	Screw (slotted-head)	M2.5
	± Screw (Pozidriv)	–
Conductor cross-section	Rigid	0.5 ... 2.5 mm²
	Flexible, with end sleeve, min.	0.5 ... 1.5 mm²
Ambient conditions		
Permissible ambient temperature		–20 ... +60 °C
Resistance to climate	Acc. to IEC/EN 60068-1	20/045/04
Resistance to vibrations, frequency 10 ... 55 Hz	Acc. to IEC/EN 60068-2-6	0.35 mm amplitude
Degree of protection	Acc. to EN 60529	IP20, with connected conductors
Protection class	Acc. to EN 61140	II

System overview, page 12/4

© Siemens 2025

5TE6 socket outlet for modular installation devices

Version	SCHUKO® socket outlet DIN VDE 0620-1	

Rated operational voltage U_e	Rated operational current I_e	Mounting width		
Without hinged cover [1]				
125 V AC	15 A	2.5 MW	–	–
230 V AC	16 A	2.5 MW	5TE6800	–
With hinged cover [2]				
230 V AC	16 A	2.5 MW	–	5TE6801

Accessories

5TE6 hinged covers for socket outlets

	Mounting width	Article No.	Article No.
	2.5 MW	5TE9120	–

[1] The hinged cover can be retrofitted on all versions.
[2] In distribution boards with 55 mm mounting depth, the socket outlet can only be used without the hinged cover.
[3] In system components where equipment is still live even after the main switch has been disconnected, this must be indicated according to EN 50110-1 (VDE 0105-1) and IEC/EN 60204-1/VDE 0113-1. Yellow socket outlets are used for these applications.

12

Further technical specifications

		5TE6800 5TE6801 5TE6810	5TE6802	5TE6803	5TE6804
Standards					
Standards		VDE 0620-1	CEI 23-50	CEE 7 standard sheet V	UL 498
Approvals		VDE 0620-1	–		UL File No. E258598/ CSA C22.2 No. 182.3M
Connection					
Terminals	± Screw (Pozidriv)	PZ1			
Terminal tightening torque	Max.	0.8 ... 1 Nm			
Stripped length		10 mm			
Conductor cross-section	Rigid	1.5 ... 6 mm² (AWG 10 ... 14)			
	Flexible, with end sleeve	0.5 ... 4 mm² (AWG 14)			
Ambient conditions					
Permissible ambient temperature		–10 ... +55 °C			
Degree of protection	Acc. to EN 60529	IP20, with connected conductors			
Mounting position	Without hinged cover	Any			
	With hinged cover	Horizontally or vertically			

System overview, page 12/4

© Siemens 2025

	Socket outlets **CEE 7 standard sheet V**	**Socket outlets** **CEI 23-50**	**Socket outlets** **UL 498**
Yellow RAL 1018 [3]	With grounding pin		
–	–	–	5TE6804
5TE6810	5TE6803	–	–
–	–	5TE6802	–
Article No.	**Article No.**	**Article No.**	**Article No.**
–	5TE9120	–	5TE9120

12

System overview, page 12/4

© Siemens 2025

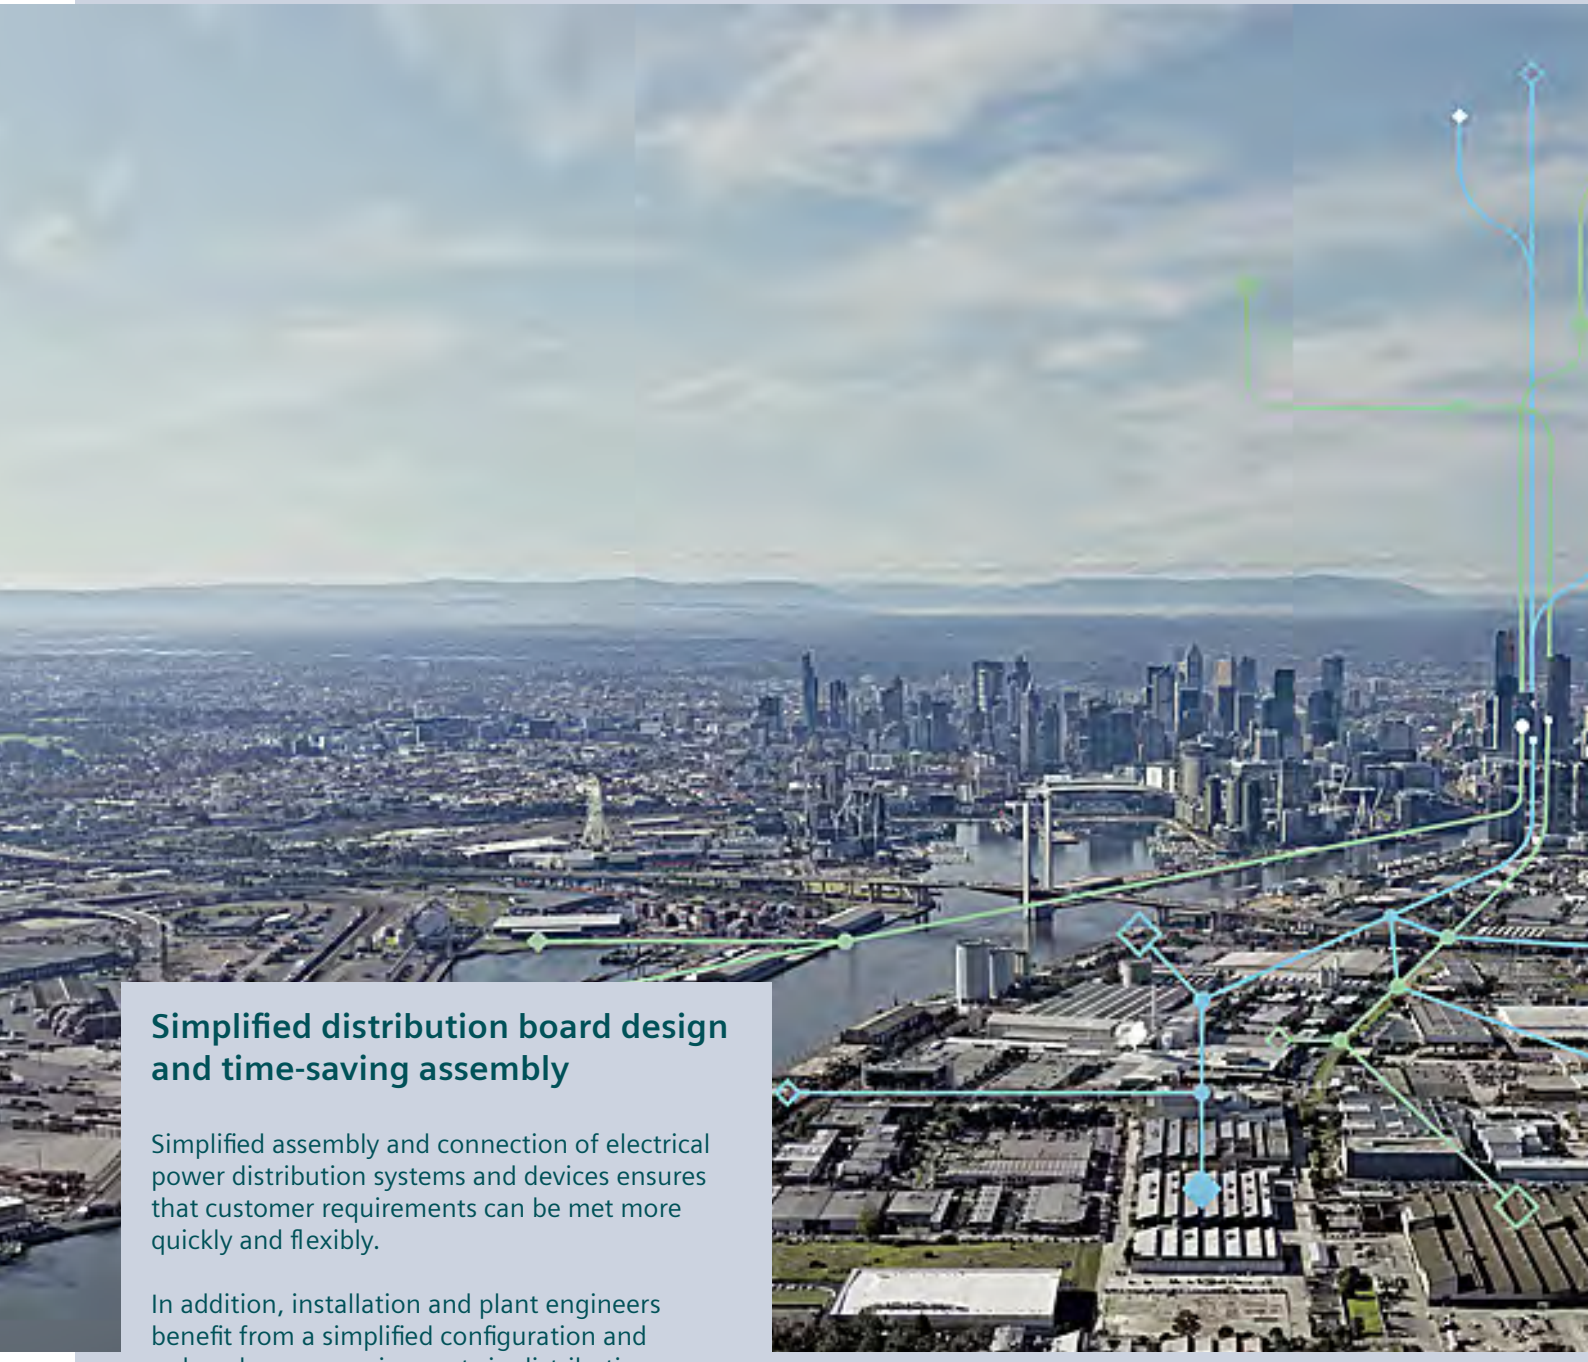

Simplified distribution board design and time-saving assembly

Simplified assembly and connection of electrical power distribution systems and devices ensures that customer requirements can be met more quickly and flexibly.

In addition, installation and plant engineers benefit from a simplified configuration and reduced space requirements in distribution systems and control cabinets.

Our busbar systems for electrical installations offer a particularly easy way of fitting distribution systems with electrotechnical components.

The modular design saves space, while quick assembly contacts ensure fast mounting.

© Siemens 2025

Busbar Systems

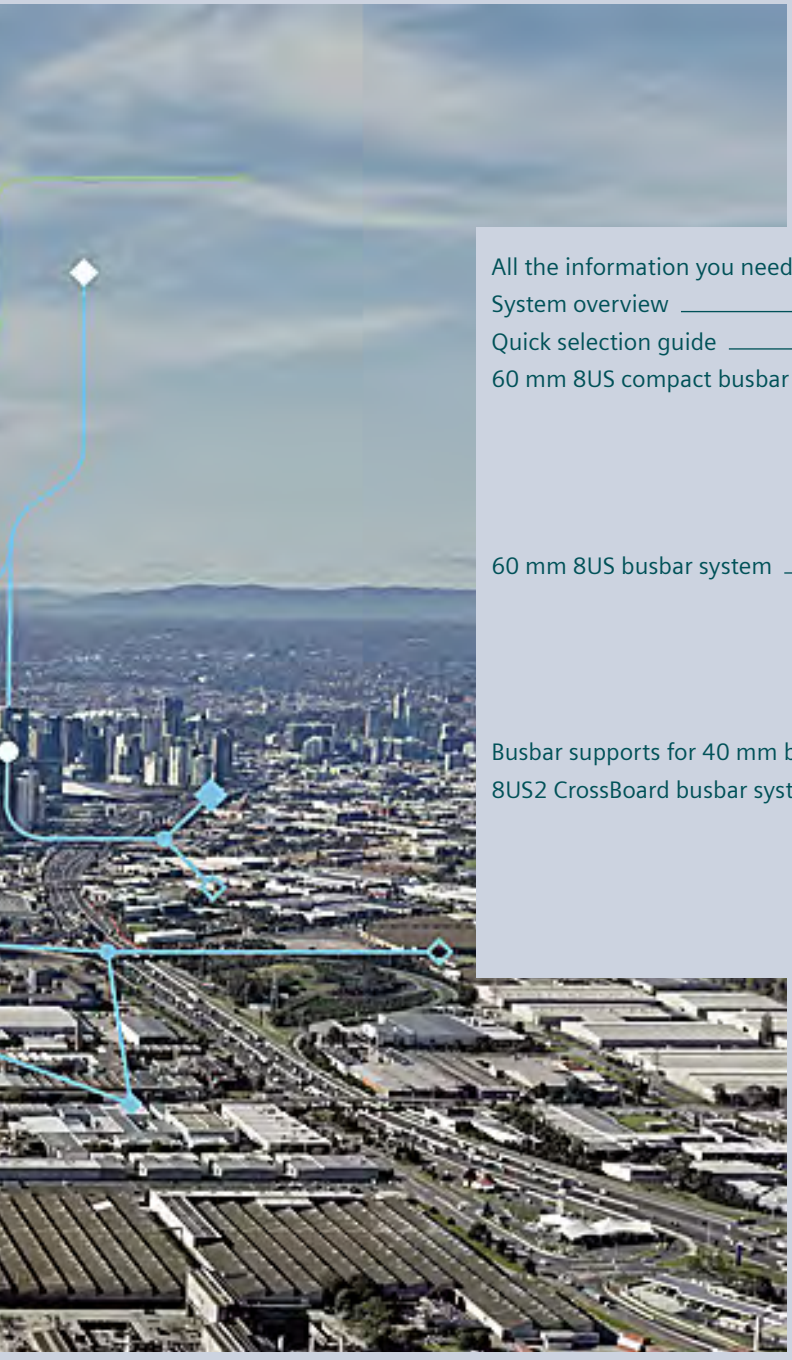

All the information you need 13/2
System overview 13/4
Quick selection guide 13/5
60 mm 8US compact busbar system 13/6
- Basic assemblies 13/6
- Infeeds and connection methods 13/8
- Built-in components 13/8
- Device adapters 13/10

60 mm 8US busbar system 13/12
- Basic assemblies 13/12
- Infeeds and connection methods 13/16
- Built-in components 13/22
- Device adapters and device holders 13/26

Busbar supports for 40 mm busbar center-to-center spacing 13/36
8US2 CrossBoard busbar systems new 13/38
- Base systems 13/40
- Infeeds and connection methods 13/41
- Adapters and device holders 13/42
- Power supply unit 13/44

© Siemens 2025

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about busbar systems, please visit our website
www.siemens.com/distribution-components

Your product in detail

The relevant tender specifications can be found at
www.siemens.com/tenderspecifications

Use our conversion tool for quick and easy conversion to Siemens products **www.siemens.com/conversion-tool**

Everything you need for your order

Refer to SiePortal to find an overview of your products (product catalog)

- Busbar systems **sie.ag/2lXoUFl**

Direct forwarding to the individual products in SiePortal by clicking on the article number in the catalog or entering this web address incl. article number
www.siemens.com/product_catalog_SIEP?Article No.

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services.
You can find your local contacts at
www.siemens.com/lowvoltage/components/contact

You will find further information on services at
www.siemens.com/service-offers

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at
www.siemens.com/support-request

© Siemens 2025

… can be found in our online services

Commissioning + operation

Your product in detail

The SiePortal platform (knowledge base) provides detailed technical information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Certificates

Online Support app available for download from the **App Store** and **Play Store**
You will find further information at
www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)

- SiePortal (product catalog)
  www.siemens.com/lowvoltage/product-catalog
- Image database
  www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAx Download Manager at
www.siemens.com/cax

Manuals

Manuals can be found in SiePortal at
www.siemens.com/lowvoltage/manuals

- Configuration Manual
  – 8US busbar systems **(109769746)**

Technical overview – Busbar systems

The fast way to get you to our online services

This page provides you with comprehensive information and links on busbar systems
www.siemens.com/lowvoltage/product-support (109769087)

© Siemens 2025

System overview

❶ Basic assemblies and base systems

Busbar supports

N/PE busbar supports



CrossBoard base systems new

Accessories

Flat copper profiles

TT special profiles

Connection pieces

Cover profiles

Blanking covers

❷ Infeeds and connection methods

Connection modules

Terminals

Accessories

Covers

❸ Built-in components

Bus-mounting fuse bases

Bus-mounting fuse holders

Bus-mounting switch disconnectors

Accessories

Covers

Auxiliary switches

Lateral modules

❹ Device adapters and device holders

Device adapters

Device holders

Accessories

N/PE modules

Lateral modules

Vibration & shock kits

Busbar supports for 40 mm busbar center-to-center spacing

Busbar supports

Accessories

Flat copper profiles

Cover profiles

Note:
You will find a detailed range of accessories with the basic units.

© Siemens 2025

Quick selection guide

		60 mm compact busbar system	60 mm busbar system flat copper profile	60 mm busbar system TT profile	CrossBoard busbar system new
Busbars					
Busbar center-to-center spacing		60 mm	60 mm	60 mm	60 mm
Flat copper profiles	5 mm	12 × 5 mm	12 × 5 mm 15 × 5 mm 20 × 5 mm 25 × 5 mm 30 × 5 mm	–	Integrated into the base system
	10 mm	12 × 10 mm	20 × 10 mm 30 × 10 mm	–	
TT special profile		–	–	2400 × 30 × 40 mm	
Rated values					
Rated operational current I_e	IEC	200 ... 360 A	200 ... 900 A	1020 ... 1600 A	125 ... 250 A
	UL 508	300 A	630 A	1400 A	100 ... 250 A
Rated operational voltage U_e	IEC	690 V AC	690 V AC	690 V AC	690 V AC
	UL 508	600 V AC	600 V AC	600 V AC	600 V AC
Standards					
IEC		■	■	■	■
UL 508		■	■	■	■
Connection modules and terminals for					
Circular conductors	IEC	Cu 1.5 ... 150 mm²	Cu 1.5 ... 300 mm² Al 95 ... 300 mm²	Cu 16 ... 300 mm²	Cu 1.5 ... 150 mm²
	UL 508	Cu AWG 2 ... MCM 300	Cu AWG 16 ... MCM 600 Al AWG 3	Cu AWG 4 ... MCM 600	Cu AWG 14 ... –4
Laminated copper		Cu lam. 15 ... 20 × 5 ... 10 mm	Cu lam. 3 × 20 × 1 ...10 × 32 × 1 mm	Cu lam. 2 × 40 × 10 mm	Cu lam. 15.5 × 8 mm max.
Cable lugs		–	Max. 240 mm²	–	–
Built-in components for					
NEOZED bus-mounting fuse bases		■	■	■	–
DIAZED bus-mounting fuse bases		–	■	■	–
Bus-mounting fuse holders for cylindrical fuses 10 × 38 mm		–	■	■	–
Class CC bus-mounting fuse holders		–	■	■	–
Class J bus-mounting fuse holders		–	■	■	–
NEOZED bus-mounting switch disconnectors			■	■	–
Device adapters for					
Universal application 3P/5P		■|■	■|■	■|■	■| –
Molded case circuit breakers		■	■	■	■
Switch disconnectors		–	■	■	–
Fuse switch disconnectors		–	■	■	–
SIRIUS 3RM1 motor starters		■	–	–	■
SIRIUS load feeders		–	■	■	■
3RM193 fuse module		■	–	–	■
5SY miniature circuit breakers		■	–	–	■
Further information					
		See page 13/6	See page 13/12	See page 13/14	See page 13/38

© Siemens 2025

❶ Basic assemblies

For 8US compact busbar system up to 360 A (3P) or 200 A (5P)

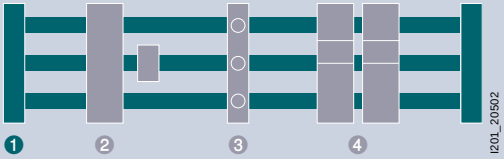

	Busbar supports [1]
No. of poles	3P/5P

Flat copper profiles		Rated operational voltage U_e		Short-circuit current rating SCCR		Standard	Dimensions	Min. order quantity	Connection
12 × 5 mm	12 × 10 mm	IEC	UL 508	3-pole	5-pole				L1 – L3 + N + PE/N
Interior mounting									
■	■	690 V AC	–	54 kA	32 kA	IEC	12 × 160 × 45 mm	10 units	8US1923-5CA02
		–	600 V AC	18 kA	–	UL 508	12 × 160 × 45 mm	10 units	8US1923-5CA02

[1] Including end cover

Accessories

Flat copper profiles

Surface	Length	Size	Article No.
Bare	2400 mm	12 × 5 mm	8WC5123

UL spacers for busbar supports

Dimensions	Minimum order quantity	Height	Article No.
12 × 160 × 18 mm	10 units	18 mm	8US1922-1CA02

Stabilizing modules

- Only for 12 × 5 mm busbars
- For protecting the N and PE busbars against bending

Dimensions	Minimum order quantity	Article No.
2 × 160 × 47 mm	10 units	8US1928-5CA02

Cover profiles

Dimensions	Minimum order quantity	Article No.
700 × 160 × 63 mm	2 units	8US1922-2CB02

Holders for 8US1922-2CB02 cover profile

Dimensions	Minimum order quantity	Article No.
5 × 156 × 55 mm	10 units	8US1922-2CA02

13

Quick selection guide, page 13/5

© Siemens 2025

Quick selection guide, page 13/5

© Siemens 2025

❷ Infeeds and connection methods

For 8US compact busbar system up to 360 A (3P) or 200 A (5P)

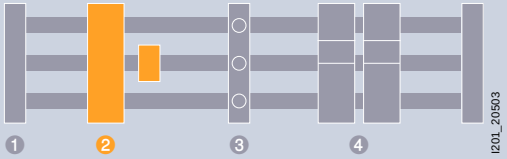

Conductor cross-section	Rated operational current I_e		Rated operational voltage U_e		Rated peak withstand current	Standard	Minimum order quantity	Dimensions
	IEC	UL 508	IEC	UL 508	IEC I_{pk} max			
Spring terminal								
1.5 ... 16 mm²	63 A	48 A	690 V AC	600 V AC	10 kA	IEC, UL 508	6 units	20 × 160 × 91 mm
Connecting terminal								
6 ... 50 mm²	175 A	175 A	690 V AC	600 V AC	40.5 kA	IEC, UL 508	1 unit	54 × 160 × 115 mm
10 ... 120 mm²	250 A	200 A	690 V AC	600 V AC	35.4 kA	IEC, UL 508	1 unit	90 × 160 × 80 mm
	–	–	690 V AC	600 V AC	35.1 kA	IEC, UL 508	1 unit	30 × 160 × 80 mm
					35.4 kA	IEC, UL 508	1 unit	30 × 160 × 80 mm
35 ... 150 mm²	275 A	285 A	690 V AC	600 V AC	45.9 kA	IEC, UL 508	1 unit	90 × 160 × 115 mm

❸ Built-in components

For 8US compact busbar systems up to 360 A (3P)

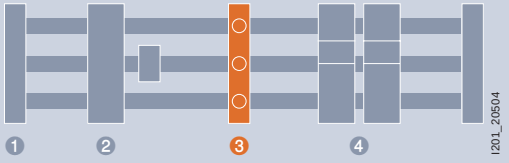

Number of poles
Mounting width

Conductor cross-section	For flat copper profiles		Rated operational current I_e	Rated operational voltage U_e	Standard	Minimum order quantity
	12 × 5 mm	12 × 10 mm	IEC	IEC		
Box terminals						
Rigid 1.5 ... 10 mm² Flexible 1.5 ... 25 mm²	■	■	63 A	400 V AC	IEC	6 units

See NEOZED screw caps, NEOZED adapter sleeves and NEOZED fuse links, from page 7/1 onwards

Quick selection guide, page 13/5

© Siemens 2025

For 12 × 5 mm and 12 × 10 mm flat copper profiles			
For 3-pole system (up to 360 A)	For 5-pole system (up to 200 A)		
Connection modules	**Connection modules**	**Connection modules**	**Connection modules**
3P	**3P**	**N**	**PE**
8US1921-1BA02	–	–	–
8US1921-1CB02	–	–	–
–	8US1921-1CD02	–	–
–	–	8US1921-1CE02	–
–	–	–	8US1921-1CF02
8US1921-1CC02	–	–	–

NEOZED bus-mounting bases
Size D02
3P
2 MW
With touch protection
5SG6208

13

Quick selection guide, page 13/5

© Siemens 2025

❹ Device adapters

For 8US compact busbar system up to 360 A (3P) or 200 A (5P)

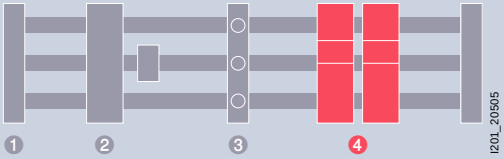

For 3-pole system
For universal applications

Rated operational current I_e		Rated operational voltage U_e		Standard	For flat copper profiles		Adapters			Minimum order quantity	
IEC	UL 508	IEC	UL 508		12 × 5 mm	12 × 10 mm	Height	Width	Length		
16 A	–	690 V AC	–	IEC, UL 508	–	–	160 mm	22.5 mm	122 mm	4 units	–
							200 mm	22.5 mm	122 mm	5 units	–
25 A	–	690 V AC	–	IEC, UL 508	■	–	160 mm	22.5 mm	41.5 mm	5 units	–
							185 mm	22.5 mm	23.5 mm	5 units	–
							200 mm	22.5 mm	41.5 mm	5 units	–
32 A	–	690 V AC	–	IEC	■	–	160 mm	18 mm	73 mm	12 units	–
	25 A	690 V AC	600 V AC	IEC, UL 508	■	■	160 mm	45 mm	63 mm	4 units	8US1651-5DK02
63 A	–	690 V AC	–	IEC	■	–	160 mm	18 mm	73 mm	12 units	–
							160 mm	18 mm	82 mm	12 units	–
	65 A	690 V AC	600 V AC	IEC, UL 508	■	■	160 mm	54 mm	63 mm	4 units	8US1661-5FK02
144 A	–	690 V AC	–	IEC	■	■	160 mm	77 mm	35 mm	1 unit	–

Accessories

N modules

Rated voltage U_e	Connecting terminal	Dimensions	Minimum order quantity	Article No.
690 V AC	1.5 ... 16 mm²	9 × 160 × 114 mm	12 units	–

PE modules

Rated voltage U_e	Connecting terminal	Dimensions	Minimum order quantity	Article No.
690 V AC	1.5 ... 16 mm²	9 × 160 × 114 mm	12 units	–

Support modules

Dimensions	Minimum order quantity	Article No.
18 × 160 × 54 mm	6 units	8US1620-5AK02

Lateral modules

Dimensions	Minimum order quantity	Article No.
9 × 160 × 47 mm	12 units	8US1998-2BH02

Set of module connectors



Use	Package	Article No.
For connecting adapters	1 pack = 100 units	–

13

Quick selection guide, page 13/5

© Siemens 2025

For 3-pole system For 3VA10/11 molded case circuit breakers	For 5-pole system For universal applications	For SIRIUS 3RM1 motor starters and for relays	For 3RM193, 8US1615 and 8US1215 fuse modules		For 5SY miniature circuit breakers
With latching function	Adapters, 1-pole	With fuse module and DIN mounting rail		With DIN mounting rail	Adapters, 1-pole
–	–	8US1615-5CK10	–	–	–
–	–	8US1215-5CS10	–	–	–
–	–	–	8US1616-0AK02	–	–
–	–	–	–	8US1716-0RK00	–
–	–	–	8US1216-0AS00	–	–
–	8US1621-2NJ02	–	–	–	–
–	–	–	–	–	–
–	8US1621-2FK02	–	–	–	–
–	–	–	–	–	8US1624-2FK02
–	–	–	–	–	–
8US1613-4AU01	–	–	–	–	–

Article No.	Article No.	Article No.	Article No.	Article No.	Article No.
–	8US1600-0RE02	8US1600-0RE02	8US1600-0RE02	8US1600-0RE02	8US1600-0RE02
Article No.	Article No.	Article No.	Article No.	Article No.	Article No.
–	8US1600-0RF02	8US1600-0RF02	8US1600-0RF02	8US1600-0RF02	8US1600-0RF02
Article No.	Article No.	Article No.	Article No.	Article No.	Article No.
8US1620-5AK02	8US1620-5AK02	8US1620-5AK02	8US1620-5AK02	8US1620-5AK02	8US1620-5AK02
Article No.	Article No.	Article No.	Article No.	Article No.	Article No.
8US1998-2BH02	8US1998-2BH02	8US1998-2BH02	8US1998-2BH02	8US1998-2BH02	8US1998-2BH02
Article No.	Article No.	Article No.	Article No.	Article No.	Article No.
–	8US1998-1AA02	8US1998-1AA02	8US1998-1AA02	8US1998-1AA02	8US1998-1AA02

Quick selection guide, page 13/5

© Siemens 2025

❶ Basic assemblies

For 8US busbar system up to 630 A

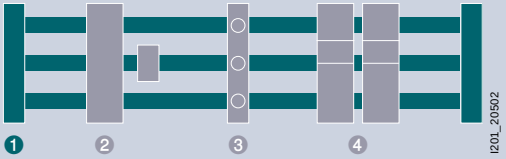

Flat copper profiles							Standard
12 × 5 mm	15 × 5 mm	20 × 5 mm	25 × 5 mm	30 × 5 mm	20 × 10 mm	30 × 10 mm	
Interior mounting							
■	■	■	■	■	■	■	IEC 61439-1
■	–	■	–	–	■	■	IEC 61439-1, UL 508 [1]
■	■	■	■	■	■	■	IEC 61439-1
■	–	■	–	■	■	■	IEC 61439-1
■	■	■	■	■	■	■	IEC 61439-1, UL 508
Exterior mounting							
■	■	■	■	■	■	■	IEC 61439-1
■	■	■	■	■	■	■	IEC 61439-1

[1] Only with base plate 8US1922-2UA01

Accessories

Flat copper profile

	Surface	Length	Size	Rated operational current	Cross-section	Standard	Article No.
	Bare	1100 mm	25 × 5 mm	400 A	125 mm²	EN 12167	8WC5031-1AA00
			30 × 5 mm	447 A	150 mm²	EN 12167	8WC5033-1AA00
		2400 mm	12 × 5 mm	200 A	60 mm²	EN 12167	8WC5123
			15 × 5 mm	250 A	75 mm²	EN 12167	8WC5121
			20 × 5 mm	320 A	100 mm²	EN 12167	8WC5126
			25 × 5 mm	400 A	125 mm²	EN 12167	8WC5131
			30 × 5 mm	447 A	150 mm²	EN 12167	8WC5133
			20 × 10 mm	520 A	200 mm²	EN 12167	8WC5128
			30 × 10 mm	630 A	300 mm²	EN 12167	8WC5134
	Tin-coated	2000 mm	12 × 5 mm	200 A	60 mm²	EN 12167	8WC5051
			15 × 5 mm	250 A	75 mm²	EN 12167	8WC5052
			20 × 5 mm	320 A	100 mm²	EN 12167	8WC5053
			25 × 5 mm	400 A	125 mm²	EN 12167	8WC5054
			30 × 5 mm	447 A	150 mm²	EN 12167	8WC5055
			20 × 10 mm	520 A	200 mm²	EN 12167	8WC5063
			30 × 10 mm	630 A	300 mm²	EN 12167	8WC5065

End covers

- For covering free busbar ends

For connection	For busbar support	Standard	Article No.
L1–L3	8US1923-2AA01, 8US1923-3AA01, 8US1923-3UA01	IEC, UL 508	8US1922-1AC00
L1–L3 + PE/N	8US1923-4AA00	IEC	8US1922-1AB00

13

Quick selection guide, page 13/5

© Siemens 2025

No. of poles	End and intermediate supports			N/PE busbar supports
	3P	2P	4P	1P
	Connection L1–L3	**Connection L1/L2/L3/PE/N**	**Connection L1–L3 + PE/N**	**Connection PE/N**
	8US1923-3AA01	–	–	–
	8US1923-3UA01	–	–	–
	–	–	8US1923-4AA00	–
	–	–	–	5SH3540
	–	–	–	8US1923-1AA01
	8US1923-2AA01	–	–	–
	–	8US1923-5AA00	–	–

Cover profiles for busbars

Length	Width	Depth	Flat copper profile size	Standard	Article No.
1000 mm	15 mm	10 mm	12 × 5 mm	UL 508	8US1922-2CA00
	40 mm	9 mm	15, 20, 25, 30 × 5 mm	UL 508	8US1922-2AA00
	40 mm	14 mm	12, 15, 20, 25, 30 × 10 mm	UL 508	8US1922-2BA00

Blanking covers

Length	Height	Depth	Article No.
700 mm	195 mm	63 mm	8US1922-2EB00

Supports for blanking covers

Depth	Article No.
32 mm	8US1922-2EA00
107 mm	8US1922-2EA01

Base plates

Version	Length	Width	Standard	Article No.
For 3-pole system	1100 mm	240 mm	UL 508	8US1922-2UA01

Connecting piece for flat copper profiles

Length	For flat copper profiles	Article No.
40 mm	20 × 5 mm, 25 × 5 mm, 30 × 5 mm, 20 × 10 mm, 25 × 10 mm, 30 × 10 mm	8US1921-2BE00
55 mm	12 × 5 mm, 15 × 5 mm, 20 × 5 mm 12 × 10 mm, 15 × 10 mm, 20 × 10 mm	8US1921-2BF00

13

Quick selection guide, page 13/5

© Siemens 2025

❶ Basic assemblies

For 8US busbar system up to 1600 A

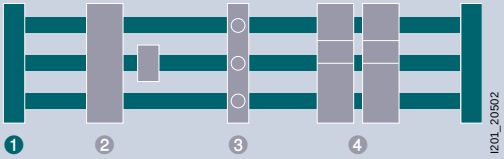

	Busbar supports
No. of poles	3P

Copper profile	Rated operational current I_e		Rated operational voltage U_e		Short-circuit current rating SCCR		Standard	Connection
	IEC	UL 508	IEC	UL 508	IEC	UL 508		L1–L3
Interior mounting								
TT special profile	1600 A	1400 A	690 V AC	600 V AC	90 kA	100 kA	IEC, UL 508	8US1943-3AA00

1 pack = 2 busbar supports + finger-safe end covers

Accessories

TT special copper profile

Surface	Length	Rated operational current	Rated operational voltage	Cross-section	Article No.
Tin-coated	2400 mm	1600 A	690 V AC	720 mm²	8US1948-2AA00

Cover profile for TT special copper profile



Length	Article No.
1000 mm	8US1922-2DA00

Blanking covers

Length	Height	Depth	Article No.
700 mm	195 mm	63 mm	8US1922-2EB00

Supports for blanking covers

Depth	Article No.
32 mm	8US1922-2EA00
107 mm	8US1922-2EA01

Connecting piece for TT special profile

Article No.
8US1941-2BF01

Partitions, closed



- For additional lateral touch protection at the top/bottom

Length	Depth	Article No.
2400 mm	76 mm	8US1922-1JA00

13

Quick selection guide, page 13/5

© Siemens 2025

Quick selection guide, page 13/5

© Siemens 2025

❷ Infeeds and connection methods

For 8US busbar system

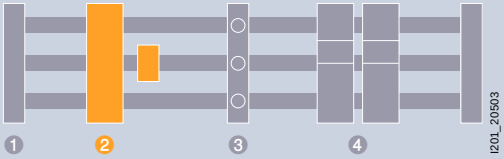

Conductor cross-section, circular conductor		Conductor cross-section, laminated copper	Rated operational current I_e		Rated operational voltage U_e		Standard	Length
IEC	UL 508		IEC	UL 508	IEC	UL 508		
With cover								
Cu 1.5 ... 16 mm²	Cu AWG 16 ... 4	Cu lam. 8 × 6 × 0.5 mm	63 A	48 A	690 V AC	600 V AC	IEC, UL 508	200 mm
Cu 6 ... 50 mm²	Cu AWG 10 ... 2	–	175 A	175 A	690 V AC	600 V AC	IEC, UL 508	200 mm
Cu 25 ... 120 mm²	Cu AWG 6 ... MCM 250	–	250 A	250 A	690 V AC	600 V AC	IEC, UL 508	200 mm
Cu 95 ... 300 mm² Al 120 ... 240 mm²	AWG 3/0 ... MCM 600	–	500 A	420 A	690 V AC	–	IEC	200 mm
Without cover								
Cu 95 ... 300 mm²	AWG 3/0 ... MCM 600	–	500 A	420 A	690 V AC	600 V AC	IEC, UL 508	184 mm
–	–	Cu lam. 20 × 3 ... 32 × 15 mm	550 A	420 A	690 V AC	600 V AC	IEC, UL 508	184 mm
For 4th pole (PE/N) [2]								
Cu 1.5 ... 16 mm²	–	–	–	–	690 V AC	600 V AC	IEC, UL 508	242 mm

[1] Shown without cover
[2] For mounting on device adapter or device holder

Accessories

Cover for connection module

13

Quick selection guide, page 13/5

© Siemens 2025

	Connection modules			
	For 5 mm and 10 mm flat copper profiles	For 5 mm and 10 mm flat copper profiles and TT special profile		For laminated copper
Width	**Connection modules**	**Connection modules**	**Connection modules**	**Connection modules**
	3P	**3P**	**PE/N**	**3P**
20 mm	5SH3538	–	–	–
54 mm	–	8US1921-1BA00	–	–
81 mm	–	8US1921-1AA00	–	–
135 mm	–	5SH3535 [1]	–	–
153 mm	–	–	–	8US1941-2AA03
153 mm	–	–	–	8US1941-2AA04
18 mm	–	–	8US1200-0AA00	–
	Article No.	**Article No.**	**Article No.**	**Article No.**
	–	–	–	8US1922-1GC00

13

Quick selection guide, page 13/5

© Siemens 2025

❷ Infeeds and connection methods

For 8US busbar system

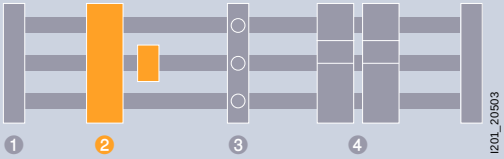

Conductor cross-section, circular conductor		Conductor cross-section, laminated copper	Rated operational current I_e		Rated operational voltage U_e		Standard	Minimum order quantity
IEC	UL 508		IEC	UL 508	IEC	UL 508		
Cu 1.5 ... 16 mm²	AWG 16 .. 6	Cu lam. 8 × 6 × 0.5 mm	65 A	55 A	690 V AC	600 V AC	IEC, UL 508	15 units
								100 units
Cu 4 ... 35 mm²	AWG 10 ... 2	Cu lam. 3 × 9 × 0.8 mm, Cu lam. 6 × 9 × 0.8 mm	115 A	115 A	690 V AC	600 V AC	IEC, UL 508	15 units
								50 units
Cu 16 ... 70 mm²	AWG 4 ... 2/0	Cu lam. 2 × 9 × 0.8 mm, Cu lam. 6 × 9 × 0.8 mm, Cu lam. 6 × 13 × 0.5 mm	175 A	175 A	690 V AC	600 V AC	IEC, UL 508	15 units
								50 units
Cu 16 ... 120 mm²	AWG 4 ... MCM 250	Cu lam. 4 × 15.5 × 0.8 mm, Cu lam. 6 × 15.5 × 0.8 mm, Cu lam. 10 × 15.5 × 0.5 mm	250 A	255 A	690 V AC	600 V AC	IEC, UL 508	15 units
								50 units

[1] Finely stranded, directly clamped or with end sleeve, solid and stranded circular conductor

Accessories

Terminal covers for circular conductors

- Fixing to busbar

Length	Width
200 mm	84 mm

Quick selection guide, page 13/5

© Siemens 2025

Terminals [1)]

For 12 × 5 mm, 15 × 5 mm, 20 × 5 mm, 25 × 5 mm and 30 × 5 mm flat copper profiles				For 12 × 10 mm, 15 × 10 mm, 20 × 10 mm, 25 × 10 mm and 30 × 10 mm flat copper profiles and TT special profile			
8US1921-2AA01	–	–	–	8US1921-2BA01	–	–	–
8US1921-2AA00	–	–	–	8US1921-2BA00	–	–	–
–	8US1921-2AB01	–	–	–	8US1921-2BB01	–	–
–	8US1921-2AB00	–	–	–	8US1921-2BB00	–	–
–	–	8US1921-2AD01	–	–	–	8US1921-2BD01	–
–	–	8US1921-2AD00	–	–	–	8US1921-2BD00	–
–	–	–	8US1921-2AC01	–	–	–	8US1921-2BC01
–	–	–	8US1921-2AC00	–	–	–	8US1921-2BC00

Article No.	Article No.	Article No.	Article No.	Article No.	Article No.	Article No.	Article No.
8US1922-1GA00	8US1922-1GA00	8US1922-1GA00	8US1922-1GA00	8US1922-1GA00	8US1922-1GA00	8US1922-1GA00	8US1922-1GA00

13

Quick selection guide, page 13/5

© Siemens 2025

❷ Infeeds and connection methods

For 8US busbar system

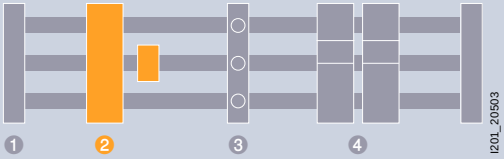

Conductor cross-section, circular conductor		Conductor cross-section, laminated copper	Conductor cross-section, cable lugs	Rated operational current I_e		Rated operational voltage U_e		Standard
IEC	UL 508			IEC	UL 508	IEC	UL 508	
Cu 95 ... 185 mm² Al 95 ... 185 mm²	AWG 3/0 ... MCM 350	–	–	300 A	310 A	690 V AC	600 V AC	IEC, UL 508
Cu 95 ... 300 mm² Al 120 ... 140 mm²	AWG 3/0 ... MCM 600	–	–	500 A	420 A	690 V AC	600 V AC	IEC, UL 508
–	–	Cu lam. 3 × 20 × 1 ... 10 × 24 × 1 mm	–	500 A	420 A	690 V AC	600 V AC	IEC, UL 508
		Cu lam. 2 × 40 × 10 mm	–	1250 A	–	690 V AC	–	IEC
		–	Max. 240 mm²	630 A	–	690 V AC	–	IEC

Accessories

Terminal covers for circular conductors

- Fixing to busbar

Length	Width
200 mm	270 mm

Quick selection guide, page 13/5

© Siemens 2025

	Terminals				
	For 20 × 5 mm, 25 × 5 mm and 30 × 5 mm flat copper profiles		For 20 × 10 mm, 25 × 10 mm and 30 × 10 mm flat copper profiles		For 40 × 25 mm and 30 × 10 mm flat copper profiles and TT special profile
					
Mounting					
–	8US1941-2AA01	–	–	–	–
–	8US1941-2AA02	–	–	–	–
M16 threaded pin, size 8 Allen key	–	8US1941-2BB00	–	8US1941-2BB00	–
M16 threaded pin, size 8 Allen key	–	–	–	–	8US1941-2BA00
M16 threaded pin, size 8 Allen key, M10 hexagon bolt, width across flats 17	–	–	8US1941-2AC00	–	–
	Article No.	Article No.	Article No.	Article No.	Article No.
	8US1922-1GA02	8US1922-1GA02	8US1922-1GA02	8US1922-1GA02	8US1922-1GA02

Quick selection guide, page 13/5

© Siemens 2025

❸ Built-in components

For 8US busbar system

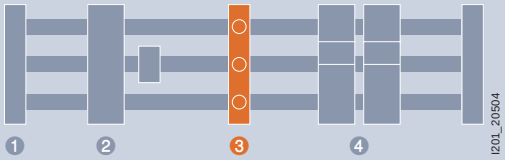

						NEOZED bus-mounting fuse bases Size D02		
						Mounting width	1.5 MW	1.5 MW	2 MW
For flat copper profiles	**Rated operational current I_e**		**Rated operational voltage U_e**			**Standard**	**Standard**	**With touch protection**	
	IEC	**UL 508**	**IEC AC**	**IEC DC**	**UL**				
Box terminals									
5 mm and 10 mm	25 A	–	500 V AC	–	–	IEC	–	–	–
	63 A	–	400 V AC	250 V DC	–	IEC	5SG6202 [1]	5SG6206 [1]	5SG6207
			690 V AC	–	–	IEC	–	–	–
	–	30 A	690 V AC	–	600 V AC	IEC, cULus, CCC	–	–	–
			–	–	600 V AC	UL, CCC	–	–	–
		100 A	–	–	600 V AC	cULus	–	–	–
		200 A	–	–	600 V AC	cULus	–	–	–
		400 A	–	–	600 V AC	CCC, cULus	–	–	–
Further information									
3NP1 fuse switch disconnectors							See page 8/82	See page 8/82	See page 8/82

[1] From 35 A continuous current load, mount the fuse base with spacing and use a wider cover

Note:
NEOZED adapter sleeves or DIAZED screw adapters are required for NEOZED and DIAZED bus-mounting fuse bases.

13

Accessories

NEOZED covers for standard version						
	Size	**Version**	**Mounting width**	**Article No.**	**Article No.**	**Article No.**
	D02	Standard	1.5 MW	5SH5241	–	–
		Extra wide	2 MW	5SH5242	–	–
		With double width	3 MW	5SH5243	–	–
DIAZED covers for standard version						
	Size		**Mounting width**	**Article No.**	**Article No.**	**Article No.**
	DII		2.3 MW	–	–	–
	DIII		3.2 MW	–	–	–

Quick selection guide, page 13/5

© Siemens 2025

DIAZED bus-mounting fuse bases		Bus-mounting fuse holders				
Size DII	Size DIII	Cylindrical fuses 10 × 38 mm	Class CC	Class J		
2.3 MW	3.2 MW	1.5 MW	1.5 MW	106 mm	184 mm	256 mm
Standard	With touch protection			3P	3P	3P
5SF6015	5SF6020	–	–	–	–	–
–	–	–	–	–	–	–
5SF6215	5SF6220	–	–	–	–	–
–	–	3NW7431	–	–	–	–
–	–	–	3NW7431-0HG	–	–	–
–	–	–	–	3NW7431-6HG	–	–
–	–	–	–	–	3NW7431-7HG	–
–	–	–	–	–	–	3NW7431-8HG
See page 8/82	See page 8/82	See page 8/82	See page 8/82	See page 8/82	See page 8/82	See page 8/82

13

Article No.	Article No.	Article No.	Article No.	Article No.	Article No.	Article No.
–	–	–	–	–	–	–
–	–	–	–	–	–	–
–	–	–	–	–	–	–
Article No.	Article No.	Article No.	Article No.	Article No.	Article No.	Article No.
5SH2042	–	–	–	–	–	–
5SH2242	–	–	–	–	–	–

Quick selection guide, page 13/5

© Siemens 2025

❸ Built-in components

For 8US busbar system

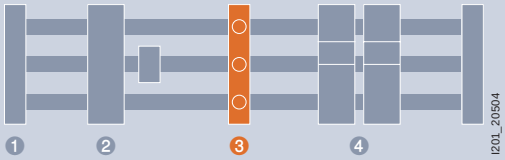

	NEOZED bus-mounting switch disconnectors Size D02		
Mounting width	1.5 MW	1.5 MW	1.5 MW

For flat copper profiles	Rated operational current I_e		Rated operational voltage U_e			Standard	Without LED signal detector		With LED signal detector
	IEC	UL 508	IEC AC	IEC DC	UL 508				
Box terminals									
5 mm, 10 mm	63 A	–	400 V AC	–	–	IEC	5SG7234-1 [2]	–	5SG7234-2 [2]
				110 V DC	–	IEC	–	5SG7230 [1]	–

[1] From 35 A current load use 5SH5526 lateral module
[2] From 35 A current load use 5SH5533 lateral module

Note:
NEOZED adapter sleeves or DIAZED screw adapters are required for NEOZED and DIAZED bus-mounting fuse bases.

Accessories

Auxiliary switches

- For signaling the switching state for bus-mounting switch disconnectors

Contacts	Mounting width	Article No.	Article No.	Article No.
1 CO	0.5 MW	–	5SH5525	–

Lateral modules

- For greater heat dissipation for loads from 35 A

Mounting width	Article No.	Article No.	Article No.
0.5 MW	5SH5533	5SH5526	5SH5533

Reducers

- For NEOZED D01 fuse links in bus-mounting switch disconnectors

	Article No.	Article No.	Article No.
	–	5SH5527	–

13

Quick selection guide, page 13/5

© Siemens 2025

Quick selection guide, page 13/5

© Siemens 2025

❹ Device adapters and device holders

For 8US busbar system, for universal application

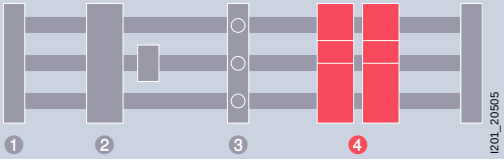

Rated operational current I_e		Rated operational voltage U_e		Standard	For copper profiles	Adapters		Connecting cable		
IEC	UL 508	IEC	UL 508			Width	Height	Cross-section	Max. temperature	Length
25 A	25 A	690 V AC	600 V AC	IEC, UL 508	5 mm, 10 mm, TT profile	45 mm	200 mm	AWG 12	150 °C	99 mm
										167 mm
							260 mm	AWG 12	150 °C	99 mm
										167 mm
32 A	32 A	690 V AC	600 V AC	IEC, UL 508	5 mm, 10 mm, TT profile	45 mm	200 mm	AWG 10	105 °C	118 mm
									150 °C	99 mm
										167 mm
								–	–	–
							260 mm	AWG 10	150 °C	99 mm
										167 mm
								–	–	–
80 A	80 A	690 V AC	600 V AC	IEC, UL 508	5 mm, 10 mm, TT profile	54 mm	200 mm	AWG 4	150 °C	150 mm
							260 mm	AWG 4	150 °C	150 mm
						72 mm	215 mm	AWG 4	150 °C	210 mm
						119 mm	260 mm	AWG 4	150 °C	150 mm
–	–	–	–	–	5 mm, 10 mm, TT profile	45 mm	200 mm	–	–	–
								–	–	–
							260 mm	–	–	–

Accessories

Lateral modules

- For extending device adapters and device holders of the same length

Length	Width
200 mm	9 mm

13

Quick selection guide, page 13/5

© Siemens 2025

Device adapters For plug-in units	Device adapters with connecting cables For contact with busbars						Device holders No electrical contact	
								For lateral mounting on device adapter
–	8US1251-5DS10	–	–	–	–	–	–	–
–	8US1251-5DS11	–	–	–	–	–	–	–
–	8US1251-5DT10	–	–	–	–	–	–	–
–	8US1251-5DT11	–	–	–	–	–	–	–
–	–	8US1211-1NS10	–	–	–	–	–	–
–	–	–	8US1251-5NS10	–	–	–	–	–
–	–	–	8US1251-5NS11	–	–	–	–	–
8US1216-5AS80	–	–	–	–	–	–	–	–
–	–	–	8US1251-5NT10	–	–	–	–	–
–	–	–	8US1251-5NT11	–	–	–	–	–
8US1216-5AT80	–	–	–	–	–	–	–	–
–	–	–	–	8US1261-5MS13	–	–	–	–
–	–	–	–	8US1261-6MT10	–	–	–	–
–	–	–	–	–	8US1211-4TR00	–	–	–
–	–	–	–	–	–	8US1211-6MT10	–	–
–	–	–	–	–	–	–	–	8US1250-1AA10
–	–	–	–	–	–	–	8US1250-5AS10	–
–	–	–	–	–	–	–	8US1250-5AT10	–
Article No.	Article No.	Article No.	Article No.	Article No.	Article No.	Article No.	Article No.	Article No.
8US1998-2BJ10	8US1998-2BJ10	8US1998-2BJ10	8US1998-2BJ10	8US1998-2BJ10	–	–	8US1998-2BJ10	–

Quick selection guide, page 13/5

© Siemens 2025

❹ Device adapters and device holders

For 8US busbar system, for universal application

Accessories

Plug-in connectors to make contact with the 3RV2 motor starter protectors for 8US1216-5AS80 and 8US1216-5AT80

Use	Version	Size	Article No.
For spring-loaded terminals	Single-unit packaging	S00 [1]	3RV2917-5AA00
		S0 [2]	3RV2927-5AA00
	Multi-unit packaging	S00 [1]	3RV2917-5A
		S0 [2]	3RV2927-5A
For screw terminals	Single-unit packaging	S00 [1] [3]	3RV2917-5CA00
		S0 [2] [4]	3RV1927-5AA00
	Multi-unit packaging	S00 [1] [3]	3RV2917-5C
		S0 [2] [4]	3RV1927-5A

Plug-in connectors to make contact with the 3RV1011 motor starter protectors



Use	Version	Size	Article No.
For screw terminals	Single-unit packaging	S00	3RV1917-5CA00
	Multi-unit packaging	S00	3RV1917-5C

[1] $I > 14$ A, please note derating.
[2] $I > 16$ A, please note derating.
[3] The plug-in connector cannot be used for the 3RV2711 and 3RV2811 circuit breakers with size S00.
[4] The plug-in connector can be used for the 3RV2711, 3RV2811 (size S00) and 3RV2721, 3RV2821 (size S0) circuit breakers.

Quick selection guide, page 13/5

© Siemens 2025

Quick selection guide, page 13/5

© Siemens 2025

❹ Device adapters and device holders

For 8US busbar system

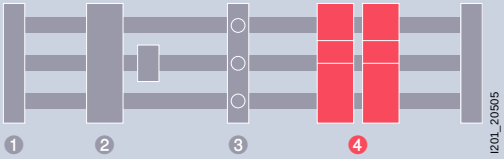

Rated operational current I_e		Rated operational voltage U_e		Standard	For copper profile	Adapters		Connecting cable
IEC	UL 508	IEC	UL 508			Length	Width	
Screw terminals								
80 A	80 A	–	600 V AC	UL 508	5 mm, 10 mm, TT profile	200 mm	81 mm	AWG 4
125 A	125 A	690 V AC	600 V AC	IEC, UL 508	5 mm, 10 mm, TT profile	200 mm	90 mm	Cu laminated 6 × 9 × 0.8 mm
Busbar contact								
144 A	–	690 V AC	–	IEC	5 mm, 10 mm, TT profile	200 mm	76 mm	–
Tubular contacts								
250 A	250 A	690 V AC	600 V AC	IEC, UL 508	5 mm, 10 mm, TT profile	240 mm	105 mm	–
	–	690 V AC	–	IEC	5 mm, 10 mm, TT profile	270 mm	140 mm	–
590 A	600 A	690 V AC	600 V AC	IEC, UL 508	5 mm, 10 mm, TT profile	300 mm	140 mm	–
	–	690 V AC	–	IEC	5 mm, 10 mm, TT profile	300 mm	185 mm	–

Quick selection guide, page 13/5

© Siemens 2025

	Device adapters For molded case circuit breakers 3VA	
Device **Size/type**	**3-pole**	**4-pole**
NGG, HGG, LGG	8US1240-5MA00	–
3VA10, 3VA11, 3VA51, NGG, HGG, LGG (connection at top)	8US1211-4SS00	–
3VA10, 3VA11, 3VA51 (connection at bottom)	8US1215-4SS00	–
3VA10, 3VA11	8US1213-4AU01	–
3VA12, 3VA20, 3VA21, 3VA22, 3VA52, 3VA61, 3VA62	8US1213-4AP03	–
3VA12, 3VA20, 3VA21, 3VA22	–	8US1313-4AH03
3VA13, 3VA14, 3VA23, 3VA24, 3VA53, 3VA54, 3VA63, 3VA64	8US1213-4AH04	–
3VA13, 3VA14, 3VA23, 3VA24	–	8US1313-4AM04

13

Quick selection guide, page 13/5

© Siemens 2025

❹ Device adapters and device holders

For 8US busbar system, for load feeders

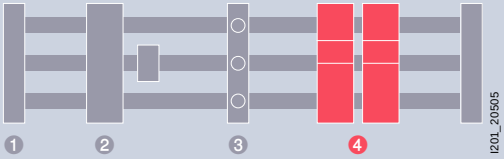

Rated operational current I_e		Rated operational voltage U_e			Standard	For copper profile	Adapters		Connecting cable		Device
IEC	UL 508	IEC	UL 508				Length	Width	Cross-section	Max. temperature	Size
Screw terminals											
25 A	25 A	690 V AC	600 V AC	–	IEC, UL 508	5 mm, 10 mm, TT profile	200 mm	45 mm	AWG 12	150 °C	S00
											S0
							260 mm	45 mm	AWG 12	150 °C	S00
32 A	32 A	690 V AC	600 V AC	–	IEC, UL 508	5 mm, 10 mm, TT profile	200 mm	45 mm	AWG 10	150 °C	S0
									–	–	S00/S0
							260 mm	45 mm	AWG 10	150 °C	S0
									–	–	S00/S0
		–	–	690 V AC		5 mm, 10 mm, TT profile	200 mm	45 mm	AWG 10	105 °C	S00/S0
80 A	80 A	690 V AC	600 V AC	–	IEC, UL 508	5 mm, 10 mm, TT profile	200 mm	54 mm	AWG 4	150 °C	S2
							215 mm	72 mm	AWG 4	150 °C	S3
							260 mm	54 mm	AWG 4	150 °C	S2
								119 mm	AWG 4	150 °C	S2
Spring-loaded terminals											
25 A	25 A	690 V AC	600 V AC	–	IEC, UL 508	5 mm, 10 mm, TT profile	200 mm	45 mm	AWG 12	150 °C	S00
							260 mm	45 mm	AWG 12	150 °C	S00
32 A	32 A	690 V AC	600 V AC	–	IEC, UL 508	5 mm, 10 mm, TT profile	200 mm	45 mm	AWG 10	150 °C	S0
							260 mm	45 mm	AWG 10	150 °C	S0

Accessories

Vibration & shock kit S2

Use
For size 2 devices

Lateral modules

- For extending device adapters and device holders of the same length

Length	Width
200 mm	9 mm

13

Quick selection guide, page 13/5

© Siemens 2025

For 3-pole system							
Device adapters for plug-in units		Device adapters for load feeders					
SIRIUS		SIRIUS 3RV2/3RT2			SIRIUS 3RV1/3RT1	SIRIUS 3RA6	
Circuit breakers, Direct-on-line starters	Circuit breakers, Direct-on-line starters, Reversing starters	Circuit breakers	Direct-on-line starters	Reversing starters	Circuit breakers	Direct-on-line starters	Reversing starters
–	–	8US1251-5DS10	8US1251-5DS10	8US1251-5DS10 + 8US1250-5AS10	–	–	–
–	–	8US1251-5DS10	–	–	–	–	–
–		–	8US1251-5DT10	–	–	–	–
–	–	8US1251-5NS10	–	–	–	–	–
8US1216-5AS80	–	–	–	–	–	–	–
–	–	8US1251-5NT10	8US1251-5NT10	8US1251-5NT10 + 8US1250-5AT10	–	–	–
8US1216-5AT80	8US1216-5AT80 + 8US1250-5AT10	–	–	–	–	–	–
–	–	–	–	–	–	8US1211-1NS10	8US1211-1NS10 + 8US1250-1AA10
–	–	8US1261-5MS13	–	–	–	–	–
–	–	–	–	–	8US1211-4TR00	–	–
–	–	–	8US1261-6MT10	–	–	–	–
–	–	–	–	8US1211-6MT10	–	–	–
–	–	8US1251-5DS11	–	–	–	–	–
–	–	8US1251-5DT11	8US1251-5DT11	8US1251-5DT11 + 8US1250-5AT10	–	–	–
–	–	8US1251-5NS11	–	–	–	–	–
–	–	8US1251-5NT11	8US1251-5NT11	8US1251-5NT11 + 8US1250-5AT10	–	–	–

Article No.	Article No.	Article No.	Article No.	Article No.	Article No.	Article No.	Article No.
8US1998-1DA10	8US1998-1DA10	8US1998-1DA10	8US1998-1DA10	8US1998-1DA10	–	–	–
Article No.	Article No.	Article No.	Article No.	Article No.	Article No.	Article No.	Article No.
8US1998-2BJ10	8US1998-2BJ10	8US1998-2BJ10	8US1998-2BJ10	8US1998-2BJ10	–	8US1998-2BJ10	8US1998-2BJ10

13

Quick selection guide, page 13/5

© Siemens 2025

❹ Device adapters and device holders

For 8US busbar system, for load feeders

Accessories

Plug-in connectors to make contact with the 3RV2 motor starter protectors for 8US1216-5AS80 and 8US1216-5AT80

Use	Version	Size	Article No.
For spring-loaded terminals	Single-unit packaging	S00 [1]	3RV2917-5AA00
		S0 [2]	3RV2927-5AA00
	Multi-unit packaging	S00 [1]	3RV2917-5A
		S0 [2]	3RV2927-5A
For screw terminals	Single-unit packaging	S00 [1] [3]	3RV2917-5CA00
		S0 [2] [4]	3RV1927-5AA00
	Multi-unit packaging	S00 [1] [3]	3RV2917-5C
		S0 [2] [4]	3RV1927-5A

Plug-in connectors to make contact with the 3RV1011 motor starter protectors



Use	Version	Size	Article No.
For screw terminals	Single-unit packaging	S00	3RV1917-5CA00
	Multi-unit packaging	S00	3RV1917-5C

[1] $I > 14$ A, please note derating.
[2] $I > 16$ A, please note derating.
[3] The plug-in connector cannot be used for the 3RV2711 and 3RV2811 circuit breakers with size S00.
[4] The plug-in connector can be used for the 3RV2711, 3RV2811 (size S00) and 3RV2721, 3RV2821 (size S0) circuit breakers.

Quick selection guide, page 13/5

© Siemens 2025

Accessories for device adapters for SIRIUS 3RV2/3RT2 load feeders

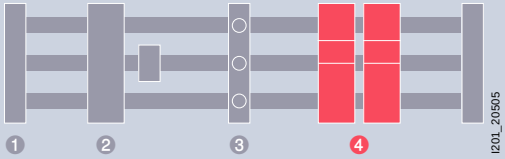

Mounting rails (35 mm) made of plastic with fixing screws

	Width	For adapter width	Article No.
	45 mm	45 mm	8US1998-7CB45
	54 mm	54 mm	8US1998-7CB54
	72 mm	54 mm	8US1998-7CB72

Positioning pieces

- For pushing on
- Secures the adaptable devices on the adapter

	For adapter width	Article No.
	45 mm	8US1998-1DA45
	54 mm	8US1998-1DA54

Connecting element

- For connecting busbar adapters and device holders

	Article No.
	8US1998-1AA10

Spacers



- Fix the feeder to the busbar adapter

	Article No.
	8US1998-1BA10

Vibration & shock kit

	Article No.
	8US1998-1CA10

13

Quick selection guide, page 13/5

© Siemens 2025

Busbar supports

For 40 mm busbar center-to-center spacing

						Busbar supports	
					No. of poles	3P	5P
Flat copper profiles				**Rated operational voltage U_e**	**Standard**	**Connection**	**Connection**
12 × 5 mm	**15 × 5 mm**	**12 × 10 mm**	**15 × 10 mm**	**IEC**		**L1 – L3**	**L1 – L3 + N + PE/N**
Interior mounting							
■	■	■	■	690 V AC	IEC	8US1903-3AB00 [1]	–
■	–	■	–	690 V AC	IEC	–	8US1903-5AA00
Further information							
3NP1 fuse switch disconnectors						See page 8/82	See page 8/82

[1] One package contains 2 busbar supports including inlay parts for bar thickness 5 mm and lateral finger-safe covers.

Accessories

				3P	5P
Flat copper profile					
	Surface	**Length**	**Size**	**Article No.**	**Article No.**
	Bare	2400 mm	12 × 5 mm	8WC5123	8WC5123
			15 × 5 mm	8WC5121	–
Cover profiles for busbars					
	Material	**Length**	**Size**	**Article No.**	**Article No.**
	Plastic profile	1000 mm	12 × 5 mm	8US1922-2CA00	8US1922-2CA00
			15 × 5 mm	8US1922-2AA00	–

Quick selection guide, page 13/5

© Siemens 2025

Quick selection guide, page 13/5

© Siemens 2025

8US2 CrossBoard busbar systems new

System overview

Base systems

For floor mounting and DIN rail

For floor mounting and snapping onto rear infeed

Infeeds and connection methods

Front main connection modules

Rear main connection and mounting module

Adapters and device holders

1-pole adapters for modular installation devices 1MW

3-pole adapters for switchswitchgear

3-pole adapters for MCCB 3VA

3-pole adapters with integrated fuse holders

Device holders for mounting devices on the base system

Accessories

Power supply unit

Expansion modules for 3-pole adapters to match the adapter to the application

13

Quick selection guide, page 13/5

© Siemens 2025

General information

Safety

- IP20 touch protection on all sides due to fully enclosed busbars in the base system
- Live working possible

Plug and Play

- Base system – out of the box product – pre-assembled and ready for use
- Easy to snap the components onto the base system

High efficiency



- Only one order number for a complete busbar system
- No short-circuit calculation necessary
- One system for IEC and UL applications
- Maximum use of the width of the control cabinet by adjusting the width of the CrossBoard base system
- Rear infeed allows use of the depth of the control cabinet – more space for feeders
- Feeders can be replaced during operation (hot swapping) – only the affected feeder is out of operation, not the entire system
- Snapping on of feeders allows extremely fast replacement – a drastic reduction in downtimes in the system

Quick selection guide, page 13/5

© Siemens 2025

8US2 CrossBoard busbar systems new

Base systems

Version	Base systems	
	125 A [1) 2)]	250 A [3) 4)]
		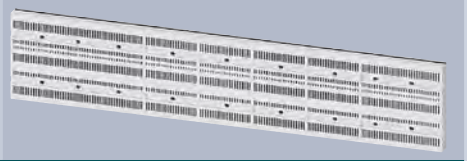
Width		
225 mm	8US2300-3LL00	–
300 mm	–	8US2300-3QM00
400 mm	–	8US2300-3QN00
405 mm	8US2300-3LN00	–
500 mm	–	8US2300-3QP00
600 mm	–	8US2300-3QQ00
700 mm	–	8US2300-3QR00
800 mm	–	8US2300-3QS00
900 mm	–	8US2300-3QT00
1000 mm	–	8US2300-3QU00
1100 mm	–	8US2300-3QV00

[1)] Infeed via a connection module snapped on the front or via an adapter for 3VA (if protection of the base system using the 3VA is desired)
[2)] For screwing onto a mounting plate or snapping onto a DIN rail
[3)] Infeed via a connection module snapped on the front, via a rear connection module or via an adapter for 3VA (if protection of the base system using the 3VA is desired)
[4)] For screwing onto a mounting plate or snapping onto rear connection and mounting modules

Accessories

Mounting module for base system with 250 A

- For use with base systems ≥ 800 mm wide, with a total system weight ≥ 35 kg or at an ambient temperature ≥ 60 °C

Article No.
8US2981-0AA00

Quick selection guide, page 13/5

© Siemens 2025

Infeeds and connection methods

Version	Connection modules 125/250 A	Connection and mounting modules 250 A

Version	Rated operational current I_e	Front [1]	Rear [2]
For cables up to 16 mm²	63 A	8US2933-3HC00	–
For cables up to 50 mm²	125 A	8US2933-3LE00	–
Connection modules with terminals on one side	250 A	–	8US2952-3QJ00
Connection modules with terminals on two sides [3]	320 A	–	8US2942-3RJ00
Mounting module	–	–	8US2901-0AH00

[1] Snapped onto the front of the base system. The connection modules can be mounted with connecting cables pointing downward or upward.
[2] Screwed onto a mounting plate. To mount a base system on rear modules, a connection and mounting module is required.
For base systems ≥ 800 mm, two mounting modules are required if the total weight of the system exceeds 35 kg or the ambient temperature is above 60 °C.
[3] Used to loop the power supply through to a second base system.

Accessories

Touch protection IP20

- Connection modules feature IP20 touch protection
- However, when certain types of cables are connected, free spaces are left that must be covered to maintain touch protection

For cables	For connection modules	Article No.
Round cable ≤ 16 mm²	8US2933-3LE00	8US2984-0AA00
Round cable ≤ 50 mm²	8US2952-3QJ00	8US2988-0AH01
	8US2942-3RJ00	8US2988-0AH01
Flat cable	8US2952-3QJ00	8US2988-0AH02
	8US2942-3RJ00	8US2988-0AH02

13

Quick selection guide, page 13/5

© Siemens 2025

8US2 CrossBoard busbar systems new

Adapters and device holders

			Adapters [1]				
			For modular installation devices			For switching devices	
	No. of poles		1P			3P	
Width	Rated operational current I_e		Infeeds of			Connection via	
	IEC	UL 508	L1	L2	L3	screw terminal	Spring-loaded terminals
18 mm	16 A	16 A	8US2410-1CB10	8US2410-1CB20	8US2410-1CB30	–	–
	63 A [4]	63 A	8US2410-1HB10	8US2410-1HB20	8US2410-1HB30	–	–
45 mm	16 A	12 A	–	–	–	8US2410-3CE01	8US2410-3CE02
	25 A	25 A	–	–	–	8US2410-3EE01	–
	32 A	30 A	–	–	–	8US2410-3FE01	8US2410-3FE02
90 mm	144 A	125 A	–	–	–	–	–
22,5 mm	16 A	12,5	–	–	–	–	–
18 mm	–	–	–	–	–	–	–
45 mm	–	–	–	–	–	–	–

[1] Establish the electrical connection of assembled switchgear to the copper bars of the base system.
[2] Suitable for 3VA10, 3VA11, 3VA51, values apply when the molded case circuit breaker is mounted with the cable outlet pointing downward. On mounting with the cable outlet pointing upward, observe the following derating values: IEC 136 A, UL 112 A
[3] For mounting any switchgear, for mounting on DIN rail, width 22.5 mm
[4] When equipped with 5SJ, maximum operational current 60 A

13

Quick selection guide, page 13/5

© Siemens 2025

For molded case circuit breakers [2]	With fuse holders			Device holders Without electrical connection
3P	3P			
	Fuse sizes			
	10 × 38 mm/Class CC with mounting rail [3] without fuse	with mounting contour for SIRIUS 3RM1 motor starters with fuse	without fuse	
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
8US2410-3NH01	–	–	–	–
–	8US2410-3CC07	3RM1932-1AB	3RM1930-1AA	–
–	–	–	–	8US2400-0AB00
–	–	–	–	8US2400-0AE00

Accessories

Module connectors



- For 18 mm wide adapters and device holders
- For mechanical connection

Version	Article No.
100 pieces	8US1998-1AA02

Expansion modules

- For 45 mm wide adapters and device holders
- Allows the adapters and device holders to be adapted to the application

Version	Width	Article No.
Expansion kit [1]	Direct-on-line starters	8US2988-0AE00
	Reversing starters	8US2988-0AE01
Mounting rails [2]	45 mm	8US1998-7CB45
	54 mm	8US2988-0AF00
Positioning pieces [3]		8US1998-1DA45

[1] Enlarge the adapter downward (e.g. for mounting direct-on-line starters) and to the side (e.g. for mounting reversing starters).
[2] Provide additional mounting spaces for switchgear.
[3] Fixes long SIRIUS switchgear assemblies to the underside if no second mounting rail is mounted.

Quick selection guide, page 13/5

© Siemens 2025

8US2 CrossBoard busbar systems new

Power supply unit

Version	Power supply unit 10 A [1]
Width	
45 mm	8US2830-2BE01

[1] Stabilized power supply unit for snapping onto CrossBoard base systems, for supplying 24 V DC loads in the distribution board

Quick selection guide, page 13/5

© Siemens 2025

Quick selection guide, page 13/5

© Siemens 2025

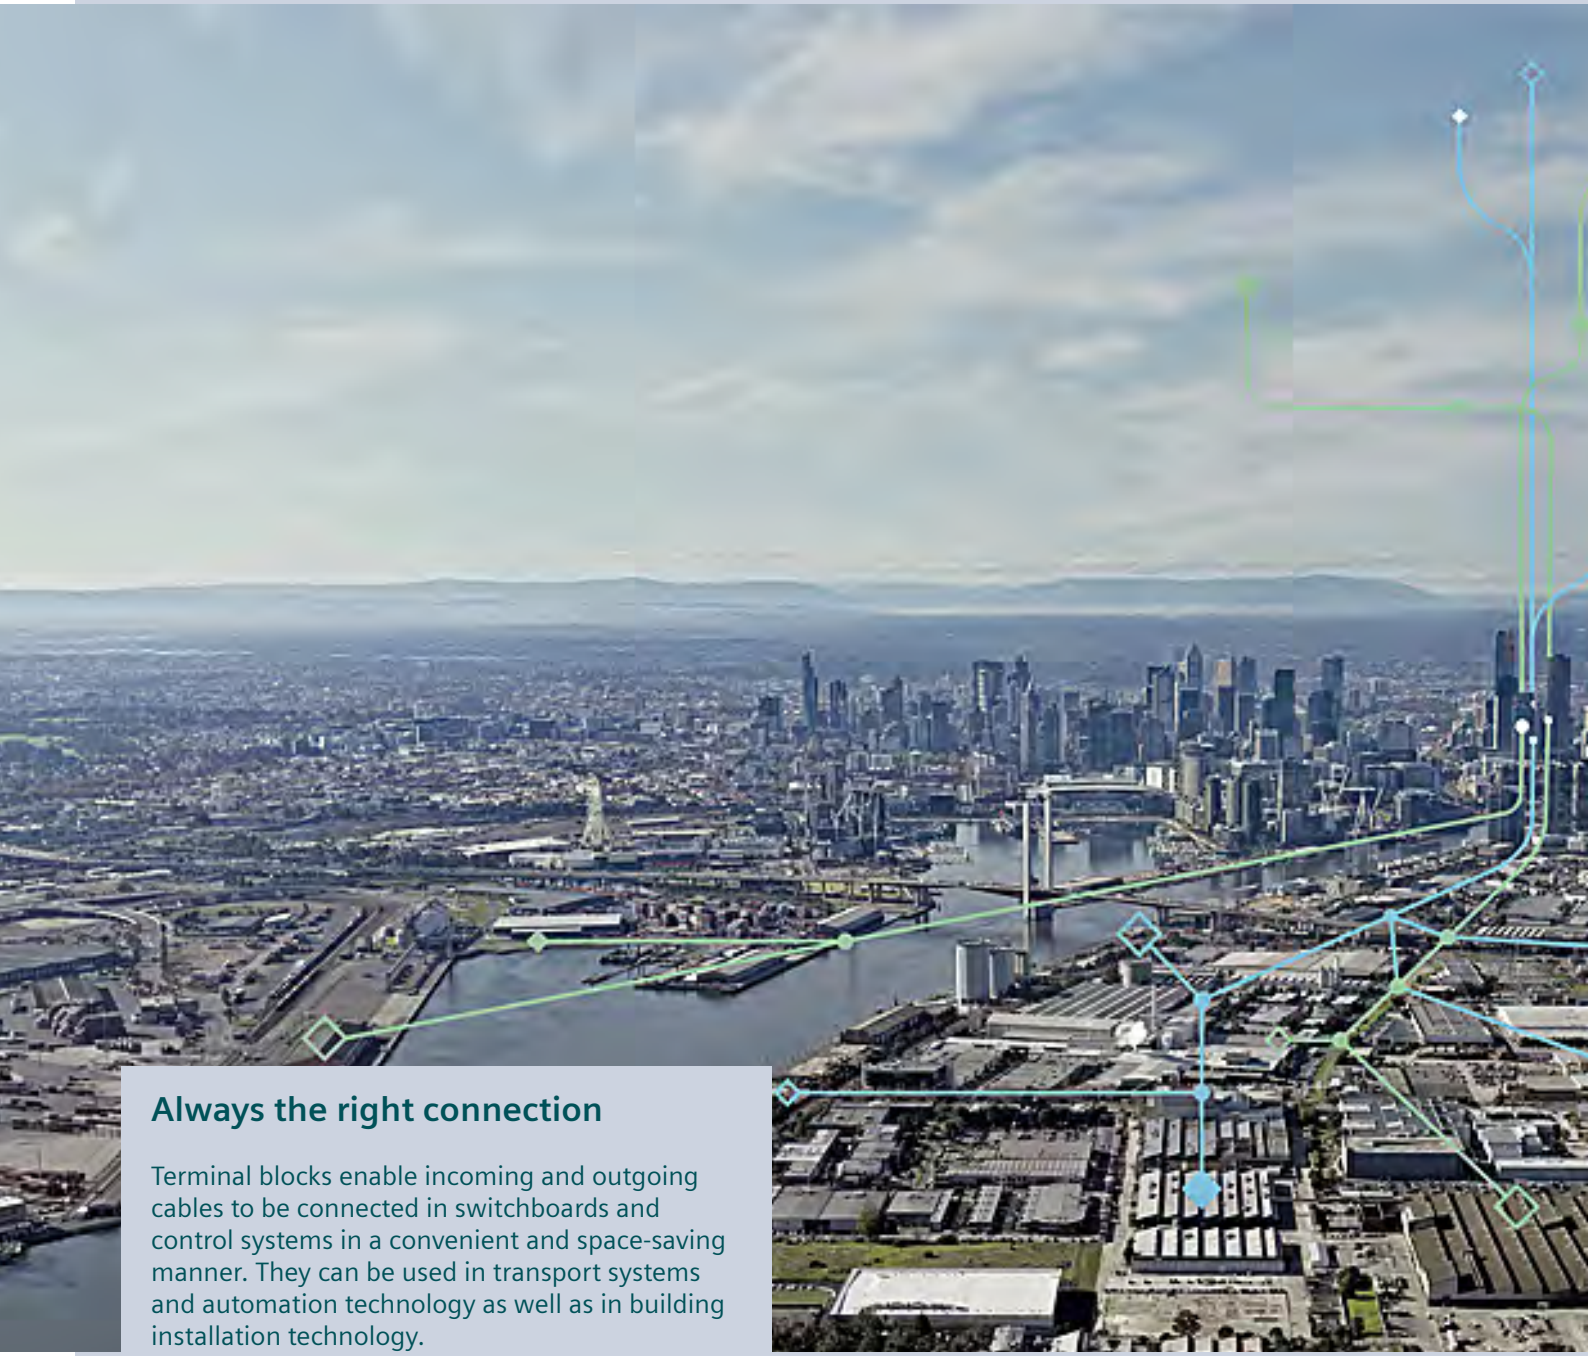

Always the right connection

Terminal blocks enable incoming and outgoing cables to be connected in switchboards and control systems in a convenient and space-saving manner. They can be used in transport systems and automation technology as well as in building installation technology.

We offer you the complete range of connection technology with screw terminals, spring-loaded terminals and In-Push-out (iPo) terminals, combination plug-in terminals, insulation displacement terminals and a wide variety of accessories. These can be combined with each other. This allows you to benefit from a high level of flexibility as well as simplified configuration.

© Siemens 2025

Terminal Blocks

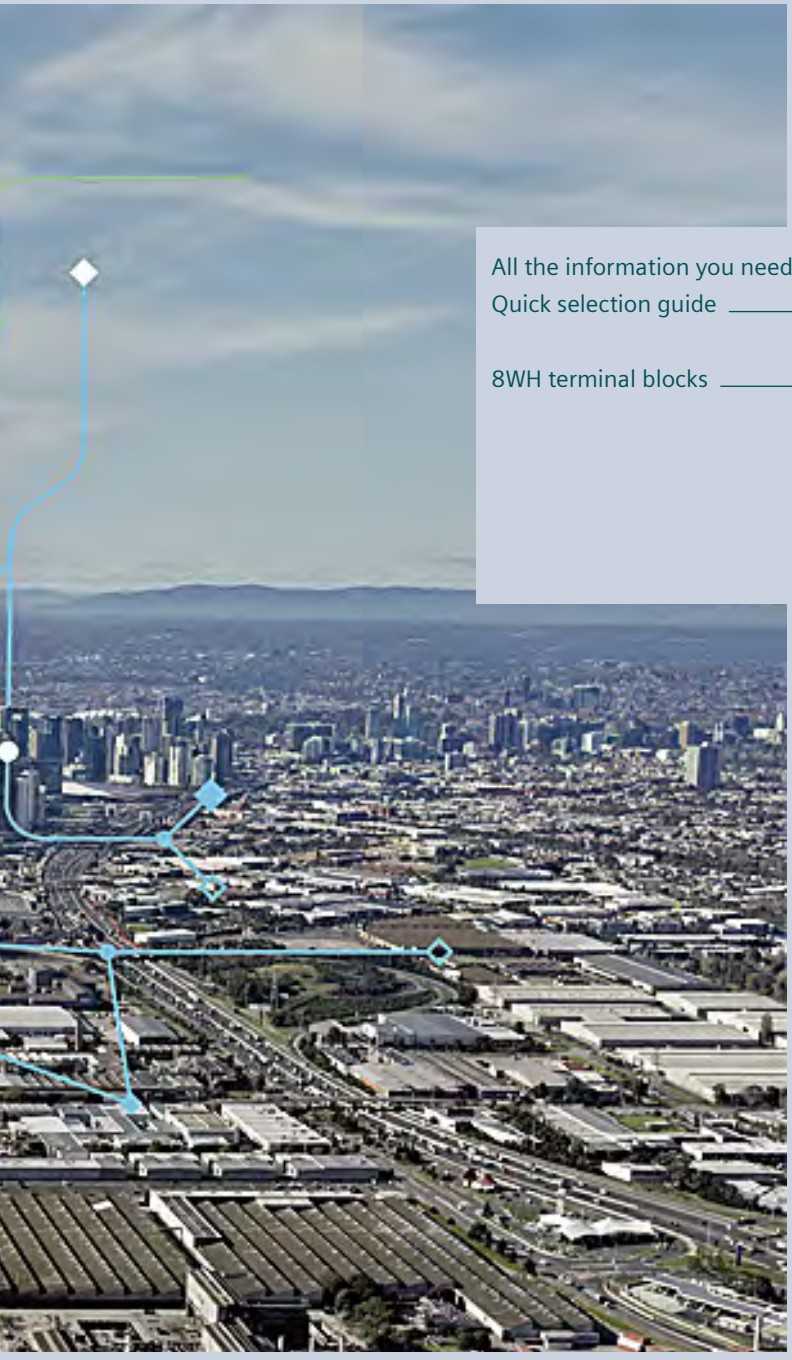

All the information you need 14/2
Quick selection guide 14/4
8WH terminal blocks 14/4
8WH terminal blocks 14/6
8WH6 iPo plug-in terminals 14/6
8WH6 iPo installation terminals 14/16
8WH2 spring-loaded terminals 14/22
8WH screw terminals 14/32
Accessories for 8WH terminal blocks 14/45

© Siemens 2025

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about terminal blocks, please visit our website **www.siemens.com/distribution-components**

Your product in detail

Use our conversion tool for quick and easy conversion to Siemens products **www.siemens.com/conversion-tool**

Siemens YouTube channel

- Siemens ALPHA FIX terminal blocks – 8WH2 terminal with spring-loaded-connection **sie.ag/6FTjPN**

Everything you need for your order

Refer to SiePortal to find an overview of your products (product catalog)

- Terminal blocks **sie.ag/2kW8ZXo**

Direct forwarding to the individual products in SiePortal by clicking on the article number in the catalog or entering this web address incl. article number **www.siemens.com/product_catalog_SIEP?Article No.**

14

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services.
You can find your local contacts at
www.siemens.com/lowvoltage/components/contact

You will find further information on services at
www.siemens.com/service-offers

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at
www.siemens.com/support-request

© Siemens 2025

… can be found in our online services

Commissioning + operation

Your product in detail

The SiePortal platform (knowledge base) provides detailed technical information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Certificates

Online Support app available for download from the **App Store** and **Play Store**
You will find further information at
www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)

- SiePortal (product catalog)
  www.siemens.com/lowvoltage/product-catalog
- Image database
  www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAx Download Manager at
www.siemens.com/cax

Technical overview – Terminal blocks

The fast way to get you to our online services

This page provides you with comprehensive information and links on terminal blocks
www.siemens.com/lowvoltage/product-support (109769088)

© Siemens 2025

8WH terminal blocks

8WH6 iPo plug-in terminals



8WH6 iPo installation terminals

Through-type terminals 	Through-type terminals	2.5 ... 150 mm² See page 14/6	2.5 ... 35 mm² See page 14/16
	Two-tier terminals	2.5 ... 4 mm² See page 14/9	–
	Three-tier terminals	–	–
	Four-tier motor terminals	–	–
Isolating terminals 	Isolating and isolating blade terminals	2.5 ... 4 mm² See page 14/10	–
	Two-tier isolating terminals	–	–
	N conductor isolating terminals	–	2.5 ... 35 mm² See page 14/18
	Measuring transformer isolating terminals	–	–
Initiator/actuator terminals 	Initiator terminals	1.5 mm² See page 14/13	–
	Actuator terminals	1.5 mm² See page 14/13	–
	Infeed terminals	2.5 mm² See page 14/14	–
Function terminals 	Fuse terminals	4 mm² See page 14/12	–
	Three-tier terminals	–	2.5 mm² See page 14/20
	Three-tier isolating terminals	–	2.5 mm² See page 14/21
	Diode terminals	–	–
	Two-tier diode terminals	–	–
	Shield terminals	–	–
	Further information	From page 14/6	From page 14/16

14

© Siemens 2025

8WH2 spring-loaded terminals

8WH1 screw terminals

1.5 ... 35 mm²	See page 14/22
1.5 ... 4 mm²	See page 14/24
2.5 mm²	See page 14/25
2.5 ... 4 mm²	See page 14/26
2.5 ... 4 mm²	See page 14/27
–	
–	
–	
–	
–	
–	
4 mm²	See page 14/29
–	
–	
2.5 mm²	See page 14/30
2.5 mm²	See page 14/31
–	
From page 14/22	

2.5 ... 240 mm²	See page 14/32
2.5 ... 4 mm²	See page 14/35
–	
–	
4 ... 6 mm²	See page 14/36
4 mm²	See page 14/38
–	
6 mm²	See page 14/39
–	
–	
–	
4 ... 6 mm²	See page 14/40
–	
–	
4 mm²	See page 14/42
2.5 mm²	See page 14/43
Diameter 2 ... 35 mm	See page 14/44
From page 14/32	

© Siemens 2025

8WH6 iPo plug-in terminals

Through-type terminals

①

②

	Terminal size 2.5 mm²	4 mm²
Terminal width	5.2 mm	6.2 mm
Max. load current I_{max}	24 A	32 A
Max. operational voltage U_{max}	800 V	800 V
AWG	26 ... 12	24 ... 10
Connection capacity, one rigid conductor	0.14 ... 4 mm²	0.2 ... 6 mm²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 2.5 mm²	0.2 ... 4 mm²
Standard	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, cULus
		
		

Terminals	Color		
❶ Through-type terminals			
2	Gray	8WH6000-0AF00	8WH6000-0AG00
	Blue	8WH6000-0AF01	8WH6000-0AG01
3	Gray	8WH6003-0AF00	8WH6003-0AG00
	Blue	8WH6003-0AF01	8WH6003-0AG01
4	Gray	8WH6004-0AF00	8WH6004-0AG00
	Blue	8WH6004-0AF01	8WH6004-0AG01
❷ PE through-type terminals			
2	Green-yellow	8WH6000-0CF07	8WH6000-0CG07
3	Green-yellow	8WH6003-0CF07	8WH6003-0CG07
4	Green-yellow	8WH6004-0CF07	8WH6004-0CG07

Specific accessories

Covers



Terminals	Color	Width	Article No.	Article No.
2	Gray	2.2 mm	8WH9000-1GA00	8WH9003-1GA00
3	Gray	2.2 mm	8WH9000-2GA00	8WH9003-2SA00
4	Gray	2.2 mm	8WH9000-4GA00	8WH9003-4SA00

Compartment partitions

Terminals	Color	Width	Article No.	Article No.
2	Gray	2.0 mm	8WH9070-0AA00	8WH9070-0AA00
3	Gray	2.0 mm	8WH9070-0GA00	8WH9070-0GA00

Cover segments

Color	Article No.	Article No.
Gray	8WH9000-0GA00	–

Warning covers

Article No.	Article No.
8WH9060-5CA06	8WH9063-5CA06

See general accessories, from page 14/45 onwards

© Siemens 2025

6 mm²	10 mm²	16 mm²	35 mm²
8.2 mm	10.2 mm	12.2 mm	16 mm
41 A	57 A	90 A	125 A
1000 V	1000 V	1000 V	1000 V
20 ... 8	20 ... 6	20 ... 4	10 ... 2
0.5 ... 10 mm²	0.5 ... 16 mm²	0.5 ... 25 mm²	6 ... 35 mm²
0.5 ... 6 mm²	0.5 ... 10 mm²	0.5 ... 16 mm²	6 ... 35 mm²
IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, UL, CSA	IEC 60947-7-1, IEC 60947-7-2, UL, CSA
			
			
8WH6000-0AH00	8WH6000-0AJ00	8WH6000-0AK00	8WH6000-0AM00
8WH6000-0AH01	8WH6000-0AJ01	8WH6000-0AK01	8WH6000-0AM01
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
8WH6000-0CH07	8WH6000-0CJ07	8WH6000-0CK07	8WH6000-0CM07
–	–	–	–
–	–	–	–
Article No.	Article No.	Article No.	Article No.
8WH9004-3SA00	8WH9005-1SA00	8WH9006-1SA00	–
–	–	–	–
–	–	–	–
Article No.	Article No.	Article No.	Article No.
–	–	–	–
–	–	–	–
Article No.	Article No.	Article No.	Article No.
–	–	–	–
Article No.	Article No.	Article No.	Article No.
8WH9063-5CA06	8WH9065-5CA06	8WH9066-5CA06	8WH9067-5CA06

14

© Siemens 2025

8WH6 iPo plug-in terminals

Through-type terminals for high-current applications

①

②

	Terminal size		
	50 mm²	**95 mm²**	**150 mm²**
Terminal width	20 mm	25 mm	31 mm
Max. load current I_{max}	150 A	232 A	309 A
Operational voltage AC/DC	1000 V/1500 V	1000 V/1500 V	1000 V/1500 V
AWG	8 ... 2/0	4 ... 3/0	1/0 ... 300
Connection capacity, rigid	10 ... 70 mm²	25 ... 95 mm²	95 ... 150 mm²
Connection capacity, flexible with end sleeve	10 ... 50 mm²	25 ... 95 mm²	95 ... 150 mm²
Standard	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, cULus
	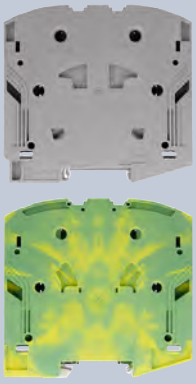	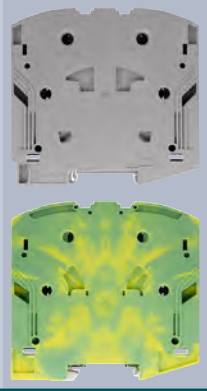	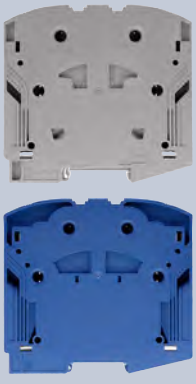

Terminals	Color			
❶ Through-type terminals				
2	Gray	8WH6000-0AN00	8WH6000-0AQ00	8WH6000-0AS00
	Blue	8WH6000-0AN01	8WH6000-0AQ01	8WH6000-0AS01
❷ PE through-type terminals				
2	Green-yellow	8WH6000-0CN07	8WH6000-0CQ07	–

Specific accessories

Connecting combs

Number of poles	Article No.	Article No.	Article No.
2-pole	8WH9020-3AB00	8WH9020-3AD00	8WH9020-3AF00
3-pole	8WH9020-3AC00	8WH9020-3AE00	8WH9020-3AG00

Tap-off terminal

Number of poles	Article No.	Article No.	Article No.
1-pole	8WH9120-0DA00	8WH9120-0DA00	8WH9120-0DA00

Test plugs

Surface	Article No.	Article No.	Article No.
Metal	8WH9010-0NB00	8WH9010-0NB00	8WH9010-0NB00

Insulating sleeves for test plugs

Color	Article No.	Article No.	Article No.
Red	8WH9010-0MB02	8WH9010-0MB02	8WH9010-0MB02

Warning covers

	Article No.	Article No.	Article No.
	8WH9067-5CA06	8WH9068-5CA06	8WH9068-5CA06

See general accessories, from page 14/45 onwards

© Siemens 2025

Two-tier terminals

①

②

	Terminal size	
	2.5 mm²	4 mm²
Terminal width	5.2 mm	6.2 mm
Max. load current I_{max}	26 A	32 A
Max. operational voltage U_{max}	500 V	500 V
AWG	26 ... 12	24 ... 10
Connection capacity, one rigid conductor	0.14 ... 4 mm²	0.2 ... 6 mm²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 2.5 mm²	0.2 ... 4 mm²
Standard	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, cULus
	 	 

Version	Color			
❶ Two-tier terminals				
Without equipotential bonding	Gray	8WH6020-0AF00	8WH6020-0AG00
	Blue	8WH6020-0AF01	8WH6020-0AG01
With equipotential bonding	Gray	8WH6025-0AF00	8WH6025-0AG00
❷ PE two-tier terminals [1]			
	Green-yellow	8WH6020-0CF07	8WH6020-0CG07

[1] Bridging the terminal is only possible in the top tier (in the center).

Specific accessories

Covers

Terminals	Color	Width	Article No.	Article No.
4	Gray	2.2 mm	8WH9000-4SE00	–
			–	8WH9003-1VA00

Compartment partitions

Terminals	Color	Width	Article No.	Article No.
4	Gray	2 mm	8WH9070-0BA00	8WH9070-0BA00

See general accessories, from page 14/45 onwards

© Siemens 2025

8WH6 iPo plug-in terminals

Isolating terminals

	Terminal size	
	2.5 mm²	**4 mm²**
Terminal width	5.2 mm	6.2 mm
Max. load current I_{max}	20 A	20 A
Max. operational voltage U_{max}	400 V	500 V
AWG	26 ... 12	24 ... 10
Connection capacity, one rigid conductor	0.14 ... 4 mm²	0.2 ... 6 mm²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 2.5 mm²	0.2 ... 4 mm²
Standard	IEC 60947-7-1, cULus	IEC 60947-7-1, cULus
		

Terminals	Color		
2	Gray	8WH6000-6CF00	8WH6000-6AG00
3	Gray	8WH6003-6CF00	–
4	Gray	8WH6004-6CF00	–

Specific accessories

Covers

Terminals	Color	Width	Article No.	Article No.
2	Gray	2.2 mm	8WH9000-3SC00	8WH9003-1GA00
3	Gray	2.2 mm	8WH9000-3SD00	–
4	Gray	2.2 mm	8WH9000-5GA00	–

Compartment partitions

Terminals	Color	Width	Article No.	Article No.
2	Gray	2.2 mm	8WH9070-0AA00	8WH9070-0AA00
3	Gray	2.2 mm	8WH9070-0GA00	–

Plug-in zone connectors

Types	Color	I_{max}	Illuminated display	Article No.	Article No.
Isolating plugs	Orange	–	–	8WH9040-0DB04	8WH9040-0DB04
Through-type connectors	Gray	16 A	–	8WH9020-8AB00	8WH9020-8AB00
Fused connectors [1]	Black	6.3 A	12 ... 30 V, 1 ... 2.5 mA	8WH9040-3AB08	8WH9040-3AB08
			Without	8WH9040-3DB08	8WH9040-3DB08
Component connectors	Gray	6 A	–	8WH9040-0BB00	8WH9040-0BB00

[1] The G fuse holders must be selected according to the maximum power loss (heat dissipation) of the G fuse links.
Depending on the application and method of installation, the heat rise conditions in closed fuse holders must be tested.
Higher ambient temperatures represent an additional load for the fuse links.
A shift in rated current should therefore be taken into account in such applications.

See general accessories, from page 14/45 onwards

© Siemens 2025

Isolating blade terminals

	Terminal size	
	2.5 mm²	4 mm²
Terminal width	5.2 mm	6.2 mm
Max. load current I_{max}	20 A	20 A
Max. operational voltage U_{max}	400 V	400 V
AWG	26 ... 12	24 ... 10
Connection capacity, one rigid conductor	0.14 ... 4 mm²	0.2 ... 6 mm²
Connection capacity, two rigid conductors	–	0.5 ... 6 mm²
Connection capacity, one flexible conductor	0.14 ... 2.5 mm²	0.2 ... 4 mm²
Standard	IEC 60947-7-1, cULus	IEC 60947-7-1, cULus
		

Terminals	Color		
2	Gray	8WH6000-6AF00	8WH6000-6CG00
3	Gray	8WH6003-6AF00	–
4	Gray	8WH6004-6AF00	–

Specific accessories

Covers

Terminals	Color	Width	Article No.	Article No.
2	Gray	2.2 mm	8WH9000-3SC00	8WH9003-1GA00
3	Gray	2.2 mm	8WH9000-3SD00	–
4	Gray	2.2 mm	8WH9000-5GA00	–

Compartment partitions

Terminals	Color	Width	Article No.	Article No.
2	Gray	2 mm	8WH9070-0AA00	8WH9070-0AA00

See general accessories, from page 14/45 onwards

© Siemens 2025

8WH6 iPo plug-in terminals

Fuse terminals

①

② 

	Terminal size 4 mm²
Terminal width	6.2 mm
Max. load current I_{max}	6.3 A
Max. operational voltage U_{max}	500 V
AWG	24 ... 10
Connection capacity, one rigid conductor	0.2 ... 6 mm²
Connection capacity, one flexible conductor with end sleeve	0.2 ... 4 mm²
Standard	cULus, CE

LED	Color		
Fuse terminals for 5 × 20 mm G fuse links			
① Without	●	Black	8WH6000-1GG08
② 10 ... 30 V AC/DC	●	Black	8WH6000-1KG38
② 110 ... 250 V AC/DC	●	Black	8WH6000-1MG88

Specific accessories

Covers

Terminals	Color		Width	Article No.
2	●	Gray	2.2 mm	8WH9003-1GA00

5 × 25 mm G fuse links

Types	Breaking capacity	Rated uninterrupted current	Article No.
Quick	Large	1 A	8WA1822-7EF16
		1.6 A	8WA1822-7EF18
		2.5 A	8WA1822-7EF21
		4 A	8WA1822-7EF23
		6.3 A	8WA1822-7EF25
Slow	Small	1 A	8WA1822-7EF76
		1.6 A	8WA1822-7EF78
		2.5 A	8WA1822-7EF81
		4 A	8WA1822-7EF83
		6.3 A	8WA1822-7EF85

Isolating links, 5 × 20 mm

Size	Article No.
5 × 20 mm	8WH9021-0CB12

See general accessories, from page 14/45 onwards

© Siemens 2025

Initiator/actuator terminals

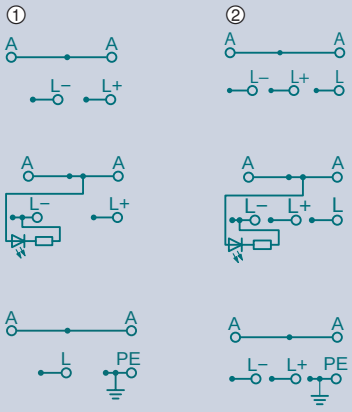

	Terminal size 1.5 mm²	
Terminal width	3.5 mm	3.5 mm
Max. load current I_{max}	13.5 A	13.5 A
Max. operational voltage U_{max}	250 V	250 V
AWG	26 ... 14	26 ... 14
Connection capacity, flexible with end sleeve, with plastic sleeve	0.14 ... 1.0 mm²	0.14 ... 1.0 mm²
Connection capacity, flexible with end sleeve, without plastic sleeve	0.14 ... 1.5 mm²	0.14 ... 1.5 mm²
Standard	IEC 60947-7-1	IEC 60947-7-1
		

Conductors [1]	Number of connections	LED	Color		
❶ Initiator terminal					
3-wire, L+, L–, A	4	–	Gray	8WH6003-0DE00	–
3-wire, L+, L–, A	4	Green, 24 V (15 ... 30 V DC)	Gray	8WH6003-0FE00	–
3-wire, L, A, PE	4	–	Gray	8WH6003-0HE00	–
❷ Actuator terminal					
4-wire, L+, L–, L, A	5	–	Gray	–	8WH6004-0DE00
4-wire, L+, L–, L, A	5	Green, 24 V (15 ... 30 V DC)	Gray	–	8WH6004-0FE00
4-wire, L+, L–, PE, A	5	–	Gray	–	8WH6004-0HE00

[1] L+ = red, L– = blue, A (output) = petrol, L = petrol, PE (ground) = green/yellow

Specific accessories

Covers

Version	Width	Color	Article No.	Article No.
For 3-wire	2.2 mm	Gray	8WH9001-2VD00	–
For 4-wire	2.2 mm	Gray	–	8WH9001-4VE00

© Siemens 2025

8WH6 iPo plug-in terminals

Infeed terminals for initiator/actuator terminals

① L+ L–

② PE L+ L–

	Terminal size 2.5 mm²
Terminal width	7 mm
Max. load current I_{max}	20 A
Max. operational voltage U_{max}	250 V
AWG	24 ... 12
Connection capacity, flexible with end sleeve, with plastic sleeve	0.2 ... 2.5 mm²
Connection capacity, flexible with end sleeve, without plastic sleeve	0.2 ... 2.5 mm²
Standard	IEC 60947-7-1



Conductors [1]	Color	
① 3-wire, L+, L–	Orange	8WH6003-0DF04
② 4-wire, L+, L–, PE	Orange	8WH6004-0HE04

[1] L+ = red, L– = blue, A (output) = petrol, L = petrol, PE (ground) = green/yellow

See general accessories, from page 14/45 onwards

© Siemens 2025

Specific accessories for 8WH6 initiator/actuator terminals

Connecting combs

Number of poles	Load current	Color	Article No.
2-pole	17.5 A	Red	8WH9020-6JC02
		Blue	8WH9020-6JC01
		Gray	8WH9020-6JC00
3-pole	17.5 A	Red	8WH9020-6JD02
		Blue	8WH9020-6JD01
		Gray	8WH9020-6JD00
4-pole	17.5 A	Red	8WH9020-6JE02
		Blue	8WH9020-6JE01
		Gray	8WH9020-6JE00
5-pole	17.5 A	Red	8WH9020-6JF02
		Blue	8WH9020-6JF01
		Gray	8WH9020-6JF00
10-pole	17.5 A	Red	8WH9020-6JL02
		Blue	8WH9020-6JL01
		Gray	8WH9020-6JL00
20-pole	17.5 A	Red	8WH9020-6JS02
		Blue	8WH9020-6JS01
		Gray	8WH9020-6JS00

Labels, front, for terminal width 3.5 mm and terminal size 1.5 mm²

Types		Color	Article No.
Blank		White	8WH8110-0AA05
Custom inscription	Printed vertically	White	8WH8140-0XA05-Z Y01
	Printed horizontally	White	8WH8120-0XA05-Z Y01

Labels, flat, for terminal width 3.5 mm and terminal size 1.5 mm²



Types		Inscription	Color	Article No.
Blank			White	8WH8111-0AA05
Consecutive numbering	Printed vertically	1 ... 10 (10 ×)	White	8WH8141-0AB05
		11 ... 20 (10 ×)	White	8WH8141-0AB15
		21 ... 30 (10 ×)	White	8WH8141-0AB25
		31 ... 40 (10 ×)	White	8WH8141-0AB35
		41 ... 50 (10 ×)	White	8WH8141-0AB45
	Printed horizontally	1 ... 10 (10 ×)	White	8WH8121-0AB05
		11 ... 20 (10 ×)	White	8WH8121-0AB15
		21 ... 30 (10 ×)	White	8WH8121-0AB25
		31 ... 40 (10 ×)	White	8WH8121-0AB35
		41 ... 50 (10 ×)	White	8WH8121-0AB45
Custom inscription	Printed vertically		White	8WH8141-0XA05-Z Y01
	Printed horizontally		White	8WH8121-0XA05-Z Y01

Labels for 8WH initiator/actuator terminals for labeling system

Types	Terminal width	Standard	Color	Article No.
Front, blank	3.5 mm	WIN 486	White	8WH8112-0AA05
Flat, blank	3.5 mm	WIN 416	White	8WH8113-0AA05

© Siemens 2025

8WH6 iPo installation terminals

Through-type terminals

①

②

	Terminal size			
	2.5 mm²		4 mm²	
Terminal width	5.2 mm	5.2 mm	6.2 mm	6.2 mm
Terminal length	59.5 mm	59.5 mm	66 mm	66 mm
Terminal height	42.5 mm	43 mm	44 mm	46.3 mm
Max. load current I_{max}	24 A	–	32 A	–
Max. operational voltage U_{max}	800 V	–	800 V	–
Rated impulse voltage	–	–	–	–
AWG	26 ... 12	24 ... 12	24 ... 10	24 ... 10
Connection capacity, one rigid conductor	0.14 ... 4 mm²	0.2 ... 4 mm²	0.2 ... 6 mm²	0.2 ... 6 mm²
Connection capacity, two rigid conductors	–	–	–	–
Connection capacity, flexible with end sleeve	0.14 ... 2.5 mm²	0.25 ... 2.5 mm²	0.25 ... 4 mm²	0.25 ... 4 mm²
Connection capacity, flexible without end sleeve	0.14 ... 2.5 mm²	0.25 ... 2.5 mm²	0.25 ... 4 mm²	0.25 ... 4 mm²
Tightening torque	–	–	–	–
Standard	IEC 60947-7-1	IEC 60947-7-2	IEC 60947-7-1	IEC 60947-7-2

Terminals	Color	iPo plug-in technology		iPo plug-in technology	
❶ Through-type terminals					
2	Gray	8WH6001-0AF00	–	8WH6001-0AG00	–
	Blue	8WH6001-0AF01	–	8WH6001-0AG01	–
❷ PE through-type terminals					
2	Green-yellow	–	8WH6001-0CF07	–	8WH6001-0CG07

Specific accessories

Covers

Color	Width	Article No.	Article No.
Gray	1.8 mm	–	–
	2.2 mm	8WH9000-1WA00	8WH9003-7WA00

N conductor support brackets

- For holding the N busbar

Color	Article No.	Article No.
Blue	8WH9143-0AF01	8WH9143-0AF01

Connecting combs

Number of poles	Article No.	Article No.
2-pole	–	–
3-pole	–	–
10-pole	–	–

Compartment partitions

Color	Article No.	Article No.
Gray	–	–

Connecting terminals

Color	Width	Article No.	Article No.
Blue	10.3 mm	8WH9126-0BA01	8WH9126-0BA01

N busbars, 10 × 3 mm

Version	Length	Article No.	Article No.
Copper, tinned	1000 mm	8WH9030-2AB12	8WH9030-2AB12

See general accessories, from page 14/45 onwards

© Siemens 2025

6 mm²		16 mm²		35 mm²	
8.2 mm	8.2 mm	12.2 mm	12.2 mm	15.2 mm	15 mm
66 mm	66 mm	51 mm	51 mm	55 mm	55 mm
50 mm	50 mm	50 mm	50 mm	51 mm	51 mm
41 A	–	76 A	–	125 A	125 A
800 V	–	400 V	–	800 V	–
–	–	6 kV	6 kV	8 kV	8 kV
20 ... 8	20 ... 8	22 ... 4	22 ... 4	18 ... 2	18 ... 2
0.5 ... 10 mm²	0.5 ... 10 mm²	6 ... 25 mm²	6 ... 25 mm²	0.75 ... 35 mm²	0.75 ... 35 mm²
–	–	2.5 ... 10 mm²	2.5 ... 10 mm²	0.75 ... 10 mm²	0.75 ... 10 mm²
0.5 ... 6 mm²	0.5 ... 6 mm²	6 ... 16 mm²	6 ... 16 mm²	0.75 ... 35 mm²	0.75 ... 35 mm²
0.5 ... 6 mm²	0.5 ... 6 mm²	6 ... 16 mm²	6 ... 16 mm²	0.75 ... 10 mm²	0.75 ... 10 mm²
–	–	2.5 ... 3.0 Nm	2.5 ... 3.0 Nm	3.2 ... 3.7 Nm	3.2 ... 3.7 Nm
IEC 60947-7-1	IEC 60947-7-2	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, cULus, CE	cULus, CE	cULus, CE
iPo plug-in technology		**Screw terminals**		**Screw terminals**	
8WH6001-0AH00	–	8WH1201-0AK00	–	8WH1201-0AM00	–
8WH6001-0AH01	–	8WH1201-0AK01	–	8WH1201-0AM01	–
–	8WH6001-0CH07	–	8WH1201-0CK07	–	8WH1201-0CM07

Article No.	**Article No.**	**Article No.**
–	8WH9005-3PA00	–
8WH9004-1WA00	–	–
Article No.	**Article No.**	**Article No.**
8WH9143-0AH01	–	–
Article No.	**Article No.**	**Article No.**
–	–	8WH9030-6BC00
–	–	8WH9030-6BD00
–	8WH9030-6AL00	–
Article No.	**Article No.**	**Article No.**
–	8WH9070-6HA00	–
Article No.	**Article No.**	**Article No.**
8WH9126-0BA01	8WH9126-0BA01	–
Article No.	**Article No.**	**Article No.**
8WH9030-2AB12	8WH9030-2AB12	8WH9030-2AB12

© Siemens 2025

8WH6 iPo installation terminals

N conductor isolating terminals

	Terminal size	
	2.5 mm²	4 mm²
Terminal width	5.2 mm	6.2 mm
Terminal length	59 mm	66 mm
Terminal height	46.3 mm	46.3 mm
Max. load current I_{max} / cross-section	24 A/2.5 mm²	32 A/4 mm²
Max. operational voltage U_{max}	250 V	250 V
Rated impulse voltage	4 kV	6 kV
AWG	26 ... 12	24 ... 10
Connection capacity, one rigid conductor	0.14 ... 4 mm²	0.2 ... 6 mm²
Connection capacity, two rigid conductors	0.2 ... 1.5 mm²	0.2 ... 2 mm²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 2.5 mm²	0.25 ... 4 mm²
Connection capacity, two flexible conductors with end sleeve	max. 0.5 mm²	max. 1 mm²
Tightening torque	–	–
Standard	IEC 60947-7-1	IEC 60947-7-1

Terminals	Color	iPo plug-in technology	iPo plug-in technology
2	Blue	8WH6001-0BF01	8WH6001-0BG01

Specific accessories

Covers

Color	Width	Article No.	Article No.
Blue	2.2 mm	8WH9000-1SA00	8WH9003-1SA00
Gray	2.2 mm	–	–

N conductor support brackets

- For holding the N busbar 10 × 3 mm
- To be placed every 20 cm

Color	Article No.	Article No.
Blue	8WH9143-0AF01	8WH9143-0AF01
	–	–

Connecting terminals

Color	Width	Article No.	Article No.
Blue	10.3 mm	8WH9126-0BA01	8WH9126-0BA01

N busbars, 10 × 3 mm

Version	Length	Article No.	Article No.
Copper, tinned	1000 mm	8WH9030-2AB12	8WH9030-2AB12

See general accessories, from page 14/45 onwards

© Siemens 2025

6 mm²	10 mm²	16 mm²	35 mm²
8.2 mm	10.2 mm	12.2 mm	15 mm
66.3 mm	55 mm	55 mm	55 mm
50 mm	47 mm	50 mm	50 mm
41 A/6 mm²	57 A/16 mm²	76 A/25 mm²	110 A/35 mm²
400 V	400 V	400 V	400 V
6 kV	6 kV	6 kV	6 kV
20 ... 8	–	–	–
0.5 ... 10 mm²	0.5 ... 16 mm²	6 ... 25 mm²	0.75 ... 35 mm²
0.5 ... 4 mm²	0.5 ... 4 mm²	2.5 ... 10 mm²	0.75 ... 10 mm²
0.5 ... 6 mm²	0.5 ... 10 mm²	6 ... 16 mm²	0.75 ... 35 mm²
0.5 ... 1.5 mm²	0.5 ... 2.5 mm²	4 ... 6 mm²	0.75 ... 10 mm²
–	1.5 ... 1.8 Nm	1.5 ... 1.8 Nm	3.2 ... 3.7 Nm
IEC 60947-7-1	IEC 60947-7-1	IEC 60947-7-1	IEC 60947-7-1
iPo plug-in technology	**Screw terminals**	**Screw terminals**	**Screw terminals**
8WH6001-0BH01	8WH1201-0BJ01	8WH1201-0BK01	8WH1201-0BM01

Article No.	Article No.	Article No.	Article No.
8WH9004-1SA00	–	–	–
–	8WH9005-3PB00	8WH9005-3PB00	–

Article No.	Article No.	Article No.	Article No.
8WH9143-0AH01	–	–	–
–	8WH9141-0BC01	8WH9141-0BC01	8WH9141-0BC01

Article No.	Article No.	Article No.	Article No.
8WH9126-0BA01	8WH9126-0BA01	8WH9126-0BA01	–

Article No.	Article No.	Article No.	Article No.
8WH9030-2AB12	8WH9030-2AB12	8WH9030-2AB12	8WH9030-2AB12

© Siemens 2025

8WH6 iPo installation terminals

Three-tier terminals

	Terminal size 2.5 mm²
Terminal width	5.2 mm
Terminal length	101 mm
Terminal height	50.5 mm
Max. load current I_{max}/cross-section	24 A/4 mm²
Max. operational voltage U_{max} (L–L)	400 V
Rated voltage U_n (L–N, L–PE)	250 V
AWG	26 ... 12
Connection capacity, rigid	0.14 ... 4 mm²
Connection capacity, flexible with end sleeve	0.14 ... 2.5 mm²

Types	Color	
L	Gray	8WH6001-4QF00
L/L	Gray	8WH6001-4DF00
L/N	Gray	8WH6001-4CF00
PE/L/L	Gray	8WH6001-4HF00
PE/L/N	Gray	8WH6001-4EF00
PE/L/NT	Gray	8WH6001-4FF00

Specific accessories

Covers

Color	Width	Article No.
Gray	2.2 mm	8WH9000-3SA00

N conductor support brackets

- For holding the N busbar
- To be placed every 20 cm

Color	Width	Article No.
Blue	2 mm	8WH9142-0AF01

Connecting terminals

Color	Width	Article No.
Blue	10.3 mm	8WH9126-0BA01

N busbars, 10 × 3 mm

Version	Length	Article No.
Copper, tinned [1]	1000 mm	8WH9030-2AB12

[1] Only copper busbars may be installed.

See general accessories, from page 14/45 onwards

© Siemens 2025

Three-tier isolating terminals



	Terminal size 2.5 mm²		
Terminal width	5.2 mm	5.2 mm	5.2 mm
Terminal length	101 mm	101 mm	101 mm
Terminal height	50.5 mm	50.5 mm	50.5 mm
Max. load current I_{max}/cross-section	24 A/4 mm²	24 A/4 mm²	24 A/4 mm²
Max. operational voltage U_{max} (L–L)	400 V	400 V	400 V
Rated voltage U_n (L–N, L–PE)	250 V	250 V	250 V
AWG	26 ... 12	26 ... 12	26 ... 12
Connection capacity, rigid	0.25 ... 4 mm²	0.25 ... 4 mm²	0.25 ... 4 mm²
Connection capacity, flexible with end sleeve	0.25 ... 2.5 mm²	0.25 ... 2.5 mm²	0.25 ... 2.5 mm²

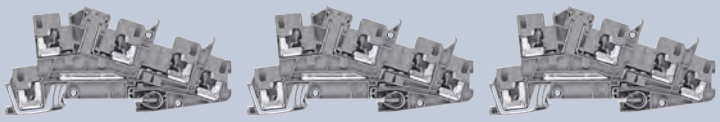

Types	Color			
❶ Through-type terminals with identical contour				
PE/L/L	Gray	–	–	8WH6001-4PF00
❷ Isolating terminals				
PE/L/L isolation	Gray	8WH6001-4MF00	–	–
❸ Isolating blade terminals				
PE/L/L isolating blade	Gray	–	8WH6001-4NF00	–
PE/L/N isolating blade	Gray	–	8WH6001-4GF00	–

Specific accessories

Covers for isolating terminal in the contour					
	Color	Width	Article No.	Article No.	Article No.
	Gray	2.2 mm	–	8WH9000-6SA00	8WH9000-6SA00

See general accessories, from page 14/45 onwards

© Siemens 2025

8WH2 spring-loaded terminals

Through-type terminals



	Terminal size	
	1.5 mm²	2.5 mm²
Terminal width	4.2 mm	5.2 mm
Max. load current I_{max}	17.5 A	31 A
Max. operational voltage U_{max}	500 V	800 V
AWG	28 ... 16	28 ... 12
Connection capacity, rigid	0.08 ... 1.5 mm²	0.08 ... 4 mm²
Connection capacity, flexible with end sleeve	0.14 ... 1.5 mm²	0.14 ... 2.5 mm²
Standard	IEC 60947-7-1, IEC 60947-7-2, cULus, CB	IEC 60947-7-1, IEC 60947-7-2, cULus
		

Terminals	Color		
❶ Through-type terminals			
2	Gray	8WH2000-0AE00	8WH2000-0AF00
	Blue	8WH2000-0AE01	8WH2000-0AF01
	Orange	8WH2000-0AE04	8WH2000-0AF04
	Red	8WH2000-0AE02	8WH2000-0AF02
	Black	8WH2000-0AE08	8WH2000-0AF08
	Green	8WH2000-0AE03	8WH2000-0AF03
	White	8WH2000-0AE05	8WH2000-0AF05
	Yellow	8WH2000-0AE06	8WH2000-0AF06
3	Gray	8WH2003-0AE00	8WH2003-0AF00
	Blue	8WH2003-0AE01	8WH2003-0AF01
	Orange	8WH2003-0AF04	8WH2003-0AF04
4	Gray	8WH2004-0AE00	8WH2004-0AF00
	Blue	8WH2004-0AE01	8WH2004-0AF01
	Orange	8WH2004-0AF04	8WH2004-0AF04
❷ PE through-type terminals			
2	Green-yellow	8WH2000-0CE07	8WH2000-0CF07
3	Green-yellow	8WH2003-0CE07	8WH2003-0CF07
4	Green-yellow	8WH2004-0CE07	8WH2004-0CF07

Specific accessories

Covers

Color	Width	Terminals	Article No.	Article No.
Gray	2.2 mm	2	8WH9000-1GA00	8WH9000-1GA00
		3	8WH9000-2GA00	8WH9000-2GA00
		4	8WH9000-4GA00	8WH9000-4GA00

Compartment partitions

Color	Terminals	Article No.	Article No.
Gray	2	8WH9070-0AA00	8WH9070-0AA00
	3	8WH9070-0GA00	8WH9070-0GA00

Cover segments

- For covering multi-wire terminals when mounting two-wire terminals side-by-side

Color	Article No.	Article No.
Gray	8WH9000-0GA00	8WH9000-0GA00

Warning covers for the operating shafts of 8WH2 through-type terminals

	Article No.	Article No.
	8WH9061-5AA06	8WH9060-5AA06

© Siemens 2025

4 mm²	6 mm²	10 mm²	16 mm²	35 mm²
6.2 mm	8.2 mm	10.2 mm	12.2 mm	16 mm
40 A	52 A	65 A	90 A	125 A
800 V	1000 V	1000 V	1000 V	1000 V
28 ... 10	24 ... 8	24 ... 6	24 ... 4	14 ... 2
0.08 ... 6 mm²	0.2 ... 10 mm²	1.5 ... 16 mm²	0.2 ... 25 mm²	2.5 ... 35 mm²
0.14 ... 4 mm²	0.25 ... 6 mm²	1.5 ... 10 mm²	0.25 ... 16 mm²	2.5 ... 35 mm²
IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, cULus
				
Article No.	**Article No.**	**Article No.**	**Article No.**	**Article No.**
8WH2000-0AG00	8WH2000-0AH00	8WH2000-0AJ00	8WH2000-0AK00	8WH2000-0AM00
8WH2000-0AG01	8WH2000-0AH01	8WH2000-0AJ01	8WH2000-0AK01	8WH2000-0AM01
8WH2000-0AG04	–	–	–	–
8WH2000-0AG02	–	–	–	–
8WH2000-0AG08	–	–	–	–
8WH2000-0AG03	–	–	–	–
8WH2000-0AG05	–	–	–	–
8WH2000-0AG06	–	–	–	–
8WH2003-0AG00	8WH2003-0AH00	–	–	–
8WH2003-0AG01	8WH2003-0AH01	–	–	–
–	–	–	–	–
8WH2004-0AG00	–	–	–	–
8WH2004-0AG01	–	–	–	–
–	–	–	–	–
Article No.	**Article No.**	**Article No.**	**Article No.**	**Article No.**
8WH2000-0CG07	8WH2000-0CH07	8WH2000-0CJ07	8WH2000-0CK07	8WH2000-0CM07
8WH2003-0CG07	8WH2003-0CH07	–	–	–
8WH2004-0CG07	–	–	–	–

14

Article No.	Article No.	Article No.	Article No.	Article No.
8WH9003-1GA00	8WH9004-1GA00	8WH9005-1GA00	8WH9006-1GA00	–
8WH9003-2GA00	8WH9004-2GA00	–	–	–
8WH9003-4GA00	–	–	–	–
Article No.	**Article No.**	**Article No.**	**Article No.**	**Article No.**
8WH9070-0AA00	8WH9070-0DA00	–	–	–
8WH9070-0GA00	8WH9070-0DA00	–	–	–
Article No.	**Article No.**	**Article No.**	**Article No.**	**Article No.**
8WH9003-0GA00	–	–	–	–
Article No.	**Article No.**	**Article No.**	**Article No.**	**Article No.**
8WH9063-5AA06	8WH9064-5AA06	–	–	8WH9067-5AA06

© Siemens 2025

8WH2 spring-loaded terminals

Two-tier terminals

①

②

③

	Terminal size		
	1.5 mm²	2.5 mm²	4 mm²
Terminal width	4.2 mm	5.2 mm	6.2 mm
Max. load current I_{max}	17.5 A	26 A	32 A
Max. operational voltage U_{max}	500 V	500 V	500 V
AWG	28 ... 16	28 ... 12	28 ... 10
Connection capacity, rigid	0.08 ... 1.5 mm²	0.08 ... 4 mm²	0.08 ... 6 mm²
Connection capacity, flexible with end sleeve	0.08 ... 1.5 mm²	0.08 ... 2.5 mm²	0.08 ... 4 mm²
Standard	IEC 60947-7-1, IEC 60947-7-2, cULus, CCA	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, cULus
			

Version	Number of poles	Terminals	Color			
❶ Two-tier terminals						
Without equipotential bonding	2-pole	4	Gray	8WH2020-0AE00	8WH2020-0AF00	8WH2020-0AG00
			Blue	8WH2020-0AE01	8WH2020-0AF01	8WH2020-0AG01
		6	Gray	–	8WH2023-0AF00	–
			Blue	–	8WH2023-0AF01	–
With equipotential bonding	1-pole	4	Gray	8WH2025-0AE00	8WH2025-0AF00	8WH2025-0AG00
			Blue	–	8WH2025-0AF01	–
		6	Gray	–	8WH2022-0AF00	–
❷ Two-tier terminals, N at top and L at bottom						
Without equipotential bonding	2-pole	4	Gray	–	8WH2020-4CF00	–
❸ PE two-tier terminals [1]						
		4	Green-yellow	8WH2020-0CE07	8WH2020-0CF07	8WH2020-0CG07
		6	Green-yellow	–	8WH2023-0CF07	–

[1] Only top tier can be fitted with connecting combs.

Specific accessories

Covers

Width	Terminals	Color	Article No.	Article No.	Article No.
2.2 mm	4	Gray	–	–	8WH9003-1VA00
	6	Gray	–	8WH9000-2VA00	–

See general accessories, from page 14/45 onwards

© Siemens 2025

Three-tier terminals

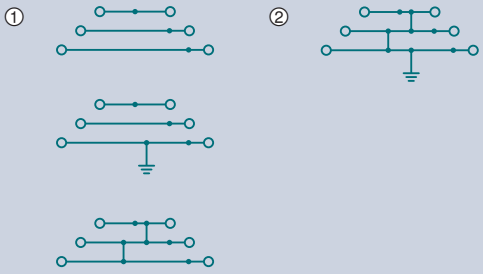

	Terminal size 2.5 mm²
Terminal width	5.2 mm
Max. load current I_{max}	28 A [1]
Max. operational voltage U_{max}	500 V
AWG	28 ... 12
Connection capacity, rigid	0.08 ... 4 mm²
Connection capacity, flexible with end sleeve	0.08 ... 2.5 mm²
Standard	IEC 60947-7-1, IEC 60947-7-2, cULus



Version	Types	Color	
❶ Three-tier terminals			
Without equipotential bonding	–	Gray	8WH2030-0AF00
		Blue	8WH2030-0AF01
	PE/L/N	Gray	8WH2030-4EF00
	PE/L/L	Gray	8WH2030-4HF00
With equipotential bonding		Gray	8WH2035-0AF00
		Blue	8WH2035-0AF01
❷ PE three-tier terminals			
		Green-yellow	8WH2035-0CF07

[1] The total current through all connected conductors must not exceed the maximum load current.

Specific accessories

Covers

Width	Color	Article No.
2.2 mm	Gray	8WH9000-1GD00

Label holder

Color	Article No.
Gray	8WH9060-4BA00

See general accessories, from page 14/45 onwards

© Siemens 2025

8WH2 spring-loaded terminals

Four-tier motor terminals

	Terminal size	
	2.5 mm²	**4 mm²**
Terminal width	5.2 mm	6.2 mm
Max. load current I_{max}	26 A	32 A
Max. operational voltage U_{max}	800 V	800 V
AWG	28 ... 12	28 ... 10
Connection capacity, rigid	0.08 ... 4 mm²	0.08 ... 6 mm²
Connection capacity, flexible with end sleeve	0.08 ... 2.5 mm²	0.08 ... 4 mm²
Standard	IEC 60947-7-1, IEC 60947-7-2,	IEC 60947-7-1, IEC 60947-7-2,
		
Types	**Color**		
L/L/L/PE	Gray	8WH2040-4LF00	8WH2040-4LG00

Specific accessories

Covers

Color	Width	Article No.	Article No.
Gray	2.2 mm	8WH9000-1GE00	–

See general accessories, from page 14/45 onwards

© Siemens 2025

Isolating terminals



	Terminal size	
	2.5 mm²	4 mm²
Terminal width	5.2 mm	6.2 mm
Max. load current I_{max}	16 A	16 A
Max. operational voltage U_{max}	400 V	400 V
AWG	28 ... 12	28 ... 10
Connection capacity, rigid	0.08 ... 4 mm²	0.08 ... 6 mm²
Connection capacity, flexible with end sleeve	0.08 ... 2.5 mm²	0.08 ... 4 mm²
Standard	IEC 60947-7-1, cULus	IEC 60947-7-1, cULus
		

Terminals	Color		
2	Gray	8WH2000-6AF00	8WH2000-6AG00
3	Gray	8WH2003-6AF00	–
4	Gray	8WH2004-6AF00	–

Specific accessories

Covers

Width	Color	Terminals	Article No.	Article No.
2.2 mm	Gray	2	8WH9000-2GA00	–
		3	8WH9000-4GA00	–
		4	8WH9000-5GA00	–

Compartment partitions

	Color	Terminals	Article No.	Article No.
	Gray	2	8WH9070-0AA00	8WH9070-0AA00
		3	8WH9070-0GA00	–

Cover segments

- For covering multi-wire terminals when mounting two-wire terminals side-by-side

Color	Terminals	Article No.	Article No.
Gray	3/4	8WH9000-0GA00	–

Plug-in zone connectors

Types	Color	I_{max}	Illuminated display	Article No.	Article No.
Isolating plugs	Orange	20 A	–	8WH9040-0DB04	8WH9040-0DB04
Through-type connectors	Gray	16 A	–	8WH9020-8AB00	8WH9020-8AB00
Fused connectors [1]	Black	6.3 A	12 ... 30 V, 1 ... 2.5 mA	8WH9040-3AB08	8WH9040-3AB08
			Without	8WH9040-3DB08	8WH9040-3DB08
Component connectors	Gray	6 A	–	8WH9040-0BB00	8WH9040-0BB00

[1] The G fuse holders must be selected according to the maximum power loss (heat dissipation) of the G fuse links. Depending on the application and method of installation, the heat rise conditions in closed fuse holders must be tested. Higher ambient temperatures represent an additional load for the fuse links. A shift in rated current should therefore be taken into account in such applications.

See general accessories, from page 14/45 onwards

© Siemens 2025

8WH2 spring-loaded terminals

Isolating blade terminals



	Terminal size		
	2.5 mm²		4 mm²
Terminal width	5.2 mm	5.2 mm	6.2 mm
Max. load current I_{max}	16 A	16 A [1]	16 A
Max. operational voltage U_{max}	400 V	400 V	400 V
AWG	28 ... 12	26 ... 14	28 ... 10
Connection capacity, rigid	0.08 ... 4 mm²	0.14 ... 4 mm²	0.08 ... 6 mm²
Connection capacity, flexible with end sleeve	0.08 ... 2.5 mm²	0.14 ... 2.5 mm²	0.08 ... 4 mm²
Standard	IEC 60947-7-1, cULus	IEC 60947-7-1, cULus	IEC 60947-7-1, cULus

Terminals	Color			
2	Gray	8WH2000-6CF00	–	8WH2000-6CG00
3	Gray	–	8WH2003-6CF00	–
4	Gray	–	8WH2004-6CF00	–

[1] On terminals with three and four clamping points, the total current through all connected conductors must not exceed the max. load current.

Specific accessories

Covers

Color	Width	Terminals	Article No.	Article No.	Article No.
Gray	2.2 mm	2	8WH9000-2GA00	8WH9000-2GA00	–
		3	8WH9000-4GA00	8WH9000-4GA00	–
		4	8WH9000-5GA00	8WH9000-5GA00	–

Compartment partitions

Color	Terminals	Article No.	Article No.	Article No.
Gray	2	8WH9070-0AA00	8WH9070-0AA00	8WH9070-0AA00
	3	8WH9070-0GA00	8WH9070-0GA00	–

Cover segments

Color	Terminals	Article No.	Article No.	Article No.
Gray	3/4	8WH9000-0GA00	8WH9000-0GA00	–

See general accessories, from page 14/45 onwards

© Siemens 2025

Fuse terminals

①

② 

	Terminal size 4 mm²		
Terminal width	6.2 mm	8.2 mm	8.2 mm
Max. load current I_{max}	6.3 A	10 A	30 A
Max. operational voltage U_{max}	250 V	400 V	400 V
Max. individual power loss as overload protection	1.6 W	–	–
Max. power loss as a group as overload protection	1.6 W	–	–
Max. individual power loss as short-circuit protection	4 W	–	–
Max. power loss as a group as short-circuit protection	2.5 W	–	–
AWG	28 ... 10	28 ... 10	28 ... 10
Connection capacity, rigid	0.08 ... 6 mm²	0.08 ... 6 mm²	0.08 ... 6 mm²
Connection capacity, flexible with end sleeve	0.08 ... 4 mm²	0.08 ... 4 mm²	0.08 ... 4 mm²
Standard	IEC 60947-7-3, cULus	IEC 60947-7-3, cULus	IEC 60947-7-3, cULus

Illuminated display	Color			
For 5 × 20 mm G fuse links				
① Without	Black	8WH2000-1GG08	–	–
② 15 ... 30 V	Black	8WH2000-1JG38	–	–
② 30 ... 60 V	Black	8WH2000-1JG68	–	–
② 110 ... 250 V	Black	8WH2000-1MG08	–	–
For 6.3 × 32 mm G fuse links				
① Without	Black	–	8WH2000-1HG08	–
② 100 ... 250 V	Black	–	8WH2000-1RG08	–
For blade-type fuses according to ISO/DIS 8820 and DIN 72581-3 [1]				
① Without	Black	–	–	8WH2000-1AG08
② 12 V	Black	–	–	8WH2000-1BG28
② 24 V	Black	–	–	8WH2000-1BG38

[1] Blade-type fuses must be ordered separately.

14

Specific accessories

Compartment partitions

Color	Terminals	Article No.	Article No.	Article No.
Gray	2	8WH9070-0AA00	8WH9070-0AA00	8WH9070-0AA00

See general accessories, from page 14/45 onwards

© Siemens 2025

8WH2 spring-loaded terminals

Diode terminals

①

②

	Terminal size 2.5 mm²
Terminal width	5.2 mm
Max. load current I_{max}	Determined by the diode
Uninterrupted limiting current	0.5 A
Max. operational voltage U_{max}	500 V
Blocking voltage	1300 V
AWG	28 ... 12
Connection capacity, rigid	0.08 ... 4 mm²
Connection capacity, flexible with end sleeve	0.08 ... 2.5 mm²
Diode	1N 4007, integrated
Standard	



Terminals	Color	Let-through	
3	Gray	① From left to right	8WH2003-5DF00
	Gray	② From right to left	8WH2003-5CF00

Specific accessories

Covers

Color	Width	Terminals	Article No.
Gray	2.2 mm	3	8WH9000-4GA00

Compartment partitions

Color	Terminals	Article No.
Gray	3	8WH9070-0GA00

Cover segments

- For covering multi-wire terminals when mounting two-wire terminals side-by-side

Color	Terminals	Article No.
Gray	3	8WH9000-0GA00

See general accessories, from page 14/45 onwards

© Siemens 2025

Two-tier diode terminals

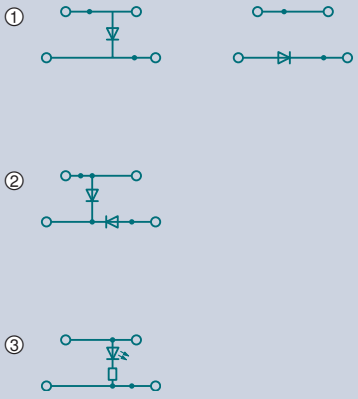

	Terminal size 2.5 mm²
Terminal width	5.2 mm
Max. load current I_{max}	26 A
Uninterrupted limiting current	0.5 A
Max. operational voltage U_{max}	500 V
Blocking voltage	1300 V
AWG	28 ... 12
Connection capacity, rigid	0.08 ... 4 mm²
Connection capacity, flexible with end sleeve	0.08 ... 2.5 mm²
Diode	1N 4007, integrated
Standard	



Types	Color	
❶ With one diode		
Let-through from top to bottom	Gray	8WH2020-5AF00
Let-through from bottom left to bottom right	Gray	8WH2020-5DF00
❷ With two diodes		
Let-through from top to bottom left and from bottom right to bottom left	Gray	8WH2020-5KF00
❸ With illuminated display		
15 ... 30 V DC/2.5 ... 7.5 A	Gray	8WH2020-5JF30

Specific accessories

Covers

Width	Color	Article No.
2.2 mm	Gray	8WH9000-1VA00

Compartment partitions

Color	Article No.
Gray	8WH9070-0BA00

See general accessories, from page 14/45 onwards

© Siemens 2025

8WH screw terminals

8WH1 through-type terminals

	Terminal size	
	2.5 mm²	4 mm²
Terminal width	5.2 mm	6.2 mm
Max. load current I_{max}	32 A	41 A
Max. operational voltage U_{max}	1000 V	1000 V
AWG	26 ... 12	26 ... 10
Connection capacity, one rigid conductor	0.14 ... 4 mm²	0.14 ... 6 mm²
Connection capacity, two rigid conductors	0.14 ... 1.5 mm²	0.14 ... 1.5 mm²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 2.5 mm²	0.14 ... 4 mm²
Connection capacity, two flexible conductors with end sleeve	0.14 ... 1.5 mm²	0.14 ... 1.5 mm²
Tightening torque	0.5 ... 0.6 Nm	0.6 ... 0.8 Nm
Standard	IEC 60947-7-1, IEC 60947-7-2, cULus, CE	IEC 60947-7-1, IEC 60947-7-2, cULus, CE






Terminals	Color		
❶ Through-type terminals			
2	Gray	8WH1000-0AF00	8WH1000-0AG00
	Blue	8WH1000-0AF01	8WH1000-0AG01
	Orange	8WH1000-0AF04	8WH1000-0AG04
	Red	8WH1000-0AF02	8WH1000-0AG02
	Black	8WH1000-0AF08	8WH1000-0AG08
	Green	8WH1000-0AF03	–
	Yellow	8WH1000-0AF06	–
❷ PE through-type terminals			
2	Green-yellow	8WH1000-0CF07	8WH1000-0CG07

Specific accessories

Covers

Width	Color	Article No.	Article No.
2.2 mm	Gray	8WH9000-1PA00	8WH9000-1PA00

Compartment partitions

Width	Color	Article No.	Article No.
2 mm	Gray	8WH9070-6BA00	8WH9070-6BA00

Reducing combs

Version	Color	Article No.	Article No.
From screw to screw	Turquoise	–	–
From screw to spring	Turquoise	–	–

Warning covers for 8WH1

Image	Color	Article No.	Article No.
Lightning symbol	Yellow	8WH9060-5BA06	8WH9063-5BA06

See general accessories, from page 14/45 onwards

© Siemens 2025

6 mm²	10 mm²	16 mm²	35 mm²	
8.2 mm	10.2 mm	12.2 mm	16 mm	16 mm
57 A	76 A	101 A	150 A	–
1000 V	1000 V	1000 V	1000 V	–
24 ... 8	20 ... 6	16 ... 4	16 ... 1/0	16 ... 2
0.2 ... 10 mm²	0.5 ... 16 mm²	1.5 ... 25 mm²	1.5 ... 50 mm²	1.5 ... 35 mm²
0.2 ... 2.5 mm²	0.5 ... 4 mm²	1 ... 6 mm²	1.5 ... 16 mm²	1.5 ... 16 mm²
0.25 ... 6 mm²	0.5 ... 10 mm²	1 ... 16 mm²	1.5 ... 35 mm²	1.5 ... 35 mm²
0.2 ... 2.5 mm²	0.5 ... 4 mm²	1 ... 6 mm²	1.5 ... 10 mm²	1.5 ... 10 mm²
1.5 ... 1.8 Nm	1.6 ... 1.8 Nm	2.5 ... 3.0 Nm	3.2 ... 3.7 Nm	3.2 ... 3.7 Nm
IEC 60947-7-1, IEC 60947-7-2, cULus, CE	IEC 60947-7-1, IEC 60947-7-2, cULus, CE	IEC 60947-7-1, IEC 60947-7-2, cULus, CE	IEC 60947-7-1, IEC 60947-7-2, cULus, CE	IEC 60947-7-1, IEC 60947-7-2, cULus, CE
				
8WH1000-0AH00	8WH1000-0AJ00	8WH1000-0AK00	8WH1000-0AM00	–
8WH1000-0AH01	8WH1000-0AJ01	8WH1000-0AK01	8WH1000-0AM01	–
–	–	–	–	–
8WH1000-0AH02	–	–	–	–
8WH1000-0AH08	–	–	–	–
–	–	–	–	–
–	–	–	–	–
8WH1000-0CH07	8WH1000-0CJ07	8WH1000-0CK07	–	8WH1000-0CM07
Article No.	**Article No.**	**Article No.**	**Article No.**	**Article No.**
8WH9000-1PA00	8WH9000-1PA00	8WH9076-1PA00	–	–
Article No.	**Article No.**	**Article No.**	**Article No.**	**Article No.**
8WH9070-6BA00	8WH9070-6BA00	–	–	–
Article No.	**Article No.**	**Article No.**	**Article No.**	**Article No.**
8WH9002-8AC10	–	8WH9002-8EC10	8WH9002-8GC10	8WH9002-8GC10
–	–	8WH9002-8FC10	8WH9002-8HC10	8WH9002-8HC10
Article No.	**Article No.**	**Article No.**	**Article No.**	**Article No.**
8WH9064-5BA06	8WH9065-5BA06	8WH9066-5BA06	8WH9067-5BA06	8WH9067-5BA06

© Siemens 2025

8WH screw terminals

8WH1 through-type terminals for high-current applications

①

②

	Terminal size				
	50 mm²	70 mm²	95 mm²	150 mm²	240 mm²
Terminal width	20 mm	20 mm	25 mm	31 mm	36 mm
Max. load current I_{max}	150 A	192 A	232 A	309 A	415 A
Max. operational voltage U_{max}	1000 V	1000 V	1000 V	1000 V	1000 V
AWG	6 ... 0	4 ... 000	4 ... 000	2 ... 300	00 ... 500
Connection capacity, rigid	16 ... 70 mm²	16 ... 95 mm²	25 ... 95 mm²	35 ... 150 mm²	70 ... 240 mm²
Connection capacity, flexible with end sleeve	25 ... 50 mm²	16 ... 70 mm²	35 ... 95 mm²	50 ... 150 mm²	70 ... 185 mm²
Tightening torque	6 ... 8 Nm	8 ... 10 Nm	15 ... 20 Nm	25 ... 30 Nm	25 ... 30 Nm
Standard	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, cULus	IEC 60947-7-1, cULus

Terminals	Color					
❶ Through-type terminals						
2	Gray	8WH1000-0AN00	8WH1000-0AP00	8WH1000-0AQ00	8WH1000-0AS00	8WH1000-0AU00
	Blue	8WH1000-0AN01	8WH1000-0AP01	8WH1000-0AQ01	8WH1000-0AS01	8WH1000-0AU01
❷ PE through-type terminals						
2	Green-yellow	8WH1000-0CN07	8WH1000-0CP07	8WH1000-0CQ07	–	–

Specific accessories

Tap-off terminal

- When wiring a tap-off with a smaller cross-section, observe the overload and short-circuit strength specified in VDE 0100 Part 430

I_{max}	Cross-section	Article No.	Article No.	Article No.	Article No.	Article No.
57 A	10 mm²	8WH9120-0AA00	–	8WH9120-0BA00	8WH9120-0CA00	8WH9120-0CA00

Insertion profiles

- Evens out the prismatic sleeve base when using flat conductors

		Article No.	Article No.	Article No.	Article No.	Article No.
		8WH9020-3MA00	–	8WH9020-3NA00	8WH9020-3PA00	8WH9020-3PA00

Combs

- Fully insulated, fitted in the clamping sleeve and latched with the terminal enclosure

I_{max}	Number of poles	Article No.	Article No.	Article No.	Article No.	Article No.
232 A	2-pole	–	–	8WH9020-3AA00	8WH9020-3CA00	–
	3-pole	–	–	8WH9020-3BA00	8WH9020-3DA00	–
320 A	2-pole	–	–	–	–	8WH9020-3EA00
	3-pole	–	–	–	–	8WH9020-3FA00

Permanent links

- For cross links
- Screw heads with insulating collar
- Remove partition first

I_{max}	Number of poles	Article No.	Article No.	Article No.	Article No.	Article No.
150 A	2-pole	8WH9020-6HC00	8WH9020-3AH00	–	–	–
	3-pole	8WH9020-6HD00	8WH9020-3AJ00	–	–	–

See general accessories, from page 14/45 onwards

© Siemens 2025

8WH1 two-tier terminals



	Terminal size	
	2.5 mm²	4 mm²
Terminal width	5.2 mm	6.2 mm
Max. load current I_{max}	28 A	36 A
Max. operational voltage U_{max}	500 V	800 V
AWG	26 ... 12	26 ... 10
Connection capacity, one rigid conductor	0.14 ... 4 mm²	0.14 ... 6 mm²
Connection capacity, two rigid conductors	0.14 ... 1.5 mm²	0.14 ... 1.5 mm²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 2.5 mm²	0.14 ... 4 mm²
Connection capacity, two flexible conductors with end sleeve	0.14 ... 1.5 mm²	0.14 ... 1.5 mm²
Tightening torque	0.5 ... 0.6 Nm	0.6 ... 0.8 Nm
Standard	cULus, CE	cULus, CE
		
		

Version	Color		
❶ Two-tier terminals			
Without equipotential bonding	Gray	8WH1020-0AF00	8WH1020-0AG00
	Blue	8WH1020-0AF01	8WH1020-0AG01
With equipotential bonding	Gray	8WH1025-0AF00	8WH1025-0AG00
❷ PE two-tier terminals			
	Green-yellow	8WH1020-0CF07	8WH1020-0CG07

Specific accessories

Covers

Width	Color	Article No.	Article No.
2.2 mm	Gray	8WH9000-1QA00	8WH9000-1QA00

Compartment partitions

Width	Color	Article No.	Article No.
2 mm	Gray	8WH9070-6FA00	8WH9070-6FA00

Spacer plates

- Compensates for tier offset if other terminals are mounted side by side

Width	Color	Article No.	Article No.
2.5 mm	Gray	8WH9160-0AA00	8WH9160-0AA00

See general accessories, from page 14/45 onwards

© Siemens 2025

8WH screw terminals

8WH1 isolating terminals

	Terminal size	
	4 mm²	6 mm²
Terminal width	6.2 mm	8.2 mm
Max. load current I_{max}	20 A	20 A
Max. operational voltage U_{max}	400 V	500 V
AWG	26 ... 10	24 ... 8
Connection capacity, one rigid conductor	0.14 ... 6 mm²	0.2 ... 10 mm²
Connection capacity, two rigid conductors	0.14 ... 1.5 mm²	0.2 ... 2.5 mm²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 6 mm²	0.2 ... 10 mm²
Connection capacity, two flexible conductors with end sleeve	0.14 ... 1.5 mm²	0.2 ... 2.5 mm²
Tightening torque	0.6 ... 0.8 Nm	1.5 ... 1.8 Nm
Standard	cULus, CSA	cULus
		
Terminals	**Color**		
2	Gray	8WH1000-6AG00	8WH1000-6AH00

© Siemens 2025

8WH1 isolating blade terminals

	Terminal size 4 mm²
Terminal width	6.2 mm
Max. load current I_{max}	20 A
Max. operational voltage U_{max}	500 V
AWG	26 ... 12
Connection capacity, one rigid conductor	0.14 ... 4 mm²
Connection capacity, two rigid conductors	0.14 ... 1.5 mm²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 4 mm²
Connection capacity, two flexible conductors with end sleeve	0.14 ... 1.5 mm²
Tightening torque	0.6 ... 0.8 Nm
Standard	



Terminals	Color	
2	Gray	8WH1000-6CG00

Specific accessories

Warning covers for 8WH1

Image	Color	Article No.
Lightning symbol	Yellow	8WH9063-5BA06

See general accessories, from page 14/45 onwards

© Siemens 2025

8WH screw terminals

8WH1 two-tier terminals with isolating function

①

②

	Terminal size 4 mm²	
Terminal width	6.2 mm	6.2 mm
Max. load current I_{max}	38 A	38 A
Max. operational voltage U_{max}	500 V	500 V
AWG	26 ... 10	26 ... 10
Connection capacity, one rigid conductor	0.14 ... 6 mm²	0.14 ... 6 mm²
Connection capacity, two rigid conductors	0.14 ... 1.5 mm²	0.14 ... 1.5 mm²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 6 mm²	0.14 ... 6 mm²
Connection capacity, two flexible conductors with end sleeve	0.14 ... 1.5 mm²	0.14 ... 1.5 mm²
Tightening torque	0.6 ... 0.8 Nm	0.6 ... 0.8 Nm
Standard	cULus, CE	cULus, CE
		

Version	Color		
❶ Isolating terminal			
Isolating terminal in the upper tier	Gray	8WH1020-6AG00	–
❷ Isolating blade			
Isolating blade in the upper tier	Gray	–	8WH1020-6AC00

© Siemens 2025

8WH1 measuring transformer isolating terminals



	Terminal size 6 mm²	
Terminal width	8.2 mm	8.2 mm
Rated uninterrupted current I_u	41 A	41 A
Rated insulation voltage U_i	500 V	800 V
AWG	24	8
Connection capacity, rigid	0.5 ... 10 mm²	0.5 ... 10 mm²
Connection capacity, flexible with end sleeve	0.5 ... 6 mm²	0.5 ... 6 mm²
Disconnect slide tightening torque	0.6 ... 0.8 Nm	–
Tightening torque	1.5 ... 1.6 Nm	1.5 ... 1.6 Nm
Standard	cULus, CE	cULus, CE
		

Terminals	Color		
❶ Isolating terminals			
2 recesses for screwing in the test sockets	Gray	8WH1000-7AH00	–
❷ Through-type terminals with identical contour			
2 recesses for screwing in the test sockets	Gray	–	8WH1000-7BH00

Specific accessories

Covers

Width	Color	Article No.	Article No.
2.2 mm	Gray	8WH9000-3UA00	8WH9000-3UA00

Disconnecting links

- For bridging two adjacent terminals
- Cannot be used with the bare 8WH9010-0MB12 test socket

Tightening torque	Number of poles	Color	Article No.	Article No.
0.6 ... 0.8 Nm	2-pole	Gray	8WH9021-0AC00	8WH9021-0AC00

Connecting combs, separable

- Consisting of connection wire, spacer sleeves and screws
- For bridging terminals, the connection wire is adjustable
- Cannot be used with the bare 8WH9010-0MB12 test socket

Tightening torque	Number of poles	Color	Article No.	Article No.
0.6 ... 0.8 Nm	10-pole	Gray	8WH9021-0AL00	8WH9021-0AL00

Short-circuiting plugs, fully insulated

- For short-circuiting adjacent terminals
- For simple transformer measurements
- Required when the bare 8WH9010-0MB12 test adapter is used in the measuring transformer terminal

I_{max}	Number of poles	Color	Article No.	Article No.
20 A	2-pole	Black	8WH9010-0BC08	8WH9010-0BC08

Test sockets, insulated

- For screwing into the measuring transformer terminals
- The 8WH9021-0AC00 disconnecting link shall be used for short-circuiting adjacent terminals

Tightening torque	Color	Article No.	Article No.
0.6 ... 0.8 Nm	Green	8WH9010-0MB03	8WH9010-0MB03
	Violet	8WH9010-0MB11	8WH9010-0MB11
	Yellow	8WH9010-0MB06	8WH9010-0MB06

Test sockets, bare

- For screwing into the measuring transformer terminals
- For simple transformer measurements
- For tapping with test plug
- The 8WH9010-0BC08 short-circuiting plug shall be used for short-circuiting adjacent terminals

Tightening torque	Article No.	Article No.
0.6 ... 0.8 Nm	8WH9010-0MB12	8WH9010-0MB12

See general accessories, from page 14/45 onwards

© Siemens 2025

8WH screw terminals

8WH1 fuse terminals

①

② 

	Terminal size	
	4 mm²	6 mm²
Terminal width	6.2 mm	8.2 mm
Max. load current I_{max}	6.3 A	10 A
Max. operational voltage U_{max}	500 V	630 V
AWG	26 ... 10	24 ... 8
Connection capacity, one rigid conductor	0.14 ... 6 mm²	0.2 ... 10 mm²
Connection capacity, two rigid conductors	0.14 ... 1.5 mm²	0.2 ... 2.5 mm²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 6 mm²	0.2 ... 10 mm²
Connection capacity, two flexible conductors with end sleeve	0.14 ... 1.5 mm²	0.2 ... 2.5 mm²
Tightening torque	0.6 ... 0.8 Nm	1.5 ... 1.8 Nm
Standard	IEC 60947-7-3, cULus, CE	IEC 60947-7-3, cULus, CE

LED	Color			
For 5 × 20 mm G fuse links				
① Without	●	Black	8WH1000-1GG08	–
② AC/DC with LED 10 ... 30 V	●	Black	8WH1000-1KG38	–
② AC/DC with LED 110 ... 250 V	●	Black	8WH1000-1MG88	–
For 6.3 × 32 mm G fuse links (inch fuses)				
① Without	●	Black	–	8WH1000-1HH08
② AC/DC with LED 12 ... 30 V	●	Black	–	8WH1000-1PH38

Specific accessories

Plug-in zone connectors

Version	Color	I_{max}	Illuminated display	Article No.	Article No.
Fused connectors [1]	● Black	6.3 A	12 ... 30 V, 1 ... 2.5 mA	8WH9040-3AB08	8WH9040-3AB08
			Without	8WH9040-3DB08	8WH9040-3DB08

Reducing combs

- For connecting terminals from terminal size 6 mm² to 2.5 mm² or 4 mm²

Version	Color	Article No.	Article No.
From screw to screw	● Turquoise	–	8WH9002-8AC10

[1] The G fuse holders must be selected according to the maximum power loss (heat dissipation) of the G fuse links. Depending on the application and method of installation, the heat rise conditions in closed fuse holders must be tested. Higher ambient temperatures represent an additional load for the fuse links. A shift in rated current should therefore be taken into account in such applications.

See general accessories, from page 14/45 onwards

© Siemens 2025

8WH1 two-tier terminals for soldering of components [1)]

	Terminal size 2.5 mm²
Terminal width	5.2 mm
Max. load current I_{max}	28 A
Max. operational voltage U_{max}	500 V
AWG	26 ... 10
Connection capacity, one rigid conductor	0.14 ... 4 mm²
Connection capacity, two rigid conductors	0.14 ... 1.5 mm²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 4 mm²
Connection capacity, two flexible conductors with end sleeve	0.14 ... 1.5 mm²
Tightening torque	0.5 ... 0.6 Nm
Standard	



Terminals	Color	
4	Gray	8WH1020-5LF00

[1)] Supplied without components; the appropriate components (resistors, diodes, capacitors, ...) are to be soldered in by user

Specific accessories

Covers

Width	Color	Article No.
2.2 mm	Gray	8WH9000-1QA00

Compartment partitions

Width	Color	Article No.
2 mm	Gray	8WH9070-6FA00

Spacer plates

- Compensates for tier offset if other terminals are mounted side by side

Width	Color	Article No.
2.5 mm	Gray	8WH9160-0AA00

See general accessories, from page 14/45 onwards

© Siemens 2025

8WH screw terminals

8WH1 diode terminals

①

②

	Terminal size 4 mm²
Terminal width	6.2 mm
Uninterrupted limiting current	0.5 A
Max. operational voltage U_{max}	800 V
Blocking voltage	1300 V
AWG	26 ... 10
Connection capacity, one rigid conductor	0.14 ... 6 mm²
Connection capacity, two rigid conductors	0.14 ... 1.5 mm²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 4 mm²
Connection capacity, two flexible conductors with end sleeve	0.14 ... 1.5 mm²
Tightening torque	0.6 ... 0.8 Nm
Diode	1N 4007, integrated
Standard	cULus, CE



Let-through	Color	
① From left to right	Gray	8WH1000-6LG00
② From right to left	Gray	8WH1000-6KG00

Specific accessories

Covers

Width	Color	Article No.
2.2 mm	Gray	8WH9000-2PA00

Warning covers

Image	Color	Article No.
Lightning symbol	Yellow	8WH9063-5CA06

See general accessories, from page 14/45 onwards

© Siemens 2025

8WH1 two-tier diode terminals

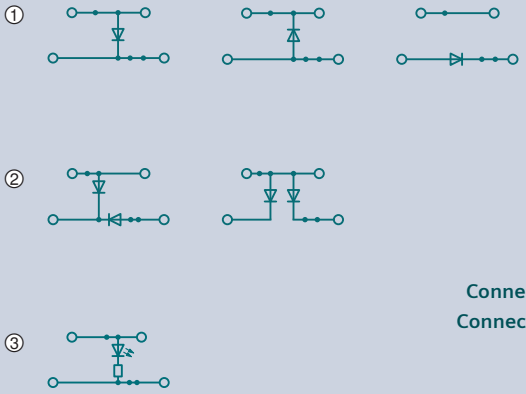

	Terminal size 2.5 mm²
Terminal width	5.2 mm
Max. load current I_{max}	28 A
Uninterrupted limiting current	0.5 A
Max. operational voltage U_{max}	500 V
AWG	26 ... 10
Connection capacity, one rigid conductor	0.14 ... 4 mm²
Connection capacity, two rigid conductors	0.14 ... 1.5 mm²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 2.5 mm²
Connection capacity, two flexible conductors with end sleeve	0.14 ... 1.5 mm²
Tightening torque	0.5 ... 0.6 Nm
Diode	1N 4007, integrated
Standard	cULus, CE



Types	LED	Color	
❶ With one diode			
Let-through from top to bottom		Gray	8WH1020-5AF00
Let-through from bottom to top		Gray	8WH1020-5BF00
Let-through from bottom left to bottom right		Gray	8WH1020-5DF00
❷ With two diodes			
Let-through from top to bottom left and from bottom right to bottom left		Gray	8WH1020-5FF00
Let-through from top to bottom left and from top to bottom right		Gray	8WH1020-5HF00
❸ With illuminated display			
Let-through from top to bottom	24 V DC	Gray	8WH1020-5JF30

Specific accessories

Covers

Width	Color	Article No.
2.2 mm	Gray	8WH9000-1QA00

Compartment partitions

Width	Color	Article No.
2 mm	Gray	8WH9070-6FA00

Spacer plates

- Compensates for tier offset if other terminals are mounted side by side

Width	Color	Article No.
2.5 mm	Gray	8WH9160-0AA00

See general accessories, from page 14/45 onwards

© Siemens 2025

8WH screw terminals

8WH9 shield terminals

	Terminal diameter			
	3 ... 8 mm	3 ... 14 mm	3 ... 20 mm	20 ... 35 mm
Tightening torque	0.6 Nm	0.8 Nm	0.8 Nm	1.5 ... 1.8 Nm
Sheet thickness, mounting plate	1 ... 2 mm	1 ... 2 mm	1 ... 2 mm	1 ... 2 mm
Version				
For direct shield attachment on conductive mounting plate				
For connecting cable shield and enclosure ground	8WH9130-0AA00	8WH9130-0BA00	8WH9130-0CA00	8WH9130-0DA00
For 10 × 3 mm busbars				
For connecting cable shield and enclosure ground	8WH9130-0LA00	8WH9130-0MA00	8WH9130-0NA00	8WH9130-0PA00

Specific accessories

N conductor support brackets

	Version	Article No.	Article No.	Article No.	Article No.
	Made of molded plastic and conductive connection with retaining screw	8WH9140-0DA00	8WH9140-0DA00	8WH9140-0DA00	8WH9140-0DA00
	For mounting rail with clearance of approx. 30 mm to the busbar	8WH9140-0BA00	8WH9140-0BA00	8WH9140-0BA00	–
	For mounting rail with clearance of approx. 65 mm to the busbar	8WH9140-0CA00	8WH9140-0CA00	8WH9140-0CA00	–

N busbars, 10 × 3 mm

	Version	Length	Article No.	Article No.	Article No.	Article No.
	Copper, tinned	1000 mm	8WH9030-2AB12	8WH9030-2AB12	8WH9030-2AB12	8WH9030-2AB12

See general accessories, from page 14/45 onwards

© Siemens 2025

Accessories for 8WH terminal blocks

Individual labeling system

Labeling systems for
- Terminal blocks
- Modular installation devices
- Circuit breakers
- Switch disconnectors

The inscription labels can be inscribed with Murrplastik labeling systems or by hand.

The WIN designation facilitates assignment in the inscription software.

Labeling systems available from:
Murrplastik Systemtechnik GmbH
Dieselstraße 10
D-71570 Oppenweiler
Telephone: +49 7191-482-0
email: info@murrplastik.de

Blank labels



- Horizontal and vertical labeling

Version	Terminal width	Designation	Color	Article No.
Front	3.5 mm	WIN 97	White	8WH8112-0AA05
	4.2 mm	WIN 97	White	8WH8112-1AA05
	5.2 and 6.2 mm	WIN 88	White	8WH8112-2AA05
	8.2, 10.2, 12.2 and 16 mm	WIN 40	White	8WH8112-4AA05
Flat	3.5 mm	WIN 97	White	8WH8113-0AA05
	4.2 mm	WIN 180	White	8WH8113-1AA05
	5.2 mm	WIN 182	White	8WH8113-1AA05
	6.2 mm	WIN 184	White	8WH8113-1AA05
	8.2 mm	WIN 186	White	8WH8113-1AA05
	10.2 mm	WIN 188	White	8WH8113-1AA05
	12.2 and 16 mm	WIN 46Z	White	8WH8113-6AA05

Snap-on device labels



- For identification of, e.g. circuit breakers, contactors and control systems

Version	Designation	Color	Article No.
20 × 7 mm, snap-on hooks at side	WIN 95	White	8WH8210-0AA55
20 × 7 mm, snap-on hooks at side	WIN 95	Turquoise	8WH8210-0AA56

Adhesive device labels

- For identification of, e.g. modular installation devices and switch disconnectors

Types	Designation	Color	Article No.
15 × 6 mm	WIN 098	White	8WH8210-0AA35
	WIN 099	Yellow	8WH8210-0AA36
19 × 8 mm	WIN 088	White	8WH8210-0AA45
	WIN 082	Yellow	8WH8210-0AA46

© Siemens 2025

Accessories for 8WH terminal blocks

Standard labeling system

			Terminal size	1.5 mm²	2.5 mm²
			Terminal width	4.2 mm/5.2 mm	5.2 mm/6.2 mm
Front					
	Text alignment	Inscription	Numbering	Article No.	Article No.
	Vertical	Consecutive numbering	1 ... 10 (10 ×)	8WH8120-1AB05	8WH8120-2AB05
			11 ... 20 (10 ×)	8WH8120-1AB15	8WH8120-2AB15
			21 ... 30 (10 ×)	8WH8120-1AB25	8WH8120-2AB25
			31 ... 40 (10 ×)	8WH8120-1AB35	8WH8120-2AB35
			41 ... 50 (10 ×)	8WH8120-1AB45	8WH8120-2AB45
			51 ... 60 (10 ×)	8WH8120-1AB55	8WH8120-2AB55
			61 ... 70 (10 ×)	8WH8120-1AB65	8WH8120-2AB65
			71 ... 80 (10 ×)	8WH8120-1AB75	8WH8120-2AB75
			81 ... 90 (10 ×)	8WH8120-1AB85	8WH8120-2AB85
			91 ... 100 (10 ×)	8WH8120-1AC05	8WH8120-2AC05
		L1, L2, L3, N, PE	–	–	8WH8120-2AA15
		Custom inscription	–	8WH8120-1XA05-Z Y01	8WH8120-2XA05-Z Y01
	Horizontal	Consecutive numbering	1 ... 10 (10 ×)	8WH8140-1AB05	8WH8140-2AB05
			11 ... 20 (10 ×)	8WH8140-1AB15	8WH8140-2AB15
			21 ... 30 (10 ×)	8WH8140-1AB25	8WH8140-2AB25
			31 ... 40 (10 ×)	8WH8140-1AB35	8WH8140-2AB35
			41 ... 50 (10 ×)	–	8WH8140-2AB45
			51 ... 60 (10 ×)	–	8WH8140-2AB55
			61 ... 70 (10 ×)	–	8WH8140-2AB65
			71 ... 80 (10 ×)	–	8WH8140-2AB75
			81 ... 90 (10 ×)	–	8WH8140-2AB85
			91 ... 100 (10 ×)	–	8WH8140-2AC05
		Custom inscription	–	8WH8140-1XA05-Z Y01	8WH8140-2XA05-Z Y01
	Blank	–	–	8WH8110-1AA05	8WH8110-2AA05
Flat					
	Text alignment	Inscription	Numbering	Article No.	Article No.
	Vertical	Consecutive numbering	1 ... 10 (10 ×)	8WH8121-1AB05	8WH8121-2AB05
			11 ... 20 (10 ×)	8WH8121-1AB15	8WH8121-2AB15
			21 ... 30 (10 ×)	8WH8121-1AB25	8WH8121-2AB25
			31 ... 40 (10 ×)	8WH8121-1AB35	8WH8121-2AB35
			41 ... 50 (10 ×)	8WH8121-1AB45	8WH8121-2AB45
			51 ... 60 (10 ×)	8WH8121-1AB55	8WH8121-2AB55
			61 ... 70 (10 ×)	–	8WH8121-2AB65
			71 ... 80 (10 ×)	–	8WH8121-2AB75
			81 ... 90 (10 ×)	–	8WH8121-2AB85
			91 ... 100 (10 ×)	–	8WH8121-2AC05
		Custom inscription	–	8WH8121-1XA05-Z Y01	8WH8121-2XA05-Z Y01
	Horizontal	Consecutive numbering	1 ... 10 (10 ×)	8WH8141-1AB05	8WH8141-2AB05
			11 ... 20 (10 ×)	8WH8141-1AB15	8WH8141-2AB15
			21 ... 30 (10 ×)	8WH8141-1AB25	8WH8141-2AB25
			31 ... 40 (10 ×)	8WH8141-1AB35	8WH8141-2AB35
			41 ... 50 (10 ×)	8WH8141-1AB45	8WH8141-2AB45
			51 ... 60 (10 ×)	–	8WH8141-2AB55
			61 ... 70 (10 ×)	–	8WH8141-2AB65
			71 ... 80 (10 ×)	–	8WH8141-2AB75
			81 ... 90 (10 ×)	–	8WH8141-2AB85
			91 ... 100 (10 ×)	–	8WH8141-2AC05
		Custom inscription	–	8WH8141-1XA05-Z Y01	8WH8141-2XA05-Z Y01
	Blank	–	–	8WH8111-1AA05	8WH8111-2AA05

© Siemens 2025

4 mm²	6 mm²	10 and 16 mm²	35 mm²
6.2 mm	8.2 mm	10.2 and 12.2 mm	16 mm
Article No.	Article No.	Article No.	Article No.
8WH8120-3AB05	8WH8120-4AB05	8WH8120-5AB05	–
8WH8120-3AB15	8WH8120-4AB15	8WH8120-5AB15	–
8WH8120-3AB25	8WH8120-4AB25	8WH8120-5AB25	–
8WH8120-3AB35	8WH8120-4AB35	8WH8120-5AB35	–
8WH8120-3AB45	8WH8120-4AB45	–	–
8WH8120-3AB55	8WH8120-4AB55	–	–
8WH8120-3AB65	8WH8120-4AB65	–	–
8WH8120-3AB75	8WH8120-4AB75	–	–
8WH8120-3AB85	–	–	–
8WH8120-3AC05	–	–	–
8WH8120-3AA15	8WH8120-4AA15	8WH8120-5AA15	8WH8120-7AA15
8WH8120-3XA05-Z Y01	8WH8120-4XA05-Z Y01	8WH8120-5XA05-Z Y01	8WH8120-7XA05-Z Y01
8WH8140-3AB05	8WH8140-4AB05	8WH8140-5AB05	–
8WH8140-3AB15	8WH8140-4AB15	8WH8140-5AB15	–
8WH8140-3AB25	8WH8140-4AB25	–	–
8WH8140-3AB35	–	–	–
8WH8140-3AB45	–	–	–
8WH8140-3AB55	–	–	–
8WH8140-3AB65	–	–	–
8WH8140-3AB75	–	–	–
8WH8140-3AB85	–	–	–
8WH8140-3AC05	–	–	–
8WH8140-3XA05-Z Y01	8WH8140-4XA05-Z Y01	8WH8140-5XA05-Z Y01	8WH8140-7XA05-Z Y01
8WH8110-3AA05	8WH8110-4AA05	8WH8110-5AA05	8WH8110-7AA05

Article No.	Article No.	Article No.	Article No.
8WH8121-3AB05	8WH8121-4AB05	8WH8121-5AB05	–
8WH8121-3AB15	8WH8121-4AB15	8WH8121-5AB15	–
8WH8121-3AB25	–	8WH8121-5AB25	–
8WH8121-3AB35	–	–	–
8WH8121-3AB45	–	–	–
8WH8121-3AB55	–	–	–
8WH8121-3AB65	–	–	–
8WH8121-3AB75	–	–	–
8WH8121-3AB85	–	–	–
8WH8121-3AC05	–	–	–
8WH8121-3XA05-Z Y01	8WH8121-4XA05-Z Y01	8WH8121-5XA05-Z Y01	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
8WH8141-3XA05-Z Y01	8WH8141-4XA05-Z Y01	8WH8141-5XA05-Z Y01	–
8WH8111-3AA05	8WH8111-4AA05	8WH8111-5AA05	8WH8111-7AA05

© Siemens 2025

Accessories for 8WH terminal blocks

Mounting accessories

Lateral mounting test plugs

- For individual assembly of test plug connectors

Terminal size	Terminal width	Color	Article No.
2.5 mm²	5.2 mm	Red	8WH9010-0EB02

Spacer plates

- For skipping single terminals for individual test plug assembly

Terminal size	Terminal width	Color	Article No.
2.5 mm²	5.2 mm	Red	8WH9010-2BA02

Bare infeed terminals, for N busbars

Size	Conductor cross-section	Rated uninterrupted current	Article No.
6 × 6 mm and 10 × 3 mm	Up to 4 mm²	32 A	8WA2867
	Up to 25 mm²	76 A	8WA2868
	Up to 35 mm²	125 A	8WA2870

Terminal strip markers, for end retainers

- Height-adjustable
- For quick-fit end retainers
- Can be provided with two front labels, for terminal width 10.2 mm and terminal strip markers

Labeling field size	Color	Article No.
20 × 8 mm	Gray	8WH9150-1CA00

Test adapters

- When plugged in, finger-safe against accidental direct contact according to EN 50274
- For 4 mm test plugs and terminal blocks with 4.2 mm ... 8.2 mm spacing

	Color	Article No.
	Gray	8WH9010-0JB00

Quick-fit end retainers



- Can be provided with front labels, for terminal width 5.2 mm and terminal strip markers

	Color	Article No.
	Gray	8WH9150-0CA00

End retainers, steel

- Suitable for 8WA1806 end label
- An 8WA1820 barrier must be inserted if using end retainers against an 8WA189 connection bar (size 2.5)

Mounting width	Article No.
10.3 mm	8WA1805

DIN rails



Version	Material	Norm	Length	Thickness	Article No.
Perforated	Steel, sendzimir-galvanized	EN 60715-35 × 7.5	2 m	1 mm	5ST1145
Non-perforated	Steel, sendzimir-galvanized	EN 60715-35 × 7.5	2 m	1 mm	5ST1141
	Copper	EN 60715-35 × 15	2 m	2.3 mm	8WA7551
	Steel, zinc-plated, chromated	Similar to EN 50022-35 × 15	2 m	1.5 mm	5ST1142

N busbars, 6 × 6 mm

Version	Length	Rated uninterrupted current	Article No.
For four-field	1109 mm	125 A	8GF9324-2

Insulation carriers

Use	Article No.
For mounting insulated mounting rails	8WA1857

Isolating links, 5 × 20 mm

Size	Article No.
5 × 20 mm	8WH9021-0CB12

© Siemens 2025

5 × 25 mm G fuse links

Types	Breaking capacity	Rated uninterrupted current	Article No.
Quick	Large	1 A	8WA1822-7EF16
		1.6 A	8WA1822-7EF18
		2.5 A	8WA1822-7EF21
		4 A	8WA1822-7EF23
		6.3 A	8WA1822-7EF25
Slow	Small	1 A	8WA1822-7EF76
		1.6 A	8WA1822-7EF78
		2.5 A	8WA1822-7EF81
		4 A	8WA1822-7EF83
		6.3 A	8WA1822-7EF85

Reducing combs

- For connecting two through-type terminals
- Cannot be used for 8WH1 through-type terminals

From terminal size	To terminal size	Color	Article No.
2.5 mm² or 4 mm²	1.5 mm²	Turquoise	8WH9020-0CC10
	6 mm²	Turquoise	8WH9020-0FC10
	10 mm²	Turquoise	8WH9020-0AC10
	16 mm²	Turquoise	8WH9020-0BC10
	35 mm²	Turquoise	8WH9020-0EC10
16 mm²	35 mm²	Turquoise	8WH9020-0DC10

Connecting combs

Terminal size	Terminal width	Max. load current I_{max}	Number of poles	Article No.
1.5 mm²	4.2 mm	17.5 A	2-pole	8WH9020-6AC10
			3-pole	8WH9020-6AD10
			4-pole	8WH9020-6AE10
			5-pole	8WH9020-6AF10
			10-pole	8WH9020-6AL10
			20-pole	8WH9020-6AS10
2.5 mm²	5.2 mm	24 A	2-pole	8WH9020-6BC10
			3-pole	8WH9020-6BD10
			4-pole	8WH9020-6BE10
			5-pole	8WH9020-6BF10
			10-pole	8WH9020-6BL10
			20-pole	8WH9020-6BS10
			50-pole	8WH9020-6BT10
4 mm²	6.2 mm	32 A	2-pole	8WH9020-6CC10
			3-pole	8WH9020-6CD10
			4-pole	8WH9020-6CE10
			5-pole	8WH9020-6CF10
			10-pole	8WH9020-6CL10
			20-pole	8WH9020-6CS10
			50-pole	8WH9020-6CT10
6 mm²	8.2 mm	41 A	2-pole	8WH9020-6DC10
			3-pole	8WH9020-6DD10
			4-pole	8WH9020-6DE10
			5-pole	8WH9020-6DF10
			10-pole	8WH9020-6DL10
10 mm²	10.2 mm	57 A	2-pole	8WH9020-6EC10
16 mm²	12.2 mm	76 A	2-pole	8WH9020-6FC10
35 mm²	16 mm	101 A	2-pole	8WH9020-6GC10

© Siemens 2025

Accessories for 8WH terminal blocks

Mounting accessories

Spacer brackets



Version	Article No.
For raised mounting of terminal strips	8WA753

Spacers



Version	Drill hole	Article No.
For raised mounting of terminal strips	5.5 mm	8WA752

Mounting brackets



Version	Article No.
For mounting rails	8WA746

Insulation carriers



Version	Article No.
For insulated mounting of mounting rails onto plates, frame profiles and DIN rails EN 50022-35	8WA1857

© Siemens 2025

© Siemens 2025

Reliable and efficient power supply in infrastructure and industrial applications

The electrical power distribution in buildings, infrastructure and industry is undergoing a transformation. A growing number of electrical loads, fluctuating load conditions and an increasing level of automation pose new challenges for switchboard manufacturers and electrical planners. Availability, safety and efficiency of the power distribution system are becoming more important. This is reflected in detailed standards and regulations and in requirements for company power management.

The planning and operation of electrical power distribution systems are becoming more complex, and the technical demands placed on the underlying systems and products are rising – in particular with respect to flexibility, communication capability and integrability. A data-based engineering process, hardware and software systems, an intelligent data management must all interact smoothly to provide optimum support to dynamic industrial and infrastructure processes.

The basis for a reliable and efficient power supply is provided by our portfolio of power distribution boards and distribution boards with innovative products and systems. A data-based engineering process with SIMARIS software tools, high availability of product-related data support the value chain of the switchgear manufacturer – from planning to documentation of the installation.

Note:
Products bearing our Siemens EcoTech label are identified by this clickable symbol in the catalog:

Siemens EcoTech

www.siemens.com/lowvoltage/SiemensEcoTech

© Siemens 2025

Switchboards, Distribution Boards and Small Distribution Boards

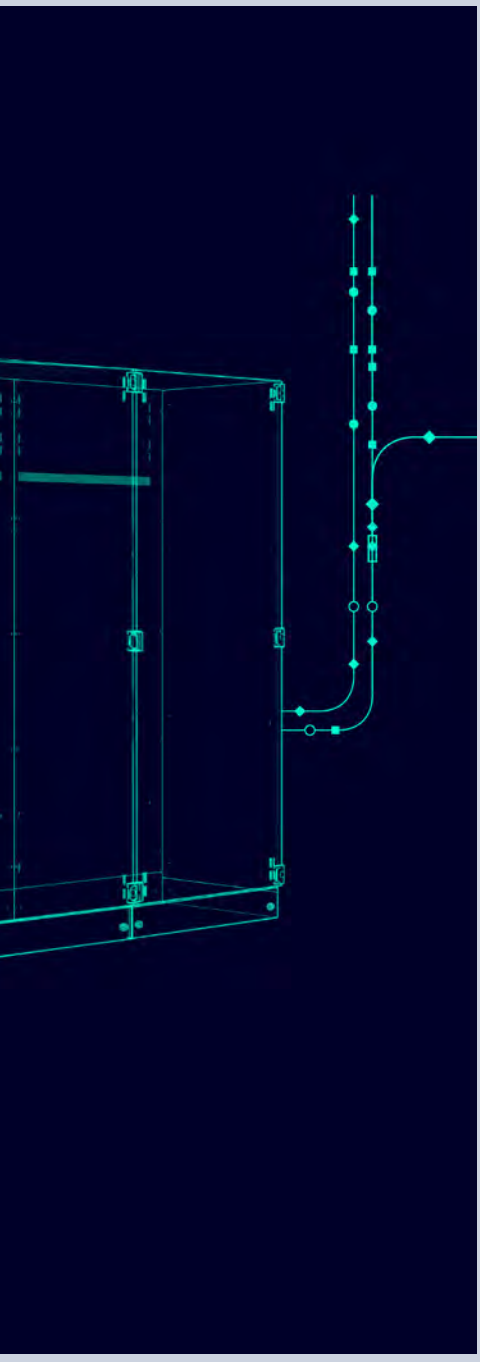

All the information you need 15/2
Quick selection guide 15/4
- Distribution systems 15/4
- System overview 15/10
- SIMARIS planning tools 15/14

SIVACON S8 power distribution boards and motor control centers 15/16
- System overview 15/16
- Design 15/18

ALPHA 3200 Eco switchboards (DIN technology) 15/20
- System overview 15/20
- Frame and enclosure 15/22
- Busbar systems 15/28
- Section expansion 15/30
- Internal partitions 15/66
- Accessories 15/68

SIVACON S4 switchboards (NF technology) 15/70
- System overview 15/70
- Frame and enclosure 15/72
- Busbar systems 15/92
- Section expansion 15/96
- Internal partitions 15/176
- Accessories 15/186

ALPHA UNIVERSAL distribution boards (NF technology) 15/188
- System overview 15/188
- Special colors for ALPHA 15/190
- ALPHA 800 UNIVERSAL floor-mounted distribution boards 15/192
- ALPHA 630 UNIVERSAL wall-mounted distribution boards 15/194
- ALPHA 630 UNIVERSAL floor-mounted distribution boards 15/196
- ALPHA 125 UNIVERSAL distribution boards 15/200
- Assembly kits 15/202
- Busbars 15/208
- Accessories 15/212

ALPHA distribution boards (DIN technology) 15/220
- System overview 15/220
- Special colors for ALPHA 15/222
- ALPHA 1250 floor-mounted distribution boards 15/224
- ALPHA 1250 marshaling boxes 15/226
- ALPHA 630 floor-mounted distribution boards 15/228
- ALPHA 630 marshaling boxes 15/230
- ALPHA 400 distribution boards 15/232
- ALPHA 160 distribution boards 15/236
- Assembly kits 15/238
- Quick-assembly kits 15/252
- Busbars 15/254
- Accessories 15/255

Small distribution boards 15/266
- System overview 15/266
- ALPHA SIMBOX XL small distribution boards 15/268
- ALPHA SIMBOX WP small distribution boards 15/271

© Siemens 2025

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about Switchboards, distribution boards and small distribution boards, please visit our websites
www.siemens.com/sivacon-S8
www.siemens.com/distributionsystems

Your product in detail

The SiePortal platform (knowledge base) provides comprehensive information
www.siemens.com/lowvoltage/product-support

- Brochure
  – SIVACON S8^{plus} – The plus for your business: Intelligent. Flexible. Safe. **(109747937)**

The relevant tender specifications can be found at
www.siemens.com/tenderspecifications

Use our conversion tool for quick and easy conversion to Siemens products **www.siemens.com/conversion-tool**

Siemens YouTube channel

- Power distribution – SIVACON (general)
  sie.ag/6wacV9
- Siemens SIVACON S4 power distribution boards up to 4000 A
  sie.ag/6v6kNm
- SIMARIS create **sie.ag/4JTAHi**

Everything you need for your order

Refer to SiePortal to find an overview of your products (product catalog)

- Switchboards **sie.ag/3Ier6zp**
- SIVACON S8 Power distribution boards and motor control centers **sie.ag/3EbN0kC**
- SIVACON S4 (NF) **sie.ag/2JUQwE4**
- Distribution boards **sie.ag/2kURLd8**
- Small distribution boards **sie.ag/3I4DUYm**
- Planning the power distribution system
  sie.ag/2m3oFbS

Direct forwarding to the individual products in SiePortal by clicking on the article number in the catalog or entering this web address incl. article number
www.siemens.com/product_catalog_SIEP?Article No.

Use the competence and experience of our experts at one of the production locations near you
www.siemens.com/sivaconS8-contact
or call
+49 (9131) 174-3072

Our certified SIVACON Technology Partners are also available to you for questions relating to the high quality of our low-voltage switchboards
www.siemens.com/sivacon-partnerfinder

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services.
You can find your local contacts at
www.siemens.com/lowvoltage/components/contact

You will find further information on services at
www.siemens.com/service-offers

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at
www.siemens.com/support-request

© Siemens 2025

... can be found in our online services

Commissioning + operation

SIMARIS configuration

The SIMARIS configuration software supports the engi-neer-ing process of the SIVACON and ALPHA distribution systems from planning right through to plant documenta-tion. The software provides 3D data for SIVACON S4 and ALPHA 3200 Eco as well as IFC data for SIVACON S8
www.siemens.com/simaris-configuration

SIMARIS create

SIMARIS create is an innovative configuration and ordering software for ALPHA DIN/NF distribution boards. With this cloud application, all documents are stored centrally and can be retrieved at any time
www.siemens.com/simaris-create

Manuals

Manuals can be found in SiePortal at
www.siemens.com/lowvoltage/manuals

- Planning Manual
  – SIVACON S8 – Technical planning information **(107113936)**
- Application Manual
  – SIVACON S4 power distribution boards up to 6300 A **(25909512)**

SIMARIS Suite

The SIMARIS planning tools (e.g. SIMARIS design, SIMARIS project, SIMARIS curves, etc.) are provided in the SIMARIS Suite and effectively support your planning process. Project-specific IFC data (Building Information Modeling) for cross-package planning is also possible.
www.siemens.com/simaris

Your product in detail

The SiePortal platform (knowledge base) provides detailed technical information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Characteristic curves
- Certificates

Online Support app available for download from the **App Store** and **Play Store**
You will find further information at
www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)

- SiePortal (product catalog)
  www.siemens.com/lowvoltage/product-catalog
- Image database
  www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAx Download Manager at
www.siemens.com/cax

Face-to-face or online training

Our training courses can be found at
www.siemens.com/sitrain-lowvoltage

- SIMARIS configuration (WT-LVASIMC)

Technical overview – Switchboards, distribution boards and small distribution boards

The fast way to get you to our online services

This page provides you with comprehensive information and links on switchboards, distribution boards and small distribution boards

www.siemens.com/lowvoltage/product-support (109769089)

© Siemens 2025

Distribution systems

Switchboards (NF technology)

SIVACON S4

Basic data			
Rated current		A	6300
Busbar position			Top, rear
Overvoltage category			III/IV
Rated impulse withstand voltage U_{imp}		kV	12
Rated insulation voltage U_i		V	1000
Rated operational voltage U_e		V AC	800
Rated peak withstand current I_{pk}		kA	220
Rated short-time current I_{cw} (1 s)		kA	100
Degree of protection according to IEC 60529/EN 60529			IP40 + IPX1/IP55
Form of internal partition			4b
Protection class			I
Color			RAL 7035 (light gray)
Dimensions			
Height		mm	2000 Base 100/200
Width		mm	400 ... 1200
Depth		mm	400 ... 1200
Standards and specifications			
DIN			EN 61439-1/-2
IEC			IEC 61439-1/-2
VDE			VDE 0660-600-1/-2
Operating personnel	Ordinary person		–
	Electrically skilled person		■
Approvals			VDE, EAC
Other			
Type of installation			Wall/back to back
Pre-assembled solutions	Without copper		■
	With copper		■
Further information			
			See page 15/70

© Siemens 2025

ALPHA UNIVERSAL distribution boards (NF technology)

ALPHA 800 UNIVERSAL	ALPHA 630 UNIVERSAL	ALPHA 125 UNIVERSAL
800	630	125
–	–	–
III	III	III
6	6	6
690	690	400
690	690	400
74	53	10
35	25	17
IP30/IP43/IP55	IP30/IP43/IP55	IP30/IP31D/IP43
1	1	1
I	I	I
RAL 7035 (light gray)	RAL 7035 (light gray)	RAL 7035 (light gray)
1800/2000	400/600/800/1000/1200/ 1600/1800/2000	400/600/800/1000/1200
300/600/900	600 + 250/900	600
400	250	140
EN 61439-1/-2	EN 61439-1/-2	EN 61439-1/-3
IEC 61439-1/-2	IEC 61439-1/-2	IEC 61439-1/-3
VDE 0660-600-1/-2	VDE 0660-600-1/-2	VDE 0660-600-1/-3
–	–	■
■	■	■
–	–	–
Wall	Wall	Wall
–	–	–
–	–	–
See page 15/192	See page 15/194	See page 15/200

© Siemens 2025

Distribution systems

			Power distribution boards and motor control centers	Switchboards (DIN technology)	
					
			SIVACON S8	**ALPHA 3200**	**ALPHA 3200 Eco**
Basic data					
Rated current		A	7010	3200	3200
Busbar position			Top, rear	Rear	Center (185 mm)
Overvoltage category			IV	III/IV	III/IV
Rated impulse withstand voltage U_{imp}		kV	12 [1]	8	8
Rated insulation voltage U_i		V	1000	1000	1000
Rated operational voltage U_e		V AC	690	690	400
Rated peak withstand current I_{pk}		kA	330	165	165
Rated short-time current I_{cw} (1 s)		kA	150	75	75
Degree of protection according to IEC 60529/EN 60529			IP30 ... IP54	IP40 + IPX1/ IP54	IP30 + IPX1/IP54
Form of internal partition			4b	2b	1
Protection class			I	I	I
Color			RAL 7035 (light gray)	RAL 7035 (light gray)	RAL 7035 (light gray)
Dimensions					
Height		mm	2000/2200 Base 100/200	2000 Base 100/200	2000 Base 100/200
Width		mm	200 ... 1400	350 ... 1400	350 ... 1100
Depth		mm	500 ... 1200	600	400/600
Standards and specifications					
DIN			EN 61439-2	EN 61439-1/-2	EN 61439-1/-2
IEC			IEC 61439-2	IEC 61439-1/-2	IEC 61439-1/-2
VDE			VDE 0660-600-2	VDE 0660-600-2	VDE 0660-600-2
Operating personnel	Ordinary person		–	–	–
	Electrically skilled person		■	■	■
Approvals			DNV GL, ASTA, EAC, CCC, DEKRA	–	–
Other					
Type of installation			Wall/back to back/ double-fronted	Wall/back to back	Wall/back to back
Pre-assembled solutions	Without copper		■	■	■
	With copper		■	■	■
Further information					
			See page 15/10	See page 15/12	See page 15/12

[1] Depending on the devices used

© Siemens 2025

ALPHA distribution boards (DIN technology)

Small distribution boards

ALPHA 1250	ALPHA 630	ALPHA 400	ALPHA 160	ALPHA SIMBOX XL	ALPHA SIMBOX WP
1250	630	400	160	63	63
–	–	–	–	–	–
III	III	III	II	II	II
8	6	6	6	–	–
690	690	690	690	–	1000
690	690	690	690	400	400
110	76	76	–	–	–
35	34	34	–	–	–
IP55	IP43/IP55	IP31/IP43/IP55	IP31/IP43/IP44	IP30	IP65
–	–	–	–	–	–
I	I/II	I/II	II	II	II
RAL 7035 (light gray)	RAL 7035 (light gray)	RAL 9016 (traffic white)/ RAL 7035 (light gray)	RAL 9016 (traffic white)/ RAL 7035 (light gray)	RAL 9010 (pure white)	RAL 7035 (light gray)
1950 Base 100	1950 Base 100	650/800/950/1100/ 1250/1400	500/650/800/950/1100	1- ... 4-tier	1- ... 4-tier
300/550/800/ 1050/1300	300/550/800/ 1050/1300	300/550/800/ 1050/1300	300/550	305	4 ... 18 MW
400	210/250/320	210	140	88/99	100/140/160
EN 61439-1/-2/-3	EN 61439-1/-2/-3	EN 61439-1/-2/-3	EN 61439-1/-3	DIN 43871	EN 61439-1/-3, DIN 43871
IEC 61439-1/-2/-3	IEC 61439-1/-2/-3	IEC 61439-1/-2/-3	IEC 61439-1/-3	IEC 61439-1/-3	IEC 61439-1/-3
VDE 0660-600-1/-2/-3	VDE 0660-600-1/-2/-3	VDE 0660-600-1/-2/-3	VDE 0660-600-1/-3	DIN VDE 0603	DIN VDE 0603-1, VDE 0660-500/-504
–	–	■	■	■	■
■	■	■	■	■	■
VDE, EAC	VDE, EAC	VDE, EAC	VDE, EAC	VDE, EAC	VDE, EAC
Surface mounting	Surface mounting	Surface mounting/ flush mounting	Surface mounting/ flush mounting	Flush mounting/ hollow wall/ surface mounting	Surface mounting
■	■	■	■	–	–
–	–	–	–	–	–
See page 15/224	See page 15/228	See page 15/232	See page 15/236	See page 15/268	See page 15/271

© Siemens 2025

Distribution systems

Applications

Power Center

Main distribution boards

Subdistribution boards

Loads

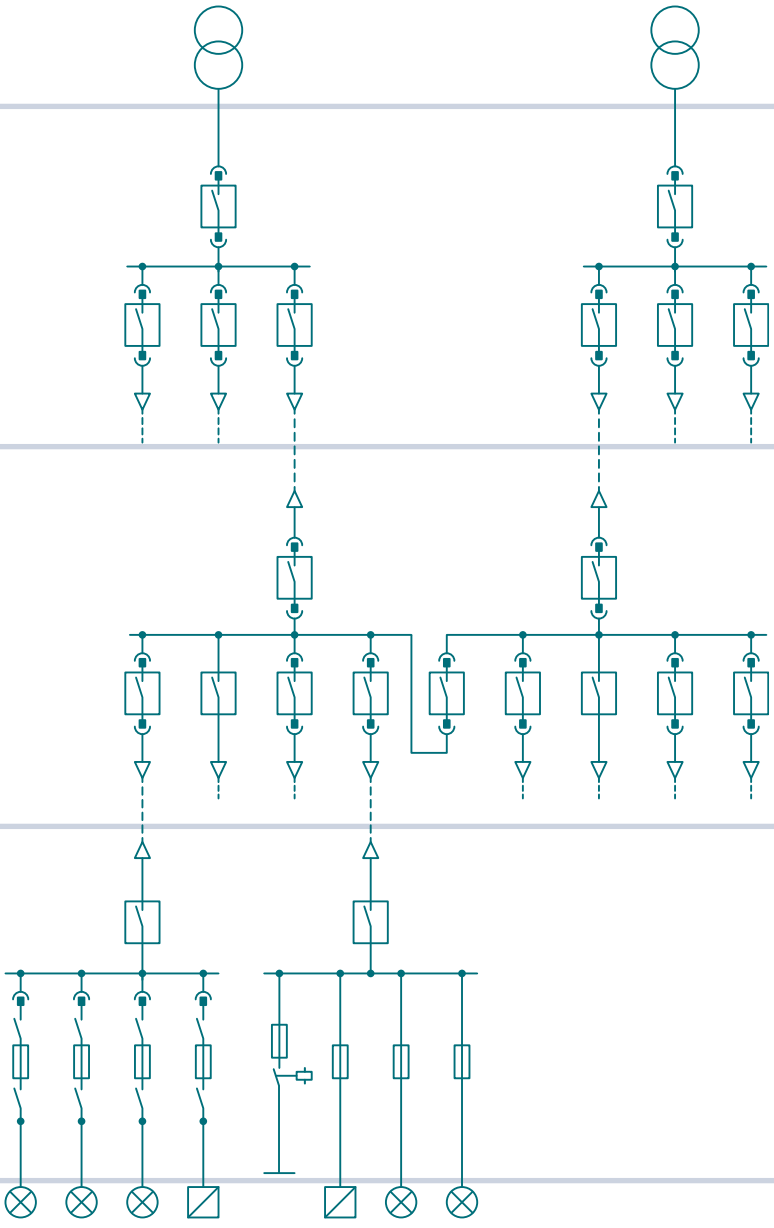

© Siemens 2025

SIVACON S8

SIVACON S8

SIVACON S4 (NF technology)

ALPHA 3200 (DIN technology)

ALPHA 3200 Eco (DIN technology)

ALPHA UNIVERSAL (NF technology)

ALPHA (DIN technology)

© Siemens 2025

System overview

SIVACON S8



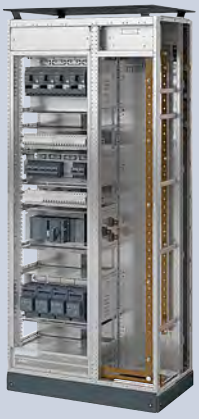

	Circuit breaker design	Fixed-mounted design	In-line design, plugged in
Devices	3WA and 3VA	3VA, 3RV, 3NP, 3K... and 5S...	3NJ6
Installation system	Fixed-mounted Withdrawable	Fixed-mounted with front covers	Plug-in
Functions	Infeed, Outgoing feeder, Coupling	Outgoing cable feeders	Outgoing cable feeders
Rated values	6300 A	630 A	630 A
Connection type	Front or rear	Front	Front

SIVACON S4



	Circuit breaker design	Molded case circuit breakers	Fixed-mounted
Devices	3WA	3VA15, 3VA25 – 3VA27	3WA, 3VA, 3NP1, Modular installation devices
Installation system	Fixed-mounted Withdrawable	Fixed-mounted Withdrawable	Fixed-mounted with front covers or modular doors
Functions	Infeed, Outgoing feeder, Coupling	Infeed Outgoing feeder	Infeed Outgoing cable feeders
Rated values	6300 A	1600 A	2000 A
Connection type	Front or rear	Front or rear	Front or rear

© Siemens 2025

In-line design (fixed-mounted)	Reactive power compensation	Active protection against internal arcing	Universal mounting design/ motor control center	Frequency converter technology
3NJ4	Capacitor units, controllers	Internal arcing protection system	3VA, 3RV, 3NP, 3K..., 3R..., 3UF, 3NJ6 and 3LD	SINAMICS G120 (6SL)
Fixed-mounted	Fixed-mounted	Fixed-mounted	Withdrawable Fixed-mounted with compartment doors Plug-in	Fixed-mounted (modules)
Outgoing cable feeders	Central compensation of reactive power	Active protection against internal arcing	Outgoing cable feeders Motor feeders (MCC)	Motor feeders (MCC)
630 A	Up to 500 kvar (with/without inductor)	Short-circuit-proof up to 100 kA at 690 V	630 A, 250 kW	132 kW
Front	Front	–	Front or rear	Front

In-line design (plugged in)	In-line design (fixed-mounted)	ALPHA DIN modular installation system	Mounting plates
3NJ63	3NJ4	8GK	Section for free configuration
Plug-in	Fixed-mounted	Fixed-mounted	Fixed-mounted
Outgoing cable feeders	Outgoing cable feeders	Final circuits	Control equipment
630 A	630 A	630 A	–
Front	Front	Front	Front

© Siemens 2025

System overview

ALPHA 3200



	Circuit breaker design	Fixed-mounted design	In-line design, plugged in
Devices	3WA and 3VA	3VA, 3RV, 3NP, 3K..	3NJ6
Installation system	Fixed-mounted Withdrawable	Fixed-mounted with front covers	Plug-in
Functions	Infeed Outgoing feeder Coupling	Outgoing cable feeders	Outgoing cable feeders
Rated values	3200 A	630 A	630 A
Connection type	Front or rear	Front	Front

ALPHA 3200 Eco



	ACB circuit breaker design	MCCB circuit breaker design	Transformer metering section
Devices	3WA, 3WL10	3VA14 – 3VA15 3VA24 – 3VA27	Current transformers
Installation system	Fixed-mounted Withdrawable	Fixed-mounted	DIN VDE 0603-2-2 DIN 42600-2
Functions	Infeed Outgoing feeder Coupling	Infeed Outgoing feeder	Utility company measurements
Rated values	3200 A	1600 A	3200 A
Connection type	Front	Front	Front

© Siemens 2025

In-line design (fixed-mounted)	Reactive power compensation
3NJ4	Capacitor units, controllers
Fixed-mounted	Fixed-mounted
Outgoing cable feeders	Central compensation of reactive power
630 A	Without inductor up to 600 kvar With inductor up to 500 kvar
Front	Front

In-line design (fixed-mounted)	ALPHA DIN modular installation system	Mounting plates
3NJ4	8GK	Section for free configuration
Fixed-mounted	Fixed-mounted	Fixed-mounted
Outgoing cable feeders	Branch circuits Utility company measurements	Control equipment
1250 A new	630 A	710 W
Front	Front	Front

© Siemens 2025

SIMARIS planning tools

For planning and visualizing the power distribution system

From planning to operation

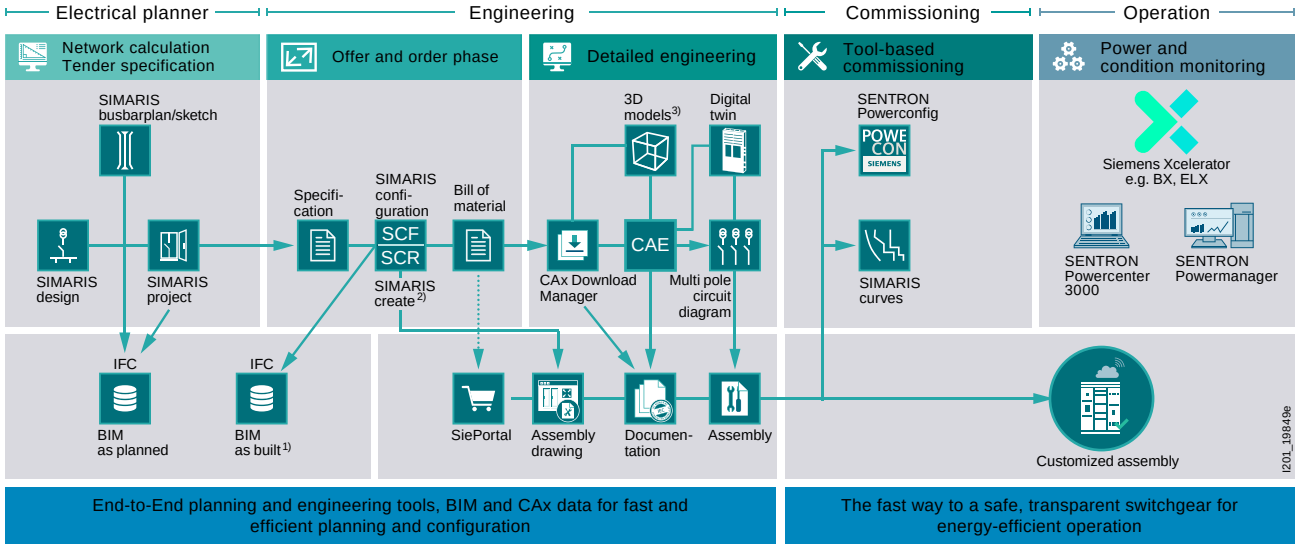

1) available for SIVACON S8
2) available for ALPHA DIN/NF
3) available for ALPHA 3200 Eco and SIVACON S4

SIMARIS design

SIMARIS design is a planning tool for quick, effective network calculations and dimensioning of electrical power distribution systems for non-residential and industrial buildings.

- Dimensioning of electrical networks on the basis of real products according to acknowledged rules of technology and the applicable standards (VDE, IEC)
- Automatic selection of the appropriate components from the integrated product database

SIMARIS design forms part of SIMARIS Suite.
Free download of the SIMARIS Suite and further information at:
www.siemens.com/simarisdesign

SIMARIS project

SIMARIS project is a planning tool for fast calculation of space requirements and electrical power distribution system budgets for non-residential and industrial buildings, and for generating specifications automatically.

- Import of projects created in SIMARIS design
- Export of 3D data in IFC 4.x format for BIM (Building Information Modeling)

SIMARIS project forms part of SIMARIS Suite.
Free download of the SIMARIS Suite and further information at:
www.siemens.com/simarisproject

© Siemens 2025

SIMARIS create

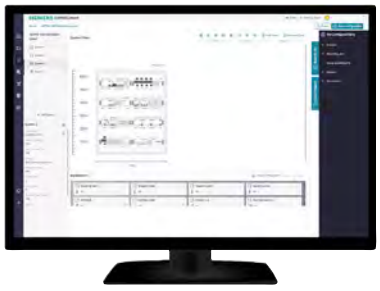

SIMARIS create is cloud-based configuration software with which the ALPHA DIN/NF distribution boards can be configured and ordered with just a few clicks.

- Simple selection of enclosures and products with filter functions
- Various ways of starting and performing a configuration – material list – system view – Circuit diagram
- Ordering via electrical wholesale trade and SiePortal
- Automatic, central storage of all relevant documents (technical data sheets, power loss reports, circuit diagram, ...)

For free use and more information, visit:
www.siemens.com/simaris-create

SIMARIS ecoguide

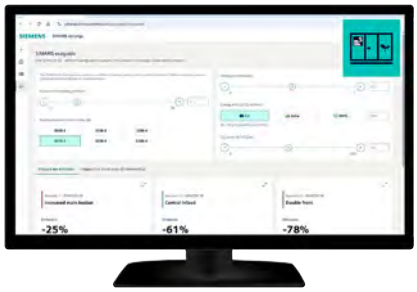

With the SIMARIS ecoguide, the SIVACON S8 Motor Control Center and power distribution boards can be configured more efficiently – with a focus on CO_2 savings and optimized life cycle costs.

- Calculation of potential CO_2 savings over the life cycle
- Optimization of the Total Cost of Ownership (TCO)
- Creation of individual sustainability scenarios
- Evaluation of efficient switchboard variants

SIMARIS ecoguide forms part of SIMARIS xchange.
For free use and more information, visit:
www.siemens.com/simarisecoguide

SIMARIS configuration

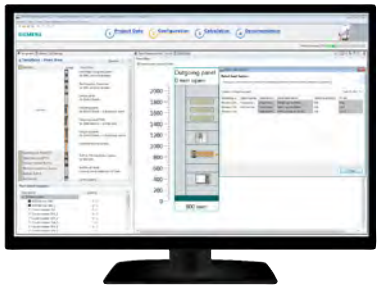

With the SIMARIS configuration software, the SIVACON S8 power distribution boards and motor control centers, the ALPHA 3200 Eco and SIVACON S4 switchboards as well as the ALPHA and ALPHA UNIVERSAL distribution boards can be quickly and reliably configured.

- Comprehensive documentation of the installation with design verification acc. to IEC 61439
- Configuration of the devices from the SENTRON portfolio with the exact article numbers and integrated price calculation feature

Free download and further information at:
www.siemens.com/simaris-configuration

SIMARIS curves

SIMARIS curves is a planning tool for visualizing and evaluating characteristic curves of Siemens low-voltage protection equipment and fuses (IEC) quickly and easily, including the possibility of simulating instrument settings.

- Available as a PC version, as a **web version** and also as an app (**Android**, **iOS**) for use on a tablet PC or a smartphone

SIMARIS curves forms part of SIMARIS Suite.
Free download of the SIMARIS Suite and further information at:
www.siemens.com/simariscurves

© Siemens 2025

System overview

SIVACON S8 power distribution boards and motor control centers

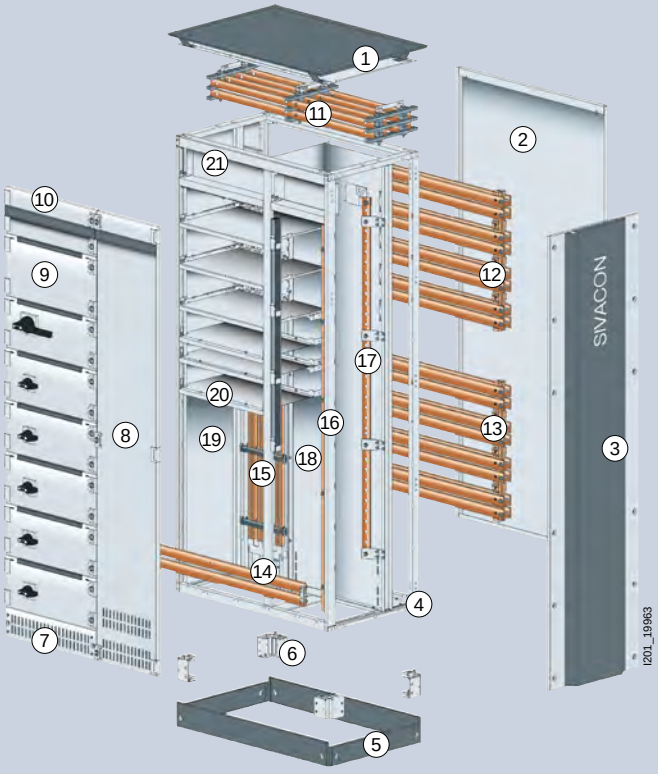

Enclosure

1. Roof plate
2. Rear wall
3. Design side wall
4. Frame
5. Base cover
6. Base
7. Base compartment cover, ventilated
8. Cubicle door, ventilated
9. Compartment door
10. Head compartment door

Busbars

11. Main busbar (L1 ... L3, N), top
12. Main busbar (L1 ... L3, N), rear, top
13. Main busbar (L1 ... L3, N), rear, bottom
14. Main busbar (PE), bottom
15. Distribution busbar (L1 ... L3, N) – device compartment
16. Distribution busbar (PE) – cable compartment
17. Distribution busbar (N) – cable compartment

Internal partitions

18. Device compartment/busbar compartment
19. Cubicle to cubicle
20. Compartment to compartment
21. Cross-wiring compartment

The SIVACON S8 low-voltage switchboard is a design-verified, low-voltage switchgear and controlgear assembly according to IEC 61439-1/2.

Furthermore, the verified testing under arcing conditions in compliance with the requirements of IEC/TR 61641 ensures the optimum safety of personnel. SIVACON S8 also integrates arc-fault protection systems in accordance with IEC/TS6107 and thus offers a high level of safety.

SIVACON S8 can be used as a type-tested power distribution board and motor control center up to 7000 A.

The optional, likewise design-verified, efficient and redundantly-designed ventilation system additionally contributes to ensuring safe and reliable operation.

Thanks to the complete building information modeling data (BIM) of SIVACON S8, the entire lifecycle of the switchboard in an infrastructure is supported from the planning stage to operation and service.

Highlights

- Design verification in accordance with IEC 61439-2 and testing in the event of arcing due to an internal fault in accordance with IEC/TR 61641
- Extended protection against internal arcing with active protection system
- Redundantly designed, efficient ventilation system
- Universal design-verified connection to SIVACON 8PS busbar trunking systems
- Innovative, modular system
- Space-optimized use with compact withdrawable design
- Optimum application thanks to high-performance SIMOCODE pro and SIMOCODE M-CP motor management system

© Siemens 2025

Design

Mounting designs

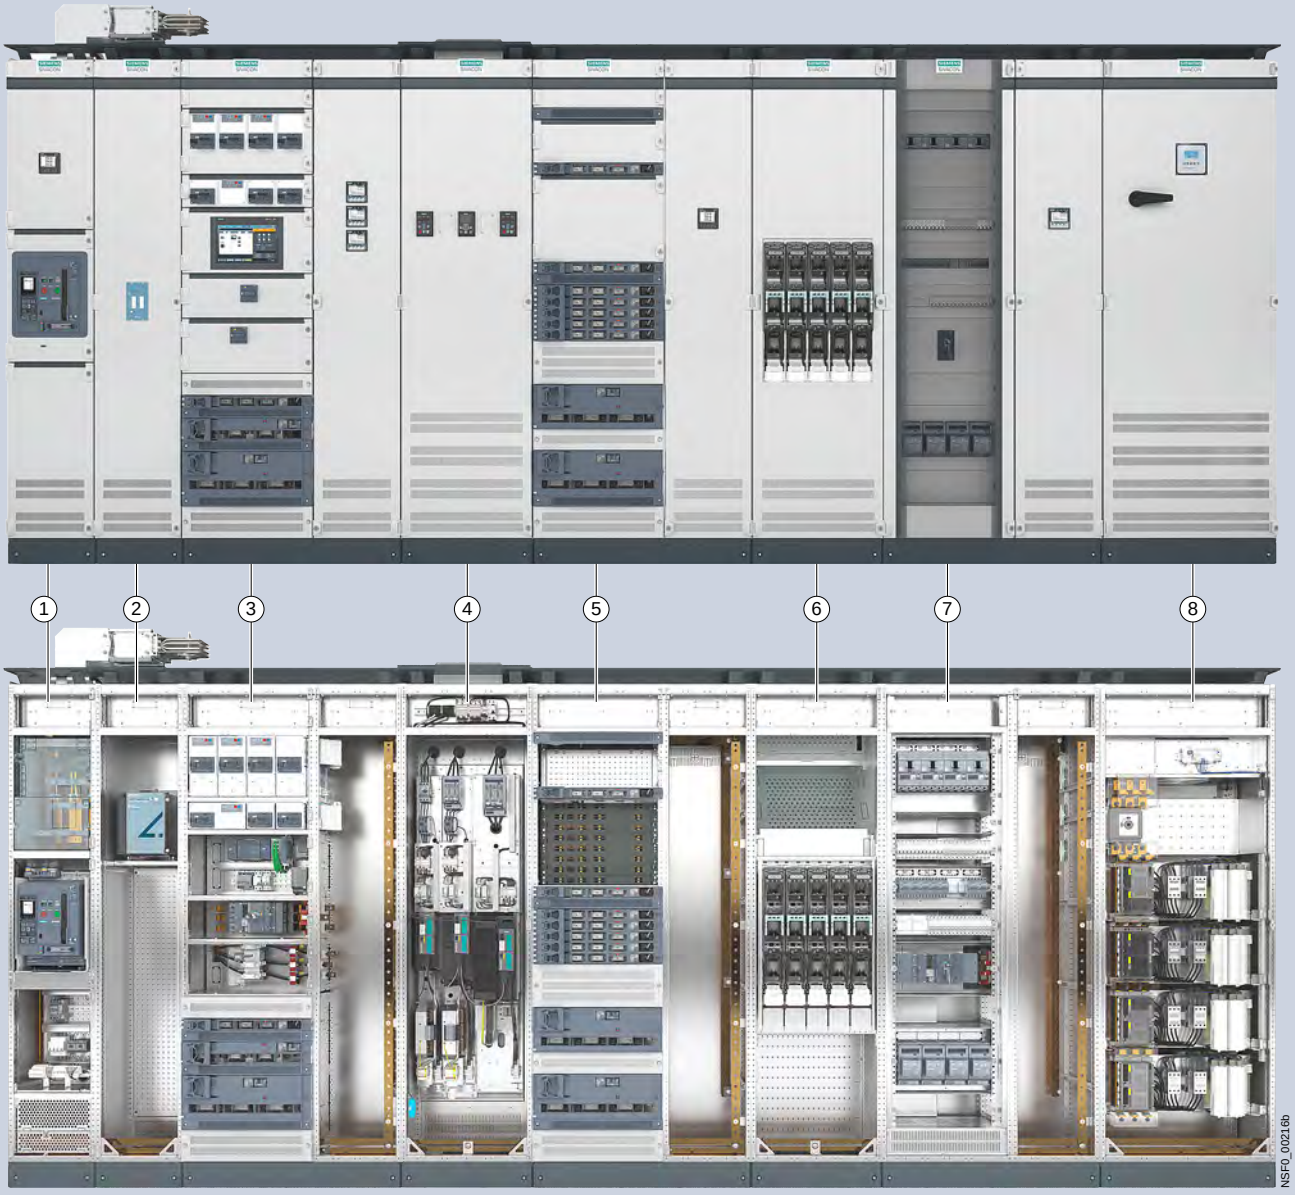

1. Circuit breaker design with 3WA air circuit breaker up to 6300A or 3VA molded case circuit breaker up to 1000A
2. Protection against internal arcing, the extended active protection against internal arcing
3. Universal mounting design section for motor and cable feeders up to 630 A in withdrawable design with combination options with fixed-mounted design (modular door) and plug-in design
4. Frequency converter cubicle up to 132 kW
5. In-line design, plugged-in, for outgoing cables up to 630 A
6. In-line design, fixed-mounted in vertical version for cable feeders up to 630 A
7. In-line design section, in vertical version for cable feeders up to 630 A
8. Reactive power compensation section up to 500 kvar

SIVACON S8 low-voltage switchboard with standardized and typified components

15

System overview, page 15/16

© Siemens 2025

Design

Universal mounting design and withdrawable design

Universal mounting design

In many applications it is necessary for space reasons to integrate various mounting designs in one and the same section. The universal mounting design from SIVACON S8 offers high efficiency, safety and high variability through the combination of

- withdrawable,
- fixed-mounted with compartment doors and
- plug-in version.

Withdrawable

The flexible withdrawable unit design is suitable for different applications, e.g. as a motor control center. The following features are offered to improve personnel and machine safety:

- Uniform operation for all withdrawable unit sizes
- Integrated operating error protection for all withdrawable units
- Unambiguous indication of withdrawable unit positions
- Separate actuation for main control switch and withdrawable unit position
- Test and disconnected position with door closed, without cancelation of degree of protection
- Withdrawable unit coding prevents swapping of withdrawable units of same size
- Lockable disconnected position
- Swiveling instrument panel on standard withdrawable units for making settings during operation
- Small withdrawable units for motor and cable feeders up to 63 A

Withdrawable unit versions

Small withdrawable units:

- Size 1/4 and 1/2
- up to 48 withdrawable units per section

Flexible withdrawable design with standard and small withdrawable units for high packing densities

Standard withdrawable units:

- Height 100 to 700 mm
- up to 18 withdrawable units per section

Standard withdrawable unit

Withdrawable unit coding and initialization modules

The mechanical withdrawable unit coding prevents swapping of withdrawable units of the same size. Alternatively, motor starters can be fitted with SIMOCODE pro initialization modules that considerably simplify commissioning and replacement.

Withdrawable unit coding in the compartment



Withdrawable unit coding on the unit

SIMOCODE per initialization module

15

System overview, page 15/16

© Siemens 2025

Space-optimized withdrawable design with motor management system
Rogowski coils for current monitoring, which are integrated into the contact system of standard withdrawable units, in combination with the SIMOCODE M-CP motor management system, enable a more compact design of the withdrawable units by eliminating the classic current/voltage measuring module.

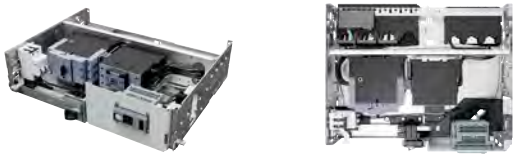

Standard withdrawable unit with SIMOCODE M-CP and Rogowski coil module

SIMARIS control

When visualized with SIMARIS control, all communication-capable switching devices can be operated and monitored uniformly by means of the SIVACON S8 low-voltage switchboard.

In addition, the data can be integrated into higher-level automation or energy management systems. Cloud-based analysis systems such as Insights Hub open up new opportunities of enhanced switchboard availability and high transparency of power flows. As a digital twin of the switchboard, SIMARIS control provides an ideal solution for local or remote visualization and control of the installed communication-capable switching devices.

SIMARIS control integrates various bus systems. A standardized data model for motor control centers enables uniform visualization of the data, Which means that all the information delivered by the communication-capable switching, protection and measuring devices used in SIVACON S8 is displayed in SIMARIS control clearly and in a structured, needs-oriented format.

Highlights
- An integrated system with easier and faster identification of events thanks to in-app alerts and email notifications
- Greater flexibility in on-site operation with local control and monitoring functions
- Increased system availability thanks to the Health Index function for accurate system health monitoring
- Easy maintenance with digital documentation and maintenance logbook
- Saves costs and space that would otherwise be required for various monitoring devices in the switchboard by displaying power flows and electrical measured values
- Easy integration with a cloud-based system
- Parallel independent operation with a higher-level control system (DC/E-SCADA)

SIMARIS control is part of the curated and modular Siemens Xcelerator portfolio.

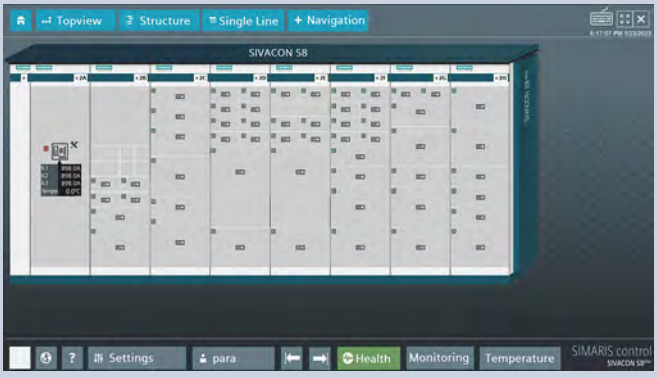

System overview, page 15/16

© Siemens 2025

System overview

ALPHA 3200 Eco switchboards

Frame and enclosure

Accessories

Double-bit key

Standardized parts

Tools

Transport aids

Busbar systems

185 mm distance centers



PE bars

N and PE elevations

Central grounding point

Section expansion

3WA, 3WL10 ACB circuit breaker design

3WA, 3WL10 coupling panels

Transformer metering section

3VA MCCB circuit breaker design

3NJ4 in-line design (fixed-mounted)

ALPHA DIN 8GK modular installation system

Mounting plates

Corner sections new

© Siemens 2025

ALPHA assembly kits

Modular installation devices

Terminal blocks

3NJ4
fuse switch disconnectors

3KD, 3KF
switch disconnectors

3VA
molded case circuit breakers

8US
busbar-adaptable units

3NP1
fuse switch disconnectors

Meter support plate

Transformer measurement

Mounting plates

ALPHA accessories

Front covers
closed

transparent

deep-drawn

Door connection module

See ALPHA 8GK assembly kits from page 15/238

© Siemens 2025

Frame and enclosure

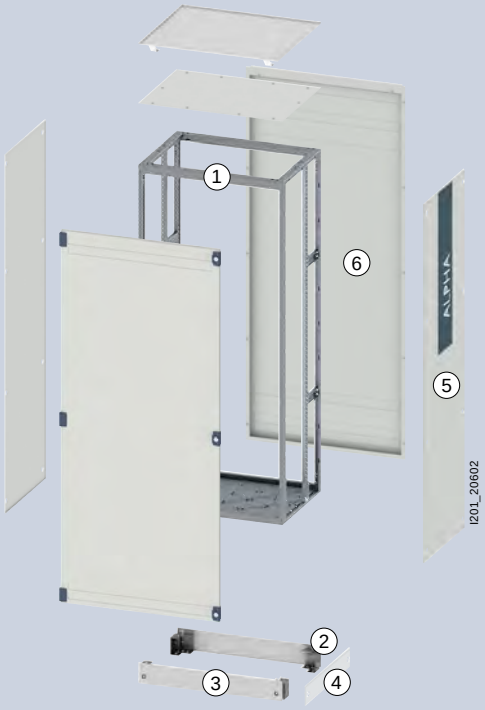

		❶ Frame	❷ Base corner pieces new		❸ Base cover	
			Height		Height	
Depth	Width		100 mm	200 mm	100 mm	200 mm
400 mm	350 mm	8LK1200-4AA03	8LK1010-0AA06	8LK1020-0AA16	8LK1014-0AA02	8LK1024-0AA04
	400 mm	8LK1204-4AA01	8LK1010-0AA06	8LK1020-0AA16	8LK1014-0AA03	8LK1024-0AA05
	600 mm	8LK1206-4AA01	8LK1010-0AA06	8LK1020-0AA16	8LK1016-0AA02	8LK1026-0AA04
	800 mm	8LK1208-4AA01	8LK1010-0AA06	8LK1020-0AA16	8LK1018-0AA06	8LK1028-0AA07
	850 mm	8LK1200-4AA04	8LK1010-0AA06	8LK1020-0AA16	8LK1018-0AA04	8LK1028-0AA05
	1100 mm	8LK1200-4AA05	8LK1010-0AA06	8LK1020-0AA16	8LK1011-0AA05	8LK1021-0AA06
600 mm	350 mm	8LK1200-6AA05	8LK1010-0AA06	8LK1020-0AA16	8LK1014-0AA02	8LK1024-0AA04
	400 mm	8LK1204-6AA01	8LK1010-0AA06	8LK1020-0AA16	8LK1014-0AA03	8LK1024-0AA05
	600 mm	8LK1206-6AA01	8LK1010-0AA06	8LK1020-0AA16	8LK1016-0AA02	8LK1026-0AA04
	800 mm	8LK1208-6AA01	8LK1010-0AA06	8LK1020-0AA16	8LK1018-0AA06	8LK1028-0AA07
	850 mm	8LK1208-6AA02	8LK1010-0AA06	8LK1020-0AA16	8LK1018-0AA04	8LK1028-0AA05
	1100 mm	8LK1200-6AA06	8LK1010-0AA06	8LK1020-0AA16	8LK1011-0AA05	8LK1021-0AA06

Accessories

Self-tapping screws – frame



T30

T30

Type	Version	Scope of supply	Article No.
Cylinder-head screws	M6 × 10 mm	100 pieces	8PQ9500-0BA34
DIN 7500-PE, ST, Zinc-plated	M6 × 16 mm	100 pieces	8PQ9500-0BA32
	M6 × 20 mm	100 pieces	8PQ9500-0BA31
Countersunk screws	M6 × 12 mm	100 pieces	8PQ9500-1BA07
DIN 7500-QE, ST, Zinc-plated			

15

System overview, page 15/20

© Siemens 2025



❹ Base cover lateral		❺ Side panels		❻ Rear panels	
Height		IP30	IP54	IP30	IP54
100 mm	200 mm				
8LK1010-4AA01	8LK1020-4AA01	8LK2520-4AA13	8LK2520-4AA12	8LK2420-0AA26	8LK2420-0AA21
8LK1010-4AA01	8LK1020-4AA01	8LK2520-4AA13	8LK2520-4AA12	8LK2420-4AA10	8LK2420-4AA08
8LK1010-4AA01	8LK1020-4AA01	8LK2520-4AA13	8LK2520-4AA12	8LK2420-6AA10	8LK2420-6AA08
8LK1010-4AA01	8LK1020-4AA01	8LK2520-4AA13	8LK2520-4AA12	8LK2420-8AA10	8LK2420-8AA08
8LK1010-4AA01	8LK1020-4AA01	8LK2520-4AA13	8LK2520-4AA12	8LK2420-0AA28	8LK2420-0AA24
8LK1010-4AA01	8LK1020-4AA01	8LK2520-4AA13	8LK2520-4AA12	8LK2420-0AA30	8LK2420-0AA25
8LK1010-0AA05	8LK1020-0AA14	8LK2520-6AA20	8LK2520-6AA18	8LK2420-0AA26	8LK2420-0AA21
8LK1010-0AA05	8LK1020-0AA14	8LK2520-6AA20	8LK2520-6AA18	8LK2420-4AA10	8LK2420-4AA08
8LK1010-0AA05	8LK1020-0AA14	8LK2520-6AA20	8LK2520-6AA18	8LK2420-6AA10	8LK2420-6AA08
8LK1010-0AA05	8LK1020-0AA14	8LK2520-6AA20	8LK2520-6AA18	8LK2420-8AA10	8LK2420-8AA08
8LK1010-0AA05	8LK1020-0AA14	8LK2520-6AA20	8LK2520-6AA18	8LK2420-0AA28	8LK2420-0AA24
8LK1010-0AA05	8LK1020-0AA14	8LK2520-6AA20	8LK2520-6AA18	8LK2420-0AA30	8LK2420-0AA25

Accessories

Cross-wiring

Version	Scope of supply	Article No.
Mounting bracket for cable ducts	1 set = 2 units	8LK3011-6AA30

Seals IP54

Version	Width	Height	Scope of supply	Article No.
Base corner pieces	30 mm	0.05 mm	1 roll = 228 m	8LK1000-0AA78
Frame sealing corners			1 set = 8 units	8LK1000-0AA25

15

System overview, page 15/20

© Siemens 2025

Frame and enclosure

Floor plates and roof plates

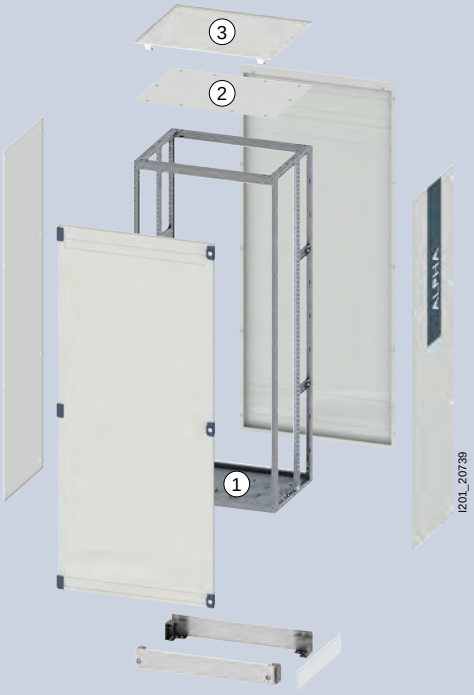

For module inserts



Depth	Width	❶ Floor plate IP30	❶ Floor plate IP54	❷ Roof plate IP30	❷ Roof plate IP54	Number of module inserts
400 mm	350 mm	8LK2300-4AA48	8LK2300-4AA45	8LK2300-4AA62	8LK2300-4AA58	2
	400 mm	8LK2300-4AA53	8LK2300-4AA52	8LK2300-4AA66	8LK2300-4AA65	2
	600 mm	8LK2300-4AA55	8LK2300-4AA54	8LK2300-4AA68	8LK2300-4AA67	4
	800 mm	8LK2300-4AA57	8LK2300-4AA56	8LK2300-4AA71	8LK2300-4AA70	4
	850 mm	8LK2300-4AA50	8LK2300-4AA46	8LK2300-4AA63	8LK2300-4AA60	6
	1100 mm	8LK2300-4AA51	8LK2300-4AA47	8LK2300-4AA64	8LK2300-4AA61	8
600 mm	350 mm	8LK2300-6AB01	8LK2300-6AA87	8LK2300-6AB14	8LK2300-6AB11	3
	400 mm	8LK2300-6AB05	8LK2300-6AB04	8LK2300-6AB18	8LK2300-6AB17	3
	600 mm	8LK2300-6AB07	8LK2300-6AB06	8LK2300-6AB21	8LK2300-6AB20	6
	800 mm	8LK2300-6AB10	8LK2300-6AB08	8LK2300-6AB23	8LK2300-6AB22	6
	850 mm	8LK2300-6AB02	8LK2300-6AA88	8LK2300-6AB15	8LK2300-6AB12	9
	1100 mm	8LK2300-6AB03	8LK2300-6AB00	8LK2300-6AB16	8LK2300-6AB13	12

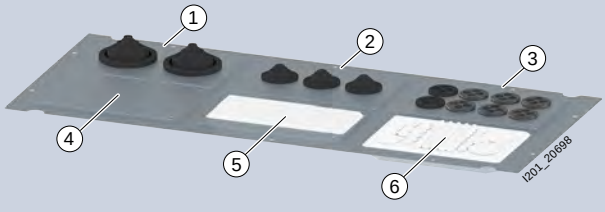

	Insert IP30	Insert IP54	Cable entry	Cable diameter
1	8LK2300-0AA48	8LK2300-0AA45	8HC6900	1 x 14 - 65 mm
2	8LK2300-0AA47	8LK2300-0AA44	8LK9400-4AA40	1 x 14 - 38 mm
3	8LK2300-0AA50	8LK2300-0AA46	8HP1805 8HP1806 8HP1807 8HP1808	1 x 12 - 29 mm 2 x 6 - 15 mm 3 x 4 - 12,5 mm 4 x 4 - 12 mm
4	8LK2300-0AA42	8LK2300-0AA40	–	–
5	8LK2300-0AA43	8LK2300-0AA41	8GK9100-0KK01	44 x 9 mm 22 x 12 mm
6	–	–	8GK9101-0KK00	58 x 5 - 10 mm 2 x 16 - 35 mm 8 x 11 - 16 mm 2 x 15 - 45 mm

System overview, page 15/20

© Siemens 2025

Closed

Depth	Width	❶ Floor plate IP30	❶ Floor plate IP54	❷ Roof plate IP30	❷ Roof plate IP54	❸ Roof add-on-plate IPX1
400 mm	350 mm	8LK2300-4AA32	8LK2300-4AA07	8LK2300-4AA38	8LK2300-4AA11	8LK2304-4AA66
	400 mm	8LK2304-4AA68	8LK2304-4AA56	8LK2304-4AA72	8LK2304-4AA57	8LK2304-4AA67
	600 mm	8LK2306-4AB13	8LK2306-4AB83	8LK2306-4AB16	8LK2306-4AA86	8LK2306-4AB04
	800 mm	8LK2308-4AB25	8LK2308-4AB05	8LK2308-4AB28	8LK2308-4AB06	8LK2308-4AB15
	850 mm	8LK2300-4AA33	8LK2300-4AA08	8LK2300-4AA40	8LK2300-4AA12	8LK2300-4AA31
	1100 mm	8LK2300-4AA34	8LK2300-4AA10	8LK2300-4AA41	8LK2300-4AA13	8LK2301-4AB03
600 mm	350 mm	8LK2300-6AA62	8LK2300-6AA34	8LK2300-6AA68	8LK2300-6AA36	8LK2300-6AA43
	400 mm	8LK2304-6AB18	8LK2304-6AB07	8LK2304-6AB22	8LK2304-6AB08	8LK2304-6AB11
	600 mm	8LK2306-6AC32	8LK2306-6AC87	8LK2306-6AC35	8LK2306-6AC00	8LK2306-6AC02
	800 mm	8LK2308-6AC61	8LK2308-6AC07	8LK2308-6AC63	8LK2308-6AC08	8LK2308-8AC20
	850 mm	8LK2300-6AA63	8LK2300-6AA51	8LK2300-6AA70	8LK2300-6AA37	8LK2300-6AA44
	1100 mm	8LK2300-6AA64	8LK2300-6AA35	8LK2300-6AA71	8LK2300-6AA38	8LK2300-6AA45

Accessories

Seals

Version	Width	Scope of supply	Article No.
Sealing foil base of frame	19 mm	1 roll = 50 m	8LK2000-0AJ71

15

System overview, page 15/20

© Siemens 2025

Frame and enclosure

Doors

Locking — **Type A**

Single locking

Rotary handle:
– Double-bit
– Flat cylinder

Hinge	Width		❶ Door IP30	❶ Door IP54	Glass door IP54	Sealing frame IP54
Left	350 mm		8LK2197-4AD56	8LK2197-4AD55	–	+ 8LK2197-0AA35
	400 mm		8LK2197-4AD57	8LK2197-4AD54	–	+ 8LK2197-4AD43
	600 mm		8LK2197-6AC75	8LK2197-6AC74	8LK2197-6AC82	+ 8LK2197-6AC64
	800 mm		8LK2197-8AD41	8LK2197-8AD40	–	+ 8LK2197-8AD24
	850 mm		8LK2197-8AD42	8LK2197-8AD38	8LK2197-8AD64	+ 8LK2197-0AA34
	1100 mm		8LK2197-1AC07	8LK2197-1AC10	–	+ 8LK2197-0AA33
Right	350 mm		8LK2197-4AD56	8LK2197-4AD55	–	+ 8LK2197-0AA35
	400 mm		8LK2197-4AD57	8LK2197-4AD54	–	+ 8LK2197-4AD43
	600 mm		8LK2197-6AC75	8LK2197-6AC74	8LK2197-6AC82	+ 8LK2197-6AC64
	800 mm		8LK2197-8AD41	8LK2197-8AD40	–	+ 8LK2197-8AD24
	850 mm		8LK2197-8AD42	8LK2197-8AD38	8LK2197-8AD64	+ 8LK2197-0AA34
	1100 mm		8LK2197-1AC07	8LK2197-1AC10	–	+ 8LK2197-0AA33
❷ Hinge						
	Ti-Grey		3 × 8LK2000-0AH55	3 × 8LK2000-0AH55	3 × 8LK2000-0AH55	–
❸ Single locking						
	Handle	without lock	8LK2000-0AH56	8LK2000-0AH56	8LK2000-0AH56	–
		with flat cylinder (keyed alike)	8LK2000-0AH61	8LK2000-0AH61	8LK2000-0AH61	–
	Double-bit		8LK2000-0AH58	8LK2000-0AH58	8LK2000-0AH58	–
❹ Central locking						
	Rotary handle	without lock	8LK2000-0AH57	8LK2000-0AH57	8LK2000-0AH57	–
		double-bit	8LK2000-0AH60	8LK2000-0AH60	8LK2000-0AH60	–
		flat cylinder	8LK2000-0AH62	8LK2000-0AH62	8LK2000-0AH62	–
		for profile semicylinder	–	–	–	–
	Profile semicylinder	DIN 18252/18254 8 × 45°	–	–	–	–
	Locking rods	with guides	8LK2100-0AA06	8LK2100-0AA06	8LK2100-0AA06	–
Accessories						
	Inner door struts		8LK2000-0AD07	8LK2000-0AD07	–	–

15

System overview, page 15/20

© Siemens 2025

Type B

Rotary handle:
– Profile semicylinder

Door		Glass door	Sealing frame
IP30	IP54	IP54	IP54
8LK2197-4AD45	8LK2197-4AD47	–	+ 8LK2197-0AA35
8LK2197-4AD50	8LK2197-4AD52	–	+ 8LK2197-4AD43
8LK2197-6AC66	8LK2197-6AC68	8LK2197-6AC83	+ 8LK2197-6AC64
8LK2197-8AD26	8LK2197-8AD28	–	+ 8LK2197-8AD24
8LK2197-8AD31	8LK2197-8AD33	8LK2197-8AD65	+ 8LK2197-0AA34
8LK2197-1AC08	8LK2197-1AC11	–	+ 8LK2197-0AA33
8LK2197-4AD46	8LK2197-4AD48	–	+ 8LK2197-0AA35
8LK2197-4AD51	8LK2197-4AD53	–	+ 8LK2197-4AD43
8LK2197-6AC67	8LK2197-6AC70	8LK2197-6AC84	+ 8LK2197-6AC64
8LK2197-8AD27	8LK2197-8AD30	–	+ 8LK2197-8AD24
8LK2197-8AD32	8LK2197-8AD34	8LK2197-8AD66	+ 8LK2197-0AA34
8LK2197-1AC08	8LK2197-1AC11	–	+ 8LK2197-0AA33
3 × 8LK2000-0AH55	3 × 8LK2000-0AH55	3 × 8LK2000-0AH55	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
8LK2000-0AH63	8LK2000-0AH63	8LK2000-0AH63	–
8PQ9400-0BA26	8PQ9400-0BA26	8PQ9400-0BA26	–
8LK2100-0AA07	8LK2100-0AA07	8LK2100-0AA07	–
8LK2000-0AD07	8LK2000-0AD07	–	–

Ordering guide

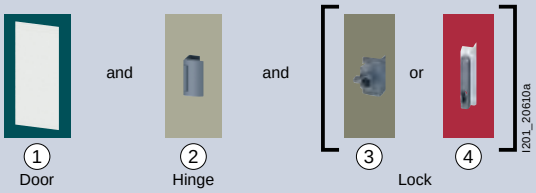

15

Locks

Profile semicylinder

Flat cylinder

Double-bit lock

System overview, page 15/20

© Siemens 2025

Busbar systems

Siemens EcoTech

185 mm distance centers

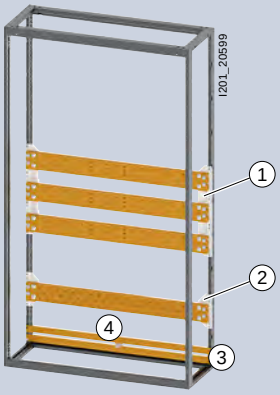

Busbar supports		Grounding	Frame connection	Mounting brackets
❶ L1 ... L3	❷ N	PEN	❸ PE	❹ PE
8LK4002-6AA38	8LK4002-6AA40	8LK4002-6AA48	8LK4002-7AA28	8LK4003-2AA76

Accessories

	Designation	Connection	Scope of supply	Article No.
	Busbar clamps 1 subconductor	M10	20 units	8LK6036-6AA21
	Busbar clamps 2 subconductor	M10	20 units	8LK6034-7AA41
	Roll Ø outside: 25 mm	M10	10 units	8LK4003-1AA27
	Intermediate piece Potential: N	M12	10 units	8LK4002-6AA47
	Intermediate piece cable connection Potential: N	M12	1 unit	8LK6035-2AA60
	Press nut	M12	500 units	8LK4003-3AA63

Circular conductors

	Busbar thickness	Ø Cable	Scope of supply	Article No.
	5 mm	1.5 ... 16 mm²	100 units	8US1921-2AA00
		1.5 ... 35 mm²	50 units	8US1921-2AB00
		16 ... 70 mm²	50 units	8US1921-2AC00
		16 ... 120 mm²	50 units	8US1921-2AD00
	10 mm	1.5 ... 16 mm²	100 units	8US1921-2BA00
		1.5 ... 35 mm²	50 units	8US1921-2BB00
		16 ... 70 mm²	50 units	8US1921-2BC00
		16 ... 120 mm²	50 units	8US1921-2BD00

Connecting lugs

	Potential	Busbar connection	Article No.
	L1 ... L3	30 × 10 mm	8LK4002-6AA41
	N	40 × 10 mm	8LK4002-6AA42
		50 × 10 mm	8LK4002-6AA43
		60 × 10 mm	8LK4002-6AA44
		80 × 10 mm	8LK4002-6AA45
		100 × 10 mm	8LK4002-6AA46
	PE	20 × 5 mm	8LK4002-7AA30
		30 × 10 mm	8LK4002-7AA30
		40 × 5 mm	8LK4002-7AA31

15

System overview, page 15/20

© Siemens 2025

N and PE elevations

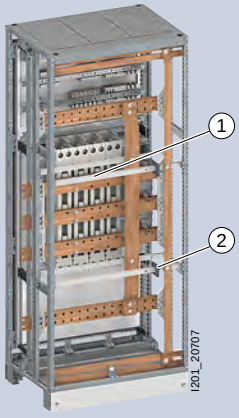

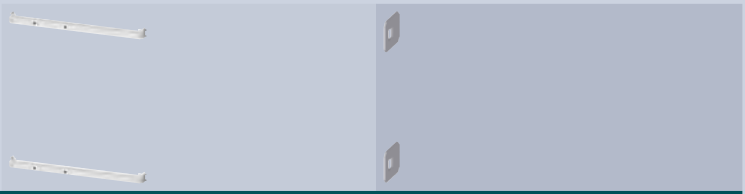

Width	❶ Holders	❷ Spacer
350 mm	8LK6036-6AA68	8LK6036-6AA73
400 mm	8LK6036-6AA70	8LK6036-6AA73
600 mm	8LK6036-6AA63	8LK6036-6AA73
800 mm	8LK6036-6AA64	8LK6036-6AA73
850 mm	8LK6036-6AA65	8LK6036-6AA73
1100 mm	8LK6036-6AA66	8LK6036-6AA73

System overview, page 15/20

© Siemens 2025

Section expansion

Siemens EcoTech

MCCB circuit breaker design

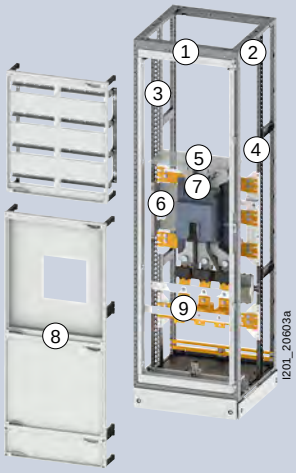

3-pole



Depth	Width	DIN	I_n	Trip unit	MCCB	❶ Cover frames	❷ 8GK adaptation
400 mm	350 mm	□	630 A	TM	3VA14	8LK3013-6AA24	8LK3011-6AA31
				ETU	3VA24	8LK3013-6AA24	8LK3011-6AA31
			1000 A	TM	3VA15	8LK3013-6AA24	8LK3011-6AA31
				ETU	3VA25	8LK3013-6AA24	8LK3011-6AA31
	600 mm	□□	1250 A	ETU	3VA26	8LK3013-6AA25	8LK3011-6AA32
			1600 A	ETU	3VA27	8LK3013-6AA25	8LK3011-6AA32
600 mm	350 mm	□	630 A	TM	3VA14	8LK3013-6AA24	8LK3011-6AA31
				ETU	3VA24	8LK3013-6AA24	8LK3011-6AA31
			1000 A	TM	3VA15	8LK3013-6AA24	8LK3011-6AA31
				ETU	3VA25	8LK3013-6AA24	8LK3011-6AA31
	600 mm	□□	1250 A	ETU	3VA26	8LK3013-6AA25	8LK3011-6AA32
			1600 A	ETU	3VA27	8LK3013-6AA25	8LK3011-6AA32

4-pole



Depth	Width	DIN	I_n	Trip unit	MCCB	❶ Cover frames	❷ 8GK adaptation
400 mm	350 mm	□	630 A	TM	3VA14	8LK3013-6AA24	8LK3011-6AA31
				ETU	3VA24	8LK3013-6AA24	8LK3011-6AA31
	600 mm	□□	1000 A	TM	3VA15	8LK3013-6AA25	8LK3011-6AA32
				ETU	3VA25	8LK3013-6AA25	8LK3011-6AA32
			1250 A	ETU	3VA26	8LK3013-6AA25	8LK3011-6AA32
			1600 A	ETU	3VA27	8LK3013-6AA25	8LK3011-6AA32
600 mm	350 mm	□	630 A	TM	3VA14	8LK3013-6AA24	8LK3011-6AA31
				ETU	3VA24	8LK3013-6AA24	8LK3011-6AA31
	600 mm	□□	1000 A	TM	3VA15	8LK3013-6AA25	8LK3011-6AA32
				ETU	3VA25	8LK3013-6AA25	8LK3011-6AA32
			1250 A	ETU	3VA26	8LK3013-6AA25	8LK3011-6AA32
			1600 A	ETU	3VA27	8LK3013-6AA25	8LK3011-6AA32

15

System overview, page 15/20

© Siemens 2025

Accessories

DIN rail overvoltage protection

Position	Article No.
Lateral overvoltage protection, see page 6/10	8LK6034-3AA10

Circuit breaker insulation

Width	Scope of supply	Article No.
35 mm	1 roll = 15 m	8LK6036-2AA14

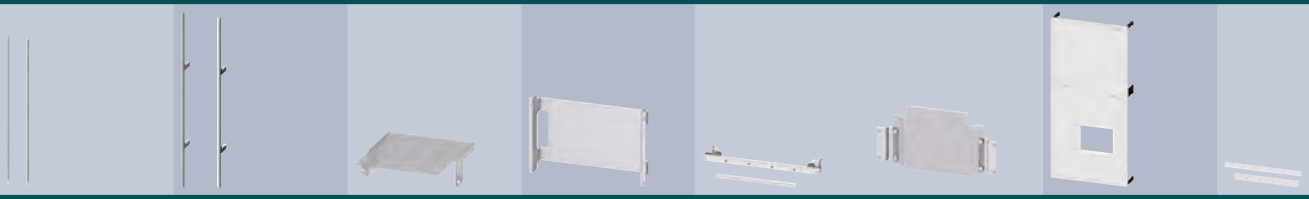

❸ Longitudinal stays	❹ Uprights	❺ Obstacle	❻ Mounting plates	❼ Busbar connection	Covers new	❽ Section covers	❾ Cable connection
8GK4853-8KK02	–	8LK3011-8AA40	8LK5002-1AA41	8LK6035-1AA52	8LK6037-2AA01	8LK5002-1AA46	8LK6035-1AA57
8GK4853-8KK02	–	8LK3011-8AA40	8LK5002-1AA41	8LK6035-1AA52	8LK6037-2AA01	8LK5002-1AA46	8LK6035-1AA57
8GK4853-8KK02	–	8LK3011-8AA40	8LK5002-1AA42	8LK6035-1AA53	8LK6037-2AA02	8LK5002-1AA47	8LK6035-1AA58
8GK4853-8KK02	–	8LK3011-8AA40	8LK5002-1AA42	8LK6035-1AA53	8LK6037-2AA02	8LK5002-1AA47	8LK6035-1AA58
8GK4853-8KK02	–	8LK3011-8AA41	8LK5002-1AA44	8LK6035-1AA55	8LK6037-2AA04	8LK5002-1AA50	8LK6035-1AA61
8GK4853-8KK02	–	8LK3011-8AA41	8LK5002-1AA45	8LK6035-1AA56	–	8LK5002-1AA51	8LK6035-1AA62
8GK4853-8KK02	8LK3011-8AA38	8LK3011-8AA40	8LK5002-1AA41	8LK6035-1AA52	8LK6037-2AA01	8LK5002-1AA46	8LK6035-1AA57
8GK4853-8KK02	8LK3011-8AA38	8LK3011-8AA40	8LK5002-1AA41	8LK6035-1AA52	8LK6037-2AA01	8LK5002-1AA46	8LK6035-1AA57
8GK4853-8KK02	8LK3011-8AA38	8LK3011-8AA40	8LK5002-1AA42	8LK6035-1AA53	8LK6037-2AA02	8LK5002-1AA47	8LK6035-1AA58
8GK4853-8KK02	8LK3011-8AA38	8LK3011-8AA40	8LK5002-1AA42	8LK6035-1AA53	8LK6037-2AA02	8LK5002-1AA47	8LK6035-1AA58
8GK4853-8KK02	8LK3011-8AA38	8LK3011-8AA41	8LK5002-1AA44	8LK6035-1AA55	8LK6037-2AA04	8LK5002-1AA50	8LK6035-1AA61
8GK4853-8KK02	8LK3011-8AA38	8LK3011-8AA41	8LK5002-1AA45	8LK6035-1AA56	–	8LK5002-1AA51	8LK6035-1AA62

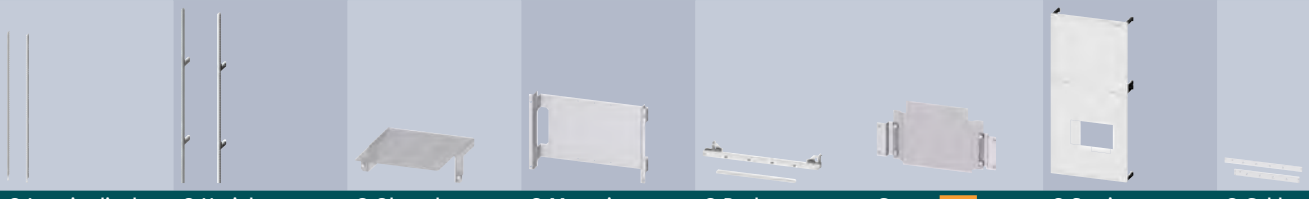

❸ Longitudinal stays	❹ Uprights	❺ Obstacle	❻ Mounting plates	❼ Busbar connection	Covers new	❽ Section covers	❾ Cable connection
8GK4853-8KK02	–	8LK3011-8AA40	8LK5002-1AA41	8LK6035-1AA52	8LK6037-2AA01	8LK5002-1AA46	8LK6035-1AA57
8GK4853-8KK02	–	8LK3011-8AA40	8LK5002-1AA41	8LK6035-1AA52	8LK6037-2AA01	8LK5002-1AA46	8LK6035-1AA57
8GK4853-8KK02	–	8LK3011-8AA41	8LK5002-1AA43	8LK6035-1AA54	8LK6037-2AA03	8LK5002-1AA48	8LK6035-1AA60
8GK4853-8KK02	–	8LK3011-8AA41	8LK5002-1AA43	8LK6035-1AA54	8LK6037-2AA03	8LK5002-1AA48	8LK6035-1AA60
8GK4853-8KK02	–	8LK3011-8AA41	8LK5002-1AA44	8LK6035-1AA55	8LK6037-2AA04	8LK5002-1AA50	8LK6035-1AA61
8GK4853-8KK02	–	8LK3011-8AA41	8LK5002-1AA45	8LK6035-1AA56	–	8LK5002-1AA51	8LK6035-1AA62
8GK4853-8KK02	8LK3011-8AA38	8LK3011-8AA40	8LK5002-1AA41	8LK6035-1AA52	8LK6037-2AA01	8LK5002-1AA46	8LK6035-1AA57
8GK4853-8KK02	8LK3011-8AA38	8LK3011-8AA40	8LK5002-1AA41	8LK6035-1AA52	8LK6037-2AA01	8LK5002-1AA46	8LK6035-1AA57
8GK4853-8KK02	8LK3011-8AA38	8LK3011-8AA41	8LK5002-1AA43	8LK6035-1AA54	8LK6037-2AA03	8LK5002-1AA48	8LK6035-1AA60
8GK4853-8KK02	8LK3011-8AA38	8LK3011-8AA41	8LK5002-1AA43	8LK6035-1AA54	8LK6037-2AA03	8LK5002-1AA48	8LK6035-1AA60
8GK4853-8KK02	8LK3011-8AA38	8LK3011-8AA41	8LK5002-1AA44	8LK6035-1AA55	8LK6037-2AA04	8LK5002-1AA50	8LK6035-1AA61
8GK4853-8KK02	8LK3011-8AA38	8LK3011-8AA41	8LK5002-1AA45	8LK6035-1AA56	–	8LK5002-1AA51	8LK6035-1AA62

System overview, page 15/20

© Siemens 2025

Section expansion

ACB circuit breaker design, 3-pole

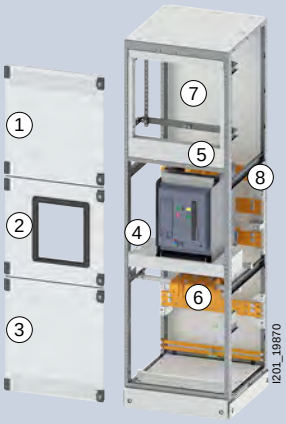

IP30

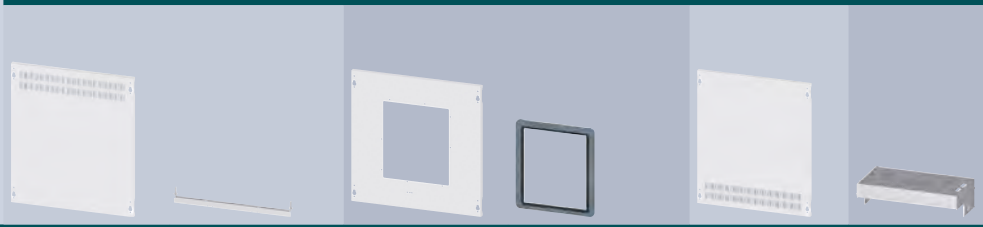

Cable connection	Size	I_n	Width	❶ Compartment doors at top [1]	Door strut	❷ Compartment doors [1]	Sealing frame	❸ Compartment doors at bottom [1]	❹ Device compartment Mounting plates
Fixed-mounted									
At bottom	0	1250 A	400 mm	8LK2067-4AA07	2 × 8LK3011-6AA57	8LK2060-4AA61	+ 3VW9011-0AP01	8LK2070-4AA21	8LK5002-0AA38
	1	2000 A	400 mm	8LK2067-4AA07	8LK3011-6AA57	8LK2060-4AA68	+ 3WA9111-0AP01	8LK2070-4AA21	8LK5002-1AA52
			600 mm	8LK2067-6AA07	8LK3011-6AA58	8LK2060-6AA60	+ 3WA9111-0AP01	8LK2070-6AA23	8LK5002-1AA53
	2	3200 A	600 mm	8LK2067-6AA07	8LK3011-6AA58	8LK2060-6AA64	+ 3WA9111-0AP01	8LK2070-6AA23	8LK5002-1AA53
			800 mm	8LK2067-8AA11	8LK3011-8AA82	8LK2060-8AA41	+ 3WA9111-0AP01	8LK2070-8AA42	8LK5002-1AA54
At top	0	1250 A	400 mm	8LK2067-4AA07	2 × 8LK3011-6AA57	8LK2060-4AA61	+ 3VW9011-0AP01	8LK2070-4AA21	8LK5002-0AA38
	1	2000 A	400 mm	8LK2067-4AA07	8LK3011-6AA57	8LK2060-4AA68	+ 3WA9111-0AP01	8LK2070-4AA21	8LK5002-1AA52
			600 mm	8LK2067-6AA07	8LK3011-6AA58	8LK2060-6AA60	+ 3WA9111-0AP01	8LK2070-6AA23	8LK5002-1AA53
	2	3200 A	600 mm	8LK2067-6AA07	8LK3011-6AA58	8LK2060-6AA64	+ 3WA9111-0AP01	8LK2070-6AA23	8LK5002-1AA53
			800 mm	8LK2067-8AA11	8LK3011-8AA82	8LK2060-8AA41	+ 3WA9111-0AP01	8LK2070-8AA42	8LK5002-1AA54
Withdrawable									
At bottom	0	1250 A	400 mm	8LK2067-4AA07	2 × 8LK3011-6AA57	8LK2060-4AA62	+ 3VW9011-0AP02	8LK2070-4AA21	8LK5002-0AA40
	1	2000 A	400 mm	8LK2067-4AA07	8LK3011-6AA57	8LK2060-4AA68	+ 3WA9111-0AP01	8LK2070-4AA21	8LK5002-1AA52
			600 mm	8LK2067-6AA07	8LK3011-6AA58	8LK2060-6AA60	+ 3WA9111-0AP01	8LK2070-6AA23	8LK5002-1AA53
	2	3200 A	600 mm	8LK2067-6AA07	8LK3011-6AA58	8LK2060-6AA64	+ 3WA9111-0AP01	8LK2070-6AA23	8LK5002-1AA53
			800 mm	8LK2067-8AA11	8LK3011-8AA82	8LK2060-8AA41	+ 3WA9111-0AP01	8LK2070-8AA42	8LK5002-1AA54
At top	0	1250 A	400 mm	8LK2067-4AA07	2 × 8LK3011-6AA57	8LK2060-4AA62	+ 3VW9011-0AP02	8LK2070-4AA21	8LK5002-0AA40
	1	2000 A	400 mm	8LK2067-4AA07	8LK3011-6AA57	8LK2060-4AA68	+ 3WA9111-0AP01	8LK2070-4AA21	8LK5002-1AA52
			600 mm	8LK2067-6AA07	8LK3011-6AA58	8LK2060-6AA60	+ 3WA9111-0AP01	8LK2070-6AA23	8LK5002-1AA53
	2	3200 A	600 mm	8LK2067-6AA07	8LK3011-6AA58	8LK2060-6AA64	+ 3WA9111-0AP01	8LK2070-6AA23	8LK5002-1AA53
			800 mm	8LK2067-8AA11	8LK3011-8AA82	8LK2060-8AA41	+ 3WA9111-0AP01	8LK2070-8AA42	8LK5002-1AA54

[1] Without locking and hinge

15

System overview, page 15/20

© Siemens 2025

Accessories

Hinge

Version	Article No.
Ti-Grey	8LK2000-0AH55

Locking

Version		Article No.
Double-bit		8LK2000-0AH58
Handle	without lock	8LK2000-0AH56
	with flat cylinder (keyed alike)	8LK2000-0AH61
Inner door struts		8LK2000-0AD15

DIN rail overvoltage protection

Position	Article No.
Lateral overvoltage protection, see page 6/10	8LK6034-3AA10

Partition	Insulation	❺ Busbar connection	❻ Cable connection		❼ Auxiliary device compartments new		❽ Uprights
			Obstacle	Holders	8GK adaptation	Cover frames	
8LK3011-6AA42	–	8LK6034-2AA63	8LK3011-6AA41	8LK6034-2AA34	8LK3013-6AA13	8LK3013-6AA31	8LK3011-6AA60 + 8LK3011-8AA38
8LK3013-5AA51	–	8LK6035-3AA07	8LK3011-6AA41	8LK6035-3AA33	8LK3013-6AA13	8LK3013-6AA31	8LK3012-0AA32
8LK3013-5AA55	–	8LK6035-3AA10	8LK3011-6AA61	8LK6035-3AA34	8LK3013-6AA14	8LK3013-6AA33	8LK3012-0AA32
8LK3013-5AA57	–	8LK6035-3AA12	8LK3011-6AA61	8LK6035-3AA36	8LK3013-6AA14	8LK3013-6AA33	8LK3012-0AA32
8LK3013-5AA62	–	8LK6035-3AA14	8LK3012-0AA00	8LK6035-3AA38	8LK3013-6AA15	8LK3013-6AA36	8LK3012-0AA32
8LK3011-6AA42	–	8LK6034-2AA63	8LK3011-6AA41	8LK6034-2AA34	8LK3013-6AA13	8LK3013-6AA32	8LK3011-6AA60 + 8LK3011-8AA38
8LK3013-5AA51	–	8LK6035-3AA07	8LK3011-6AA41	8LK6035-3AA33	8LK3013-6AA13	8LK3013-6AA32	8LK3012-0AA16
8LK3013-5AA55	–	8LK6035-3AA10	8LK3011-6AA61	8LK6035-3AA34	8LK3013-6AA14	8LK3013-6AA34	8LK3012-0AA16
8LK3013-5AA57	–	8LK6035-3AA12	8LK3011-6AA61	8LK6035-3AA36	8LK3013-6AA14	8LK3013-6AA34	8LK3012-0AA16
8LK3013-5AA62	–	8LK6035-3AA14	8LK3012-0AA00	8LK6035-3AA38	8LK3013-6AA15	8LK3013-6AA35	8LK3012-0AA16
8LK3011-6AA54	–	8LK6034-2AA64	8LK3011-6AA41	8LK6034-2AA37	8LK3013-6AA13	8LK3013-6AA31	8LK3011-6AA60 + 8LK3011-8AA38
8LK3013-5AA52	8LK6035-3AA68	8LK6035-3AA06	8LK3011-6AA41	8LK6035-3AA32	8LK3013-6AA13	8LK3013-6AA31	8LK3012-0AA32
8LK3013-5AA54	–	8LK6035-3AA08	8LK3011-6AA61	8LK6036-7AA61 new	8LK3013-6AA14	8LK3013-6AA33	8LK3012-0AA32
8LK3013-5AA58	–	8LK6035-3AA11	8LK3011-6AA61	8LK6035-3AA35	8LK3013-6AA14	8LK3013-6AA33	8LK3012-0AA32
8LK3013-5AA61	–	8LK6035-3AA13	8LK3012-0AA00	8LK6035-2AA34	8LK3013-6AA15	8LK3013-6AA36	8LK3012-0AA32
8LK3011-6AA54	–	8LK6034-2AA64	8LK3011-6AA41	8LK6034-2AA37	8LK3013-6AA13	8LK3013-6AA32	8LK3011-6AA60 + 8LK3011-8AA38
8LK3013-5AA52	8LK6035-3AA68	8LK6035-3AA06	8LK3011-6AA41	8LK6035-3AA32	8LK3013-6AA13	8LK3013-6AA32	8LK3012-0AA16
8LK3013-5AA54	–	8LK6035-3AA08	8LK3011-6AA61	8LK6036-7AA61 new	8LK3013-6AA14	8LK3013-6AA34	8LK3012-0AA16
8LK3013-5AA58	–	8LK6035-3AA11	8LK3011-6AA61	8LK6035-3AA35	8LK3013-6AA14	8LK3013-6AA34	8LK3012-0AA16
8LK3013-5AA61	–	8LK6035-3AA13	8LK3012-0AA00	8LK6035-2AA34	8LK3013-6AA15	8LK3013-6AA35	8LK3012-0AA16

System overview, page 15/20

© Siemens 2025

Section expansion

ACB circuit breaker design, 3-pole

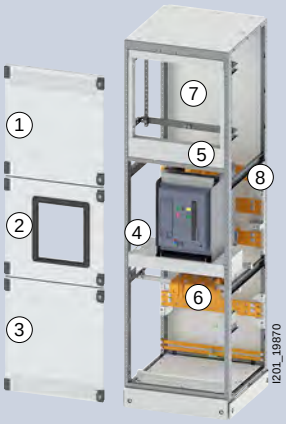

IP54

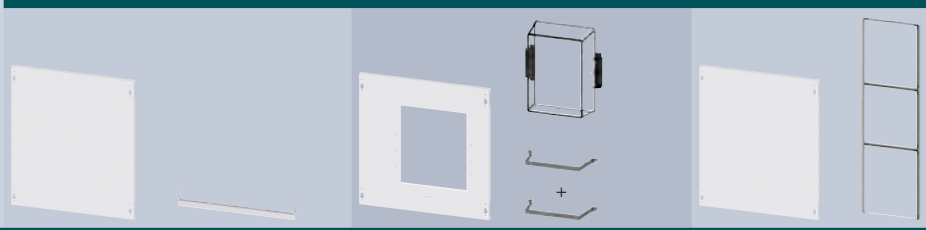

Cable connection	Size	I_n	Width	❶ Compartment doors at top [1]	Door strut	❷ Compartment doors [1]	Plexiglas cover + Fixing element	❸ Compartment doors at bottom [1]	Sealing frame
Fixed-mounted									
At bottom	0	1250 A	400 mm	8LK2067-4AA08	2 × 8LK3011-6AA57	8LK2060-4AA57	+ 3WA9111-0AP03 + 8LK2000-0AJ65	8LK2070-4AA22	8LK2197-4AD44
	1	2000 A	400 mm	8LK2067-4AA08	8LK3011-6AA57	8LK2060-4AA70	+ 3WA9111-0AP03	8LK2070-4AA22	8LK2197-4AD44
			600 mm	8LK2067-6AA08	8LK3011-6AA58	8LK2060-6AA61	+ 3WA9111-0AP03	8LK2070-6AA24	8LK2197-6AC65
	2	3200 A	600 mm	8LK2067-6AA08	8LK3011-6AA58	8LK2060-6AA65	+ 3WA9111-0AP03	8LK2070-6AA24	8LK2197-6AC65
			800 mm	8LK2067-8AA12	8LK3011-8AA82	8LK2060-8AA42	+ 3WA9111-0AP03	8LK2070-8AA43	8LK2197-8AD25
At top	0	1250 A	400 mm	8LK2067-4AA08	2 × 8LK3011-6AA57	8LK2060-4AA57	+ 3WA9111-0AP03 + 8LK2000-0AJ65	8LK2070-4AA22	8LK2197-4AD44
	1	2000 A	400 mm	8LK2067-4AA08	8LK3011-6AA57	8LK2060-4AA70	+ 3WA9111-0AP03	8LK2070-4AA22	8LK2197-4AD44
			600 mm	8LK2067-6AA08	8LK3011-6AA58	8LK2060-6AA61	+ 3WA9111-0AP03	8LK2070-6AA24	8LK2197-6AC65
	2	3200 A	600 mm	8LK2067-6AA08	8LK3011-6AA58	8LK2060-6AA65	+ 3WA9111-0AP03	8LK2070-6AA24	8LK2197-6AC65
			800 mm	8LK2067-8AA12	8LK3011-8AA82	8LK2060-8AA42	+ 3WA9111-0AP03	8LK2070-8AA43	8LK2197-8AD25
Withdrawable									
At bottom	0	1250 A	400 mm	8LK2067-4AA08	2 × 8LK3011-6AA57	8LK2060-4AA60	+ 3WA9111-0AP03 + 8LK2000-0AJ65	8LK2070-4AA22	8LK2197-4AD44
	1	2000 A	400 mm	8LK2067-4AA08	8LK3011-6AA57	8LK2060-4AA70	+ 3WA9111-0AP03	8LK2070-4AA22	8LK2197-4AD44
			600 mm	8LK2067-6AA08	8LK3011-6AA58	8LK2060-6AA61	+ 3WA9111-0AP03	8LK2070-6AA24	8LK2197-6AC65
	2	3200 A	600 mm	8LK2067-6AA08	8LK3011-6AA58	8LK2060-6AA65	+ 3WA9111-0AP03	8LK2070-6AA24	8LK2197-6AC65
			800 mm	8LK2067-8AA12	8LK3011-8AA82	8LK2060-8AA42	+ 3WA9111-0AP03	8LK2070-8AA43	8LK2197-8AD25
At bottom	0	1250 A	400 mm	8LK2067-4AA08	2 × 8LK3011-6AA57	8LK2060-4AA60	+ 3WA9111-0AP03 + 8LK2000-0AJ65	8LK2070-4AA22	8LK2197-4AD44
	1	2000 A	400 mm	8LK2067-4AA08	8LK3011-6AA57	8LK2060-4AA70	+ 3WA9111-0AP03	8LK2070-4AA22	8LK2197-4AD44
			600 mm	8LK2067-6AA08	8LK3011-6AA58	8LK2060-6AA61	+ 3WA9111-0AP03	8LK2070-6AA24	8LK2197-6AC65
	2	3200 A	600 mm	8LK2067-6AA08	8LK3011-6AA58	8LK2060-6AA65	+ 3WA9111-0AP03	8LK2070-6AA24	8LK2197-6AC65
			800 mm	8LK2067-8AA12	8LK3011-8AA82	8LK2060-8AA42	+ 3WA9111-0AP03	8LK2070-8AA43	8LK2197-8AD25

[1] Without locking and hinge

15

System overview, page 15/20

© Siemens 2025

Accessories

Hinge			
	Version		**Article No.**
	Ti-Grey		8LK2000-0AH55
Locking			
	Version		**Article No.**
	Double-bit		8LK2000-0AH58
	Handle	without lock	8LK2000-0AH56
		with flat cylinder (keyed alike)	8LK2000-0AH61
	Inner door struts		8LK2000-0AD15
DIN rail overvoltage protection			
	Position		**Article No.**
	Lateral overvoltage protection, see page 6/10		8LK6034-3AA10

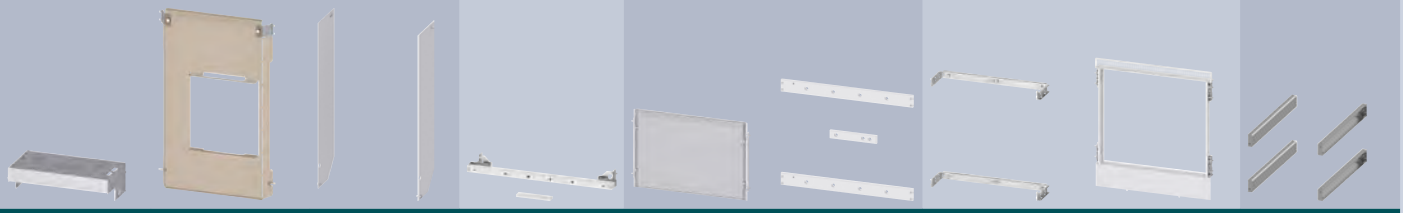

❹ Device compartment			❺ Busbar connection	❻ Cable connection		❼ Auxiliary device compartments new		❽ Uprights
Mounting plates	Partition	Insulation		Obstacle	Holders	8GK adaptation	Cover frames	
8LK5002-0AA38	8LK3011-6AA42	–	8LK6034-2AA63	8LK3011-6AA41	8LK6034-2AA34	8LK3013-6AA13	8LK3013-6AA31	8LK3011-6AA60 + 8LK3011-8AA38
8LK5002-1AA52	8LK3013-5AA51	–	8LK6035-3AA07	8LK3011-6AA41	8LK6035-3AA33	8LK3013-6AA13	8LK3013-6AA31	8LK3012-0AA32
8LK5002-1AA53	8LK3013-5AA55	–	8LK6035-3AA10	8LK3011-6AA61	8LK6035-3AA34	8LK3013-6AA14	8LK3013-6AA33	8LK3012-0AA32
8LK5002-1AA53	8LK3013-5AA57	–	8LK6035-3AA12	8LK3011-6AA61	8LK6035-3AA36	8LK3013-6AA14	8LK3013-6AA33	8LK3012-0AA32
8LK5002-1AA54	8LK3013-5AA62	–	8LK6035-3AA14	8LK3012-0AA00	8LK6035-3AA38	8LK3013-6AA15	8LK3013-6AA36	8LK3012-0AA32
8LK5002-0AA38	8LK3011-6AA42	–	8LK6034-2AA63	8LK3011-6AA41	8LK6034-2AA34	8LK3013-6AA13	8LK3013-6AA32	8LK3011-6AA60 + 8LK3011-8AA38
8LK5002-1AA52	8LK3013-5AA51	–	8LK6035-3AA07	8LK3011-6AA41	8LK6035-3AA33	8LK3013-6AA13	8LK3013-6AA32	8LK3012-0AA16
8LK5002-1AA53	8LK3013-5AA55	–	8LK6035-3AA10	8LK3011-6AA61	8LK6035-3AA34	8LK3013-6AA14	8LK3013-6AA34	8LK3012-0AA16
8LK5002-1AA53	8LK3013-5AA57	–	8LK6035-3AA12	8LK3011-6AA61	8LK6035-3AA36	8LK3013-6AA14	8LK3013-6AA34	8LK3012-0AA16
8LK5002-1AA54	8LK3013-5AA62	–	8LK6035-3AA14	8LK3012-0AA00	8LK6035-3AA38	8LK3013-6AA15	8LK3013-6AA35	8LK3012-0AA16
8LK5002-0AA40	8LK3011-6AA54	–	8LK6034-2AA64	8LK3011-6AA41	8LK6034-2AA37	8LK3013-6AA13	8LK3013-6AA31	8LK3011-6AA60 + 8LK3011-8AA38
8LK5002-1AA52	8LK3013-5AA52	8LK6035-3AA68	8LK6035-3AA06	8LK3011-6AA41	8LK6035-3AA32	8LK3013-6AA13	8LK3013-6AA31	8LK3012-0AA32
8LK5002-1AA53	8LK3013-5AA54	–	8LK6035-3AA08	8LK3011-6AA61	8LK6036-7AA61 new	8LK3013-6AA14	8LK3013-6AA33	8LK3012-0AA32
8LK5002-1AA53	8LK3013-5AA58	–	8LK6035-3AA11	8LK3011-6AA61	8LK6035-3AA35	8LK3013-6AA14	8LK3013-6AA33	8LK3012-0AA32
8LK5002-1AA54	8LK3013-5AA61	–	8LK6035-3AA13	8LK3012-0AA00	8LK6035-2AA34	8LK3013-6AA15	8LK3013-6AA36	8LK3012-0AA32
8LK5002-0AA40	8LK3011-6AA54	–	8LK6034-2AA64	8LK3011-6AA41	8LK6034-2AA37	8LK3013-6AA13	8LK3013-6AA32	8LK3011-6AA60 + 8LK3011-8AA38
8LK5002-1AA52	8LK3013-5AA52	8LK6035-3AA68	8LK6035-3AA06	8LK3011-6AA41	8LK6035-3AA32	8LK3013-6AA13	8LK3013-6AA32	8LK3012-0AA16
8LK5002-1AA53	8LK3013-5AA54	–	8LK6035-3AA08	8LK3011-6AA61	8LK6036-7AA61 new	8LK3013-6AA14	8LK3013-6AA34	8LK3012-0AA16
8LK5002-1AA53	8LK3013-5AA58	–	8LK6035-3AA11	8LK3011-6AA61	8LK6035-3AA35	8LK3013-6AA14	8LK3013-6AA34	8LK3012-0AA16
8LK5002-1AA54	8LK3013-5AA61	–	8LK6035-3AA13	8LK3012-0AA00	8LK6035-2AA34	8LK3013-6AA15	8LK3013-6AA35	8LK3012-0AA16

System overview, page 15/20

© Siemens 2025

Section expansion

ACB circuit breaker design, 4-pole

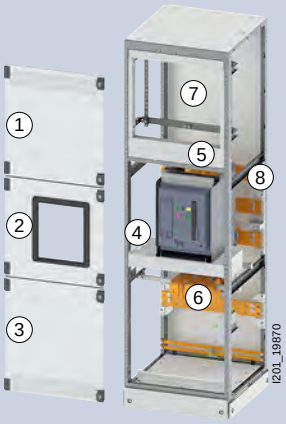

IP30

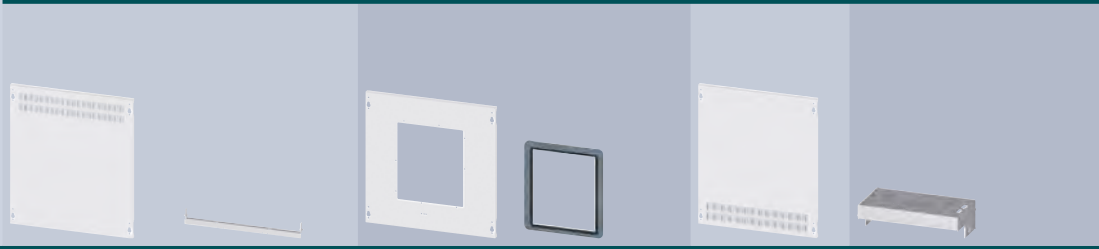

Cable connection	Size	I_n	Width	❶ Compartment doors at top [1]	Door strut	❷ Compartment doors [1]	Sealing frame	❸ Compartment doors at bottom [1]	❹ Device compartment Mounting plates
Fixed-mounted									
At bottom	0	1250 A	400 mm	8LK2067-4AA07	2 × 8LK3011-6AA57	8LK2060-4AA61	3VW9011-0AP01	8LK2070-4AA21	8LK5002-0AA38
	1	2000 A	600 mm	8LK2067-6AA07	8LK3011-6AA58	8LK2060-6AA60	3WA9111-0AP01	8LK2070-6AA23	8LK5002-1AA53
	2	3200 A	800 mm	8LK2067-8AA11	8LK3011-8AA82	8LK2060-8AA41	3WA9111-0AP01	8LK2070-8AA42	8LK5002-1AA54
At top	0	1250 A	400 mm	8LK2067-4AA07	2 × 8LK3011-6AA57	8LK2060-4AA61	3VW9011-0AP01	8LK2070-4AA21	8LK5002-0AA38
	1	2000 A	600 mm	8LK2067-6AA07	8LK3011-6AA58	8LK2060-6AA60	3WA9111-0AP01	8LK2070-6AA23	8LK5002-1AA53
	2	3200 A	800 mm	8LK2067-8AA11	8LK3011-8AA82	8LK2060-8AA41	3WA9111-0AP01	8LK2070-8AA42	8LK5002-1AA54
Withdrawable									
At bottom	0	1250 A	600 mm	8LK2067-6AA07	2 × 8LK3011-6AA58	8LK2060-6AA54	3VW9011-0AP02	8LK2070-6AA23	8LK5002-0AA41
	1	2000 A	600 mm	8LK2067-6AA07	8LK3011-6AA58	8LK2060-6AA60	3WA9111-0AP01	8LK2070-6AA23	8LK5002-1AA53
	2	3200 A	800 mm	8LK2067-8AA11	8LK3011-8AA82	8LK2060-8AA41	3WA9111-0AP01	8LK2070-8AA42	8LK5002-1AA54
At top	0	1250 A	600 mm	8LK2067-6AA07	2 × 8LK3011-6AA58	8LK2060-6AA54	3VW9011-0AP02	8LK2070-6AA23	8LK5002-0AA41
	1	2000 A	600 mm	8LK2067-6AA07	8LK3011-6AA58	8LK2060-6AA60	3WA9111-0AP01	8LK2070-6AA23	8LK5002-1AA53
	2	3200 A	800 mm	8LK2067-8AA11	8LK3011-8AA82	8LK2060-8AA41	3WA9111-0AP01	8LK2070-8AA42	8LK5002-1AA54

[1] Without locking and hinge

15

System overview, page 15/20

© Siemens 2025

Accessories

Hinge		
	Version	**Article No.**
	Ti-Grey	8LK2000-0AH55

Locking			
	Version		**Article No.**
	Double-bit		8LK2000-0AH58
	Handle	without lock	8LK2000-0AH56
		with flat cylinder (keyed alike)	8LK2000-0AH61
	Inner door struts		8LK2000-0AD15

DIN rail overvoltage protection		
	Position	**Article No.**
	Lateral overvoltage protection, see page 6/10	8LK6034-3AA10



	❺ Busbar connection	❻ Cable connection		❼ Auxiliary device compartments new		❽ Uprights
Partition		**Obstacle**	**Holders**	**8GK adaptation**	**Cover frames**	
8LK3011-6AA42	8LK6034-2AA63	8LK3011-6AA41	8LK6034-2AA34	8LK3013-6AA13	8LK3013-6AA31	8LK3011-6AA60 + 8LK3011-8AA38
8LK3013-5AA55	8LK6035-3AA15	8LK3011-6AA61	8LK6035-3AA37	8LK3013-6AA14	8LK3013-6AA33	8LK3012-0AA32
8LK3013-5AA62	8LK6035-3AA16	8LK3012-0AA00	8LK6035-3AA40	8LK3013-6AA15	8LK3013-6AA36	8LK3012-0AA32
8LK3011-6AA42	8LK6034-2AA63	8LK3011-6AA41	8LK6034-2AA34	8LK3013-6AA13	8LK3013-6AA32	8LK3011-6AA60 + 8LK3011-8AA38
8LK3013-5AA55	8LK6035-3AA15	8LK3011-6AA61	8LK6035-3AA37	8LK3013-6AA14	8LK3013-6AA34	8LK3012-0AA16
8LK3013-5AA62	8LK6035-3AA16	8LK3012-0AA00	8LK6035-3AA40	8LK3013-6AA15	8LK3013-6AA35	8LK3012-0AA16
8LK3011-6AA56	8LK6034-2AA65	8LK3011-6AA61	8LK6034-2AA42	8LK3013-6AA14	8LK3013-6AA33	8LK3011-6AA60 + 8LK3011-8AA38
8LK3013-5AA56	8LK6035-2AA27	8LK3011-6AA61	8LK6035-2AA33	8LK3013-6AA14	8LK3013-6AA33	8LK3012-0AA32
8LK3013-5AA63	8LK6035-2AA67	8LK3012-0AA00	8LK6035-4AA78	8LK3013-6AA15	8LK3013-6AA36	8LK3012-0AA32
8LK3011-6AA56	8LK6034-2AA65	8LK3011-6AA61	8LK6034-2AA42	8LK3013-6AA14	8LK3013-6AA34	8LK3011-6AA60 + 8LK3011-8AA38
8LK3013-5AA56	8LK6035-2AA27	8LK3011-6AA61	8LK6035-2AA33	8LK3013-6AA14	8LK3013-6AA34	8LK3012-0AA16
8LK3013-5AA63	8LK6035-2AA67	8LK3012-0AA00	8LK6035-4AA78	8LK3013-6AA15	8LK3013-6AA35	8LK3012-0AA16

System overview, page 15/20

© Siemens 2025

Section expansion

ACB circuit breaker design, 4-pole

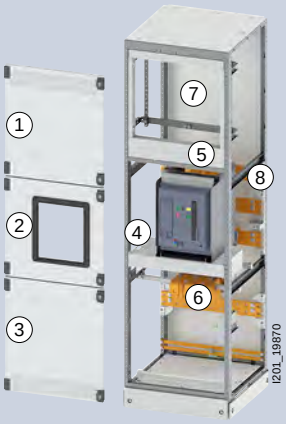

IP54

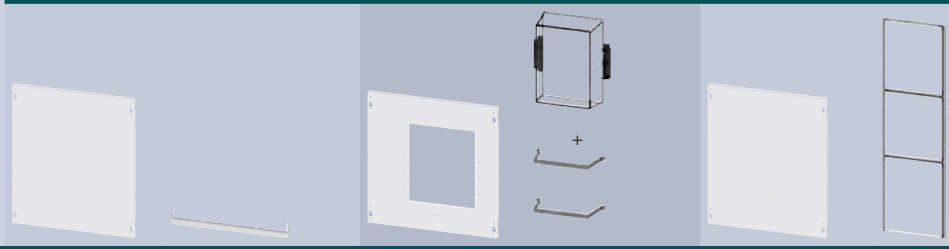

Cable connection	Size	I_n	Width	❶ Compartment doors at top [1]	Door strut	❷ Compartment doors [1]	Plexiglas cover + Fixing element	❸ Compartment doors at bottom [1]	Sealing frame
Fixed-mounted									
At bottom	0	1250 A	400 mm	8LK2067-4AA08	2 × 8LK3011-6AA57	8LK2060-4AA57	+ 3WA9111-0AP03 + 8LK2000-0AJ65	8LK2070-4AA22	8LK2197-4AD44
	1	2000 A	600 mm	8LK2067-6AA08	8LK3011-6AA58	8LK2060-6AA61	+ 3WA9111-0AP03	8LK2070-6AA24	8LK2197-6AC65
	2	3200 A	800 mm	8LK2067-8AA12	8LK3011-8AA82	8LK2060-8AA42	+ 3WA9111-0AP03	8LK2070-8AA43	8LK2197-8AD25
At top	0	1250 A	400 mm	8LK2067-4AA08	2 × 8LK3011-6AA57	8LK2060-4AA57	+ 3WA9111-0AP03 + 8LK2000-0AJ65	8LK2070-4AA22	8LK2197-4AD44
	1	2000 A	600 mm	8LK2067-6AA08	8LK3011-6AA58	8LK2060-6AA61	+ 3WA9111-0AP03	8LK2070-6AA24	8LK2197-6AC65
	2	3200 A	800 mm	8LK2067-8AA12	8LK3011-8AA82	8LK2060-8AA42	+ 3WA9111-0AP03	8LK2070-8AA43	8LK2197-8AD25
Withdrawable									
At bottom	0	1250 A	600 mm	8LK2067-6AA08	2 × 8LK3011-6AA58	8LK2060-6AA53	+ 3WA9111-0AP03 + 8LK2000-0AJ65	8LK2070-6AA24	8LK2197-6AC65
	1	2000 A	600 mm	8LK2067-6AA08	8LK3011-6AA58	8LK2060-6AA61	+ 3WA9111-0AP03	8LK2070-6AA24	8LK2197-6AC65
	2	3200 A	800 mm	8LK2067-8AA12	8LK3011-8AA82	8LK2060-8AA42	+ 3WA9111-0AP03	8LK2070-8AA43	8LK2197-8AD25
At top	0	1250 A	600 mm	8LK2067-6AA08	2 × 8LK3011-6AA58	8LK2060-6AA53	+ 3WA9111-0AP03 + 8LK2000-0AJ65	8LK2070-6AA24	8LK2197-6AC65
	1	2000 A	600 mm	8LK2067-6AA08	8LK3011-6AA58	8LK2060-6AA61	+ 3WA9111-0AP03	8LK2070-6AA24	8LK2197-6AC65
	2	3200 A	800 mm	8LK2067-8AA12	8LK3011-8AA82	8LK2060-8AA42	+ 3WA9111-0AP03	8LK2070-8AA43	8LK2197-8AD25

[1] Without locking and hinge

15

System overview, page 15/20

© Siemens 2025

Accessories

Hinge

Version	Article No.
Ti-Grey	8LK2000-0AH55

Locking

Version		Article No.
Double-bit		8LK2000-0AH58
Handle	without lock	8LK2000-0AH56
	with flat cylinder (keyed alike)	8LK2000-0AH61
Inner door struts		8LK2000-0AD15

DIN rail overvoltage protection

Position	Article No.
Lateral overvoltage protection, see page 6/10	8LK6034-3AA10



❹ Device compartment		❺ Busbar connection	❻ Cable connection		❼ Auxiliary device compartments new		❽ Uprights
Mounting plates	Partition		Obstacle	Holders	8GK adaptation	Cover frames	
8LK5002-0AA38	8LK3011-6AA42	8LK6034-2AA63	8LK3011-6AA41	8LK6034-2AA34	8LK3013-6AA13	8LK3013-6AA31	8LK3011-6AA60 + 8LK3011-8AA38
8LK5002-1AA53	8LK3013-5AA55	8LK6035-3AA15	8LK3011-6AA61	8LK6035-3AA37	8LK3013-6AA14	8LK3013-6AA33	8LK3012-0AA32
8LK5002-1AA54	8LK3013-5AA62	8LK6035-3AA16	8LK3012-0AA00	8LK6035-3AA40	8LK3013-6AA15	8LK3013-6AA36	8LK3012-0AA32
8LK5002-0AA38	8LK3011-6AA42	8LK6034-2AA63	8LK3011-6AA41	8LK6034-2AA34	8LK3013-6AA13	8LK3013-6AA32	8LK3011-6AA60 + 8LK3011-8AA38
8LK5002-1AA53	8LK3013-5AA55	8LK6035-3AA15	8LK3011-6AA61	8LK6035-3AA37	8LK3013-6AA14	8LK3013-6AA34	8LK3012-0AA16
8LK5002-1AA54	8LK3013-5AA62	8LK6035-3AA16	8LK3012-0AA00	8LK6035-3AA40	8LK3013-6AA15	8LK3013-6AA35	8LK3012-0AA16
8LK5002-0AA41	8LK3011-6AA56	8LK6034-2AA65	8LK3011-6AA61	8LK6034-2AA42	8LK3013-6AA14	8LK3013-6AA33	8LK3011-6AA60 + 8LK3011-8AA38
8LK5002-1AA53	8LK3013-5AA56	8LK6035-2AA27	8LK3011-6AA61	8LK6035-2AA33	8LK3013-6AA14	8LK3013-6AA33	8LK3012-0AA32
8LK5002-1AA54	8LK3013-5AA63	8LK6035-2AA67	8LK3012-0AA00	8LK6035-4AA78	8LK3013-6AA15	8LK3013-6AA36	8LK3012-0AA32
8LK5002-0AA41	8LK3011-6AA56	8LK6034-2AA65	8LK3011-6AA61	8LK6034-2AA42	8LK3013-6AA14	8LK3013-6AA34	8LK3011-6AA60 + 8LK3011-8AA38
8LK5002-1AA53	8LK3013-5AA56	8LK6035-2AA27	8LK3011-6AA61	8LK6035-2AA33	8LK3013-6AA14	8LK3013-6AA34	8LK3012-0AA16
8LK5002-1AA54	8LK3013-5AA63	8LK6035-2AA67	8LK3012-0AA00	8LK6035-4AA78	8LK3013-6AA15	8LK3013-6AA35	8LK3012-0AA16

System overview, page 15/20

© Siemens 2025

Section expansion

Siemens EcoTech

Incoming feeder panels, doors

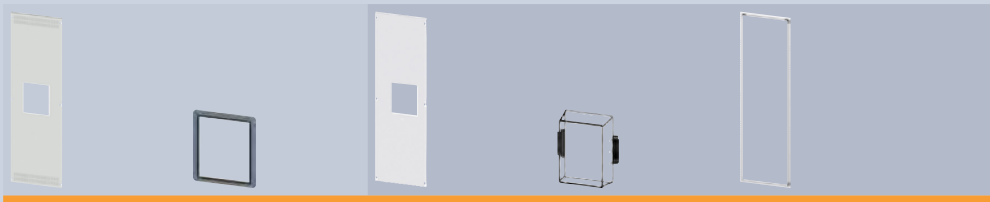

Locking — Type A

Single locking

Rotary handle:
– Double-bit
– Flat cylinder

❶ Doors	Hinge	Size	Width	Double-bit IP30	Dichtrahmen	Double-bit IP54	Covers	Sealing frame
Fixed-mounted								
3-pole	Left	0	400 mm	–	–	–	–	–
		1	600 mm	8LK2197-6AD07	3WA9111-0AP01	8LK2197-6AD11	3WA9111-0AP03	8LK2197-6AC64
		2	600 mm	8LK2197-6AD12	3WA9111-0AP01	8LK2197-6AD13	3WA9111-0AP03	8LK2197-6AC64
			800 mm	8LK2197-8AE87	3WA9111-0AP01	8LK2197-8AE88	3WA9111-0AP03	8LK2197-8AD24
	Right	0	400 mm	–	–	–	–	–
		1	600 mm	8LK2197-6AD07	3WA9111-0AP01	8LK2197-6AD11	3WA9111-0AP03	8LK2197-6AC64
		2	600 mm	8LK2197-6AD12	3WA9111-0AP01	8LK2197-6AD13	3WA9111-0AP03	8LK2197-6AC64
			800 mm	8LK2197-8AE87	3WA9111-0AP01	8LK2197-8AE88	3WA9111-0AP03	8LK2197-8AD24
4-pole	Left	0	400 mm	–	–	–	–	–
		1	600 mm	8LK2197-6AD07	3WA9111-0AP01	8LK2197-6AD11	3WA9111-0AP03	8LK2197-6AC64
		2	800 mm	8LK2197-8AE87	3WA9111-0AP01	8LK2197-8AE88	3WA9111-0AP03	8LK2197-8AD24
	Right	0	400 mm	–	–	–	–	–
		1	600 mm	8LK2197-6AD07	3WA9111-0AP01	8LK2197-6AD11	3WA9111-0AP03	8LK2197-6AC64
		2	800 mm	8LK2197-8AE87	3WA9111-0AP01	8LK2197-8AE88	3WA9111-0AP03	8LK2197-8AD24
Withdrawable								
3-pole	Links	0	400 mm	–	–	–	–	–
		1	600 mm	8LK2197-6AD07	3WA9111-0AP01	8LK2197-6AD11	3WA9111-0AP03	8LK2197-6AC64
		2	600 mm	8LK2197-6AD12	3WA9111-0AP01	8LK2197-6AD13	3WA9111-0AP03	8LK2197-6AC64
			800 mm	8LK2197-8AE87	3WA9111-0AP01	8LK2197-8AE88	3WA9111-0AP03	8LK2197-8AD24
	Right	0	400 mm	–	–	–	–	–
		1	600 mm	8LK2197-6AD07	3WA9111-0AP01	8LK2197-6AD11	3WA9111-0AP03	8LK2197-6AC64
		2	600 mm	8LK2197-6AD12	3WA9111-0AP01	8LK2197-6AD13	3WA9111-0AP03	8LK2197-6AC64
			800 mm	8LK2197-8AE87	3WA9111-0AP01	8LK2197-8AE88	3WA9111-0AP03	8LK2197-8AD24
4-pole	Left	0	600 mm	8LK2197-6AD17	3VW9011-0AP01	8LK2197-6AD16	3WA9111-0AP03 + 8LK2000-0AJ65	8LK2197-6AC64
		1	600 mm	8LK2197-6AD07	3WA9111-0AP01	8LK2197-6AD11	3WA9111-0AP03	8LK2197-6AC64
		2	800 mm	8LK2197-8AE87	3WA9111-0AP01	8LK2197-8AE88	3WA9111-0AP03	8LK2197-8AD24
	Right	0	600 mm	8LK2197-6AD17	3VW9011-0AP01	8LK2197-6AD16	3WA9111-0AP03 + 8LK2000-0AJ65	8LK2197-6AC64
		1	600 mm	8LK2197-6AD07	3WA9111-0AP01	8LK2197-6AD11	3WA9111-0AP03	8LK2197-6AC64
		2	800 mm	8LK2197-8AE87	3WA9111-0AP01	8LK2197-8AE88	3WA9111-0AP03	8LK2197-8AD24
❷ Hinge								
	Ti-Grey			3 × 8LK2000-0AH55	–	3 × 8LK2000-0AH55	–	–
❸ Single locking								
	Handle	without lock		8LK2000-0AH56	–	8LK2000-0AH56	–	–
		with flat cylinder (keyed alike)		8LK2000-0AH61	–	8LK2000-0AH61	–	–
	Double-bit			8LK2000-0AH58	–	8LK2000-0AH58	–	–
❹ Central locking								
	Rotary handle	without lock		8LK2000-0AH57	–	8LK2000-0AH57	–	–
		double-bit		8LK2000-0AH60	–	8LK2000-0AH60	–	–
		flat cylinder		8LK2000-0AH62	–	8LK2000-0AH62	–	–
		for profile semicylinder		–	–	–	–	–
	Profile semicylinder	DIN 18252/18254 8 × 45°		–	–	–	–	–
	Locking rods	with guides		8LK2100-0AA06	–	8LK2100-0AA06	–	–

15

System overview, page 15/20

© Siemens 2025

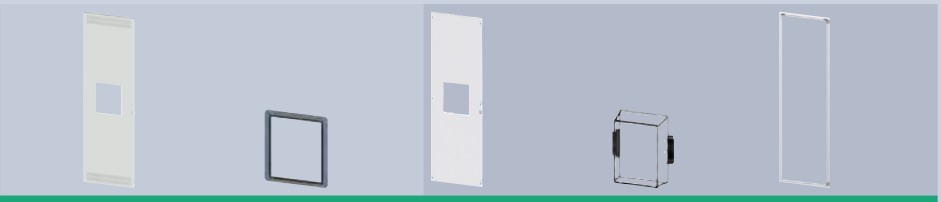

Type B

Rotary handle:
– Profile semicylinder

Rotary handle IP30	Sealing frame	Rotary handle IP54	Covers	Sealing frame
–	–	–	–	–
8LK2197-6AD08	3WA9111-0AP01	–	3WA9111-0AP03	–
8LK2197-6AD14	3WA9111-0AP01	8LK2197-6AD27	3WA9111-0AP03	8LK2197-6AC64
8LK2197-8AF00	3WA9111-0AP01	8LK2197-8AF02	3WA9111-0AP03	8LK2197-8AD24
–	–	–	–	–
8LK2197-6AD06	3WA9111-0AP01	8LK2197-6AD10	3WA9111-0AP03	8LK2197-6AC64
8LK2197-6AD15	3WA9111-0AP01	8LK2197-6AD28	3WA9111-0AP03	8LK2197-6AC64
8LK2197-8AF01	3WA9111-0AP01	8LK2197-8AF03	3WA9111-0AP03	8LK2197-8AD24
–	–	–	–	–
8LK2197-6AD08	3WA9111-0AP01	–	3WA9111-0AP03	–
8LK2197-8AF00	3WA9111-0AP01	8LK2197-8AF02	3WA9111-0AP03	8LK2197-8AD24
–	–	–	–	–
8LK2197-6AD06	3WA9111-0AP01	8LK2197-6AD10	3WA9111-0AP03	8LK2197-6AC64
8LK2197-8AF01	3WA9111-0AP01	8LK2197-8AF03	3WA9111-0AP03	8LK2197-8AD24
–	–	–	–	–
8LK2197-6AD08	3WA9111-0AP01	–	3WA9111-0AP03	–
8LK2197-6AD14	3WA9111-0AP01	8LK2197-6AD27	3WA9111-0AP03	8LK2197-6AC64
8LK2197-8AF00	3WA9111-0AP01	8LK2197-8AF02	3WA9111-0AP03	8LK2197-8AD24
–	–	–	–	–
8LK2197-6AD06	3WA9111-0AP01	8LK2197-6AD10	3WA9111-0AP03	8LK2197-6AC64
8LK2197-6AD15	3WA9111-0AP01	8LK2197-6AD28	3WA9111-0AP03	8LK2197-6AC64
8LK2197-8AF01	3WA9111-0AP01	8LK2197-8AF03	3WA9111-0AP03	8LK2197-8AD24
8LK2197-6AD20	3VW9011-0AP01	–	–	–
8LK2197-6AD08	3WA9111-0AP01	–	–	–
8LK2197-8AF00	3WA9111-0AP01	8LK2197-8AF02	3WA9111-0AP03	8LK2197-8AD24
8LK2197-6AD21	3VW9011-0AP01	8LK2197-6AD18	3WA9111-0AP03 + 8LK2000-0AJ65	8LK2197-6AC64
8LK2197-6AD06	3WA9111-0AP01	8LK2197-6AD10	3WA9111-0AP03	8LK2197-6AC64
8LK2197-8AF01	3WA9111-0AP01	8LK2197-8AF03	3WA9111-0AP03	8LK2197-8AD24
3 × 8LK2000-0AH55	–	3 × 8LK2000-0AH55	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
8LK2000-0AH63	–	8LK2000-0AH63	–	–
8PQ9400-0BA26	–	8PQ9400-0BA26	–	–
8LK2100-0AA07	–	8LK2100-0AA07	–	–

Ordering guide

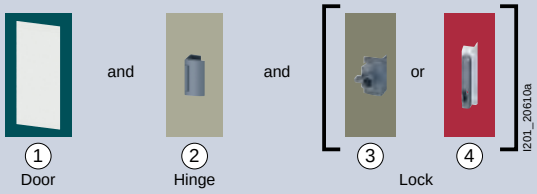

15

Locks

System overview, page 15/20

© Siemens 2025

Section expansion

Coupling panels, 3-pole

IP30



Size	I_n	Width	❶ Compartment doors at top [1]	Door strut	❷ Compartment doors [1]	Sealing frame	❸ Compartment doors at bottom [1]
Fixed-mounted							
0	1250 A	600 mm	8LK2067-6AA07	8LK3011-6AA58	8LK2060-6AA80	3VW9011-0AP01	8LK2070-6AA23
1	2000 A	600 mm	8LK2067-6AA07	8LK3011-6AA58	8LK2060-4AA66	3WA9111-0AP01	8LK2070-6AA23
2	3200 A	800 mm	8LK2067-8AA11	8LK3011-8AA82	8LK2060-8AA41	3WA9111-0AP01	8LK2070-8AA42
Withdrawable							
0	1250 A	600 mm	8LK2067-6AA07	8LK3011-6AA58	8LK2060-6AA54	3VW9011-0AP02	8LK2070-6AA23
2	2000 A	600 mm	8LK2067-6AA07	8LK3011-6AA58	8LK2060-4AA66	3WA9111-0AP01	8LK2070-6AA23
3	3200 A	800 mm	8LK2067-8AA11	8LK3011-8AA82	8LK2060-8AA41	3WA9111-0AP01	8LK2070-8AA42

[1] Without locking and hinge

15

System overview, page 15/20

© Siemens 2025

Accessories

Hinge

Version	Article No.
Ti-Grey	8LK2000-0AH55

Locking

Version		Article No.
Double-bit		8LK2000-0AH58
Handle	without lock	8LK2000-0AH56
	with flat cylinder (keyed alike)	8LK2000-0AH61
Inner door struts		8LK2000-0AD15

❹ Device compartment		❺ Connection	❻ Auxiliary device compartments		❼ Uprights
Mounting plates	Obstacle	Busbar	8GK adaptation	Cover frames	
8LK5002-2AA28	8LK3013-5AA73	8LK6036-8AA68	1 × 8LK3013-7AA52	8LK3013-6AA30	8LK3013-6AA12
8LK5002-1AA53	8LK3013-5AA66	8LK6035-4AA33	2 × 8LK3013-6AA14	8LK3013-7AA51	8LK3012-0AA23
8LK5002-1AA54	8LK3013-5AA62	8LK6036-8AA54	2 × 8LK3013-6AA15	8LK3013-6AA20	8LK3012-0AA23
8LK5002-0AA41	8LK3013-6AA11	8LK6036-8AA84	1 × 8LK3013-7AA52	8LK3013-6AA30	8LK3013-6AA12
8LK5002-1AA53	8LK3013-5AA65	8LK6035-4AA32	2 × 8LK3013-6AA14	8LK3013-7AA51	8LK3012-0AA23
8LK5002-1AA54	8LK3013-5AA61	8LK6036-8AA53	2 × 8LK3013-6AA15	8LK3013-6AA20	8LK3012-0AA23

System overview, page 15/20

© Siemens 2025

Section expansion

Coupling panels, 3-pole

IP54

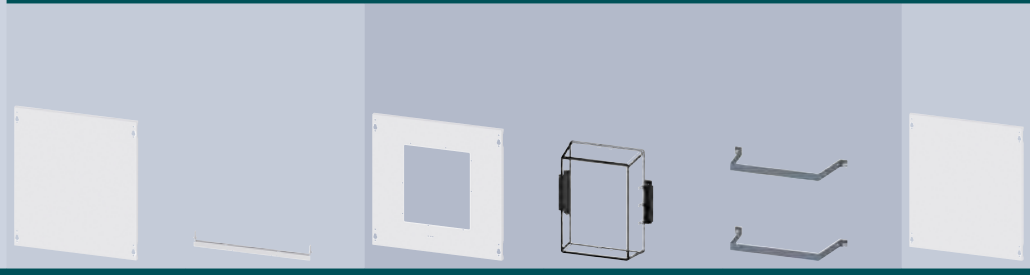

Size	I_n	Width	❶ Compartment doors at top [1]	Door strut	❷ Compartment doors [1]	Plexiglas cover	Fixing element	❸ Compartment doors at bottom [1]
Fixed-mounted								
0	1250 A	600 mm	8LK2067-6AA08	8LK3011-6AA58	8LK2060-6AA78	3WA9111-0AP03	8LK2000-0AJ65	8LK2070-6AA24
1	2000 A	600 mm	8LK2067-6AA08	8LK3011-6AA58	8LK2060-6AA67	3WA9111-0AP03	–	8LK2070-6AA24
2	3200 A	800 mm	8LK2067-8AA12	8LK3011-8AA82	8LK2060-8AA42	3WA9111-0AP03	–	8LK2070-8AA43
Withdrawable								
0	1250 A	600 mm	8LK2067-6AA08	8LK3011-6AA58	8LK2060-6AA53	3WA9111-0AP03	8LK2000-0AJ65	8LK2070-6AA24
2	2000 A	600 mm	8LK2067-6AA08	8LK3011-6AA58	8LK2060-6AA67	3WA9111-0AP03	–	8LK2070-6AA24
3	3200 A	800 mm	8LK2067-8AA12	8LK3011-8AA82	8LK2060-8AA42	3WA9111-0AP03	–	8LK2070-8AA43

[1] Without locking and hinge

System overview, page 15/20

© Siemens 2025

Accessories

Hinge

Version	Article No.
Ti-Grey	8LK2000-0AH55

Locking

Version		Article No.
Double-bit		8LK2000-0AH58
Handle	without lock	8LK2000-0AH56
	with flat cylinder (keyed alike)	8LK2000-0AH61
Inner door struts		8LK2000-0AD15





Sealing frame	❹ Device compartment		❺ Connection	❻ Auxiliary device compartments		❼ Uprights
	Mounting plates	Obstacle	Busbar	8GK adaptation	Cover frames	
8LK2197-6AC65	8LK5002-2AA28	8LK3013-5AA73	8LK6036-8AA68	1 × 8LK3013-7AA52	8LK3013-6AA30	8LK3013-6AA12
8LK2197-6AC65	8LK5002-1AA53	8LK3013-5AA66	8LK6035-4AA33	2 × 8LK3013-6AA14	8LK3013-7AA51	8LK3012-0AA23
8LK2197-8AD25	8LK5002-1AA54	8LK3013-5AA62	8LK6036-8AA54	2 × 8LK3013-6AA15	8LK3013-6AA20	8LK3012-0AA23
8LK2197-6AC65	8LK5002-0AA41	8LK3013-6AA11	8LK6036-8AA84	1 × 8LK3013-7AA52	8LK3013-6AA30	8LK3013-6AA12
8LK2197-6AC65	8LK5002-1AA53	8LK3013-5AA65	8LK6035-4AA32	2 × 8LK3013-6AA14	8LK3013-7AA51	8LK3012-0AA23
8LK2197-8AD25	8LK5002-1AA54	8LK3013-5AA61	8LK6036-8AA53	2 × 8LK3013-6AA15	8LK3013-6AA20	8LK3012-0AA23

System overview, page 15/20

© Siemens 2025

Section expansion

Coupling panels, 4-pole

IP30



Size	I_n	Width	❶ Compartment doors at top [1]	Door strut	❷ Compartment doors [1]	Sealing frame	❸ Compartment doors at bottom [1]
Fixed-mounted							
0	1250 A	600 mm	8LK2067-6AA07	8LK3011-6AA58	8LK2060-6AA80	3VW9011-0AP01	8LK2070-6AA23
1	2000 A	600 mm	8LK2067-6AA07	8LK3011-6AA58	8LK2060-4AA66	3WA9111-0AP01	8LK2070-6AA23
2	3200 A	800 mm	8LK2067-8AA11	8LK3011-8AA82	8LK2060-8AA41	3WA9111-0AP01	8LK2070-8AA42
Withdrawable							
0	1250 A	600 mm	8LK2067-6AA07	8LK3011-6AA58	8LK2060-6AA54	3VW9011-0AP02	8LK2070-6AA23
2	2000 A	600 mm	8LK2067-6AA07	8LK3011-6AA58	8LK2060-4AA66	3WA9111-0AP01	8LK2070-6AA23
3	3200 A	800 mm	8LK2067-8AA11	8LK3011-8AA82	8LK2060-8AA41	3WA9111-0AP01	8LK2070-8AA42

[1] Without locking and hinge

15

System overview, page 15/20

© Siemens 2025

Accessories

Hinge

Version	Article No.
Ti-Grey	8LK2000-0AH55

Locking

Version		Article No.
Double-bit		8LK2000-0AH58
Handle	without lock	8LK2000-0AH56
	with flat cylinder (keyed alike)	8LK2000-0AH61
Inner door struts		8LK2000-0AD15

❹ Device compartment		❺ Busbar connection		❻ Auxiliary device compartments		❼ Uprights
Mounting plates	Obstacle	L1 – L3	N	8GK adaptation	Cover frames	
8LK5002-2AA28	8LK3013-5AA73	8LK6036-8AA68	8LK3013-7AA52	1 × 8LK3013-7AA52	8LK3013-6AA30	8LK3013-6AA12
8LK5002-1AA53	8LK3013-5AA66	8LK6035-4AA33	8LK3013-6AA14	2 × 8LK3013-6AA14	8LK3013-7AA51	8LK3012-0AA23
8LK5002-1AA54	8LK3013-5AA62	8LK6036-8AA54	8LK3013-6AA15	2 × 8LK3013-6AA15	8LK3013-6AA20	8LK3012-0AA23
8LK5002-0AA41	8LK3011-6AA56	8LK6036-8AA84	8LK3013-7AA52	1 × 8LK3013-7AA52	8LK3013-6AA30	8LK3013-6AA12
8LK5002-1AA53	8LK3013-5AA67	8LK6035-4AA32	8LK3013-6AA14	2 × 8LK3013-6AA14	8LK3013-7AA51	8LK3012-0AA23
8LK5002-1AA54	8LK3013-5AA63	8LK6036-8AA53	8LK3013-6AA15	2 × 8LK3013-6AA15	8LK3013-6AA20	8LK3012-0AA23

15

System overview, page 15/20

© Siemens 2025

Section expansion

Coupling panels, 4-pole

IP54

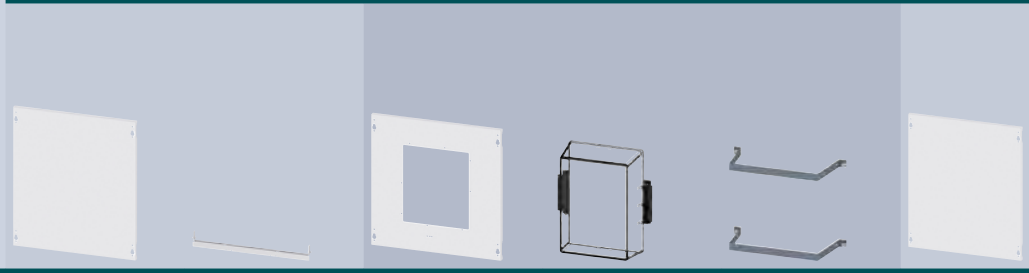

Size	I_n	Width	❶ Compartment doors at top [1]	Door strut	❷ Compartment doors [1]	Plexiglas cover	Fixing element	❸ Compartment doors at bottom [1]
Festeinbau								
0	1250 A	600 mm	8LK2067-6AA08	8LK3011-6AA58	8LK2060-6AA78	3WA9111-0AP03	8LK2000-0AJ65	8LK2070-6AA24
1	2000 A	600 mm	8LK2067-6AA08	8LK3011-6AA58	8LK2060-6AA67	3WA9111-0AP03	–	8LK2070-6AA24
2	3200 A	800 mm	8LK2067-8AA12	8LK3011-8AA82	8LK2060-8AA42	3WA9111-0AP03	–	8LK2070-8AA43
Einschubtechnik								
0	1250 A	600 mm	8LK2067-6AA08	8LK3011-6AA58	8LK2060-6AA53	3WA9111-0AP03	8LK2000-0AJ65	8LK2070-6AA24
2	2000 A	600 mm	8LK2067-6AA08	8LK3011-6AA58	8LK2060-6AA67	3WA9111-0AP03	–	8LK2070-6AA24
3	3200 A	800 mm	8LK2067-8AA12	8LK3011-8AA82	8LK2060-8AA42	3WA9111-0AP03	–	8LK2070-8AA43

[1] Without locking and hinge

15

System overview, page 15/20

© Siemens 2025

Accessories

Hinge

Version	Article No.
Ti-Grey	8LK2000-0AH55

Locking

Version		Article No.
Double-bit		8LK2000-0AH58
Handle	without lock	8LK2000-0AH56
	with flat cylinder (keyed alike)	8LK2000-0AH61
Inner door struts		8LK2000-0AD15









Sealing frame	❹ Device compartment		❺ Busbar connection		❻ Auxiliary device compartments		❼ Uprights
	Mounting plates	Obstacle	L1 – L3	N	8GK adaptation	Cover frames	
8LK2197-6AC65	8LK5002-2AA28	8LK3013-5AA73	8LK6036-8AA68	8LK3013-7AA52	1 × 8LK3013-7AA52	8LK3013-6AA30	8LK3013-6AA12
8LK2197-6AC65	8LK5002-1AA53	8LK3013-5AA66	8LK6035-4AA33	8LK3013-6AA14	2 × 8LK3013-6AA14	8LK3013-7AA51	8LK3012-0AA23
8LK2197-8AD25	8LK5002-1AA54	8LK3013-5AA62	8LK6036-8AA54	8LK3013-6AA15	2 × 8LK3013-6AA15	8LK3013-6AA20	8LK3012-0AA23
8LK2197-6AC65	8LK5002-0AA41	8LK3011-6AA56	8LK6036-8AA84	8LK3013-7AA52	1 × 8LK3013-7AA52	8LK3013-6AA30	8LK3013-6AA12
8LK2197-6AC65	8LK5002-1AA53	8LK3013-5AA67	8LK6035-4AA32	8LK3013-6AA14	2 × 8LK3013-6AA14	8LK3013-7AA51	8LK3012-0AA23
8LK2197-8AD25	8LK5002-1AA54	8LK3013-5AA63	8LK6036-8AA53	8LK3013-6AA15	2 × 8LK3013-6AA15	8LK3013-6AA20	8LK3012-0AA23

System overview, page 15/20

© Siemens 2025

Section expansion

Siemens EcoTech

Coupling panels, doors

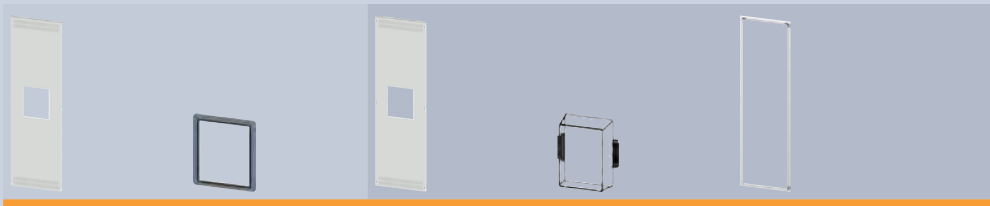

Locking — Type A

Single locking

Rotary handle:
– Double-bit
– Flat cylinder

❶ Doors	Hinge	Size	Width	Double-bit IP30	Sealing frame	Double-bit IP54	Covers	Sealing frame
Festeinbau								
3-pole	Left	1	600 mm	8LK2197-6AD22	3WA9111-0AP01	8LK2197-6AD25	3WA9111-0AP03	8LK2197-6AC64
	Right	1	600 mm	8LK2197-6AD22	3WA9111-0AP01	8LK2197-6AD25	3WA9111-0AP03	8LK2197-6AC64
4-pole	Left	1	600 mm	8LK2197-6AD22	3WA9111-0AP01	8LK2197-6AD25	3WA9111-0AP03	8LK2197-6AC64
	Right	1	600 mm	8LK2197-6AD22	3WA9111-0AP01	8LK2197-6AD25	3WA9111-0AP03	8LK2197-6AC64
Einschubtechnik								
3-pole	Left	1	600 mm	8LK2197-6AD22	3WA9111-0AP01	8LK2197-6AD25	3WA9111-0AP03	8LK2197-6AC64
	Right	1	600 mm	8LK2197-6AD22	3WA9111-0AP01	8LK2197-6AD25	3WA9111-0AP03	8LK2197-6AC64
4-pole	Left	1	600 mm	8LK2197-6AD22	3WA9111-0AP01	8LK2197-6AD25	3WA9111-0AP03	8LK2197-6AC64
	Right	1	600 mm	8LK2197-6AD22	3WA9111-0AP01	8LK2197-6AD25	3WA9111-0AP03	8LK2197-6AC64
❷ Hinge								
	Ti-Grey			3 × 8LK2000-0AH55	–	3 × 8LK2000-0AH55	–	–
❸ Single locking								
	Handle	without lock		8LK2000-0AH56	–	8LK2000-0AH56	–	–
		lockable		8LK2000-0AH61	–	8LK2000-0AH61	–	
	Double-bit			8LK2000-0AH58	–	8LK2000-0AH58	–	–
❹ Central locking								
	Rotary handle	without lock		8LK2000-0AH57	–	8LK2000-0AH57	–	–
		double-bit		8LK2000-0AH60	–	8LK2000-0AH60	–	–
		flat cylinder		8LK2000-0AH62	–	8LK2000-0AH62	–	–
		for profile semicylinder		–	–	–	–	–
	Profile semicylinder	DIN 18252/18254 8 × 45°		–	–	–	–	–
	Locking rods	with guides		8LK2100-0AA06	–	8LK2100-0AA06	–	–

15

System overview, page 15/20

© Siemens 2025

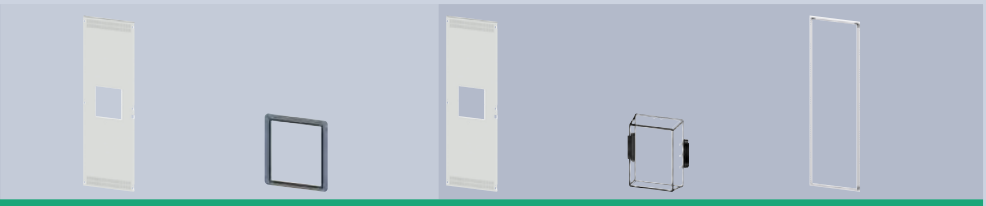

Type B

Rotary handle:
– Profile semicylinder

Rotary handle IP30	Sealing frame	Rotary handle IP54	Covers	Sealing frame
8LK2197-6AD23	3WA9111-0AP01	–	–	–
8LK2197-6AD24	3WA9111-0AP01	8LK2197-6AD26	3WA9111-0AP03	8LK2197-6AC64
8LK2197-6AD23	3WA9111-0AP01	–	–	–
8LK2197-6AD24	3WA9111-0AP01	8LK2197-6AD26	3WA9111-0AP03	8LK2197-6AC64
8LK2197-6AD23	3WA9111-0AP01	–	–	–
8LK2197-6AD24	3WA9111-0AP01	8LK2197-6AD26	3WA9111-0AP03	8LK2197-6AC64
8LK2197-6AD23	3WA9111-0AP01	–	–	–
8LK2197-6AD24	3WA9111-0AP01	8LK2197-6AD26	3WA9111-0AP03	8LK2197-6AC64
3 × 8LK2000-0AH55	–	3 × 8LK2000-0AH55	–	–
–	–	–	–	–
–	–	–	–	
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
8LK2000-0AH63	–	8LK2000-0AH63	–	–
8PQ9400-0BA26	–	8PQ9400-0BA26	–	–
8LK2100-0AA07	–	8LK2100-0AA07	–	–

Ordering guide

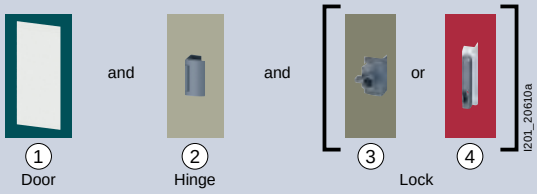

15

Locks

Profile semicylinder

Flat cylinder

Double-bit lock

System overview, page 15/20

© Siemens 2025

Section expansion

Transformer metering section

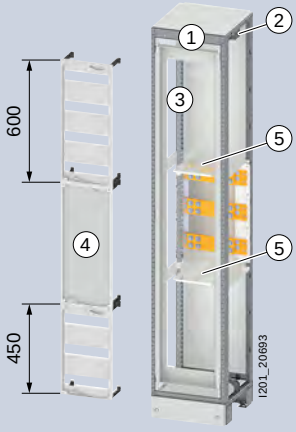

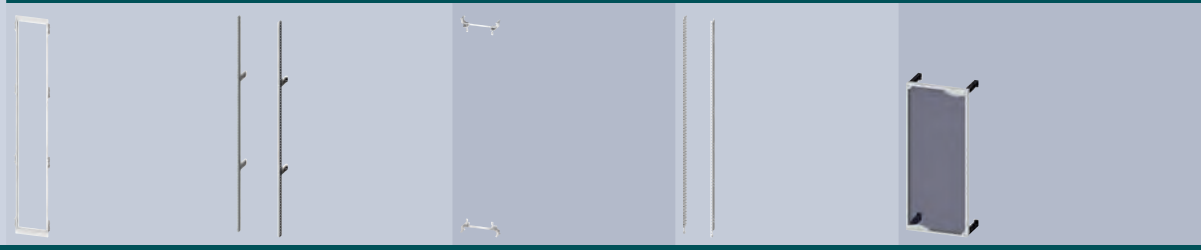

Depth	Width	DIN	❶ Cover frames	Uprights	❷ 8GK adaptation	❸ Longitudinal stays	❹ Front covers with inspection window Height 600 mm
400 mm	400 mm	☐	8LK3013-6AA25	–	8LK3013-5AA25	8GK4851-4KK00	8GK4500-4KK12
600 mm	400 mm	☐	8LK3013-6AA25	8LK3011-8AA38	8LK3013-5AA25	8GK4851-4KK00	8GK4500-4KK12

Accessories

Copper plate

Busbar cross-section (mm)	Article No.
2 × 80 × 10 mm 2 × 100 × 10 mm	8LK4003-3AA64

System overview, page 15/20

© Siemens 2025



❺ Partition

Busbar: front	Busbar: rear
2 × 8LK3013-5AA35	–
2 × 8LK3013-3AA36	2 × 8LK3013-6AA10 new

System overview, page 15/20

© Siemens 2025

Section expansion

Siemens EcoTech

In-line design (fixed-mounted), to I_n = 1250 A

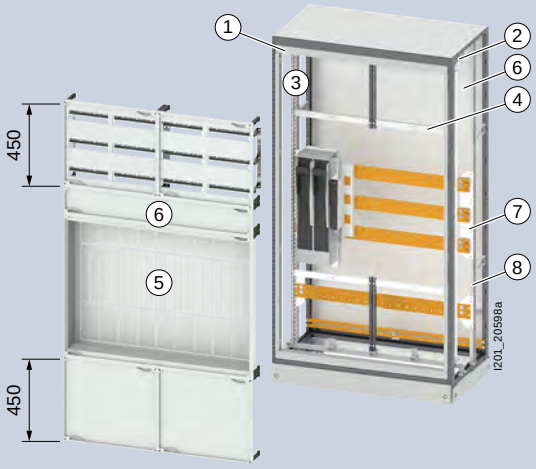

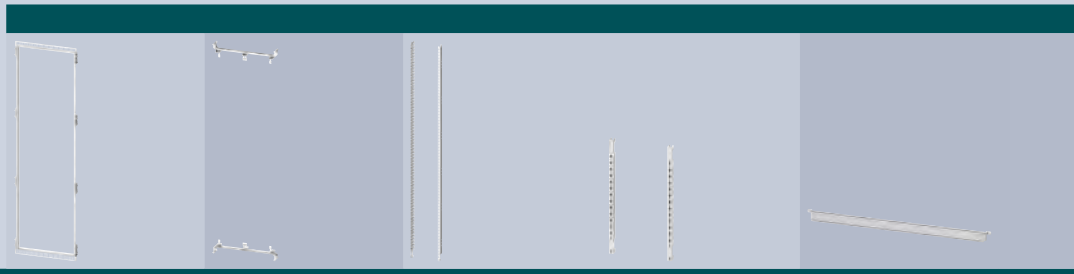

Depth	Width	DIN	Quantity NH1	❶ Cover frames new	❷ 8GK adaptation	❸ Longitudinal stays Height 1800 mm	Height 450 mm	❹ Crossbars
400 mm	600 mm	□□	4	8LK3013-6AA26	8LK3011-6AA32	8GK4853-8KK02	–	–
	850 mm	□□□	7	8LK3013-6AA27	8LK3011-6AA33	8GK4853-8KK02	–	–
	1100 mm	□□□□	9	8LK3013-6AA28	8LK3011-6AA34	8GK4853-8KK02	8GK4851-3KK00	8GK4853-0KK40
600 mm	600 mm	□□	4	8LK3013-6AA26	8LK3011-6AA32	8GK4853-8KK02	–	–
	850 mm	□□□	7	8LK3013-6AA27	8LK3011-6AA33	8GK4853-8KK02	–	–
	1100 mm	□□□□	9	8LK3013-6AA28	8LK3011-6AA34	8GK4853-8KK02	8GK4851-3KK00	8GK4853-0KK40

15

Accessories

NH00 installation

Version	Article No.
Adapter 185 mm	3NJ4918-0DA02

Version	Article No.
Covers	3NJ4912-1DA02

Blanking covers for ❺

Version	Article No.
NH00: 50 mm	3NJ4912-2AA00
NH1-3: 100 mm	3NJ4912-2BA00

System overview, page 15/20

© Siemens 2025



❺ Covers	❻ Front cover Height 150 mm	Height 450 mm	❼ Busbar supports	Set of supports Transformer measurement	❽ Uprights
8LK5002-0AA30	8LK5002-2AA21	8GK4501-3KK22	8LK4002-6AA38	8LK4002-8AA61	–
8LK5002-0AA31	8LK5002-2AA22	8GK4501-3KK32	8LK4002-6AA38	8LK4002-8AA62	–
8LK5002-0AA37	8LK5002-2AA04	8LK5002-2AA31 new	8LK4002-6AA38	8LK4002-8AA63	–
8LK5002-0AA30	8LK5002-2AA21	8GK4501-3KK22	8LK4002-6AA38	8LK4002-8AA61	8LK3011-8AA38
8LK5002-0AA31	8LK5002-2AA22	8GK4501-3KK32	8LK4002-6AA38	8LK4002-8AA62	8LK3011-8AA38
8LK5002-0AA37	8LK5002-2AA04	8LK5002-2AA31 new	8LK4002-6AA38	8LK4002-8AA63	8LK3011-8AA38

See 3NJ4 fuse switch disconnectors from page 8/96
See LV HRC fuse links from page 7/38

System overview, page 15/20

© Siemens 2025

Section expansion

Siemens EcoTech

In-line design (fixed-mounted) with second level, to I_n = 630 A

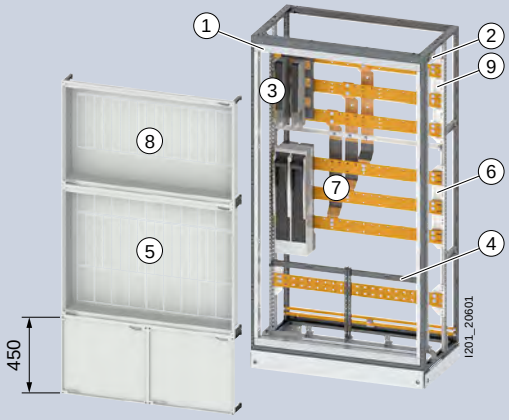

Position

Center

Bottom

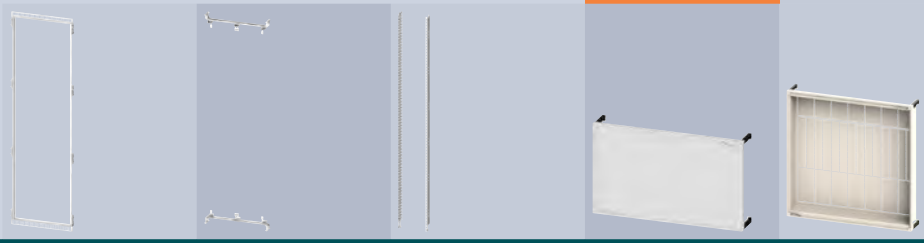

Depth	Width	DIN	Quantity NH1 ❺	Quantity NH00 ❽	❶ Cover frames new	❷ 8GK adaptation	❸ Longitudinal stays Height 1800 mm	❹ Front cover Height 450 mm	❺ Covers
400 mm	600 mm	□□	3	8	8LK3013-6AA26	8LK3011-6AA32	8GK4853-8KK02	8GK4501-3KK22	8LK5002-0AA30
	850 mm	□□□	6	14	8LK3013-6AA27	8LK3011-6AA33	8GK4853-8KK02	8GK4501-3KK32	8LK5002-0AA31
	1100 mm	□□□□	7	18	8LK3013-6AA28	8LK3011-6AA34	8GK4853-8KK02	8LK5002-2AA31 new	8LK5002-0AA37
600 mm	600 mm	□□	3	8	8LK3013-6AA26	8LK3011-6AA32	8GK4853-8KK02	8GK4501-3KK22	8LK5002-0AA30
	850 mm	□□□	6	14	8LK3013-6AA27	8LK3011-6AA33	8GK4853-8KK02	8GK4501-3KK32	8LK5002-0AA31
	1100 mm	□□□□	7	18	8LK3013-6AA28	8LK3011-6AA34	8GK4853-8KK02	8LK5002-2AA31 new	8LK5002-0AA37

Accessories

NH00 installation

	Version	Article No.
	Adapter 185 mm	3NJ4918-0DA02
	Covers	3NJ4912-1DA02

15

System overview, page 15/20

© Siemens 2025

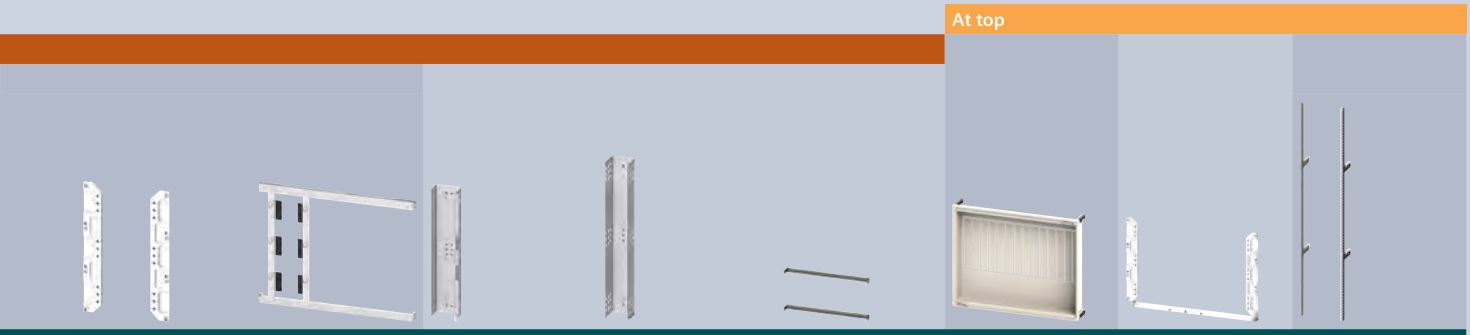

					At top		
❻ Busbar supports	Set of supports Transformer measurement	❼ Cable duct			❽ Covers	❾ Busbar supports	❿ Uprights
		center	outside	rear	NH00	at top	
8LK4002-6AA38	8LK4002-8AA61	–	8LK5002-0AA36	–	8LK5002-2AA25	8LK4002-8AA82	–
8LK4002-6AA38	8LK4002-8AA62	–	8LK5002-0AA34	–	8LK5002-2AA26	8LK4002-8AA83	–
8LK4002-6AA38	8LK4002-8AA63	8LK5002-0AA35	8LK5002-0AA36	–	8LK5002-2AA27	8LK4002-8AA84	–
8LK4002-6AA38	8LK4002-8AA61	–	–	8LK5002-2AA17	8LK5002-2AA25	8LK4002-8AA82	8LK3011-8AA38
8LK4002-6AA38	8LK4002-8AA62	–	–	8LK5002-2AA20	8LK5002-2AA26	8LK4002-8AA83	8LK3011-8AA38
8LK4002-6AA38	8LK4002-8AA63	–	–	8LK5002-2AA18	8LK5002-2AA27	8LK4002-8AA84	8LK3011-8AA38

15

Accessories

Blanking covers

Installation	Version	Article No.
At top ❽	NH00: 50 mm	3NJ4912-2CA00
Center ❺	NH00: 50 mm	3NJ4912-2AA00
	NH1-3: 100 mm	3NJ4912-2BA00

See 3NJ4 fuse switch disconnectors 3NJ4 from page 8/96
See LV HRC fuse links from page 7/38

System overview, page 15/20

© Siemens 2025

Section expansion

Siemens EcoTech

ALPHA DIN modular installation system

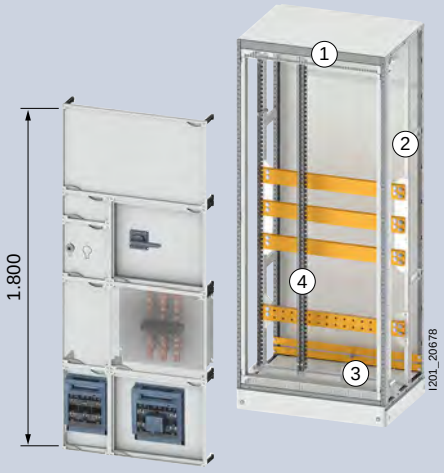

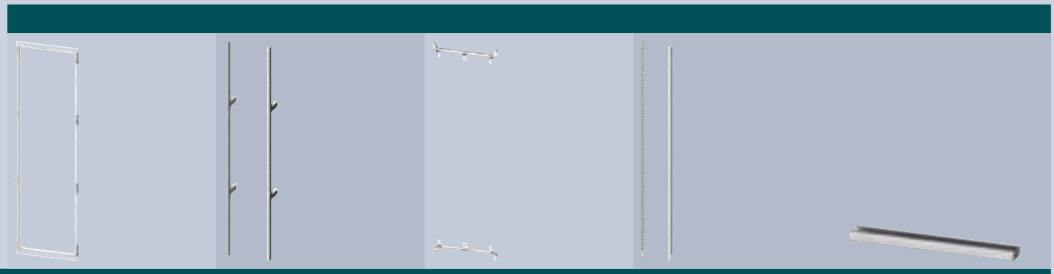

Depth	Width	DIN	❶ Cover frames new	❷ Uprights	❸ 8GK adaptation	❹ Longitudinal stays	Cable clamping rail C30 × 15 mm
400 mm	350 mm	□	8LK3013-6AA24	–	8LK3011-6AA31	1 × 8GK4853-8KK02	8GK9911-0KK10
	600 mm	□□	8LK3013-6AA26	–	8LK3011-6AA32	2 × 8GK4853-8KK02	8GK9911-0KK20
	850 mm	□□□	8LK3013-6AA27	–	8LK3011-6AA33	3 × 8GK4853-8KK02	8GK9911-0KK30
	1100 mm	□□□□	8LK3013-6AA28	–	8LK3011-6AA34	4 × 8GK4853-8KK02	8GK9911-0KK40
600 mm	350 mm	□	8LK3013-6AA24	8LK3011-8AA38	8LK3011-6AA31	1 × 8GK4853-8KK02	8GK9911-0KK10
	600 mm	□□	8LK3013-6AA26	8LK3011-8AA38	8LK3011-6AA32	2 × 8GK4853-8KK02	8GK9911-0KK20
	850 mm	□□□	8LK3013-6AA27	8LK3011-8AA38	8LK3011-6AA33	3 × 8GK4853-8KK02	8GK9911-0KK30
	1100 mm	□□□□	8LK3013-6AA28	8LK3011-8AA38	8LK3011-6AA34	4 × 8GK4853-8KK02	8GK9911-0KK40

15

See ALPHA 8GK assembly kits from page 15/238

System overview, page 15/20

© Siemens 2025

Transformer measurement

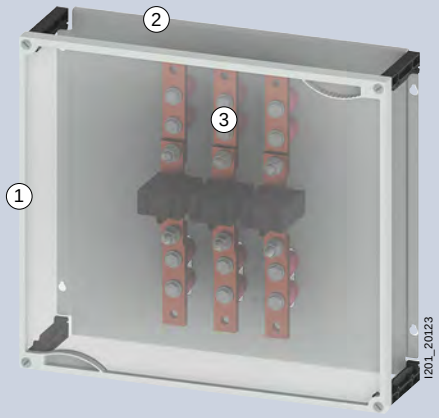

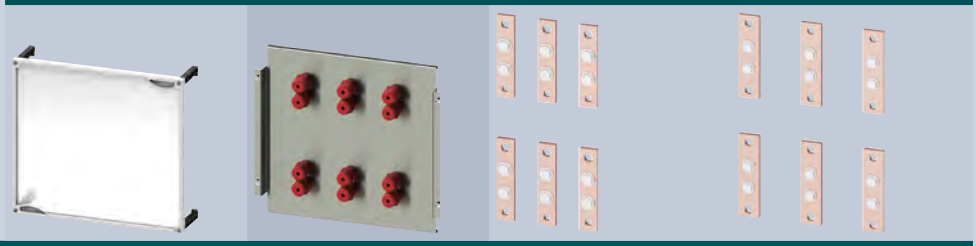

Height	Width	DIN	I_n	❶ Transparent covers	❷ Mounting plates	❸ Connecting terminal 30 × 10 mm	❸ Connecting terminal 40 × 10 mm
450 mm	250 mm	□	400 A	8GK4500-3KK12	8LK5002-1AA55	8LK6035-3AA82	8LK6035-3AA83
	500 mm	□□	500 A	8GK4500-3KK22	8LK5002-1AA56	8LK6035-3AA82	8LK6035-3AA83

System overview, page 15/20

© Siemens 2025

Section expansion

Meter support plates

	Terminal compartment:		❶ Terminal compartment: At top		
Counter	At top	At bottom	Front cover	DIN rails	Supports
300 mm Tariff switching device 	150 mm	150 mm	8GS4006-0	8GS4010-6	8GS4018-8
		300 mm	8GS4006-0	8GS4010-6	8GS4018-8
	300 mm	150 mm	8GS4006-5	8GS4010-6	8GS4018-8
		300 mm	8GS4006-5	8GS4010-6	8GS4018-8
450 mm 	150 mm	150 mm	8GS4006-0	8GS4010-6	8GS4018-8
		300 mm	8GS4006-0	8GS4010-6	8GS4018-8
	300 mm	150 mm	8GS4006-5	8GS4010-6	8GS4018-8
		300 mm	8GS4006-5	8GS4010-6	8GS4018-8
750 mm 	150 mm	150 mm	8GS4006-0	8GS4010-6	8GS4018-8
		300 mm	8GS4006-0	8GS4010-6	8GS4018-8
	300 mm	150 mm	8GS4006-5	8GS4010-6	8GS4018-8
		300 mm	8GS4006-5	8GS4010-6	8GS4018-8

15

System overview, page 15/20

© Siemens 2025

❷ Meter support plates	❸ Terminal compartment: At bottom		❹ Partition
	Front cover	Supports	
8GS4007-7	8GS4006-0	8GS4018-8	2 × 8GK9302-2KK01
8GS4007-7	8GS4006-5	8GS4018-8	2 × 8GK9302-2KK01
8GS4007-7	8GS4006-0	8GS4018-8	2 × 8GK9302-2KK01
8GS4007-7	8GS4006-5	8GS4018-8	2 × 8GK9302-2KK01
8GS4007-4	8GS4006-0	8GS4018-8	2 × 8GK9302-3KK01
8GS4007-4	8GS4006-5	8GS4018-8	2 × 8GK9302-3KK01
8GS4007-4	8GS4006-0	8GS4018-8	2 × 8GK9302-3KK01
8GS4007-4	8GS4006-5	8GS4018-8	2 × 8GK9302-3KK01
top: 8GS4007-5 bottom: 8GS4007-6	8GS4006-0	8GS4018-8	2 × 8GK9302-5KK01
top: 8GS4007-5 bottom: 8GS4007-6	8GS4006-5	8GS4018-8	2 × 8GK9302-5KK01
top: 8GS4007-5 bottom: 8GS4007-6	8GS4006-0	8GS4018-8	2 × 8GK9302-5KK01
top: 8GS4007-5 bottom: 8GS4007-6	8GS4006-5	8GS4018-8	2 × 8GK9302-5KK01

System overview, page 15/20

© Siemens 2025

Section expansion

Mounting plates

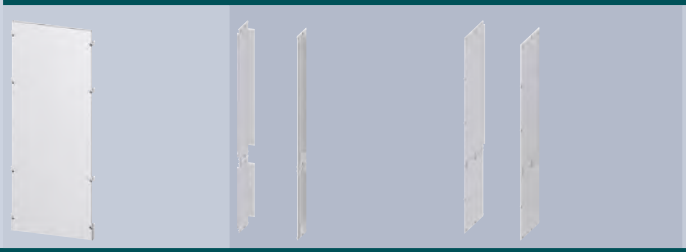

Depth	Width	❶ Mounting plates	❷ Partition		❸ Uprights	
			with busbar	without busbar	with busbar	without busbar
400 mm	400 mm	8LK3011-5AA30	8LK3011-5AA23	8LK3011-5AA35	8LK3011-5AA37	8LK3011-5AA36
	600 mm	8LK3011-5AA31	8LK3011-5AA23	8LK3011-5AA35	8LK3011-5AA37	8LK3011-5AA36
	800 mm	8LK3011-5AA32	8LK3011-5AA23	8LK3011-5AA35	8LK3011-5AA37	8LK3011-5AA36
	1100 mm	8LK3011-5AA33	8LK3011-5AA23	8LK3011-5AA35	8LK3011-5AA37	8LK3011-5AA36
600 mm	400 mm	8LK3011-5AA30	8LK3011-5AA23	8LK3011-5AA35	8LK3013-5AA33	8LK3013-5AA32
	600 mm	8LK3011-5AA31	8LK3011-5AA23	8LK3011-5AA35	8LK3013-5AA33	8LK3013-5AA32
	800 mm	8LK3011-5AA32	8LK3011-5AA23	8LK3011-5AA35	8LK3013-5AA33	8LK3013-5AA32
	1100 mm	8LK3011-5AA33	8LK3011-5AA23	8LK3011-5AA35	8LK3013-5AA33	8LK3013-5AA32

System overview, page 15/20

© Siemens 2025

❹ Cable brackets C40 × 22.5 mm	❺ Inner door	Inner door struts
8LK3001-6AA60	–	–
8LK3001-6AA61	8LK3011-6AA37	2 × 8LK2000-0AD16
8LK3001-6AA62	8LK3011-6AA38	2 × 8LK2000-0AD16
8LK3011-6AA40	–	–
8LK3001-6AA60	–	–
8LK3001-6AA61	8LK3011-6AA37	2 × 8LK2000-0AD16
8LK3001-6AA62	8LK3011-6AA38	2 × 8LK2000-0AD16
8LK3011-6AA40	–	–

System overview, page 15/20

© Siemens 2025

Section expansion

Siemens EcoTech

Corner sections new

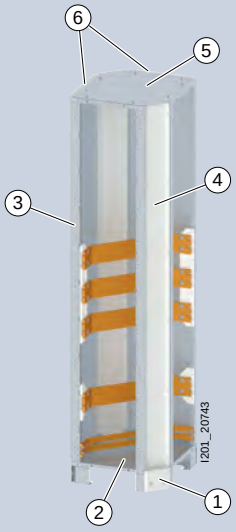

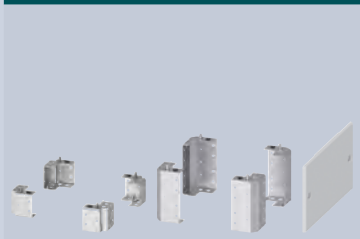

Depth	Busbar	❶ Base corner pieces		Base cover		❷ Floor plate		❸ Frame	Uprights
		Height				IP30	IP54		
		100 mm	200 mm	100 mm	200 mm				
400 mm	rear	8LK1010-0AA07	8LK1020-0AA17	8LK1010-4AA02	8LK1020-4AA02	8LK2300-4AA74	8LK2300-4AA75	8LK1200-0AA05	–
600 mm	front	8LK1010-0AA07	8LK1020-0AA17	8LK1010-6AA03	8LK1020-6AA05	8LK2300-6AB26	8LK2300-6AB27	8LK1200-6AA04	2 × 8LK3013-6AA37
	rear	8LK1010-0AA07	8LK1020-0AA17	8LK1010-6AA03	8LK1020-6AA05	8LK2300-6AB26	8LK2300-6AB27	8LK1200-6AA04	–
	front-rear	8LK1010-0AA07	8LK1020-0AA17	8LK1010-6AA03	8LK1020-6AA05	8LK2300-6AB26	8LK2300-6AB27	8LK1200-6AA04	8LK3013-6AA37
	rear-front	8LK1010-0AA07	8LK1020-0AA17	8LK1010-6AA03	8LK1020-6AA05	8LK2300-6AB26	8LK2300-6AB27	8LK1200-6AA04	8LK3013-6AA37

System overview, page 15/20

© Siemens 2025

PE fixing	❹ Covers		❺ Roof plate			❻ Rear wall	
	IP30	IP54	IP30	IP54	IP X1	IP30	IP45
–	8LK2200-0AA21	8LK2200-0AA22	8LK2300-4AA72	8LK2300-4AA73	8LK2300-4AA76	2 × 8LK2420-4AA10	2 × 8LK2420-4AA08
8LK4003-5AA14	8LK2200-0AA21	8LK2200-0AA22	8LK2300-6AB24	8LK2300-6AB25	8LK2300-6AB28	2 × 8LK2420-6AA10	2 × 8LK2420-6AA08
8LK4003-5AA14	8LK2200-0AA21	8LK2200-0AA22	8LK2300-6AB24	8LK2300-6AB25	8LK2300-6AB28	2 × 8LK2420-6AA10	2 × 8LK2420-6AA08
8LK4003-5AA14	8LK2200-0AA21	8LK2200-0AA22	8LK2300-6AB24	8LK2300-6AB25	8LK2300-6AB28	2 × 8LK2420-6AA10	2 × 8LK2420-6AA08
8LK4003-5AA14	8LK2200-0AA21	8LK2200-0AA22	8LK2300-6AB24	8LK2300-6AB25	8LK2300-6AB28	2 × 8LK2420-6AA10	2 × 8LK2420-6AA08

System overview, page 15/20

© Siemens 2025

Internal partitions

Barriers

Depth	Busbar	straight	With changeover – mounting on left
400 mm	rear	8LK3013-5AA26	–
600 mm	rear	8LK3013-5AA31	–
	front	8LK3013-5AA27	–
600 mm	600 to 400 mm	–	8LK3013-5AA28
	400 to 600 mm	–	8LK3013-5AA30

15

System overview, page 15/20

© Siemens 2025

System overview, page 15/20

© Siemens 2025

Accessories

Siemens EcoTech

Roll material



Application	Version	Scope of supply	Article No.
Sealing tape – base	Width 30 mm, height 0.05 mm	1 roll = 228 m	8LK1000-0AA78
Sealing foil – base of frame	Width 19 mm	1 roll = 50 m	8LK2000-0AJ71
Sealing tape – cable entry at top	Width 10 mm, height 4 mm	1 roll = 15 m	8LK2000-0AJ72
Circuit breaker insulation	Width 35 mm	1 roll = 15 m	8LK6036-2AA14

Cubicle keys

Version	Scope of supply	Article No.
3 mm double bit	10 units	8PQ9400-0BA12

Self-tapping screws – Frame

Type	Version	Scope of supply	Article No.
Cylinder-head screws	M6 × 10 mm	100 units	8PQ9500-0BA34
DIN 7500-PE, ST, zinc-plated	M6 × 16 mm	100 units	8PQ9500-0BA32
	M6 × 20 mm	100 units	8PQ9500-0BA31
Countersunk screws DIN 7500-QE, ST, zinc-plated	M6 × 12 mm	100 units	8PQ9500-1BA07

Mounting accessories

Version	Scope of supply	Article No.
ALPHA 8GK assembly tool for supports	1 unit	8GK9910-0KK27

Cable clamping rails C40 × 22.5 mm

Type	Width	Scope of supply	Article No.
Direct installation	350 mm	1 unit	8LK3006-6AA46
	400 mm	1 unit	8LK3001-6AA60
	600 mm	1 unit	8LK3001-6AA61
	800 mm	1 unit	8LK3001-6AA62
	850 mm	1 unit	8LK3006-6AA45
	1100 mm	1 unit	8LK3011-6AA40
With bracket	350 mm	1 unit	8LK3011-8AA42
	400 mm	1 unit	8LK3011-8AA43
	600 mm	1 unit	8LK3011-8AA44
	800 mm	1 unit	8LK3011-8AA45
	850 mm	1 unit	8LK3011-8AA46
	1100 mm	1 unit	8LK3011-8AA47

Mounting frame for measuring devices new

Type	Depth	Scope of supply	Article No.
92 × 92 mm	36.5 mm	1 unit	8LK9400-4AA48

System overview, page 15/20

© Siemens 2025

Transport aids



Type	Width	Scope of supply	Article No.
Lifting brackets	350 mm	2 units	8LK9400-4AA14
	400 mm	2 units	8LK9400-4AA15
	600 mm	2 units	8LK9400-4AA16
	800 mm	2 units	8LK9400-4AA17
	850 mm	2 units	8LK9400-4AA18
	1100 mm	2 units	8LK9400-4AA21
Lifting brackets, corner section new	–	4 units	8LK9400-4AA45



Base reinforcements Height 100 mm	350 mm	2 units	8LK1000-0AA43
	400 mm	2 units	8LK1000-0AA11
	600 mm	2 units	8LK1000-0AA12
	800 mm	2 units	8LK1000-0AA13
	850 mm	2 units	8LK1000-0AA42
	1100 mm	2 units	8LK1011-0AA04

Transport

Base reinforcements

Pallet truck

15

System overview, page 15/20

© Siemens 2025

System overview

SIVACON S4 switchboards

Frame and enclosure

Accessories for frame and enclosure

Hinges for covers

Locks

Mech. mounting parts

Busbar systems

Main busbars

Vertical distribution busbars



PE bars

N and PE elevations

Section expansion: Main busbar at top/at bottom

3WA
incoming feeder panels

3WA
coupling panels

3VA
molded case
circuit breaker design

3VA
outgoing feeder panels
3NP1modular installation devices

3NJ4
outgoing feeder panels

3NJ6
outgoing feeder panels

Cable section

Corner sections

Mounting plates

ALPHA DIN 8GK modular installation system

© Siemens 2025

Section expansion: Main busbar at rear

3WA
incoming feeder panels

3VA
outgoing feeder panels
3NP1 modular
installation devices

3WA
coupling panels

Mounting plates

Internal partitions

Form 1
No internal partition

Form 2
Partition
+ busbar systems



Form 3
Partition
+ busbar systems
+ device compartments

Form 4
Partition
+ busbar systems
+ device compartments
+ connections

© Siemens 2025

Frame

For main busbar at top, at bottom and without

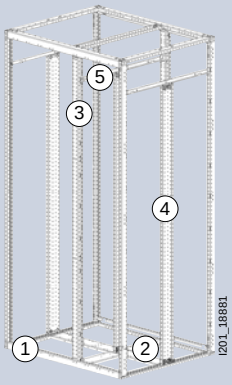

Position of main busbar

At top
At bottom
Without

Width	Depth	❶ Frame	❷ Floor plate partition crossbar	❸ Exterior intermediate upright	❹ Interior side upright	❺ Section division
400 mm	400 mm	8PQ1204-4BA01	–	–	8PQ3000-0BA65	–
	600 mm	8PQ1204-6BA01	–	–	8PQ3000-0BA01	–
	800 mm	8PQ1204-8BA01	–	–	8PQ3000-0BA02	–
600 mm	400 mm	8PQ1206-4BA01	–	–	8PQ3000-0BA65	–
	600 mm	8PQ1206-6BA01	–	–	8PQ3000-0BA01	–
	800 mm	8PQ1206-8BA01	–	–	8PQ3000-0BA02	–
800 mm	400 mm	8PQ1208-4BA01	8PQ3000-1BA38	8PQ3000-1BA43	8PQ3000-0BA65	8PQ3000-1BA31
	600 mm	8PQ1208-6BA01	8PQ3000-1BA40	8PQ3000-1BA43	8PQ3000-0BA01	8PQ3000-1BA32
	800 mm	8PQ1208-8BA01	2 × 8PQ3000-1BA38	8PQ3000-1BA43	8PQ3000-0BA02	8PQ3000-1BA34
1000 mm	400 mm	8PQ1201-4BA02	8PQ3000-1BA38	8PQ3000-1BA43	8PQ3000-0BA65	8PQ3000-1BA31
	600 mm	8PQ1201-6BA02	8PQ3000-1BA40	8PQ3000-1BA43	8PQ3000-0BA01	8PQ3000-1BA32
	800 mm	8PQ1201-8BA03	2 × 8PQ3000-1BA38	8PQ3000-1BA43	8PQ3000-0BA02	8PQ3000-1BA34
1200 mm	400 mm	8PQ1202-4BA02	8PQ3000-1BA38	8PQ3000-1BA43	8PQ3000-0BA65	8PQ3000-1BA31
	600 mm	8PQ1202-6BA02	8PQ3000-1BA40	8PQ3000-1BA43	8PQ3000-0BA01	8PQ3000-1BA32
	800 mm	8PQ1202-8BA02	2 × 8PQ3000-1BA38	8PQ3000-1BA43	8PQ3000-0BA02	8PQ3000-1BA34

System overview, page 15/70

© Siemens 2025

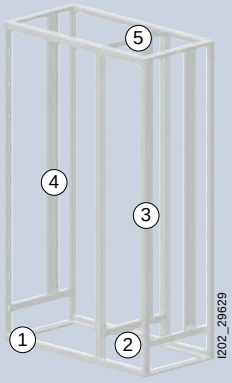

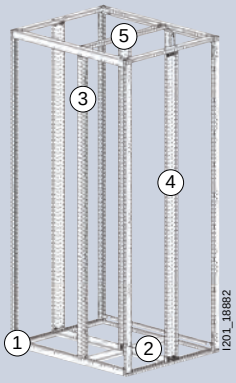



❹ Interior side upright	❺ Section division	❹ Interior side upright	❺ Section division
8PQ3000-0BA10	–	–	–
8PQ3000-3BA10	–	8PQ3000-0BA03	–
8PQ3000-3BA11	–	8PQ3000-0BA03	–
8PQ3000-0BA10	–	–	–
8PQ3000-3BA10	–	8PQ3000-0BA03	–
8PQ3000-3BA11	–	8PQ3000-0BA03	–
8PQ3000-0BA10	8PQ3000-0BA10	–	–
8PQ3000-3BA10	8PQ3000-3BA47	8PQ3000-0BA03	8PQ3000-1BA36
8PQ3000-3BA11	8PQ3000-3BA48	8PQ3000-0BA03	8PQ3000-1BA37
8PQ3000-0BA10	8PQ3000-0BA10	–	–
8PQ3000-3BA10	8PQ3000-3BA47	8PQ3000-0BA03	8PQ3000-1BA36
8PQ3000-3BA11	8PQ3000-3BA48	8PQ3000-0BA03	8PQ3000-1BA37
8PQ3000-0BA10	8PQ3000-0BA10	–	–
8PQ3000-3BA10	8PQ3000-3BA47	8PQ3000-0BA03	8PQ3000-1BA36
8PQ3000-3BA11	8PQ3000-3BA48	8PQ3000-0BA03	8PQ3000-1BA37

System overview, page 15/70

© Siemens 2025

Frame

Siemens EcoTech

For main busbar at rear

Position of main busbar | At rear

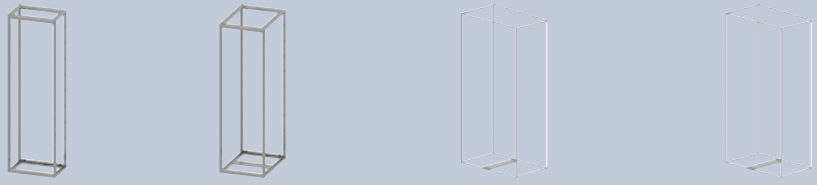

Width	Depth	Main busbar system	❶ Frame Front		Rear	❷ Floor plate partition crossbar Depth 400 mm	Depth 600 mm
600 mm	800 mm		8PQ1206-8BA01		–	–	–
	1000 mm		8PQ1206-4BA01	+	8PQ1206-6BA01	–	–
	1200 mm	Single	8PQ1206-4BA01	+	8PQ1206-8BA01	–	–
		Duplex	8PQ1206-4BA01	+	8PQ1206-8BA01	–	–
800 mm	800 mm		8PQ1208-8BA01		–	8PQ3000-1BA38	–
	1000 mm		8PQ1208-4BA01	+	8PQ1208-6BA01	8PQ3000-1BA38	8PQ3000-1BA40
	1200 mm	Single	8PQ1208-4BA01	+	8PQ1208-8BA01	3 × 8PQ3000-1BA38	–
		Duplex	8PQ1208-4BA01	+	8PQ1208-8BA01	3 × 8PQ3000-1BA38	–
1000 mm	800 mm		8PQ1201-8BA03		–	8PQ3000-1BA38	–
	1000 mm		8PQ1201-4BA02	+	8PQ1201-6BA02	8PQ3000-1BA38	8PQ3000-1BA40
	1200 mm	Single	8PQ1201-4BA02	+	8PQ1201-8BA03	3 × 8PQ3000-1BA38	–
		Duplex	8PQ1201-4BA02	+	8PQ1201-8BA03	3 × 8PQ3000-1BA38	–

15

Main busbar systems

Single



I_n = 3200 A

Duplex



I_n = 6300 A

System overview, page 15/70

© Siemens 2025

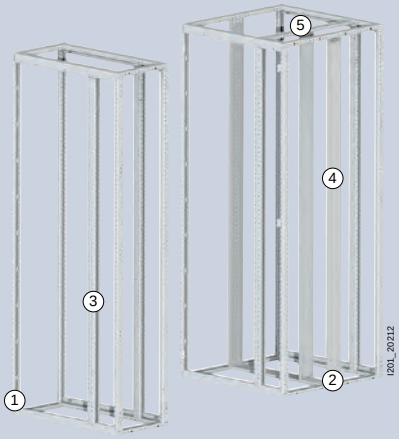



❸ Exterior intermediate upright	❹ Interior side upright	❺ Section division
–	8PQ3000-0BA03	–
–	8PQ3000-0BA03	–
–	8PQ3000-0BA03	–
–	8PQ3000-0BA03	–
8PQ3000-1BA43	8PQ3000-0BA03	8PQ3000-1BA37
8PQ3000-1BA43	8PQ3000-0BA03	8PQ3000-1BA36
8PQ3000-1BA43	8PQ3000-0BA03	8PQ3000-1BA37
8PQ3000-1BA43	8PQ3000-0BA03	8PQ3000-1BA37
8PQ3000-1BA43	8PQ3000-0BA03	8PQ3000-1BA37
8PQ3000-1BA43	8PQ3000-0BA03	8PQ3000-1BA36
8PQ3000-1BA43	8PQ3000-0BA03	8PQ3000-1BA37
8PQ3000-1BA43	8PQ3000-0BA03	8PQ3000-1BA37

System overview, page 15/70

© Siemens 2025

Frame

Accessories

Frame reinforcement

Use	Scope of supply	Article No.
Recommended from width 1000 mm	4 units	8PQ9400-0BA35

Crossbars





Version	Width	Crossbar length	Scope of supply	Article No.
–	400 mm	350 mm	2 units	8PQ3000-0BA12
	600 mm	550 mm	2 units	8PQ3000-0BA71
	800 mm	750 mm	2 units	8PQ3000-0BA72
	1000 mm	950 mm	2 units	8PQ3000-0BA84
	1200 mm	1150 mm	2 units	8PQ3000-0BA85
Without uprights	400 mm	300 mm	2 units	8PQ3000-0BA10
	600 mm	500 mm	2 units	8PQ3000-1BA24
	800 mm	700 mm	2 units	8PQ3000-1BA25
With uprights	600 mm	300 mm	2 units	8PQ3000-0BA10
	800 mm	300 mm	2 units	8PQ3000-0BA10

Forming rows of frames



Version	Scope of supply	Article No.
Frame connection	6 units	8PQ1204-4BA05
Set of IP55 seals	5.5 m	8PQ1204-4BA04

Self-tapping screws

Type	Version	Scope of supply	Article No.
Cylinder-head screws DIN 7500-PE, ST, zinc-plated	M6 × 10 mm	100 units	8PQ9500-0BA34
	M6 × 16 mm	100 units	8PQ9500-0BA32
	M6 × 20 mm	100 units	8PQ9500-0BA31
Countersunk screws DIN 7500-QE, ST, zinc-plated	M6 × 12 mm	100 units	8PQ9500-1BA07

System overview, page 15/70

© Siemens 2025

Lifting brackets



Width	Depth	Scope of supply	Article No.
800 mm	–	2 units	8PQ3000-1BA01
850 mm	–	2 units	8PQ3000-2BA38
1000 mm	–	2 units	8PQ3000-1BA02
1200 mm	–	2 units	8PQ3000-1BA03
–	800 mm	2 units	8PQ3000-1BA01
	1000 mm	2 units	8PQ3000-3BA70
	1200 mm	2 units	8PQ3000-3BA71

Lifting eyebolts (Transport aids)

Version	Application	Scope of supply	Article No.
M12, DIN 580, C15E	• Max. supported weight = 240 kg at load angle ≤ 45 ° • Max. section depth 800 mm	4 units	8PQ9400-0BA11

Reinforcements for transport



Height	Width/Depth	Article No.
100 mm	400 mm	8PQ1014-0BA02
	600 mm	8PQ1016-0BA02
	800 mm	8PQ1018-0BA02
	1000 mm	8PQ1011-1BA01
	1200 mm	8PQ1012-2BA01

Transport

Base reinforcements

Pallet truck

15

System overview, page 15/70

© Siemens 2025

Enclosure

Siemens EcoTech

Paneling sections, main busbar at top/at bottom

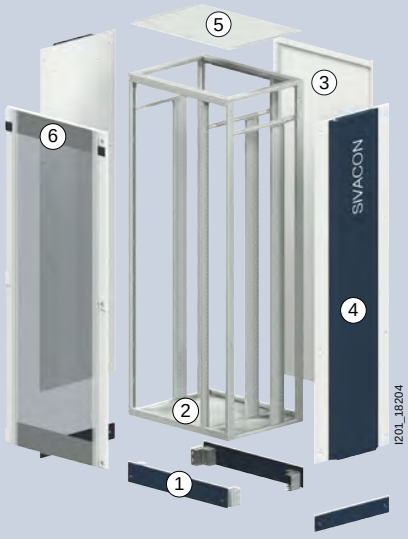

Position of main busbar	At top	At bottom
	❶ Bases	❷ Floor plates



Width	Depth	Height 100 mm	200 mm	Height 100 mm	IP40 cable entry	IP55	IP20
200 mm	400 mm	–	–	–	–	8PQ2302-4BA04	–
	600 mm	–	–	–	–	8PQ2302-6BA04	–
	800 mm	–	–	–	–	2 × 8PQ2302-4BA04	–
400 mm	400 mm	8PQ1014-0BA01	8PQ1024-0BA01	8PQ1010-4BA01	8PQ2304-4BA06	8PQ2304-4BA05	8PQ2304-4BA14
	600 mm	8PQ1014-0BA01	8PQ1024-0BA01	8PQ1010-6BA01	8PQ2306-4BA06	8PQ2306-4BA05	8PQ2304-6BA11
	800 mm	8PQ1014-0BA01	8PQ1024-0BA01	8PQ1010-8BA01	2 × 8PQ2304-4BA06	2 × 8PQ2304-4BA05	8PQ2304-8BA05
600 mm	400 mm	8PQ1016-0BA01	8PQ1026-0BA01	8PQ1010-4BA01	8PQ2306-4BA06	8PQ2306-4BA05	8PQ2306-4BA10
	600 mm	8PQ1016-0BA01	8PQ1026-0BA01	8PQ1010-6BA01	8PQ2306-6BA06	8PQ2306-6BA05	8PQ2306-6BA16
	800 mm	8PQ1016-0BA01	8PQ1026-0BA01	8PQ1010-8BA01	2 × 8PQ2306-4BA06	2 × 8PQ2306-4BA05	8PQ2306-8BA05
800 mm	400 mm	8PQ1018-0BA01	8PQ1028-0BA01	8PQ1010-4BA01	8PQ2308-4BA06	8PQ2308-4BA05	8PQ2308-4BA13
	600 mm	8PQ1018-0BA01	8PQ1028-0BA01	8PQ1010-6BA01	8PQ2308-6BA06	8PQ2308-6BA05	8PQ2308-6BA13
	800 mm	8PQ1018-0BA01	8PQ1028-0BA01	8PQ1010-8BA01	2 × 8PQ2308-4BA06	2 × 8PQ2308-4BA05	8PQ2308-8BA10
1000 mm	400 mm	8PQ1011-0BA01	8PQ1021-0BA01	8PQ1010-4BA01	–	8PQ2301-4BA04	8PQ2301-4BA06
	600 mm	8PQ1011-0BA01	8PQ1021-0BA01	8PQ1010-6BA01	–	–	8PQ2301-6BA05
	800 mm	8PQ1011-0BA01	8PQ1021-0BA01	8PQ1010-8BA01	–	2 × 8PQ2301-4BA04	8PQ2301-8BA04
1200 mm	400 mm	8PQ1012-0BA01	8PQ1022-0BA01	8PQ1010-4BA01	–	–	8PQ2302-4BA05
	600 mm	8PQ1012-0BA01	8PQ1022-0BA01	8PQ1010-6BA01	–	–	8PQ2302-6BA05
	800 mm	8PQ1012-0BA01	8PQ1022-0BA01	8PQ1010-8BA01	–	–	8PQ2302-8BA04

15

System overview, page 15/70

© Siemens 2025

❸ Rear panels		❹ Side panels		❺ Roof plates			
IP40	IP55	IP55	IP55 with design strip	IP40	IP40 cable entry	IPX1 upgrade	IP55
–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–
8PQ2420-4BA02	8PQ2420-4BA01	8PQ2520-4BA02	8PQ2520-4BA01	8PQ2304-4BA02	8PQ2304-4BA03	8PQ2304-4BA04	8PQ2304-4BA01
8PQ2420-4BA02	8PQ2420-4BA01	8PQ2520-6BA02	8PQ2520-6BA01	8PQ2304-6BA02	8PQ2304-6BA03	8PQ2304-6BA04	8PQ2304-6BA01
8PQ2420-4BA02	8PQ2420-4BA01	8PQ2520-8BA02	8PQ2520-8BA01	8PQ2304-8BA02	8PQ2304-8BA03	8PQ2304-8BA04	8PQ2304-8BA01
8PQ2420-6BA02	8PQ2420-6BA01	8PQ2520-4BA02	8PQ2520-4BA01	8PQ2306-4BA02	8PQ2306-4BA03	8PQ2306-4BA04	8PQ2306-4BA01
8PQ2420-6BA02	8PQ2420-6BA01	8PQ2520-6BA02	8PQ2520-6BA01	8PQ2306-6BA02	8PQ2306-6BA03	8PQ2306-6BA04	8PQ2306-6BA01
8PQ2420-6BA02	8PQ2420-6BA01	8PQ2520-8BA02	8PQ2520-8BA01	8PQ2306-8BA02	8PQ2306-8BA03	8PQ2306-8BA04	8PQ2306-8BA01
8PQ2420-8BA02	8PQ2420-8BA01	8PQ2520-4BA02	8PQ2520-4BA01	8PQ2308-4BA02	8PQ2308-4BA03	8PQ2308-4BA04	8PQ2308-4BA01
8PQ2420-8BA02	8PQ2420-8BA01	8PQ2520-6BA02	8PQ2520-6BA01	8PQ2308-6BA02	8PQ2308-6BA03	8PQ2308-6BA04	8PQ2308-6BA01
8PQ2420-8BA02	8PQ2420-8BA01	8PQ2520-8BA02	8PQ2520-8BA01	8PQ2308-8BA02	8PQ2308-8BA03	8PQ2308-8BA04	8PQ2308-8BA01
8PQ2420-1BA02	8PQ2420-1BA01	8PQ2520-4BA02	8PQ2520-4BA01	8PQ2301-4BA02	–	8PQ2301-4BA03	8PQ2301-4BA01
8PQ2420-1BA02	8PQ2420-1BA01	8PQ2520-6BA02	8PQ2520-6BA01	8PQ2301-6BA02	–	8PQ2301-6BA03	8PQ2301-6BA01
8PQ2420-1BA02	8PQ2420-1BA01	8PQ2520-8BA02	8PQ2520-8BA01	8PQ2301-8BA02	–	8PQ2301-8BA03	8PQ2301-8BA01
8PQ2420-2BA02	8PQ2420-2BA01	8PQ2520-4BA02	8PQ2520-4BA01	8PQ2302-4BA02	–	8PQ2302-4BA03	8PQ2302-4BA01
8PQ2420-2BA02	8PQ2420-2BA01	8PQ2520-6BA02	8PQ2520-6BA01	8PQ2302-6BA02	–	8PQ2302-6BA03	8PQ2302-6BA01
8PQ2420-2BA02	8PQ2420-2BA01	8PQ2520-8BA02	8PQ2520-8BA01	8PQ2302-8BA02	–	8PQ2302-8BA03	8PQ2302-8BA01

System overview, page 15/70

© Siemens 2025

Enclosure

Paneling sections, main busbar at rear

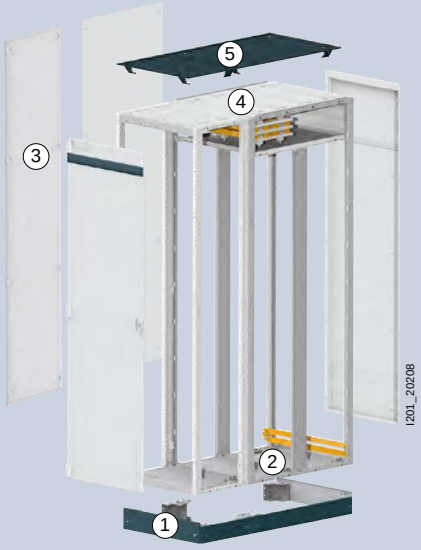

❶ Bases		❷ Floor plates		❸ Side panels	
					

Width	Depth	Height 100 mm	Height 200 mm	Height 100 mm		IP55		IP55		IP55		IP55	
400 mm	800 mm	8PQ1014-0BA01	8PQ1024-0BA01	8PQ1010-8BA01	–	2 ×	8PQ2304-4BA05	–		8PQ2520-8BA02		–	
	1000 mm	8PQ1014-0BA01	8PQ1024-0BA01	8PQ1010-4BA01 +	8PQ1010-6BA01		8PQ2304-4BA05 +	8PQ2306-4BA05		8PQ2520-4BA02	+	8PQ2520-6BA02	
	1200 mm	8PQ1014-0BA01	8PQ1024-0BA01	8PQ1010-4BA01 +	8PQ1010-8BA01	3 ×	8PQ2304-4BA05	–		8PQ2520-4BA02	+	8PQ2520-8BA02	
600 mm	800 mm	8PQ1016-0BA01	8PQ1026-0BA01	8PQ1010-8BA01	–	2 ×	8PQ2306-4BA05	–		8PQ2520-8BA02		–	
	1000 mm	8PQ1016-0BA01	8PQ1026-0BA01	8PQ1010-4BA01 +	8PQ1010-6BA01		8PQ2306-4BA05 +	8PQ2306-6BA05		8PQ2520-4BA02	+	8PQ2520-6BA02	
	1200 mm	8PQ1016-0BA01	8PQ1026-0BA01	8PQ1010-4BA01 +	8PQ1010-8BA01	3 ×	8PQ2306-4BA05	–		8PQ2520-4BA02	+	8PQ2520-8BA02	
800 mm	800 mm	8PQ1018-0BA01	8PQ1028-0BA01	8PQ1010-8BA01	–	2 ×	8PQ2308-4BA05	–		8PQ2520-8BA02		–	
	1000 mm	8PQ1018-0BA01	8PQ1028-0BA01	8PQ1010-4BA01 +	8PQ1010-6BA01		8PQ2308-4BA05 +	8PQ2308-6BA05		8PQ2520-4BA02	+	8PQ2520-6BA02	
	1200 mm	8PQ1018-0BA01	8PQ1028-0BA01	8PQ1010-4BA01 +	8PQ1010-8BA01	3 ×	8PQ2308-4BA05	–		8PQ2520-4BA02	+	8PQ2520-8BA02	
1000 mm	800 mm	8PQ1011-0BA01	8PQ1021-0BA01	8PQ1010-8BA01	–	2 ×	8PQ2301-4BA04	–		8PQ2520-8BA02		–	
	1000 mm	8PQ1011-0BA01	8PQ1021-0BA01	8PQ1010-4BA01 +	8PQ1010-6BA01		8PQ2301-4BA04 +	8PQ2301-6BA06		8PQ2520-4BA02	+	8PQ2520-6BA02	
	1200 mm	8PQ1011-0BA01	8PQ1021-0BA01	8PQ1010-4BA01 +	8PQ1010-8BA01	3 ×	8PQ2301-4BA04	–		8PQ2520-4BA02	+	8PQ2520-8BA02	
1200 mm	800 mm	8PQ1012-0BA01	8PQ1022-0BA01	8PQ1010-8BA01	–	4 ×	8PQ2306-4BA05	–		8PQ2520-8BA02		–	
	1000 mm	8PQ1012-0BA01	8PQ1022-0BA01	8PQ1010-4BA01 +	8PQ1010-6BA01	2 ×	8PQ2306-4BA05	2 ×	8PQ2306-6BA05	8PQ2520-4BA02	+	8PQ2520-6BA02	
	1200 mm	8PQ1012-0BA01	8PQ1022-0BA01	8PQ1010-4BA01 +	8PQ1010-8BA01	6 ×	8PQ2306-4BA05	–		8PQ2520-4BA02	+	8PQ2520-8BA02	

Accessories

Base corner pieces for depths of 1000 mm and 1200 mm

Height	Article No.
100 mm	8PQ1010-1BA01
200 mm	8PQ1020-1BA01

15

System overview, page 15/70

© Siemens 2025

❹ Roof plates

❺ Roof add-on-plates



IP40	IP40	IP55	IP55	IP40 cable entry	IP40 cable entry	IPX1	IPX1
8PQ2304-8BA02	–	8PQ2304-8BA01	–	–	8PQ2304-8BA08	8PQ2304-8BA04	–
8PQ2304-4BA02 +	8PQ2304-6BA02	8PQ2304-4BA01 +	8PQ2304-6BA01	8PQ2304-4BA02 +	8PQ2304-6BA13	8PQ2304-4BA15 +	8PQ2304-6BA12
8PQ2304-4BA02 +	8PQ2304-8BA02	8PQ2304-4BA01 +	8PQ2304-8BA01	8PQ2304-8BA08 +	8PQ2304-4BA16	8PQ2304-4BA15 +	8PQ2304-8BA07
8PQ2306-8BA02	–	8PQ2306-8BA01	–	–	8PQ2306-8BA08	8PQ2306-8BA04	–
8PQ2306-4BA02 +	8PQ2306-6BA02	8PQ2306-4BA01 +	8PQ2306-6BA01	8PQ2306-4BA02 +	8PQ2306-6BA18	8PQ2306-4BA11 +	8PQ2306-6BA17
8PQ2306-4BA02 +	8PQ2306-8BA02	8PQ2306-4BA01 +	8PQ2306-8BA01	8PQ2306-4BA12 +	8PQ2306-8BA08	8PQ2306-4BA11 +	8PQ2306-8BA07
8PQ2308-8BA02	–	8PQ2308-8BA01	–	–	8PQ2308-8BA13	8PQ2308-8BA04	–
8PQ2308-4BA02 +	8PQ2308-6BA02	8PQ2308-4BA01 +	8PQ2308-6BA01	8PQ2308-4BA02 +	8PQ2308-6BA15	8PQ2308-4BA14 +	8PQ2308-6BA14
8PQ2308-4BA02 +	8PQ2308-8BA02	8PQ2308-4BA01 +	8PQ2308-8BA01	8PQ2308-4BA15 +	8PQ2308-8BA13	8PQ2308-4BA14 +	8PQ2308-8BA12
8PQ2301-8BA02	–	8PQ2301-8BA01	–	–	8PQ2301-8BA07	8PQ2301-8BA03	–
8PQ2301-4BA02 +	8PQ2301-6BA02	8PQ2301-4BA01 +	8PQ2301-6BA01	8PQ2301-4BA02 +	8PQ2301-6BA08	8PQ2301-4BA07 +	8PQ2301-6BA07
8PQ2301-4BA02 +	8PQ2301-8BA02	8PQ2301-4BA01 +	8PQ2301-8BA01	8PQ2301-4BA08 +	8PQ2301-8BA07	8PQ2301-4BA07 +	8PQ2301-8BA06
8PQ2302-8BA02	–	8PQ2302-8BA01	-	–	8PQ2302-8BA07	8PQ2302-8BA03	–
8PQ2302-4BA02 +	8PQ2302-6BA02	8PQ2302-4BA01 +	8PQ2302-6BA01	8PQ2302-4BA02 +	8PQ2302-6BA07	8PQ2302-4BA06 +	8PQ2302-6BA06
8PQ2302-4BA02 +	8PQ2302-8BA02	8PQ2302-4BA01 +	8PQ2302-8BA01	8PQ2302-4BA07 +	8PQ2302-8BA07	8PQ2302-4BA06 +	8PQ2302-8BA06

System overview, page 15/70

© Siemens 2025

Enclosure

Siemens EcoTech

Paneling sections

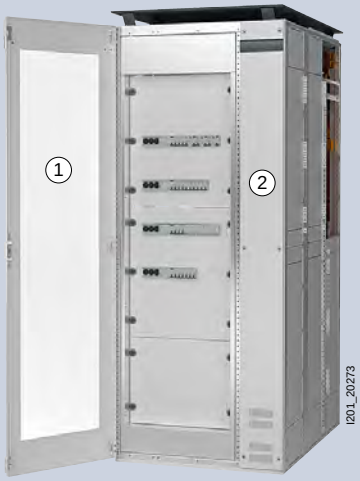

Doors

		With double-bit lock			For profile semicylinder		
Hinge	**Width**	**IP40**	**IP55**	**IP55 glass doors**	**IP40**	**IP55**	**IP55 glass doors**
Left	200 mm	–	–	–	–	–	–
	400 mm	8PQ2197-4BA08	8PQ2197-4BA05	–	8PQ2197-4BA06	8PQ2197-4BA03	–
	600 mm	8PQ2197-6BA06	8PQ2197-6BA03	8PQ2197-6BA10	8PQ2197-6BA04	8PQ2197-6BA01	8PQ2197-6BA07
	800 mm	8PQ2197-8BA06	8PQ2197-8BA03	8PQ2197-8BA10	8PQ2197-8BA04	8PQ2197-8BA01	8PQ2197-8BA07
	1000 mm	8PQ2197-1BA06	8PQ2197-1BA03	8PQ2197-1BA10	8PQ2197-1BA07	8PQ2197-1BA04	8PQ2197-1BA11
Right	200 mm	–	–	–	–	–	–
	400 mm	8PQ2197-4BA11	8PQ2197-4BA10	–	8PQ2197-4BA07	8PQ2197-4BA04	–
	600 mm	8PQ2197-6BA13	8PQ2197-6BA12	8PQ2197-6BA14	8PQ2197-6BA05	8PQ2197-6BA02	8PQ2197-6BA08
	800 mm	8PQ2197-8BA13	8PQ2197-8BA12	8PQ2197-8BA14	8PQ2197-8BA05	8PQ2197-8BA02	8PQ2197-8BA08
	1000 mm	8PQ2197-1BA18	8PQ2197-1BA17	8PQ2197-1BA20	8PQ2197-1BA08	8PQ2197-1BA05	8PQ2197-1BA12

15

Lock systems

	Double-bit lock	Flat cylinder	 Profile semicylinder
Rotary handles			
	8PQ9400-0BA08	8PQ9400-0BA07	8PQ9400-0BA41 + 8PQ9400-0BA26
Coupling bars			
	8PQ9400-0BA27	8PQ9400-0BA27	8PQ9400-0BA28
Locking rods			
	8PQ9400-0BA37	8PQ9400-0BA37	8PQ9400-0BA38
Bar guides			
	8PQ9400-0BA36	8PQ9400-0BA36	8PQ9400-0BA36

System overview, page 15/70

© Siemens 2025

Frame paneling	❷ Outer cover	
IP30	**IP40**	**IP55**
–	8PQ2197-2BA15	8PQ2197-2BA14
–	8PQ2197-4BA02	8PQ2197-4BA01
8PQ2197-6BA11	–	–
8PQ2197-8BA11	–	–
–	–	–
–	8PQ2197-2BA15	8PQ2197-2BA14
–	8PQ2197-4BA02	8PQ2197-4BA01
8PQ2197-6BA11	–	–
8PQ2197-8BA11	–	–
–	–	–

15

Door cutouts

Double-bit lock

Flat cylinder

Profile semicylinder

System overview, page 15/70

© Siemens 2025

Enclosure

Paneling sections

Accessories

Cubicle keys

Version	Scope of supply	Article No.
3 mm double bit	10 units	8PQ9400-0BA12

Inner door struts

Version	Article No.
Section-high	8PQ2197-0BA10

Cubicle ID plate

Version	Article No.
SIVACON designed by Siemens	8PQ9400-0BA06

Door hinges

Version	Scope of supply	Article No.
Hinges	2 units	8PQ9400-0BA55

System overview, page 15/70

© Siemens 2025

System overview, page 15/70

© Siemens 2025

Enclosure

Internal covers

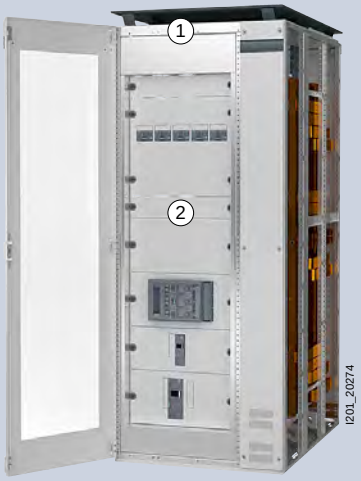

Position of main busbar	At top		Without	
	❶ Cover frames			
				
Width	**Fixed**	**Swivel**	**Fixed**	**Swivel**
600 mm	8PQ2000-6BA03	8PQ2000-6BA02	8PQ2000-6BA04	8PQ2000-6BA01
800 mm	8PQ2000-8BA03	8PQ2000-8BA02	8PQ2000-8BA04	8PQ2000-8BA01

❷ Covers

Height	Width 600 mm	Width 800 mm
50 mm	8PQ2005-6BA01	8PQ2005-8BA01
100 mm	8PQ2010-6BA01	8PQ2010-8BA01
150 mm	8PQ2015-6BA02	8PQ2015-8BA02
200 mm	8PQ2020-6BA01	8PQ2020-8BA01
250 mm	8PQ2025-6BA01	8PQ2025-8BA01
300 mm	8PQ2030-6BA01	8PQ2030-8BA01
350 mm	8PQ2035-6BA01	8PQ2035-8BA01
400 mm	8PQ2040-6BA01	8PQ2040-8BA01
500 mm	8PQ2050-6BA01	8PQ2050-8BA01
550 mm	8PQ2055-6BA01	8PQ2055-8BA01
600 mm	8PQ2060-6BA01	8PQ2060-8BA01
650 mm	8PQ2065-6BA01	8PQ2065-8BA01
700 mm	8PQ2070-6BA12	8PQ2070-8BA03
800 mm	8PQ2080-6BA01	8PQ2080-8BA01

15

System overview, page 15/70

© Siemens 2025

Accessories

Covers, ventilated

Height	Width	Article No.
100 mm	600 mm	8PQ2010-6BA02
	800 mm	8PQ2010-8BA02

Quick-release lock

Version	Scope of supply	Article No.
SIVACON – Blue green basic	20 units	8PQ9400-0BA54

Hinges for masking frames

Version	Scope of supply	Article No.
• Hinges, incl. fixing accessories • From a masking frame height of 150 mm	1 set	8PQ2000-0BA08

Swivel-mounted cover frame

System overview, page 15/70

© Siemens 2025

Enclosure

Siemens EcoTech

Compartment doors

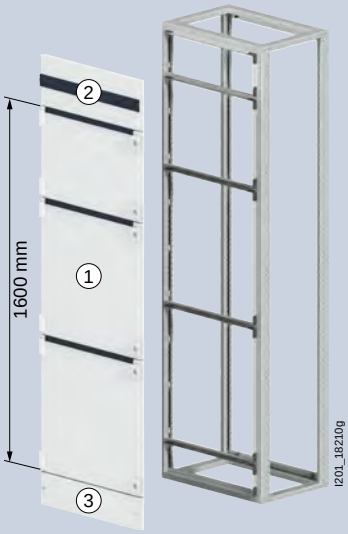

① Device compartments

		Compartment doors		Covers	
					
Width	**Height**	**IP40**	**IP55 upgrade**	**IP40**	**IP55 upgrade**
400 mm	50 mm	–	–	8PQ2005-4BA03	8PQ2005-4BA01
	100 mm	–	–	8PQ2010-4BA02	8PQ2010-4BA01
	150 mm	8PQ2015-4BA04	8PQ2015-4BA05	–	–
	200 mm	8PQ2020-4BA01	8PQ2020-4BA03	–	–
	250 mm	8PQ2025-4BA01	8PQ2025-4BA02	–	–
	300 mm	8PQ2030-4BA01	8PQ2030-4BA02	–	–
	350 mm	8PQ2035-4BA01	8PQ2035-4BA02	–	–
	400 mm	8PQ2040-4BA01	8PQ2040-4BA03	–	–
	450 mm	8PQ2045-4BA01	8PQ2045-4BA02	–	–
	500 mm	8PQ2050-4BA01	8PQ2050-4BA02	–	–
	550 mm	8PQ2055-4BA11	8PQ2055-4BA07	–	–
	600 mm	8PQ2060-4BA01	8PQ2060-4BA03	–	–
	650 mm	8PQ2065-4BA01	8PQ2065-4BA02	–	–
	700 mm	8PQ2070-4BA07	8PQ2070-4BA08	–	–
	750 mm	8PQ2072-4BA01	8PQ2075-4BA01	–	–
	800 mm	8PQ2080-4BA01	8PQ2080-4BA04	–	–
600 mm	50 mm	–	–	8PQ2005-6BA04	8PQ2005-6BA03
	100 mm	–	–	8PQ2010-6BA04	8PQ2010-6BA03
	150 mm	8PQ2015-6BA10	8PQ2015-6BA12	–	–
	200 mm	8PQ2020-6BA14	8PQ2020-6BA15	–	–
	250 mm	8PQ2025-6BA07	8PQ2025-6BA08	–	–
	300 mm	8PQ2030-6BA10	8PQ2030-6BA12	–	–
	350 mm	8PQ2035-6BA12	8PQ2035-6BA13	–	–
	400 mm	8PQ2040-6BA12	8PQ2040-6BA13	–	–
	450 mm	8PQ2045-6BA05	8PQ2045-6BA06	–	–
	500 mm	8PQ2050-6BA03	8PQ2050-6BA04	–	–
	550 mm	8PQ2055-6BA04	8PQ2055-6BA06	–	–
	600 mm	8PQ2060-6BA06	8PQ2060-6BA07	–	–
	650 mm	8PQ2065-6BA03	8PQ2065-6BA04	–	–
	700 mm	8PQ2070-6BA03	8PQ2070-6BA04	–	–
	750 mm	8PQ2075-6BA01	8PQ2075-6BA02	–	–
	800 mm	8PQ2080-6BA03	8PQ2080-6BA04	–	–
800 mm	50 mm	–	–	8PQ2005-8BA04	8PQ2005-8BA03
	100 mm	–	–	8PQ2010-8BA04	8PQ2010-8BA03
	150 mm	8PQ2015-8BA05	8PQ2015-8BA07	–	–
	200 mm	8PQ2020-8BA07	8PQ2020-8BA08	–	–
	250 mm	8PQ2025-8BA04	8PQ2025-8BA05	–	–
	300 mm	8PQ2030-8BA05	8PQ2030-8BA06	–	–
	350 mm	8PQ2035-8BA06	8PQ2035-8BA07	–	–
	400 mm	8PQ2040-8BA12	8PQ2040-8BA13	–	–
	450 mm	8PQ2045-8BA03	8PQ2045-8BA04	–	–
	500 mm	8PQ2050-8BA03	8PQ2050-8BA04	–	–
	550 mm	8PQ2055-8BA03	8PQ2055-8BA06	–	–
	600 mm	8PQ2060-8BA04	8PQ2060-8BA05	–	–
	650 mm	8PQ2065-8BA03	8PQ2065-8BA04	–	–
	700 mm	8PQ2070-8BA01	8PQ2070-8BA02	–	–
	750 mm	8PQ2075-8BA01	8PQ2075-8BA02	–	–
	800 mm	8PQ2080-8BA03	8PQ2080-8BA04	–	–

System overview, page 15/70

© Siemens 2025

② Head compartments

Covers



Width	Height	IP40	IP55 upgrade
Main busbar at top			
400 mm	225 mm	8PQ2022-4BA01	8PQ2022-4BA03
600 mm	225 mm	8PQ2022-6BA01	8PQ2022-6BA02
800 mm	225 mm	8PQ2022-8BA01	8PQ2022-8BA02
Main busbar at bottom			
400 mm	175 mm	8PQ2000-4BA02	8PQ2022-4BA03
600 mm	175 mm	8PQ2000-6BA08	8PQ2022-6BA02
800 mm	175 mm	8PQ2000-8BA08	8PQ2022-8BA02

③ Base compartments

Covers

Width	Height	IP4X	IP55 upgrade
Main busbar at top			
400 mm	150 mm	8PQ2015-4BA01	8PQ2015-4BA03
600 mm	150 mm	8PQ2000-6BA07	8PQ2015-6BA13
800 mm	150 mm	8PQ2000-8BA07	8PQ2015-8BA08
Main busbar at bottom			
400 mm	200 mm	8PQ2020-4BA04	8PQ2020-4BA05
600 mm	200 mm	8PQ2020-6BA34	8PQ2020-6BA35
800 mm	200 mm	8PQ2020-8BA17	8PQ2020-8BA18

System overview, page 15/70

© Siemens 2025

Enclosure

Compartment doors

Accessories

Door hinges

Version	Scope of supply	Article No.
Light gray	2 units	8PQ9400-0BA55

Locks



Version	Article No.
Two-way interlocking mechanisms	8PQ9400-0BA40

Handles for compartment doors

Version	Article No.
Without lock	8PQ9400-0BA73
With flat cylinder, identical key type	8PQ9400-0BA72

Inner door struts



Height	Article No.
400 mm	8PQ2040-0BA06
550 mm	8PQ2055-0BA05
600 mm	8PQ2060-0BA14
700 mm	8PQ2070-0BA02
800 mm	8PQ2080-0BA07

Cubicle keys

Version	Scope of supply	Article No.
3 mm double bit	10 units	8PQ9400-0BA12

System overview, page 15/70

© Siemens 2025

System overview, page 15/70

© Siemens 2025

Busbar systems

Siemens EcoTech

Main busbars

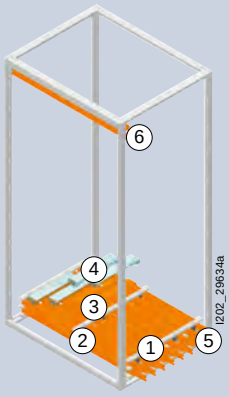

	❶ Busbar supports	❷ Reinforcement	❸ Equipo-tential bonding	❹ Covers	PEN grounding	Arcing fault barriers
					1 set = 10 units	

Position	Single I_n = 3200 A	Duplex I_n = 6300 A	Single I_n = 3200 A	Duplex I_n = 6300 A	Duplex I_n = 6300 A			
Top	8PQ4000-0BA04	8PQ4000-0BA60	8PQ4000-0BA37	2 × 8PQ4000-0BA37	8PQ4000-0BA62	–	8PQ4000-0BA12	8PQ9400-0BA21
Bottom	8PQ4000-0BA04	8PQ4000-0BA60	8PQ4000-0BA37	2 × 8PQ4000-0BA37	8PQ4000-0BA62	4 × 8PQ4000-1BA25	8PQ4000-0BA12	8PQ9400-0BA21
Rear	8PQ4000-0BA04	8PQ4000-0BA60	8PQ4000-0BA37	2 × 8PQ4000-0BA37	–	–	8PQ4000-2BA24	8PQ9400-0BA21
	+ 8PQ3000-0BA10	+ 2 × 8PQ3000-0BA10						

Accessories

Connecting lugs

Type	Cross-section	Article No.
❺ Main busbars	20 × 10 mm	8PQ4000-0BA53
	30 × 10 mm	8PQ4000-0BA54
	40 × 10 mm	8PQ4000-0BA56
	50 × 10 mm	8PQ4000-0BA57
❻ PE bar	20 × 5 mm	8PQ4000-0BA52
	30 × 5 mm	
	30 × 10 mm	
	40 × 5 mm	8PQ4000-0BA67
	40 × 10 mm	
	50 × 10 mm	

Protective cover

Type	Article No.
• Main busbar at rear • Mounting width 200 mm	8PQ4000-3BA35

Circular conductors



Busbar thickness	Ø Cable	Scope of supply	Article No.
5 mm	1.5 ... 16 mm²	100 units	8US1921-2AA00
	1.5 ... 35 mm²	50 units	8US1921-2AB00
	16 ... 70 mm²	50 units	8US1921-2AC00
	16 ... 120 mm²	50 units	8US1921-2AD00
10 mm	1.5 ... 16 mm²	100 units	8US1921-2BA00
	1.5 ... 35 mm²	50 units	8US1921-2BB00
	16 ... 70 mm²	50 units	8US1921-2BC00
	16 ... 120 mm²	50 units	8US1921-2BD00

System overview, page 15/70

© Siemens 2025

Aluminum busbar new

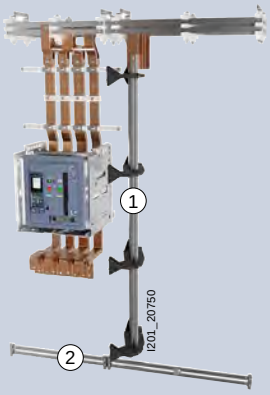

❶ Main busbars

- Material: EN 755-EN AW-6101 B-T7
- Surface treatment: nickel-plated, tin-coated

Cross-section	Length	Article No.
20 × 10 mm	2.2 m	8PQ9400-1BA63
30 × 10 mm	2.2 m	8PQ9400-1BA64
40 × 10 mm	2.2 m	8PQ9400-1BA65
50 × 10 mm	2.2 m	8PQ9400-1BA66

❷ PE bars

- Material: EN 755-EN AW-6101 B-T7
- Surface treatment: nickel-plated, tin-coated

Cross-section	Length	Article No.
20 × 5 mm	2.2 m	8PQ9400-1BA60
30 × 5 mm	2.2 m	8PQ9400-1BA61
40 × 5 mm	2.2 m	8PQ9400-1BA62
30 × 10 mm	2.2 m	8PQ9400-1BA64

Accessories

Washers

Version	Article No.
Type A: main busbars, vertical distribution busbars, non-cascaded 20 × 10 mm	8PQ9400-1BA55
Type B: vertical distribution busbars, non-cascaded 40 × 10 mm, 50 × 10 mm	8PQ9400-1BA56
Type C: vertical distribution busbars, non-cascaded 30 × 10 mm	8PQ9400-1BA57

PE strand reinforcement

Version	Article No.
M12 × 35	8PQ4000-7BA15

Rated currents: copper and aluminum (35 °C)

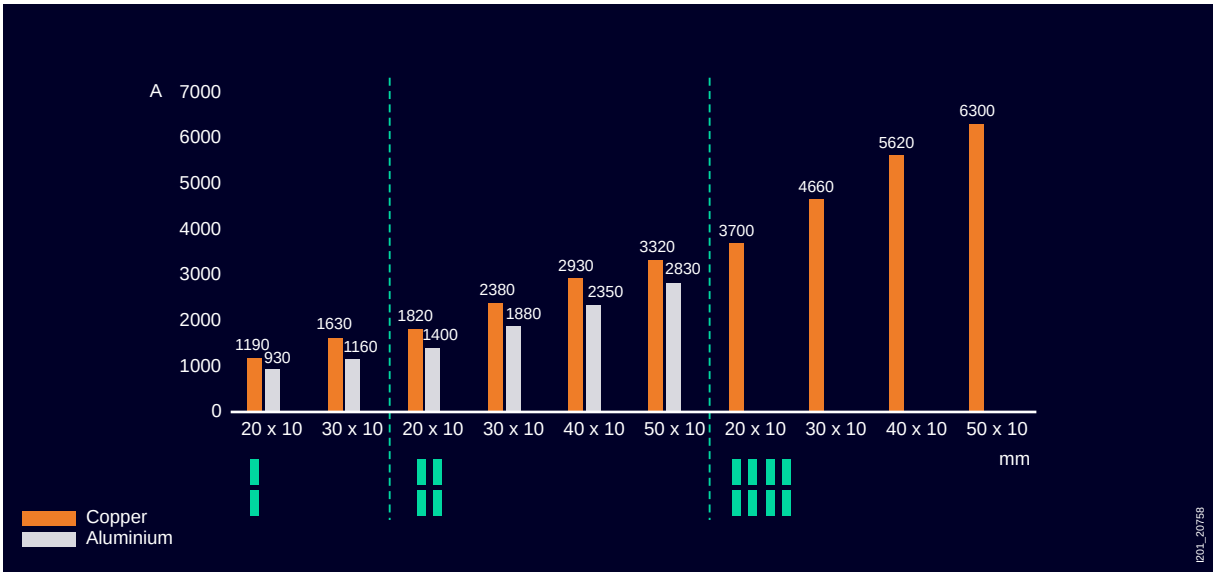

System overview, page 15/70

© Siemens 2025

Busbar systems

Vertical distribution busbars, cascaded, up to I_{cw} = 65 kA

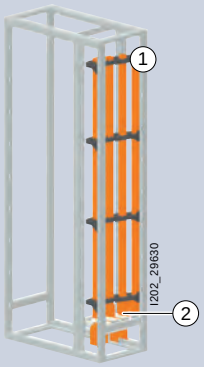

	❶ Busbar supports		❷ Supports
Position of main busbar	**30 × 10 mm**	**40 × 10 mm**	
Top	8PQ4000-0BA32	8PQ4000-0BA63	–
Bottom	8PQ4000-0BA32	8PQ4000-0BA63	8PQ4000-1BA23



Accessories

Connection

	Component	Version	Scope of supply	Article No.
	Busbar clamps	M10	20 units	8PQ9400-1BA58
	Saucer-head bolts	M10 × 35 mm	50 units	8PQ9500-0BA14
		M10 × 45 mm	50 units	8PQ9500-0BA16
		M10 × 55 mm	50 units	8PQ9500-1BA36
		M10 × 65 mm	50 units	8PQ9500-1BA25
	Spring washers	For M10	50 units	8PQ9500-0BA60
	Hexagonal nuts	M10	50 units	8PQ9500-0BA05

Connecting lugs

	Cross-section	Position of vertical distribution busbar	Position of main busbar	Depth	Article No.
	30 × 10 mm	Right	Front	400 mm	8PQ4000-0BA45
				600 mm	8PQ4000-0BA46
				800 mm	8PQ4000-0BA46
			Rear	800 mm	8PQ4000-0BA50
		Left	Front	400 mm	8PQ4000-0BA73
				600 mm	8PQ4000-0BA72
				800 mm	8PQ4000-0BA72
			Rear	800 mm	8PQ4000-0BA70
	40 × 10 mm	Right	Front	400 mm	8PQ4000-0BA47
				600 mm	8PQ4000-0BA48
				800 mm	8PQ4000-0BA48
			Rear	800 mm	8PQ4000-0BA51
		Left	Front	400 mm	8PQ4000-0BA75
				600 mm	8PQ4000-0BA48
				800 mm	8PQ4000-0BA48
			Rear	800 mm	8PQ4000-0BA71

15

System overview, page 15/70

© Siemens 2025

Vertical distribution busbars, non-cascaded, up to I_{cw} = 100 kA



		❶ Busbar supports	❷ Reinforcement	❸ Supports
				
Position of main busbar	**Width**			
At top	200 mm	8PQ4000-2BA25	8PQ4000-0BA37	8PQ4000-0BA78
	400 mm	8PQ4000-2BA26	8PQ4000-0BA37	8PQ4000-0BA61
At bottom	200 mm	8PQ4000-2BA25	8PQ4000-0BA37	–
	400 mm	8PQ4000-2BA26	8PQ4000-0BA37	–
At rear	200 mm	8PQ4000-2BA25	8PQ4000-0BA37	8PQ4000-0BA78

Accessories

Connecting lugs

	Cross-section	Position of main busbar	Depth	Article No.
	20 × 10 mm 30 × 10 mm	At front	400 mm	8PQ4000-0BA38
			600 mm	8PQ4000-0BA40
			800 mm	8PQ4000-0BA40
		At rear	800 mm	8PQ4000-0BA38
	40 × 10 mm 50 × 10 mm	At front	400 mm	8PQ4000-0BA41
			600 mm	8PQ4000-0BA42
			800 mm	8PQ4000-0BA42
		At rear	800 mm	8PQ4000-0BA41

15

System overview, page 15/70

© Siemens 2025

Section expansion

3WA air circuit breakers, main busbar at top, up to 690 V

3 and 4-pole

	❶ Head compartment doors		❷ Compartment doors			
			+ 3WA9111-0AP01	 + 3WA9111-0AP03		
Type of mounting	**Size**	**Width**	**Depth**	**IP40**	**IP55 upgrade**	**IP40**	**IP55**	**IP55 upgrade**
Fixed-mounted	1	600 mm	400 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
			600 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
			800 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
	2	800 mm	600 mm	8PQ2067-8BA01	8PQ2067-8BA02	8PQ2055-8BA08	8PQ2055-8BA10	8PQ2055-8BA06
			800 mm	8PQ2067-8BA01	8PQ2067-8BA02	8PQ2055-8BA08	8PQ2055-8BA10	8PQ2055-8BA06
	3	1000 mm	800 mm	8PQ2067-1BA01	8PQ2067-1BA02	8PQ2055-1BA03	8PQ2055-1BA04	8PQ2055-1BA06
Withdraw-able	1	600 mm	400 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
			600 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
			800 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
	2	800 mm	600 mm	8PQ2067-8BA01	8PQ2067-8BA02	8PQ2055-8BA08	8PQ2055-8BA10	8PQ2055-8BA06
			800 mm	8PQ2067-8BA01	8PQ2067-8BA02	8PQ2055-8BA08	8PQ2055-8BA10	8PQ2055-8BA06
	3	1000 mm	800 mm	8PQ2067-1BA01	8PQ2067-1BA02	8PQ2055-1BA03	8PQ2055-1BA04	8PQ2055-1BA06

System overview, page 15/70

© Siemens 2025

❸ Base compartment doors		❹ Mounting plates	❺ Main busbar connection		❻ Partition 4b	❼ Cable connection	Insulation
							
IP40	IP55 upgrade		Front	Rear			
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	8PQ6000-6BA75	–	8PQ5000-4BA28	8PQ6000-5BA81	–
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	8PQ6000-6BA75	–	8PQ5000-4BA30	8PQ6000-5BA81	–
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	8PQ6000-6BA75	8PQ6001-1BA00	8PQ5000-4BA31	8PQ6000-5BA81	–
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6000-5BA24	8PQ6000-6BA76	–	8PQ5000-4BA32	8PQ6000-5BA83	–
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6000-5BA24	8PQ6000-6BA76	8PQ6001-1BA01	8PQ5000-4BA33	8PQ6000-5BA83	–
8PQ2075-1BA01	8PQ2075-1BA02	8PQ6000-8BA70	8PQ6000-5BA33	–	8PQ5000-5BA11	8PQ6000-5BA84	–
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	8PQ6000-6BA75	–	8PQ5000-4BA28	8PQ6000-5BA82	8PQ6000-7BA28
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	8PQ6000-6BA75	–	8PQ5000-4BA30	8PQ6000-5BA82	8PQ6000-7BA28
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	8PQ6000-6BA75	8PQ6001-1BA00	8PQ5000-4BA31	8PQ6000-5BA82	8PQ6000-7BA28
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6000-5BA24	8PQ6000-6BA76	–	8PQ5000-4BA32	8PQ6000-5BA83	–
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6000-5BA24	8PQ6000-6BA76	8PQ6001-1BA01	8PQ5000-4BA33	8PQ6000-5BA83	–
8PQ2075-1BA01	8PQ2075-1BA02	8PQ6000-8BA70	8PQ6000-5BA33	–	8PQ5000-5BA11	8PQ6000-5BA84	–

System overview, page 15/70

© Siemens 2025

Section expansion

Siemens EcoTech

3WA air circuit breakers, main busbar at bottom, up to 690 V

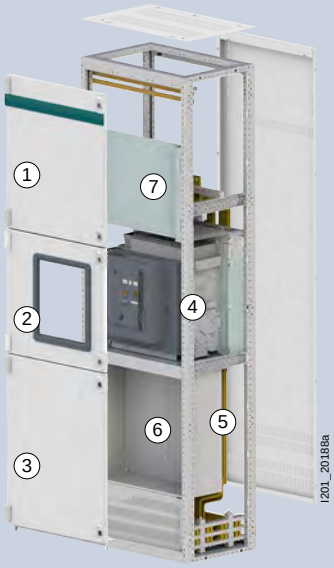

3 and 4-pole

❶ Head compartment doors		❷ Compartment doors				
		+ 3WA9111-0AP01		 + 3WA9111-0AP03		

Type of mounting	Size	Width	Depth	IP40	IP55 upgrade	IP40	IP55	IP55 upgrade
Fixed-mounted	1	600 mm	400 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
			600 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
			800 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
	2	800 mm	600 mm	8PQ2067-8BA01	8PQ2067-8BA02	8PQ2055-8BA08	8PQ2055-8BA10	8PQ2055-8BA06
			800 mm	8PQ2067-8BA01	8PQ2067-8BA02	8PQ2055-8BA08	8PQ2055-8BA10	8PQ2055-8BA06
Withdraw-able	1	600 mm	400 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
			600 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
			800 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
	2	800 mm	600 mm	8PQ2067-8BA01	8PQ2067-8BA02	8PQ2055-8BA08	8PQ2055-8BA10	8PQ2055-8BA06
			800 mm	8PQ2067-8BA01	8PQ2067-8BA02	8PQ2055-8BA08	8PQ2055-8BA10	8PQ2055-8BA06

System overview, page 15/70

© Siemens 2025

❸ Base compartment doors		❹ Mounting plates	❺ Main busbar connection		❻ Partition 4b	❼ Cable connection	Insulation
							
IP40	IP55 upgrade		Front	Rear			
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	8PQ6000-6BA75	–	8PQ5000-4BA34	8PQ6000-5BA81	–
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	8PQ6000-6BA75	–	8PQ5000-4BA35	8PQ6000-5BA81	–
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	8PQ6000-6BA75	8PQ6001-1BA00	8PQ5000-4BA36	8PQ6000-5BA81	–
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6000-5BA24	8PQ6000-6BA76	–	8PQ5000-4BA37	8PQ6000-5BA83	–
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6000-5BA24	8PQ6000-6BA76	8PQ6001-1BA01	8PQ5000-4BA38	8PQ6000-5BA83	–
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	8PQ6000-6BA75	–	8PQ5000-4BA34	8PQ6000-5BA82	8PQ6000-7BA28
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	8PQ6000-6BA75	–	8PQ5000-4BA35	8PQ6000-5BA82	8PQ6000-7BA28
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	8PQ6000-6BA75	8PQ6001-1BA00	8PQ5000-4BA36	8PQ6000-5BA82	8PQ6000-7BA28
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6000-5BA24	8PQ6000-6BA76	–	8PQ5000-4BA37	8PQ6000-5BA83	–
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6000-5BA24	8PQ6000-6BA76	8PQ6001-1BA01	8PQ5000-4BA38	8PQ6000-5BA83	–

System overview, page 15/70

© Siemens 2025

Section expansion

Siemens EcoTech

3WA air circuit breakers, main busbar at top, up to 800 V new

3 and 4-pole

	❶ Head compartment doors		❷ Compartment doors		
			 + 3WA9111-0AP01	 + 3WA9111-0AP03	

Type of mounting	Size	Width	Depth	IP40	IP55 upgrade	IP40	IP55	IP55 upgrade
Fixed-mounted	1	600 mm	400 mm	8PQ2055-6BA31	8PQ2055-6BA32	8PQ2067-6BA03	8PQ2067-6BA04	8PQ2067-6BA05
			600 mm	8PQ2055-6BA31	8PQ2055-6BA32	8PQ2067-6BA03	8PQ2067-6BA04	8PQ2067-6BA05
			800 mm	8PQ2055-6BA31	8PQ2055-6BA32	8PQ2067-6BA03	8PQ2067-6BA04	8PQ2067-6BA05
	2	800 mm	600 mm	8PQ2055-8BA24	8PQ2055-8BA25	8PQ2067-8BA03	8PQ2067-8BA04	8PQ2067-8BA05
			800 mm	8PQ2055-8BA24	8PQ2055-8BA25	8PQ2067-8BA03	8PQ2067-8BA04	8PQ2067-8BA05
Withdraw-able	1	600 mm	400 mm	8PQ2055-6BA31	8PQ2055-6BA32	8PQ2067-6BA03	8PQ2067-6BA04	8PQ2067-6BA05
			600 mm	8PQ2055-6BA31	8PQ2055-6BA32	8PQ2067-6BA03	8PQ2067-6BA04	8PQ2067-6BA05
			800 mm	8PQ2055-6BA31	8PQ2055-6BA32	8PQ2067-6BA03	8PQ2067-6BA04	8PQ2067-6BA05
	2	800 mm	600 mm	8PQ2055-8BA24	8PQ2055-8BA25	8PQ2067-8BA03	8PQ2067-8BA04	8PQ2067-8BA05
			800 mm	8PQ2055-8BA24	8PQ2055-8BA25	8PQ2067-8BA03	8PQ2067-8BA04	8PQ2067-8BA05

System overview, page 15/70

© Siemens 2025

❸ Base compartment doors		❹ Mounting plates	❺ Main busbar connection		❻ Partition 4	❼ Cable connection	Insulation
							
IP40	IP55 upgrade		Front	Rear			
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6001-6BA23	8PQ6000-6BA75	–	8PQ5000-6BA31	8PQ6000-5BA81	–
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6001-6BA23	8PQ6000-6BA75	–	8PQ5000-6BA32	8PQ6000-5BA81	–
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6001-6BA23	8PQ6000-6BA75	8PQ6001-1BA00	8PQ5000-6BA33	8PQ6000-5BA81	–
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6001-6BA22	8PQ6000-6BA76	–	8PQ5000-6BA34	8PQ6000-5BA83	–
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6001-6BA22	8PQ6000-6BA76	8PQ6001-1BA01	8PQ5000-6BA35	8PQ6000-5BA83	–
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6001-6BA23	8PQ6000-6BA75	–	8PQ5000-6BA31	8PQ6000-5BA82	8PQ6000-7BA28
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6001-6BA23	8PQ6000-6BA75	–	8PQ5000-6BA32	8PQ6000-5BA82	8PQ6000-7BA28
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6001-6BA23	8PQ6000-6BA75	8PQ6001-1BA00	8PQ5000-6BA33	8PQ6000-5BA82	8PQ6000-7BA28
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6001-6BA22	8PQ6000-6BA76	–	8PQ5000-6BA34	8PQ6000-5BA83	–
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6001-6BA22	8PQ6000-6BA76	8PQ6001-1BA01	8PQ5000-6BA35	8PQ6000-5BA83	–

System overview, page 15/70

© Siemens 2025

Section expansion

Siemens EcoTech

3WA air circuit breakers, main busbar at bottom, up to 800 V new

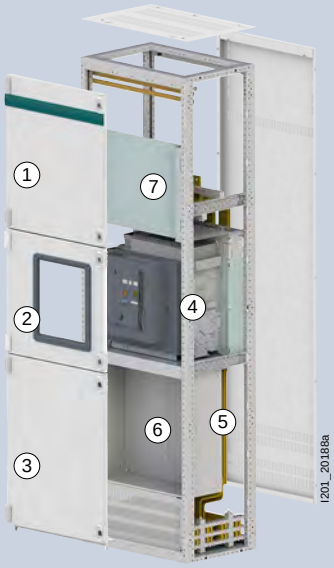

3 and 4-pole

Type of mounting	Size	Width	Depth	❶ Head compartment doors IP40	❶ Head compartment doors IP55 upgrade	❷ Compartment doors IP40	❷ Compartment doors IP55	❷ Compartment doors IP55 upgrade
						+ 3WA9111-0AP01	 + 3WA9111-0AP03	
Fixed-mounted	1	600 mm	400 mm	8PQ2055-6BA31	8PQ2055-6BA32	8PQ2067-6BA03	8PQ2067-6BA04	8PQ2067-6BA05
			600 mm	8PQ2055-6BA31	8PQ2055-6BA32	8PQ2067-6BA03	8PQ2067-6BA04	8PQ2067-6BA05
			800 mm	8PQ2055-6BA31	8PQ2055-6BA32	8PQ2067-6BA03	8PQ2067-6BA04	8PQ2067-6BA05
	2	800 mm	600 mm	8PQ2055-8BA24	8PQ2055-8BA25	8PQ2067-8BA03	8PQ2067-8BA04	8PQ2067-8BA05
			800 mm	8PQ2055-8BA24	8PQ2055-8BA25	8PQ2067-8BA03	8PQ2067-8BA04	8PQ2067-8BA05
Withdraw-able	1	600 mm	400 mm	8PQ2055-6BA31	8PQ2055-6BA32	8PQ2067-6BA03	8PQ2067-6BA04	8PQ2067-6BA05
			600 mm	8PQ2055-6BA31	8PQ2055-6BA32	8PQ2067-6BA03	8PQ2067-6BA04	8PQ2067-6BA05
			800 mm	8PQ2055-6BA31	8PQ2055-6BA32	8PQ2067-6BA03	8PQ2067-6BA04	8PQ2067-6BA05
	2	800 mm	600 mm	8PQ2055-8BA24	8PQ2055-8BA25	8PQ2067-8BA03	8PQ2067-8BA04	8PQ2067-8BA05
			800 mm	8PQ2055-8BA24	8PQ2055-8BA25	8PQ2067-8BA03	8PQ2067-8BA04	8PQ2067-8BA05

System overview, page 15/70

© Siemens 2025

❸ Base compartment doors		❹ Mounting plates	❺ Main busbar connection		❻ Partition 4b	❼ Cable connection	Insulation
							
IP40	IP55 upgrade		Front	Rear			
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6001-6BA23	8PQ6000-6BA75	–	8PQ5000-4BA34	8PQ6001-6BA33	–
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6001-6BA23	8PQ6000-6BA75	–	8PQ5000-4BA35	8PQ6001-6BA33	–
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6001-6BA23	8PQ6000-6BA75	8PQ6001-1BA00	8PQ5000-4BA36	8PQ6001-6BA33	–
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6001-6BA22	8PQ6000-6BA76	–	8PQ5000-4BA37	8PQ6001-6BA35	–
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6001-6BA22	8PQ6000-6BA76	8PQ6001-1BA01	8PQ5000-4BA38	8PQ6001-6BA35	–
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6001-6BA23	8PQ6000-6BA75	–	8PQ5000-4BA34	8PQ6001-6BA34	8PQ6000-7BA28
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6001-6BA23	8PQ6000-6BA75	–	8PQ5000-4BA35	8PQ6001-6BA34	8PQ6000-7BA28
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6001-6BA23	8PQ6000-6BA75	8PQ6001-1BA00	8PQ5000-4BA36	8PQ6001-6BA34	8PQ6000-7BA28
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6001-6BA22	8PQ6000-6BA76	–	8PQ5000-4BA37	8PQ6001-6BA35	–
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6001-6BA22	8PQ6000-6BA76	8PQ6001-1BA01	8PQ5000-4BA38	8PQ6001-6BA35	–

System overview, page 15/70

© Siemens 2025

Section expansion

3WA air circuit breakers, coupling, up to 690 V

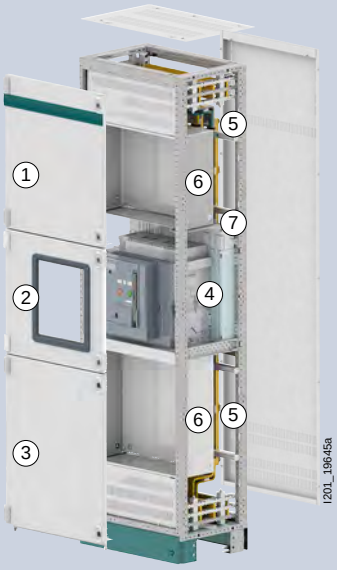

	❶ Head compartment doors		❷ Compartment doors			
			+ 3WA9111-0AP01	 + 3WA9111-0AP03		

Type of mounting	Size	Width	Depth	IP40	IP55 upgrade	IP4X	IP55	IP55 upgrade
Fixed-mounted	1	600 mm	400 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
			600 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
			800 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
	2	800 mm	600 mm	8PQ2067-8BA01	8PQ2067-8BA02	8PQ2055-8BA08	8PQ2055-8BA10	8PQ2055-8BA06
			800 mm	8PQ2067-8BA01	8PQ2067-8BA02	8PQ2055-8BA08	8PQ2055-8BA10	8PQ2055-8BA06
Withdraw-able	1	600 mm	400 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
			600 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
			800 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
	2	800 mm	600 mm	8PQ2067-8BA01	8PQ2067-8BA02	8PQ2055-8BA08	8PQ2055-8BA10	8PQ2055-8BA06
			800 mm	8PQ2067-8BA01	8PQ2067-8BA02	8PQ2055-8BA08	8PQ2055-8BA10	8PQ2055-8BA06

System overview, page 15/70

© Siemens 2025

❸ Base compartment doors		❹ Mounting plates	❺ Main busbar connection	❻ Partition 4b	❼ Uprights
					
IP40	**IP55 upgrade**				
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	2 × 8PQ6000-6BA75	8PQ5000-5BA12	–
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	2 × 8PQ6000-6BA75	8PQ5000-5BA13	2 × 8PQ3000-3BA50
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	2 × 8PQ6000-6BA75	8PQ5000-5BA14	2 × 8PQ3000-3BA51
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6000-5BA24	2 × 8PQ6000-6BA76	8PQ5000-5BA15	2 × 8PQ3000-3BA50
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6000-5BA24	2 × 8PQ6000-6BA76	8PQ5000-5BA16	2 × 8PQ3000-3BA51
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	2 × 8PQ6000-6BA75	8PQ5000-5BA12	–
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	2 × 8PQ6000-6BA75	8PQ5000-5BA13	2 × 8PQ3000-3BA50
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	2 × 8PQ6000-6BA75	8PQ5000-5BA14	2 × 8PQ3000-3BA51
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6000-5BA24	2 × 8PQ6000-6BA76	8PQ5000-5BA15	2 × 8PQ3000-3BA50
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6000-5BA24	2 × 8PQ6000-6BA76	8PQ5000-5BA16	2 × 8PQ3000-3BA51

System overview, page 15/70

© Siemens 2025

Section expansion

Siemens EcoTech

3WA air circuit breakers, coupling, up to 800 V new

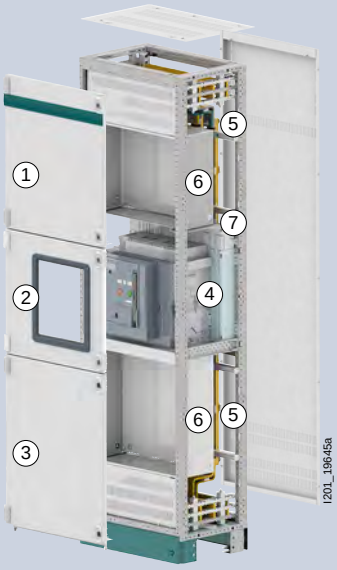

	❶ Head compartment doors		❷ Compartment doors			
			 + 3WA9111-0AP01	 + 3WA9111-0AP03		

Type of mounting	Size	Width	Depth	IP40	IP55 upgrade	IP40	IP55	IP55 upgrade
Fixed-mounted	1	600 mm	400 mm	8PQ2055-6BA31	8PQ2055-6BA32	8PQ2067-6BA03	8PQ2067-6BA04	8PQ2067-6BA05
			600 mm	8PQ2055-6BA31	8PQ2055-6BA32	8PQ2067-6BA03	8PQ2067-6BA04	8PQ2067-6BA05
			800 mm	8PQ2055-6BA31	8PQ2055-6BA32	8PQ2067-6BA03	8PQ2067-6BA04	8PQ2067-6BA05
	2	800 mm	600 mm	8PQ2055-8BA24	8PQ2055-8BA25	8PQ2067-8BA03	8PQ2067-8BA04	8PQ2067-8BA05
			800 mm	8PQ2055-8BA24	8PQ2055-8BA25	8PQ2067-8BA03	8PQ2067-8BA04	8PQ2067-8BA05
Withdraw-able	1	600 mm	400 mm	8PQ2055-6BA31	8PQ2055-6BA32	8PQ2067-6BA03	8PQ2067-6BA04	8PQ2067-6BA05
			600 mm	8PQ2055-6BA31	8PQ2055-6BA32	8PQ2067-6BA03	8PQ2067-6BA04	8PQ2067-6BA05
			800 mm	8PQ2055-6BA31	8PQ2055-6BA32	8PQ2067-6BA03	8PQ2067-6BA04	8PQ2067-6BA05
	2	800 mm	600 mm	8PQ2055-8BA24	8PQ2055-8BA25	8PQ2067-8BA03	8PQ2067-8BA04	8PQ2067-8BA05
			800 mm	8PQ2055-8BA24	8PQ2055-8BA25	8PQ2067-8BA03	8PQ2067-8BA04	8PQ2067-8BA05

System overview, page 15/70

© Siemens 2025

❸ Base compartment doors		❹ Mounting plates	❺ Main busbar connection	❻ Partition 4b	❼ Uprights
					
IP40	**IP55 upgrade**				
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6001-6BA23	2 × 8PQ6000-6BA75	8PQ5000-6BA36	–
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6001-6BA23	2 × 8PQ6000-6BA75	8PQ5000-6BA37	2 × 8PQ3000-3BA50
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6001-6BA23	2 × 8PQ6000-6BA75	8PQ5000-6BA38	2 × 8PQ3000-3BA51
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6001-6BA22	2 × 8PQ6000-6BA76	8PQ5000-6BA40	2 × 8PQ3000-3BA50
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6001-6BA22	2 × 8PQ6000-6BA76	8PQ5000-6BA41	2 × 8PQ3000-3BA51
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6001-6BA23	2 × 8PQ6000-6BA75	8PQ5000-6BA36	–
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6001-6BA23	2 × 8PQ6000-6BA75	8PQ5000-6BA37	2 × 8PQ3000-3BA50
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6001-6BA23	2 × 8PQ6000-6BA75	8PQ5000-6BA38	2 × 8PQ3000-3BA51
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6001-6BA22	2 × 8PQ6000-6BA76	8PQ5000-6BA40	2 × 8PQ3000-3BA50
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6001-6BA22	2 × 8PQ6000-6BA76	8PQ5000-6BA41	2 × 8PQ3000-3BA51

System overview, page 15/70

© Siemens 2025

Section expansion

Siemens EcoTech

3WA air circuit breakers, connection of section busbar systems

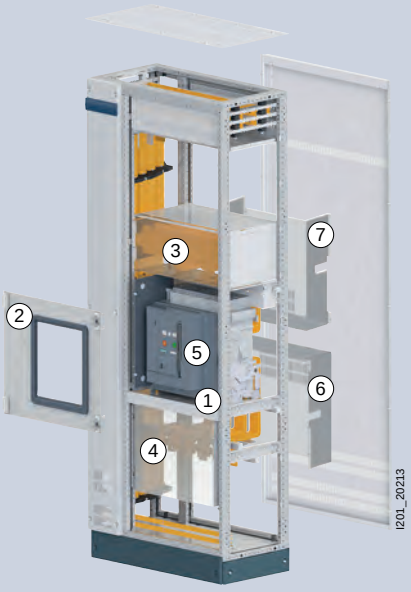

Compartment doors

❶ Mounting plates	❷ Compartment doors	
	 + 3WA9111-0AP01	 + 3WA9111-0AP03

Type of mounting	Size	Width	Number of poles	I_n		IP40	IP55	IP55 upgrade
Fixed-mounted	1	400 mm	3-pole	1600 A	8PQ6000-5BA25	8PQ2055-4BA12	–	
				2000 A	8PQ6000-5BA25	8PQ2055-4BA12	–	
		600 mm	4-pole	1600 A	8PQ6000-5BA26	8PQ2055-6BA16	8PQ2055-6BA17	+ 8PQ2055-6BA06
				2000 A	8PQ6000-5BA26	8PQ2055-6BA16	8PQ2055-6BA17	+ 8PQ2055-6BA06
Withdrawable	1	400 mm	3-pole	1600 A	8PQ6000-5BA25	8PQ2055-4BA12	–	
				2000 A	8PQ6000-5BA25	8PQ2055-4BA12	–	
		600 mm	4-pole	1600 A	8PQ6000-5BA26	8PQ2055-6BA16	8PQ2055-6BA17	+ 8PQ2055-6BA06
				2000 A	8PQ6000-5BA26	8PQ2055-6BA16	8PQ2055-6BA17	+ 8PQ2055-6BA06

Covers

❶ Mounting plates	❷ Covers
	 + 3WA9111-0AP01

Type of mounting	Size	Width	Number of poles	I_n		IP40
Fixed-mounted	1	600 mm	3-pole	1600 A	8PQ6000-3BA31	8PQ2055-6BA05
				2000 A	8PQ6000-3BA31	8PQ2055-6BA05
			4-pole	1600 A	8PQ6000-3BA31	8PQ2055-6BA07
				2000 A	8PQ6000-3BA31	8PQ2055-6BA07
		800 mm	3/4-pole	1600 A	8PQ6000-3BA32	8PQ2055-8BA04
				2000 A	8PQ6000-3BA32	8PQ2055-8BA04
Withdrawable	1	600 mm	3-pole	1600 A	8PQ6000-3BA31	8PQ2055-6BA05
				2000 A	8PQ6000-3BA31	8PQ2055-6BA05
			4-pole	1600 A	8PQ6000-3BA31	8PQ2055-6BA07
				2000 A	8PQ6000-3BA31	8PQ2055-6BA07
		800 mm	3/4-pole	1600 A	8PQ6000-3BA32	8PQ2055-8BA04
				2000 A	8PQ6000-3BA32	8PQ2055-8BA04

15

System overview, page 15/70

© Siemens 2025

❸ Section busbars	❹ Cable connection	❺ Device compartment	❻ Cable connection	❼ Section busbars
				
		Partition 3b	Partition 4b	Partition 4b
8PQ6000-5BA48	8PQ6000-5BA78	8PQ5000-3BA82	8PQ5000-3BA84	8PQ5000-3BA84
8PQ6000-7BA05	8PQ6000-5BA78	8PQ5000-3BA82	8PQ5000-4BA00	8PQ5000-3BA85
8PQ6000-5BA51	8PQ6000-5BA81	8PQ5000-3BA82	8PQ5000-3BA86	8PQ5000-3BA86
8PQ6000-7BA07	8PQ6000-5BA81	8PQ5000-3BA82	8PQ5000-4BA01	8PQ5000-3BA87
8PQ6000-5BA50	8PQ6000-5BA80	8PQ5000-3BA82	8PQ5000-3BA84	8PQ5000-3BA84
8PQ6000-7BA06	8PQ6000-5BA80	8PQ5000-3BA82	8PQ5000-4BA00	8PQ5000-3BA85
8PQ6000-5BA52	8PQ6000-5BA82	8PQ5000-3BA82	8PQ5000-3BA86	8PQ5000-3BA86
8PQ6000-7BA08	8PQ6000-5BA82	8PQ5000-3BA82	8PQ5000-4BA01	8PQ5000-3BA87

❸ Section busbars	❹ Cable connection	❺ Device compartment	❻ Cable connection	❼ Section busbars
				
		Partition 3b	Partition 4b	Partition 4b
8PQ6000-5BA45	8PQ6000-5BA75	8PQ5000-0BA08	8PQ5000-0BA30	8PQ5000-0BA14
8PQ6000-7BA03	8PQ6000-5BA75	8PQ5000-0BA08	8PQ5000-0BA30	8PQ5000-0BA14
8PQ6000-5BA45	8PQ6000-5BA75	8PQ5000-0BA08	8PQ5000-0BA30	8PQ5000-0BA14
8PQ6000-7BA03	8PQ6000-5BA75	8PQ5000-0BA08	8PQ5000-0BA30	8PQ5000-0BA14
8PQ6000-5BA46	8PQ6000-5BA76	8PQ5000-1BA65	8PQ5000-1BA68	8PQ5000-1BA67
8PQ6000-7BA04	8PQ6000-5BA76	8PQ5000-1BA65	8PQ5000-1BA68	8PQ5000-1BA67
8PQ6000-5BA45	8PQ6000-5BA75	8PQ5000-0BA07	8PQ5000-0BA30	8PQ5000-0BA14
8PQ6000-7BA03	8PQ6000-5BA75	8PQ5000-0BA07	8PQ5000-0BA30	8PQ5000-0BA14
8PQ6000-5BA45	8PQ6000-5BA75	8PQ5000-0BA07	8PQ5000-0BA30	8PQ5000-0BA14
8PQ6000-7BA03	8PQ6000-5BA75	8PQ5000-0BA07	8PQ5000-0BA30	8PQ5000-0BA14
8PQ6000-5BA46	8PQ6000-5BA76	8PQ5000-1BA66	8PQ5000-1BA68	8PQ5000-1BA67
8PQ6000-7BA04	8PQ6000-5BA76	8PQ5000-1BA66	8PQ5000-1BA68	8PQ5000-1BA67

System overview, page 15/70

© Siemens 2025

Section expansion

Siemens EcoTech

3WA air circuit breakers, fixed-mounted

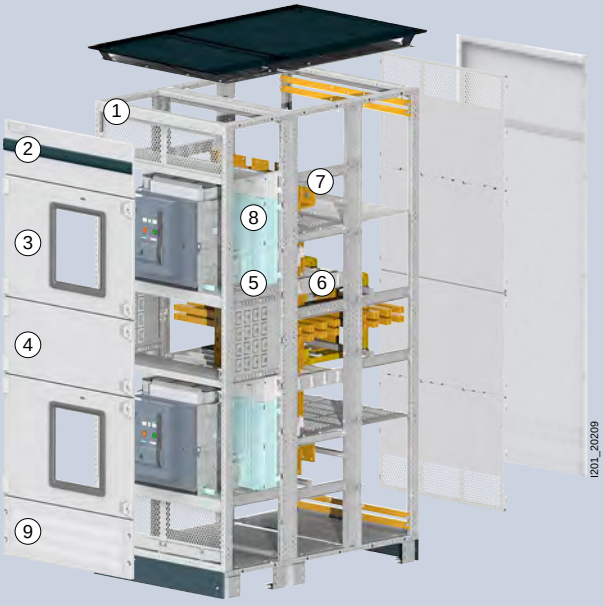

	❶ Frames			❷ Head compart-ments	❸ Compartment doors		
					+ 3WA9111-0AP01	+ 3WA9111-0AP03	

Size	I_n	Width	Depth	Number of poles	At front		At rear	Covers	IP40	IP55		IP55 upgrade
1	2000 A	400 mm	800 mm	3-pole	8PQ1204-8BA01		–	8PQ2025-4BA03	8PQ2055-4BA12	–		–
			1000 mm	3-pole	8PQ1204-4BA01	+	8PQ1204-6BA01	8PQ2025-4BA03	8PQ2055-4BA12	–		–
			1200 mm	3-pole	8PQ1204-4BA01	+	8PQ1204-8BA01	8PQ2025-4BA03	8PQ2055-4BA12	–		–
			1200 mm duplex	3-pole	8PQ1204-4BA01	+	8PQ1204-8BA01	8PQ2025-4BA03	8PQ2055-4BA12	–		–
		600 mm	800 mm	3/4-pole	8PQ1206-8BA01		–	8PQ2025-6BA25	8PQ2055-6BA16	8PQ2055-6BA17	+	8PQ2055-6BA06
			1000 mm	3/4-pole	8PQ1206-4BA01	+	8PQ1206-6BA01	8PQ2025-6BA25	8PQ2055-6BA16	8PQ2055-6BA17	+	8PQ2055-6BA06
			1200 mm	3/4-pole	8PQ1206-4BA01	+	8PQ1206-8BA01	8PQ2025-6BA25	8PQ2055-6BA16	8PQ2055-6BA17	+	8PQ2055-6BA06
			1200 mm duplex	3/4-pole	8PQ1206-4BA01	+	8PQ1206-8BA01	8PQ2025-6BA25	8PQ2055-6BA16	8PQ2055-6BA17	+	8PQ2055-6BA06
2	3200 A	800 mm	800 mm	3/4-pole	8PQ1208-8BA01		–	8PQ2025-8BA16	8PQ2055-8BA08	8PQ2055-8BA10	+	8PQ2055-8BA06
			1000 mm	3/4-pole	8PQ1208-4BA01	+	8PQ1208-6BA01	8PQ2025-8BA16	8PQ2055-8BA08	8PQ2055-8BA10	+	8PQ2055-8BA06
			1200 mm	3/4-pole	8PQ1208-4BA01	+	8PQ1208-8BA01	8PQ2025-8BA16	8PQ2055-8BA08	8PQ2055-8BA10	+	8PQ2055-8BA06
			1200 mm duplex	3/4-pole	8PQ1208-4BA01	+	8PQ1208-8BA01	8PQ2025-8BA16	8PQ2055-8BA08	8PQ2055-8BA10	+	8PQ2055-8BA06
3	4000 A	1000 mm	1200 mm	3/4-pole	8PQ1201-4BA02	+	8PQ1201-8BA03	8PQ2025-1BA01	8PQ2055-1BA03	8PQ2055-1BA04	+	8PQ2055-1BA06
	5000 A	1000 mm	1200 mm	3/4-pole	8PQ1201-4BA02	+	8PQ1201-8BA03	8PQ2025-1BA01	8PQ2055-1BA03	8PQ2055-1BA04	+	8PQ2055-1BA06

Accessories

Frame reinforcement

Size	Depth	Article No.
3	1200 mm	8PQ5000-5BA46

Barrier supports

Size	Depth	Scope of supply	Article No.
1, 2, 3	1200 mm	1 set = 6 units	8PQ3000-3BA67

15

System overview, page 15/70

© Siemens 2025

❹ Auxiliary device compart-ments	❺ Mounting plates	❻ Main busbar connection	❼ Cable connection	❽ Partition			❾ Base compartment covers	
								
Compartment doors				**Device compartment**	**Rear panels**	**Section**	**IP40**	**IP55**
8PQ2035-4BA01	8PQ6000-5BA25	8PQ6001-0BA65	8PQ6001-0BA77	8PQ5000-3BA82	8PQ5000-5BA21	8PQ5000-5BA30	8PQ2000-4BA06	–
8PQ2035-4BA01	8PQ6000-5BA25	8PQ6001-0BA65	8PQ6001-0BA77	8PQ5000-3BA82	8PQ5000-5BA48	8PQ5000-5BA30	8PQ2000-4BA06	–
8PQ2035-4BA01	8PQ6000-5BA25	8PQ6001-0BA65	8PQ6001-0BA77	8PQ5000-3BA82	8PQ5000-5BA21	8PQ5000-5BA30	8PQ2000-4BA06	–
8PQ2035-4BA01	8PQ6000-5BA25	8PQ6001-0BA65 + 8PQ6001-0BA61	8PQ6001-0BA77	8PQ5000-3BA82	8PQ5000-5BA21	8PQ5000-5BA32	8PQ2000-4BA06	–
8PQ2035-6BA12	8PQ6000-5BA26	8PQ6001-0BA67	8PQ6001-0BA78	8PQ5000-3BA82	8PQ5000-5BA22	8PQ5000-5BA34	8PQ2000-6BA13	8PQ2000-6BA11
8PQ2035-6BA12	8PQ6000-5BA26	8PQ6001-0BA67	8PQ6001-0BA78	8PQ5000-3BA82	8PQ5000-5BA50	8PQ5000-5BA34	8PQ2000-6BA13	8PQ2000-6BA11
8PQ2035-6BA12	8PQ6000-5BA26	8PQ6001-0BA67	8PQ6001-0BA78	8PQ5000-3BA82	8PQ5000-5BA22	8PQ5000-5BA34	8PQ2000-6BA13	8PQ2000-6BA11
8PQ2035-6BA12	8PQ6000-5BA26	8PQ6001-0BA67 + 8PQ6001-0BA62	8PQ6001-0BA78	8PQ5000-3BA82	8PQ5000-5BA22	8PQ5000-5BA36	8PQ2000-6BA13	8PQ2000-6BA11
8PQ2035-8BA06	8PQ6000-5BA24	8PQ6001-0BA72	8PQ6001-0BA81	8PQ5000-3BA81	8PQ5000-5BA23	8PQ5000-5BA38	8PQ2000-8BA13	8PQ2000-8BA11
8PQ2035-8BA06	8PQ6000-5BA24	8PQ6001-0BA72	8PQ6001-0BA81	8PQ5000-3BA81	8PQ5000-5BA51	8PQ5000-5BA38	8PQ2000-8BA13	8PQ2000-8BA11
8PQ2035-8BA06	8PQ6000-5BA24	8PQ6001-0BA72	8PQ6001-0BA81	8PQ5000-3BA81	8PQ5000-5BA23	8PQ5000-5BA38	8PQ2000-8BA13	8PQ2000-8BA11
8PQ2035-8BA06	8PQ6000-5BA24	8PQ6001-0BA72 + 8PQ6001-0BA64	8PQ6001-0BA81	8PQ5000-3BA81	8PQ5000-5BA23	8PQ5000-5BA41	8PQ2000-8BA13	8PQ2000-8BA11
8PQ2035-1BA01	8PQ6000-8BA70	8PQ6001-0BA74	8PQ6001-0BA82	8PQ5000-1BA74	8PQ5000-5BA24	8PQ5000-5BA43	8PQ2000-1BA04	8PQ2000-1BA02
8PQ2035-1BA01	8PQ6000-8BA70	8PQ6001-0BA75	8PQ6001-4BA18	8PQ5000-1BA74	8PQ5000-5BA24	8PQ5000-5BA43	8PQ2000-1BA04	8PQ2000-1BA02

System overview, page 15/70

© Siemens 2025

Section expansion

Siemens EcoTech

3WA air circuit breakers, withdrawable

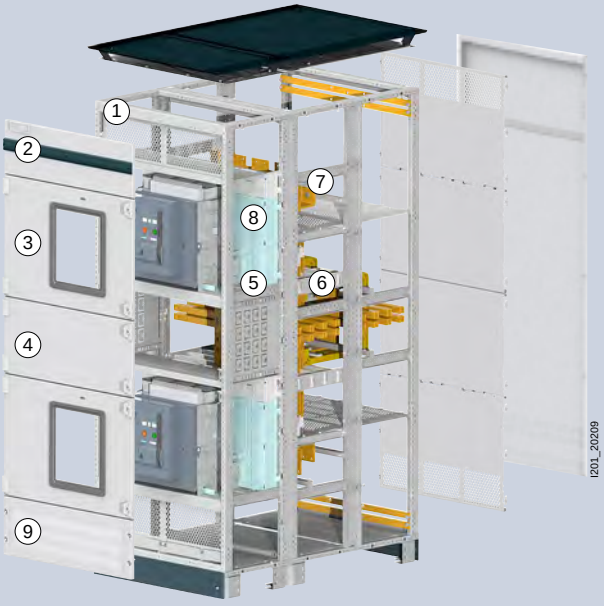

Size	I_n	Width	Depth	Number of poles	❶ Frames: At front		❶ Frames: At rear	❷ Head compartments: Covers	❸ Compartment doors: IP40	❸ Compartment doors: IP55		❸ Compartment doors: IP55 upgrade
										+ 3WA9111-0AP01	+ 3WA9111-0AP03	
1	2000 A	400 mm	800 mm	3-pole	8PQ1204-8BA01		–	8PQ2025-4BA03	8PQ2055-4BA12	–		–
			1000 mm	3-pole	8PQ1204-4BA01	+	8PQ1204-6BA01	8PQ2025-4BA03	8PQ2055-4BA12	–		–
			1200 mm	3-pole	8PQ1204-4BA01	+	8PQ1204-8BA01	8PQ2025-4BA03	8PQ2055-4BA12	–		–
			1200 mm duplex	3-pole	8PQ1204-4BA01	+	8PQ1204-8BA01	8PQ2025-4BA03	8PQ2055-4BA12	–		–
		600 mm	800 mm	3/4-pole	8PQ1204-4BA05		–	8PQ2025-6BA25	8PQ2055-6BA16	8PQ2055-6BA17	+	8PQ2055-6BA06
			1000 mm	3/4-pole	8PQ1206-4BA01	+	8PQ1206-6BA01	8PQ2025-6BA25	8PQ2055-6BA16	8PQ2055-6BA17	+	8PQ2055-6BA06
			1200 mm	3/4-pole	8PQ1206-4BA01	+	8PQ1206-8BA01	8PQ2025-6BA25	8PQ2055-6BA16	8PQ2055-6BA17	+	8PQ2055-6BA06
			1200 mm duplex	3/4-pole	8PQ1206-4BA01	+	8PQ1206-8BA01	8PQ2025-6BA25	8PQ2055-6BA16	8PQ2055-6BA17	+	8PQ2055-6BA06
2	3200 A	800 mm	800 mm	3/4-pole	8PQ1204-4BA05		–	8PQ2025-8BA16	8PQ2055-8BA08	8PQ2055-8BA10	+	8PQ2055-8BA06
			1000 mm	3/4-pole	8PQ1208-4BA01	+	8PQ1208-6BA01	8PQ2025-8BA16	8PQ2055-8BA08	8PQ2055-8BA10	+	8PQ2055-8BA06
			1200 mm	3/4-pole	8PQ1208-4BA01	+	8PQ1208-8BA01	8PQ2025-8BA16	8PQ2055-8BA08	8PQ2055-8BA10	+	8PQ2055-8BA06
			1200 mm duplex	3/4-pole	8PQ1208-4BA01	+	8PQ1208-8BA01	8PQ2025-8BA16	8PQ2055-8BA08	8PQ2055-8BA10	+	8PQ2055-8BA06
3	4000 A	1000 mm	1200 mm	3/4-pole	8PQ1201-4BA02	+	8PQ1201-8BA03	8PQ2025-1BA01	8PQ2055-1BA03	8PQ2055-1BA04	+	8PQ2055-1BA06
	5000 A	1000 mm	1200 mm	3/4-pole	8PQ1201-4BA02	+	8PQ1201-8BA03	8PQ2025-1BA01	8PQ2055-1BA03	8PQ2055-1BA04	+	8PQ2055-1BA06
	6300 A	1000 mm	1200 mm	3/4-pole	8PQ1201-4BA02	+	8PQ1201-8BA03	8PQ2025-1BA01	8PQ2055-1BA03	8PQ2055-1BA04	+	8PQ2055-1BA06

Accessories

Frame reinforcement

Size	Depth	Article No.
3	1200 mm	8PQ5000-5BA46

Barrier supports

Size	Depth	Scope of supply	Article No.
1, 2, 3	1200 mm	1 set = 6 units	8PQ3000-3BA67

15

System overview, page 15/70

© Siemens 2025

❹ Auxiliary device compartments	❺ Mounting plates	❻ Main busbar connection	❼ Cable connection	❽ Partition			❾ Base compartment covers	
								
Compartment doors				Device compartment	Rear panels	Section	IP40	IP55
8PQ2035-4BA01	8PQ6000-5BA25	8PQ6001-0BA66	8PQ6001-0BA77	8PQ5000-3BA82	8PQ5000-5BA21	8PQ5000-5BA30	8PQ2000-4BA06	–
8PQ2035-4BA01	8PQ6000-5BA25	8PQ6001-0BA66	8PQ6001-0BA77	8PQ5000-3BA82	8PQ5000-5BA48	8PQ5000-5BA30	8PQ2000-4BA06	–
8PQ2035-4BA01	8PQ6000-5BA25	8PQ6001-0BA66	8PQ6001-0BA77	8PQ5000-3BA82	8PQ5000-5BA21	8PQ5000-5BA30	8PQ2000-4BA06	–
8PQ2035-4BA01	8PQ6000-5BA25	8PQ6001-0BA66 + 8PQ6001-0BA61	8PQ6001-0BA77	8PQ5000-3BA82	8PQ5000-5BA21	8PQ5000-5BA32	8PQ2000-4BA06	–
8PQ2035-6BA12	8PQ6000-5BA26	8PQ6001-0BA68	8PQ6001-0BA78	8PQ5000-3BA82	8PQ5000-5BA22	8PQ5000-5BA34	8PQ2000-6BA13	8PQ2000-6BA11
8PQ2035-6BA12	8PQ6000-5BA26	8PQ6001-0BA68	8PQ6001-0BA78	8PQ5000-3BA82	8PQ5000-5BA50	8PQ5000-5BA34	8PQ2000-6BA13	8PQ2000-6BA11
8PQ2035-6BA12	8PQ6000-5BA26	8PQ6001-0BA68	8PQ6001-0BA78	8PQ5000-3BA82	8PQ5000-5BA22	8PQ5000-5BA34	8PQ2000-6BA13	8PQ2000-6BA11
8PQ2035-6BA12	8PQ6000-5BA26	8PQ6001-0BA68 + 8PQ6001-0BA61	8PQ6001-0BA78	8PQ5000-3BA82	8PQ5000-5BA22	8PQ5000-5BA36	8PQ2000-6BA13	8PQ2000-6BA11
8PQ2035-8BA06	8PQ6000-5BA24	8PQ6001-0BA73	8PQ6001-0BA81	8PQ5000-3BA81	8PQ5000-5BA23	8PQ5000-5BA38	8PQ2000-8BA13	8PQ2000-8BA11
8PQ2035-8BA06	8PQ6000-5BA24	8PQ6001-0BA73	8PQ6001-0BA81	8PQ5000-3BA81	8PQ5000-5BA51	8PQ5000-5BA38	8PQ2000-8BA13	8PQ2000-8BA11
8PQ2035-8BA06	8PQ6000-5BA24	8PQ6001-0BA73	8PQ6001-0BA81	8PQ5000-3BA81	8PQ5000-5BA23	8PQ5000-5BA38	8PQ2000-8BA13	8PQ2000-8BA11
8PQ2035-8BA06	8PQ6000-5BA24	8PQ6001-0BA73 + 8PQ6001-0BA61	8PQ6001-0BA81	8PQ5000-3BA81	8PQ5000-5BA23	8PQ5000-5BA41	8PQ2000-8BA13	8PQ2000-8BA11
8PQ2035-1BA01	8PQ6000-8BA70	8PQ6001-0BA74	8PQ6001-0BA83	8PQ5000-1BA74	8PQ5000-5BA24	8PQ5000-5BA43	8PQ2000-1BA04	8PQ2000-1BA02
8PQ2035-1BA01	8PQ6000-8BA70	8PQ6001-0BA75	8PQ6001-0BA83	8PQ5000-1BA74	8PQ5000-5BA24	8PQ5000-5BA43	8PQ2000-1BA04	8PQ2000-1BA02
8PQ2035-1BA01	8PQ6000-8BA70	8PQ6001-0BA76	8PQ6001-0BA84	8PQ5000-1BA74	8PQ5000-5BA24	8PQ5000-5BA43	8PQ2000-1BA04	8PQ2000-1BA02

System overview, page 15/70

© Siemens 2025

Section expansion

3WA air circuit breakers, couplings, fixed-mounted

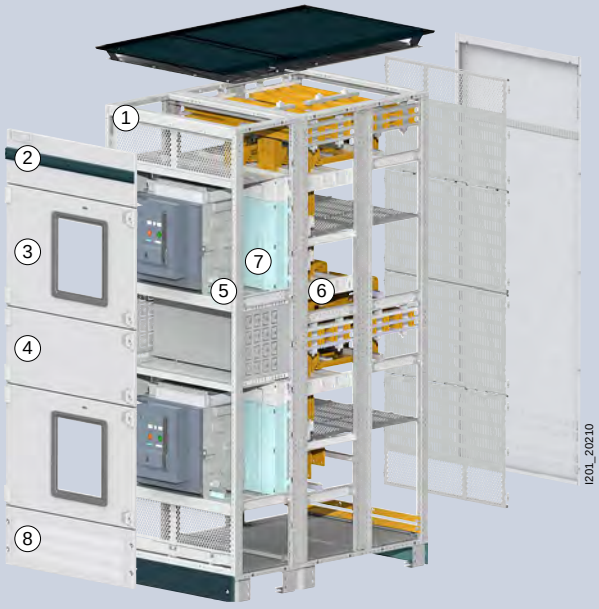

	❶ Frame		❷ Head compartments	❸ Compartment doors	
				+ 3WA9111-0AP01	+ 3WA9111-0AP03

Size	I_n	Width	Depth	Number of poles	At front		At rear	Covers	IP40	IP55		IP55 upgrade
1	2000 A	400 mm	800 mm	3-pole	8PQ1204-8BA01		–	8PQ2025-4BA03	8PQ2055-4BA12	–		–
			1000 mm	3-pole	8PQ1204-4BA01	+	8PQ1204-6BA01	8PQ2025-4BA03	8PQ2055-4BA12	–		–
			1200 mm	3-pole	8PQ1204-4BA01	+	8PQ1204-8BA01	8PQ2025-4BA03	8PQ2055-4BA12	–		–
			1200 mm duplex	3-pole	8PQ1204-4BA01	+	8PQ1204-8BA01	8PQ2025-4BA03	8PQ2055-4BA12	–		–
		600 mm	800 mm	3/4-pole	8PQ1206-8BA01		–	8PQ2025-6BA25	8PQ2055-6BA16	8PQ2055-6BA17	+	8PQ2055-6BA06
			1000 mm	3/4-pole	8PQ1206-4BA01	+	8PQ1206-6BA01	8PQ2025-6BA25	8PQ2055-6BA16	8PQ2055-6BA17	+	8PQ2055-6BA06
			1200 mm	3/4-pole	8PQ1206-4BA01	+	8PQ1206-8BA01	8PQ2025-6BA25	8PQ2055-6BA16	8PQ2055-6BA17	+	8PQ2055-6BA06
			1200 mm duplex	3/4-pole	8PQ1206-4BA01	+	8PQ1206-8BA01	8PQ2025-6BA25	8PQ2055-6BA16	8PQ2055-6BA17	+	8PQ2055-6BA06
2	3200 A	800 mm	800 mm	3/4-pole	8PQ1208-8BA01		–	8PQ2025-8BA16	8PQ2055-8BA08	8PQ2055-8BA10	+	8PQ2055-8BA06
			1000 mm	3/4-pole	8PQ1208-4BA01	+	8PQ1208-6BA01	8PQ2025-8BA16	8PQ2055-8BA08	8PQ2055-8BA10	+	8PQ2055-8BA06
			1200 mm	3/4-pole	8PQ1208-4BA01	+	8PQ1208-8BA01	8PQ2025-8BA16	8PQ2055-8BA08	8PQ2055-8BA10	+	8PQ2055-8BA06
			1200 mm duplex	3/4-pole	8PQ1208-4BA01	+	8PQ1208-8BA01	8PQ2025-8BA16	8PQ2055-8BA08	8PQ2055-8BA10	+	8PQ2055-8BA06
3	4000 A	1000 mm	1200 mm	3/4-pole	8PQ1201-4BA02	+	8PQ1201-8BA03	8PQ2025-1BA01	8PQ2055-1BA03	8PQ2055-1BA04	+	8PQ2055-1BA06
	5000 A	1000 mm	1200 mm	3/4-pole	8PQ1201-4BA02	+	8PQ1201-8BA03	8PQ2025-1BA01	8PQ2055-1BA03	8PQ2055-1BA04	+	8PQ2055-1BA06

Accessories

Frame reinforcement

Size	Depth	Article No.
3	1200 mm	8PQ5000-5BA46

Barrier supports

Size	Depth	Scope of supply	Article No.
1, 2, 3	1200 mm	1 set = 6 units	8PQ3000-3BA67

15

System overview, page 15/70

© Siemens 2025

❹ Auxiliary device compartments	❺ Mounting plates	❻ Main busbar connection	❼ Partition			❽ Base compartment covers	
							
Compartment doors			**Device compartment**	**Rear panels**	**Section**	**IP40**	**IP55**
8PQ2035-4BA01	8PQ6000-5BA25	2 × 8PQ6001-0BA65	8PQ5000-3BA82	8PQ5000-5BA25	8PQ5000-5BA31	8PQ2000-4BA06	–
8PQ2035-4BA01	8PQ6000-5BA25	2 × 8PQ6001-0BA65	8PQ5000-3BA82	8PQ5000-5BA52	8PQ5000-5BA31	8PQ2000-4BA06	–
8PQ2035-4BA01	8PQ6000-5BA25	2 × 8PQ6001-0BA65	8PQ5000-3BA82	8PQ5000-5BA25	8PQ5000-5BA31	8PQ2000-4BA06	–
8PQ2035-4BA01	8PQ6000-5BA25	2 × 8PQ6001-0BA65 + 8PQ6001-0BA61	8PQ5000-3BA82	8PQ5000-5BA25	8PQ5000-5BA33	8PQ2000-4BA06	–
8PQ2035-6BA12	8PQ6000-5BA26	2 × 8PQ6001-0BA67	8PQ5000-3BA82	8PQ5000-5BA26	8PQ5000-5BA35	8PQ2000-6BA13	8PQ2000-6BA11
8PQ2035-6BA12	8PQ6000-5BA26	2 × 8PQ6001-0BA67	8PQ5000-3BA82	8PQ5000-5BA53	8PQ5000-5BA35	8PQ2000-6BA13	8PQ2000-6BA11
8PQ2035-6BA12	8PQ6000-5BA26	2 × 8PQ6001-0BA67	8PQ5000-3BA82	8PQ5000-5BA26	8PQ5000-5BA35	8PQ2000-6BA13	8PQ2000-6BA11
8PQ2035-6BA12	8PQ6000-5BA26	2 × 8PQ6001-0BA67 + 8PQ6001-0BA62	8PQ5000-3BA82	8PQ5000-5BA26	8PQ5000-5BA37	8PQ2000-6BA13	8PQ2000-6BA11
8PQ2035-8BA06	8PQ6000-5BA24	2 × 8PQ6001-0BA72	8PQ5000-3BA81	8PQ5000-5BA27	8PQ5000-5BA40	8PQ2000-8BA13	8PQ2000-8BA11
8PQ2035-8BA06	8PQ6000-5BA24	2 × 8PQ6001-0BA72	8PQ5000-3BA81	8PQ5000-5BA54	8PQ5000-5BA40	8PQ2000-8BA13	8PQ2000-8BA11
8PQ2035-8BA06	8PQ6000-5BA24	2 × 8PQ6001-0BA72	8PQ5000-3BA81	8PQ5000-5BA27	8PQ5000-5BA40	8PQ2000-8BA13	8PQ2000-8BA11
8PQ2035-8BA06	8PQ6000-5BA24	2 × 8PQ6001-0BA72 + 8PQ6001-0BA64	8PQ5000-3BA81	8PQ5000-5BA27	8PQ5000-5BA42	8PQ2000-8BA13	8PQ2000-8BA11
8PQ2035-1BA01	8PQ6000-8BA70	2 × 8PQ6001-0BA74	8PQ5000-1BA74	8PQ5000-5BA28	8PQ5000-5BA44	8PQ2000-1BA04	8PQ2000-1BA02
8PQ2035-1BA01	8PQ6000-8BA70	2 × 8PQ6001-0BA75	8PQ5000-1BA74	8PQ5000-5BA28	8PQ5000-5BA44	8PQ2000-1BA04	8PQ2000-1BA02

System overview, page 15/70

© Siemens 2025

Section expansion

Siemens EcoTech

3WA air circuit breakers, couplings, withdrawable

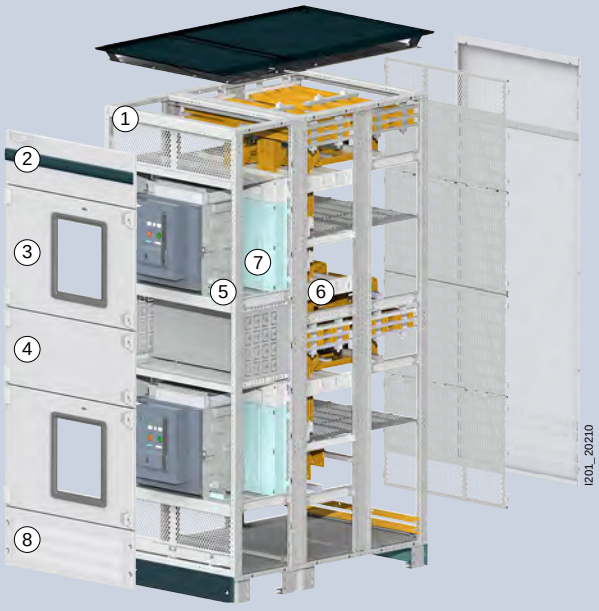

					❶ Frame		❷ Head compartments	❸ Compartment doors		
								+ 3WA9111-0AP01	+ 3WA9111-0AP03	
Size	**I_n**	**Width**	**Depth**	**Number of poles**	**At front**	**At rear**	**Covers**	**IP40**	**IP55**	**IP55 upgrade**
1	2000 A	400 mm	800 mm	3-pole	8PQ1204-8BA01	–	8PQ2025-4BA03	8PQ2055-4BA12	–	–
			1000 mm	3-pole	8PQ1204-4BA01	+ 8PQ1204-6BA01	8PQ2025-4BA03	8PQ2055-4BA12	–	–
			1200 mm	3-pole	8PQ1204-4BA01	+ 8PQ1204-8BA01	8PQ2025-4BA03	8PQ2055-4BA12	–	–
			1200 mm duplex	3-pole	8PQ1204-4BA01	+ 8PQ1204-8BA01	8PQ2025-4BA03	8PQ2055-4BA12	–	–
		600 mm	800 mm	3/4-pole	8PQ1206-8BA01	–	8PQ2025-6BA25	8PQ2055-6BA16	8PQ2055-6BA17 +	8PQ2055-6BA06
			1000 mm	3/4-pole	8PQ1206-4BA01	+ 8PQ1206-6BA01	8PQ2025-6BA25	8PQ2055-6BA16	8PQ2055-6BA17 +	8PQ2055-6BA06
			1200 mm	3/4-pole	8PQ1206-4BA01	+ 8PQ1206-8BA01	8PQ2025-6BA25	8PQ2055-6BA16	8PQ2055-6BA17 +	8PQ2055-6BA06
			1200 mm duplex	3/4-pole	8PQ1206-4BA01	+ 8PQ1206-8BA01	8PQ2025-6BA25	8PQ2055-6BA16	8PQ2055-6BA17 +	8PQ2055-6BA06
2	3200 A	800 mm	800 mm	3/4-pole	8PQ1208-8BA01	–	8PQ2025-8BA16	8PQ2055-8BA08	8PQ2055-8BA10 +	8PQ2055-8BA06
			1000 mm	3/4-pole	8PQ1208-4BA01	+ 8PQ1208-6BA01	8PQ2025-8BA16	8PQ2055-8BA08	8PQ2055-8BA10 +	8PQ2055-8BA06
			1200 mm	3/4-pole	8PQ1208-4BA01	+ 8PQ1208-8BA01	8PQ2025-8BA16	8PQ2055-8BA08	8PQ2055-8BA10 +	8PQ2055-8BA06
			1200 mm duplex	3/4-pole	8PQ1208-4BA01	+ 8PQ1208-8BA01	8PQ2025-8BA16	8PQ2055-8BA08	8PQ2055-8BA10 +	8PQ2055-8BA06
3	4000 A	1000 mm	1200 mm	3/4-pole	8PQ1201-4BA02	+ 8PQ1201-8BA03	8PQ2025-1BA01	8PQ2055-1BA03	8PQ2055-1BA04 +	8PQ2055-1BA06
	5000 A	1000 mm	1200 mm	3/4-pole	8PQ1201-4BA02	+ 8PQ1201-8BA03	8PQ2025-1BA01	8PQ2055-1BA03	8PQ2055-1BA04 +	8PQ2055-1BA06
	6300 A	1000 mm	1200 mm	3/4-pole	8PQ1201-4BA02	+ 8PQ1201-8BA03	8PQ2025-1BA01	8PQ2055-1BA03	8PQ2055-1BA04 +	8PQ2055-1BA06

Accessories

Frame reinforcement

Size	Depth	Article No.
3	1200 mm	8PQ5000-5BA46

Barrier supports

Size	Depth	Scope of supply	Article No.
1, 2, 3	1200 mm	1 set = 6 units	8PQ3000-3BA67

15

System overview, page 15/70

© Siemens 2025

❹ Auxiliary device compartments	❺ Mounting plates	❻ Main busbar connection	❼ Partition			❽ Base compartment covers	
							
Compartment doors			Device compartment	Rear panels	Section	IP40	IP55
8PQ2035-4BA01	8PQ6000-5BA25	2 × 8PQ6001-0BA66	8PQ5000-3BA82	8PQ5000-5BA25	8PQ5000-5BA31	8PQ2000-4BA06	–
8PQ2035-4BA01	8PQ6000-5BA25	2 × 8PQ6001-0BA66	8PQ5000-3BA82	8PQ5000-5BA52	8PQ5000-5BA31	8PQ2000-4BA06	–
8PQ2035-4BA01	8PQ6000-5BA25	2 × 8PQ6001-0BA66	8PQ5000-3BA82	8PQ5000-5BA25	8PQ5000-5BA31	8PQ2000-4BA06	–
8PQ2035-4BA01	8PQ6000-5BA25	2 × 8PQ6001-0BA66 + 8PQ6001-0BA61	8PQ5000-3BA82	8PQ5000-5BA25	8PQ5000-5BA33	8PQ2000-4BA06	–
8PQ2035-6BA12	8PQ6000-5BA26	2 × 8PQ6001-0BA68	8PQ5000-3BA82	8PQ5000-5BA26	8PQ5000-5BA35	8PQ2000-6BA13	8PQ2000-6BA11
8PQ2035-6BA12	8PQ6000-5BA26	2 × 8PQ6001-0BA68	8PQ5000-3BA82	8PQ5000-5BA53	8PQ5000-5BA35	8PQ2000-6BA13	8PQ2000-6BA11
8PQ2035-6BA12	8PQ6000-5BA26	2 × 8PQ6001-0BA68	8PQ5000-3BA82	8PQ5000-5BA26	8PQ5000-5BA35	8PQ2000-6BA13	8PQ2000-6BA11
8PQ2035-6BA12	8PQ6000-5BA26	8PQ6001-0BA68 + 8PQ6001-0BA62	8PQ5000-3BA82	8PQ5000-5BA26	8PQ5000-5BA35	8PQ2000-6BA13	8PQ2000-6BA11
8PQ2035-8BA06	8PQ6000-5BA24	2 × 8PQ6001-0BA73	8PQ5000-3BA81	8PQ5000-5BA27	8PQ5000-5BA40	8PQ2000-8BA13	8PQ2000-8BA11
8PQ2035-8BA06	8PQ6000-5BA24	2 × 8PQ6001-0BA73	8PQ5000-3BA81	8PQ5000-5BA54	8PQ5000-5BA40	8PQ2000-8BA13	8PQ2000-8BA11
8PQ2035-8BA06	8PQ6000-5BA24	2 × 8PQ6001-0BA73	8PQ5000-3BA81	8PQ5000-5BA27	8PQ5000-5BA40	8PQ2000-8BA13	8PQ2000-8BA11
8PQ2035-8BA06	8PQ6000-5BA24	2 × 8PQ6001-0BA73 + 8PQ6001-0BA64	8PQ5000-3BA81	8PQ5000-5BA27	8PQ5000-5BA42	8PQ2000-8BA13	8PQ2000-8BA11
8PQ2035-1BA01	8PQ6000-8BA70	2 × 8PQ6001-0BA74	8PQ5000-1BA74	8PQ5000-5BA28	8PQ5000-5BA44	8PQ2000-1BA04	8PQ2000-1BA02
8PQ2035-1BA01	8PQ6000-8BA70	2 × 8PQ6001-0BA75	8PQ5000-1BA74	8PQ5000-5BA28	8PQ5000-5BA44	8PQ2000-1BA04	8PQ2000-1BA02
8PQ2035-1BA01	8PQ6000-8BA70	2 × 8PQ6001-0BA76	8PQ5000-1BA74	8PQ5000-5BA28	8PQ5000-5BA44	8PQ2000-1BA04	8PQ2000-1BA02

System overview, page 15/70

© Siemens 2025

Section expansion

3WA air circuit breakers, accessories

Busbar supports

Size	Width	Number of poles	Scope of supply	Article No.
1	600 mm	4-pole	4 units	8PQ6000-4BA35
	800 mm	4-pole	4 units	8PQ6000-4BA37
2	600 mm	3-pole	4 units	8PQ6000-4BA36
	800 mm	4-pole	4 units	8PQ6000-4BA38
3	1000 mm	4-pole	4 units	8PQ6000-4BA40

Busbar connections



	Size	Width	Number of poles	Scope of supply	Article No.
For use with SIVACON 8PS	1	600 mm	4-pole	1 unit	8PQ3000-1BA70
		800 mm	4-pole	1 unit	8PQ3000-1BA71
	2	600 mm	3-pole	1 unit	8PQ3000-1BA70
		800 mm	4-pole	1 unit	8PQ3000-1BA71
	3	1000 mm	4-pole	1 unit	8PQ3000-1BA72

Cable clamping rails

Size	Width	Scope of supply	Article No.
1	400 mm	5 units	8PQ3000-0BA41
	600 mm	5 units	8PQ3000-0BA42
	800 mm	5 units	8PQ3000-0BA43
2	600 mm	5 units	8PQ3000-0BA42
	800 mm	5 units	8PQ3000-0BA43
3	1000 mm	4 units	8PQ3000-3BA68

System overview, page 15/70

© Siemens 2025

System overview, page 15/70

© Siemens 2025

Section expansion

Siemens EcoTech

3VA molded case circuit breakers, 3-pole

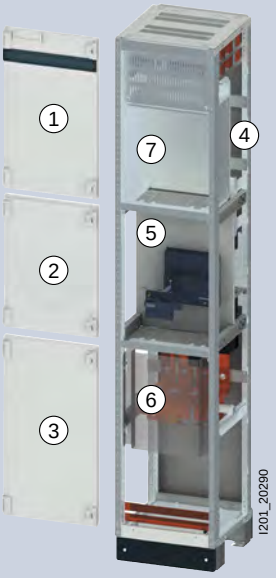

Width 400 mm

Main busbars	Type	I_n	Insert	❶ Head compartment doors	❷ Compartment doors	❸ Base compartment doors	❹ Main busbar connection		
				IP40	IP40	IP40	Holder	Covers	Insulation Length 15 m
Top front	3VA15	1000A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA55	8PQ3000-3BA82	–
	3VA25	1000A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA55	8PQ3000-3BA82	–
	3VA26	1250A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA58	–	8PQ3000-3BA81
	3VA27	1600A	Withdrawable	8PQ2067-4BA01	8PQ2055-4BA17	8PQ2072-4BA01	8PQ6001-5BA65	8PQ3000-4BA01	–
Top rear	3VA15	1000A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA56	8PQ3000-3BA82	–
	3VA25	1000A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA56	8PQ3000-3BA82	–
	3VA26	1250A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA60	–	8PQ3000-3BA81
	3VA27	1600A	Withdrawable	8PQ2067-4BA01	8PQ2055-4BA17	8PQ2072-4BA01	8PQ6001-5BA66	8PQ3000-4BA01	–
Top duplex	3VA15	1000A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA57	8PQ3000-3BA82	–
	3VA25	1000A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA57	8PQ3000-3BA82	–
	3VA26	1250A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA61	–	8PQ3000-3BA81
	3VA27	1600A	Withdrawable	8PQ2067-4BA01	8PQ2055-4BA17	8PQ2072-4BA01	8PQ6001-5BA67	8PQ3000-4BA01	–
Bottom front	3VA15	1000A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA55	–	8PQ3000-3BA81
	3VA25	1000A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA55	–	8PQ3000-3BA81
	3VA26	1250A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA58	–	8PQ3000-3BA81
	3VA27	1600A	Withdrawable	8PQ2067-4BA01	8PQ2055-4BA17	8PQ2072-4BA01	8PQ6001-5BA65	8PQ3000-4BA02	8PQ3000-3BA81
Bottom rear	3VA15	1000A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA56	–	8PQ3000-3BA81
	3VA25	1000A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA56	–	8PQ3000-3BA81
	3VA26	1250A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA60	–	8PQ3000-3BA81
	3VA27	1600A	Withdrawable	8PQ2067-4BA01	8PQ2055-4BA17	8PQ2072-4BA01	8PQ6001-5BA66	8PQ3000-4BA02	8PQ3000-3BA81
Bottom duplex	3VA15	1000A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA57	–	8PQ3000-3BA81
	3VA25	1000A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA57	–	8PQ3000-3BA81
	3VA26	1250A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA61	–	8PQ3000-3BA81
	3VA27	1600A	Withdrawable	8PQ2067-4BA01	8PQ2055-4BA17	8PQ2072-4BA01	8PQ6001-5BA67	8PQ3000-4BA02	8PQ3000-3BA81

System overview, page 15/70

© Siemens 2025

Accessories

Position	Article No.
Head compartment	8PQ2067-4BA02
Compartment doors 3VA	8PQ2055-4BA07
Base compartment	8PQ2075-4BA02

	❺ Mounting plates	❻ Cable connection		❼ Partition			
Insulation on the left		L1 – L3	N	Auxiliary device compartments	Compartment	Rear Depth 600 mm	Depth 800 mm
–	8PQ6001-4BA26	8PQ6001-4BA67	8PQ6001-5BA81	8PQ5000-5BA65	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
–	8PQ6001-4BA26	8PQ6001-4BA67	8PQ6001-5BA81	8PQ5000-5BA65	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
8PQ5000-5BA74	8PQ6001-4BA26	8PQ6001-4BA68	8PQ6001-5BA82	8PQ5000-5BA65	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
–	8PQ6001-4BA27	8PQ6001-4BA71	8PQ6001-5BA84	8PQ5000-5BA65	8PQ5000-5BA60	8PQ5000-5BA70	8PQ5000-5BA71
–	8PQ6001-4BA26	8PQ6001-4BA67	8PQ6001-5BA81	8PQ5000-5BA65	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
–	8PQ6001-4BA26	8PQ6001-4BA67	8PQ6001-5BA81	8PQ5000-5BA65	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
8PQ5000-5BA74	8PQ6001-4BA26	8PQ6001-4BA68	8PQ6001-5BA82	8PQ5000-5BA65	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
–	8PQ6001-4BA27	8PQ6001-4BA71	8PQ6001-5BA84	8PQ5000-5BA65	8PQ5000-5BA60	8PQ5000-5BA70	8PQ5000-5BA71
–	8PQ6001-4BA26	8PQ6001-4BA67	8PQ6001-5BA81	8PQ5000-5BA65	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
–	8PQ6001-4BA26	8PQ6001-4BA67	8PQ6001-5BA81	8PQ5000-5BA65	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
8PQ5000-5BA74	8PQ6001-4BA26	8PQ6001-4BA68	8PQ6001-5BA82	8PQ5000-5BA65	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
–	8PQ6001-4BA27	8PQ6001-4BA71	8PQ6001-5BA84	8PQ5000-5BA65	8PQ5000-5BA60	8PQ5000-5BA70	8PQ5000-5BA71
–	8PQ6001-4BA26	8PQ6001-4BA67	8PQ6001-5BA81	8PQ5000-5BA66	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
–	8PQ6001-4BA26	8PQ6001-4BA67	8PQ6001-5BA81	8PQ5000-5BA66	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
8PQ5000-5BA74	8PQ6001-4BA26	8PQ6001-4BA68	8PQ6001-5BA82	8PQ5000-5BA66	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
–	8PQ6001-4BA27	8PQ6001-4BA71	8PQ6001-5BA84	8PQ5000-5BA66	8PQ5000-5BA60	8PQ5000-5BA70	8PQ5000-5BA71
–	8PQ6001-4BA26	8PQ6001-4BA67	8PQ6001-5BA81	8PQ5000-5BA66	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
–	8PQ6001-4BA26	8PQ6001-4BA67	8PQ6001-5BA81	8PQ5000-5BA66	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
8PQ5000-5BA74	8PQ6001-4BA26	8PQ6001-4BA68	8PQ6001-5BA82	8PQ5000-5BA66	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
–	8PQ6001-4BA27	8PQ6001-4BA71	8PQ6001-5BA84	8PQ5000-5BA66	8PQ5000-5BA60	8PQ5000-5BA70	8PQ5000-5BA71
–	8PQ6001-4BA26	8PQ6001-4BA67	8PQ6001-5BA81	8PQ5000-5BA66	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
–	8PQ6001-4BA26	8PQ6001-4BA67	8PQ6001-5BA81	8PQ5000-5BA66	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
8PQ5000-5BA74	8PQ6001-4BA26	8PQ6001-4BA68	8PQ6001-5BA82	8PQ5000-5BA66	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
–	8PQ6001-4BA27	8PQ6001-4BA71	8PQ6001-5BA84	8PQ5000-5BA66	8PQ5000-5BA60	8PQ5000-5BA70	8PQ5000-5BA71

System overview, page 15/70

© Siemens 2025

Section expansion

Siemens EcoTech

3VA molded case circuit breakers, 4-pole

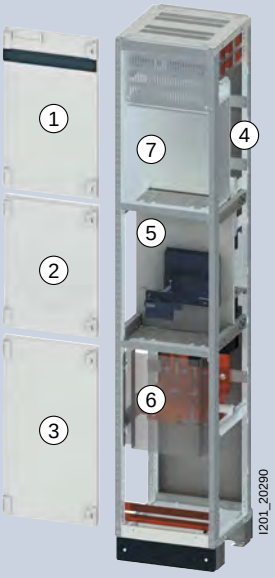

Width 400 mm

				❶ Head compartment doors	❷ Compartment doors	❸ Base compartment doors	❹ Main busbar connection		
Main busbars	**Type**	**I_n**	**Insert**	**IP40**	**IP40**	**IP40**	**Holder**	**Covers**	**Insulation Length 15 m**
Top front	3VA15	1000A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA55	8PQ3000-3BA82	–
	3VA25	1000A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA55	8PQ3000-3BA82	–
	3VA26	1250A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA58	–	8PQ3000-3BA81
	3VA27	1600A	Withdrawable	8PQ2067-4BA01	8PQ2055-4BA17	8PQ2072-4BA01	8PQ6001-5BA65	8PQ3000-4BA01	–
Top rear	3VA15	1000A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA56	8PQ3000-3BA82	–
	3VA25	1000A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA56	8PQ3000-3BA82	–
	3VA26	1250A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA60	–	8PQ3000-3BA81
	3VA27	1600A	Withdrawable	8PQ2067-4BA01	8PQ2055-4BA17	8PQ2072-4BA01	8PQ6001-5BA66	8PQ3000-4BA01	–
Top duplex	3VA15	1000A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA57	8PQ3000-3BA82	–
	3VA25	1000A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA57	8PQ3000-3BA82	–
	3VA26	1250A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA61	–	8PQ3000-3BA81
	3VA27	1600A	Withdrawable	8PQ2067-4BA01	8PQ2055-4BA17	8PQ2072-4BA01	8PQ6001-5BA67	8PQ3000-4BA01	–
Bottom front	3VA15	1000A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA55	–	8PQ3000-3BA81
	3VA25	1000A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA55	–	8PQ3000-3BA81
	3VA26	1250A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA58	–	8PQ3000-3BA81
	3VA27	1600A	Withdrawable	8PQ2067-4BA01	8PQ2055-4BA17	8PQ2072-4BA01	8PQ6001-5BA65	8PQ3000-4BA02	8PQ3000-3BA81
Bottom rear	3VA15	1000A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA56	–	8PQ3000-3BA81
	3VA25	1000A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA56	–	8PQ3000-3BA81
	3VA26	1250A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA60	–	8PQ3000-3BA81
	3VA27	1600A	Withdrawable	8PQ2067-4BA01	8PQ2055-4BA17	8PQ2072-4BA01	8PQ6001-5BA66	8PQ3000-4BA02	8PQ3000-3BA81
Bottom duplex	3VA15	1000A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA57	–	8PQ3000-3BA81
	3VA25	1000A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA57	–	8PQ3000-3BA81
	3VA26	1250A	Fixed-mounted	8PQ2067-4BA01	8PQ2055-4BA15	8PQ2072-4BA01	8PQ6001-5BA61	–	8PQ3000-3BA81
	3VA27	1600A	Withdrawable	8PQ2067-4BA01	8PQ2055-4BA17	8PQ2072-4BA01	8PQ6001-5BA67	8PQ3000-4BA02	8PQ3000-3BA81

System overview, page 15/70

© Siemens 2025

Accessories

Position	Article No.
Head compartment	8PQ2067-4BA02
Compartment doors 3VA	8PQ2055-4BA07
Base compartment	8PQ2075-4BA02

	❺ Mounting plates	❻ Cable connection	❼ Partition			
Insulation on the left		L1 – L3	Auxiliary device compartments	Compartment	Rear Depth 600 mm	Depth 800 mm
–	8PQ6001-4BA26	8PQ6001-4BA67	8PQ5000-5BA65	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
–	8PQ6001-4BA26	8PQ6001-4BA67	8PQ5000-5BA65	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
8PQ5000-5BA74	8PQ6001-4BA26	8PQ6001-4BA68	8PQ5000-5BA65	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
–	8PQ6001-4BA27	8PQ6001-4BA71	8PQ5000-5BA65	8PQ5000-5BA60	8PQ5000-5BA70	8PQ5000-5BA71
–	8PQ6001-4BA26	8PQ6001-4BA67	8PQ5000-5BA65	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
–	8PQ6001-4BA26	8PQ6001-4BA67	8PQ5000-5BA65	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
8PQ5000-5BA74	8PQ6001-4BA26	8PQ6001-4BA68	8PQ5000-5BA65	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
–	8PQ6001-4BA27	8PQ6001-4BA71	8PQ5000-5BA65	8PQ5000-5BA60	8PQ5000-5BA70	8PQ5000-5BA71
–	8PQ6001-4BA26	8PQ6001-4BA67	8PQ5000-5BA65	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
–	8PQ6001-4BA26	8PQ6001-4BA67	8PQ5000-5BA65	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
8PQ5000-5BA74	8PQ6001-4BA26	8PQ6001-4BA68	8PQ5000-5BA65	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
–	8PQ6001-4BA27	8PQ6001-4BA71	8PQ5000-5BA65	8PQ5000-5BA60	8PQ5000-5BA70	8PQ5000-5BA71
–	8PQ6001-4BA26	8PQ6001-4BA67	8PQ5000-5BA66	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
–	8PQ6001-4BA26	8PQ6001-4BA67	8PQ5000-5BA66	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
8PQ5000-5BA74	8PQ6001-4BA26	8PQ6001-4BA68	8PQ5000-5BA66	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
–	8PQ6001-4BA27	8PQ6001-4BA71	8PQ5000-5BA66	8PQ5000-5BA60	8PQ5000-5BA70	8PQ5000-5BA71
–	8PQ6001-4BA26	8PQ6001-4BA67	8PQ5000-5BA66	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
–	8PQ6001-4BA26	8PQ6001-4BA67	8PQ5000-5BA66	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
8PQ5000-5BA74	8PQ6001-4BA26	8PQ6001-4BA68	8PQ5000-5BA66	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
–	8PQ6001-4BA27	8PQ6001-4BA71	8PQ5000-5BA66	8PQ5000-5BA60	8PQ5000-5BA70	8PQ5000-5BA71
–	8PQ6001-4BA26	8PQ6001-4BA67	8PQ5000-5BA66	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
–	8PQ6001-4BA26	8PQ6001-4BA67	8PQ5000-5BA66	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
8PQ5000-5BA74	8PQ6001-4BA26	8PQ6001-4BA68	8PQ5000-5BA66	8PQ5000-6BA30	8PQ5000-5BA70	8PQ5000-5BA71
–	8PQ6001-4BA27	8PQ6001-4BA71	8PQ5000-5BA66	8PQ5000-5BA60	8PQ5000-5BA70	8PQ5000-5BA71

System overview, page 15/70

© Siemens 2025

Section expansion

Siemens EcoTech

3VA molded case circuit breakers, 3-pole

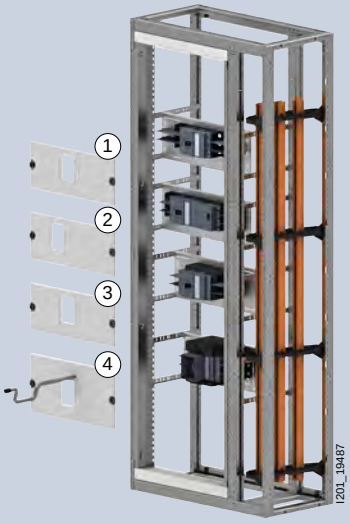

❶ Fixed-mounted version

Type	I_n	Width	Operating mechanism			Device holders	Covers
			Direct	Rotary	Motorized		
3VA10	100 A	600 mm	■	■	–	8PQ6000-8BA01	8PQ2015-6BA26
		800 mm	■	■	–	8PQ6000-8BA02	8PQ2015-8BA11
3VA11	160 A	600 mm	■	■	–	8PQ6000-8BA01	8PQ2015-6BA26
			–	–	■	8PQ6000-8BA01	8PQ2015-6BA26
		800 mm	■	■	–	8PQ6000-8BA02	8PQ2015-8BA11
			–	–	■	8PQ6000-8BA02	8PQ2015-8BA11
3VA12	250 A	600 mm	■	■	–	8PQ6000-8BA03	8PQ2015-6BA28
			–	–	■	8PQ6000-8BA03	8PQ2015-6BA28
		800 mm	■	■	–	8PQ6000-8BA07	8PQ2020-8BA20
			–	–	■	8PQ6000-8BA07	8PQ2020-8BA20
3VA13	400 A	600 mm	■	■	–	8PQ6000-8BA23	8PQ2020-6BA41
			–	–	■	8PQ6000-8BA23	8PQ2020-6BA41
		800 mm	■	■	–	8PQ6000-8BA27	8PQ2025-8BA14
			–	–	■	8PQ6000-8BA27	8PQ2025-8BA14
3VA14	630 A	600 mm	■	■	–	8PQ6000-8BA23	8PQ2020-6BA41
			–	–	■	8PQ6000-8BA23	8PQ2020-6BA41
		800 mm	■	■	–	8PQ6000-8BA27	8PQ2025-8BA14
			–	–	■	8PQ6000-8BA27	8PQ2025-8BA14
3VA15	1000 A	800 mm	■	–	–	8PQ6001-4BA22	8PQ2045-8BA22
3VA20	100 A	600 mm	■	■	–	8PQ6000-8BA08	8PQ2020-6BA38
			–	–	■	8PQ6000-8BA08	8PQ2020-6BA38
		800 mm	■	■	–	8PQ6000-8BA10	8PQ2020-8BA21
			–	–	■	8PQ6000-8BA10	8PQ2020-8BA21
3VA21	160 A	600 mm	■	■	–	8PQ6000-8BA08	8PQ2020-6BA38
			–	–	■	8PQ6000-8BA08	8PQ2020-6BA38
		800 mm	■	■	–	8PQ6000-8BA10	8PQ2020-8BA21
			–	–	■	8PQ6000-8BA10	8PQ2020-8BA21
3VA22	250 A	600 mm	■	■	–	8PQ6000-8BA08	8PQ2020-6BA38
			–	–	■	8PQ6000-8BA08	8PQ2020-6BA38
		800 mm	■	■	–	8PQ6000-8BA10	8PQ2020-8BA21
			–	–	■	8PQ6000-8BA10	8PQ2020-8BA21
3VA23	400 A	600 mm	■	■	–	8PQ6000-8BA23	8PQ2020-6BA41
			–	–	■	8PQ6000-8BA23	8PQ2020-6BA41
		800 mm	■	■	–	8PQ6000-8BA27	8PQ2025-8BA14
			–	–	■	8PQ6000-8BA27	8PQ2025-8BA14
3VA24	630 A	600 mm	■	■	–	8PQ6000-8BA23	8PQ2020-6BA41
			–	–	■	8PQ6000-8BA23	8PQ2020-6BA41
		800 mm	■	■	–	8PQ6000-8BA27	8PQ2025-8BA14
			–	–	■	8PQ6000-8BA27	8PQ2025-8BA14
3VA25	1000 A	800 mm	■	–	–	8PQ6001-4BA22	8PQ2045-8BA22
3VA26	1250 A	800 mm	■	–	–	8PQ6001-4BA22	8PQ2045-8BA22
3VA27	1600 A	800 mm	■	–	–	8PQ6001-4BA23	8PQ2045-8BA23

Accessories

Insulation 130 × 2 mm

Size	Length	Article No.
3VA15 3VA25 3VA26	15 m	8PQ3000-3BA81

15

System overview, page 15/70

© Siemens 2025

❷ Fixed-mounted version with RCD		❸ Plug-in version		❹ Withdrawable version [2]	
					
Device holders	**Covers**	**Device holders**	**Covers**	**Device holders**	**Covers**
–	–	–	–	–	–
–	–	–	–	–	–
8PQ6000-8BA01	8PQ2015-6BA27	8PQ6000-8BA01	8PQ2015-6BA26	–	–
8PQ6000-8BA01	8PQ2015-6BA27	8PQ6000-8BA01	8PQ2015-6BA26	–	–
8PQ6000-8BA02	8PQ2015-8BA11	8PQ6000-8BA02	8PQ2015-8BA11	–	–
8PQ6000-8BA02	8PQ2015-8BA11	8PQ6000-8BA02	8PQ2015-8BA11	–	–
8PQ6000-8BA03 [1]	8PQ2015-6BA30	8PQ6000-8BA04	8PQ2015-6BA28	8PQ6000-8BA04	8PQ2025-6BA21
8PQ6000-8BA03	8PQ2015-6BA30	8PQ6000-8BA04	8PQ2015-6BA28	–	–
8PQ6000-8BA07	8PQ2020-8BA20	8PQ6000-8BA07	8PQ2020-8BA20	8PQ6000-8BA07	8PQ2025-8BA12
8PQ6000-8BA07	8PQ2020-8BA20	8PQ6000-8BA07	8PQ2020-8BA20	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	8PQ6001-1BA02	8PQ2025-8BA18	8PQ6001-1BA02	8PQ2030-8BA15
–	–	8PQ6001-1BA02	8PQ2025-8BA18	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	8PQ6001-1BA02	8PQ2025-8BA18	8PQ6001-1BA02	8PQ2030-8BA15
–	–	8PQ6001-1BA02	8PQ2025-8BA18	–	–
–	–	–	–	–	–
8PQ6000-8BA11	8PQ2020-6BA40	8PQ6000-8BA08	8PQ2020-6BA38	8PQ6000-8BA08	8PQ2025-6BA22
8PQ6000-8BA11	8PQ2020-6BA40	8PQ6000-8BA08	8PQ2020-6BA38	–	–
8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2025-8BA13
8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2020-8BA21	–	–
8PQ6000-8BA11	8PQ2020-6BA40	8PQ6000-8BA08	8PQ2020-6BA38	8PQ6000-8BA08	8PQ2025-6BA22
8PQ6000-8BA11	8PQ2020-6BA40	8PQ6000-8BA08	8PQ2020-6BA38	–	–
8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2025-8BA13
8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2020-8BA21	–	–
8PQ6000-8BA11	8PQ2020-6BA40	8PQ6000-8BA08	8PQ2020-6BA38	8PQ6000-8BA08	8PQ2025-6BA22
8PQ6000-8BA11	8PQ2020-6BA40	8PQ6000-8BA08	8PQ2020-6BA38	–	–
8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2025-8BA13
8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2020-8BA21	–	–
–	–	–	–	–	–
–	–	–	–	–	–
8PQ6000-8BA27	8PQ2025-8BA14	8PQ6001-1BA02	8PQ2025-8BA18	8PQ6001-1BA02	8PQ2030-8BA15
8PQ6000-8BA27	8PQ2025-8BA14	8PQ6001-1BA02	8PQ2025-8BA18	–	–
–	–	–	–	–	–
–	–	–	–	–	–
8PQ6000-8BA27	8PQ2025-8BA14	8PQ6001-1BA02	8PQ2025-8BA18	8PQ6001-1BA02	8PQ2030-8BA15
8PQ6000-8BA27	8PQ2025-8BA14	8PQ6001-1BA02	8PQ2025-8BA18	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	8PQ6001-4BA24	8PQ2045-8BA24

[1] For applications > 415 V, front mounted rotary operating mechanism or motorized operating mechanism required for compliance with creepage distances and clearances.
[2] Guide frame with direct operating mechanism only

System overview, page 15/70

© Siemens 2025

Section expansion

Siemens EcoTech

3VA molded case circuit breakers, 4-pole

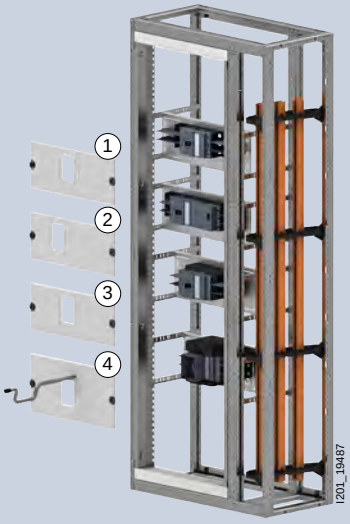

❶ Fixed-mounted version



Type	I_n	Width	Operating mechanism			Device holders	Covers
			Direct	Rotary	Motorized		
3VA10	100 A	600 mm	■	■	–	8PQ6000-8BA01	8PQ2015-6BA26
		800 mm	■	■	–	8PQ6000-8BA02	8PQ2015-8BA11
3VA11	160 A	600 mm	■	■	–	8PQ6000-8BA01	8PQ2015-6BA26
			–	–	■	8PQ6000-8BA01	8PQ2015-6BA26
		800 mm	■	■	–	8PQ6000-8BA02	8PQ2015-8BA11
			–	–	■	8PQ6000-8BA02	8PQ2015-8BA11
3VA12	250 A	600 mm	■	■	–	8PQ6000-8BA05	8PQ2020-6BA36
			–	–	■	8PQ6000-8BA05	8PQ2020-6BA36
		800 mm	■	■	–	8PQ6000-8BA07	8PQ2020-8BA20
			–	–	■	8PQ6000-8BA07	8PQ2020-8BA20
3VA13	400 A	600 mm	■	■	–	8PQ6000-8BA25	8PQ2025-6BA23
			–	–	■	8PQ6000-8BA25	8PQ2025-6BA23
		800 mm	■	■	–	8PQ6000-8BA27	8PQ2025-8BA14
			–	–	■	8PQ6000-8BA27	8PQ2025-8BA14
3VA14	630 A	600 mm	■	■	–	8PQ6000-8BA25	8PQ2025-6BA23
			–	–	■	8PQ6000-8BA25	8PQ2025-6BA23
		800 mm	■	■	–	8PQ6000-8BA27	8PQ2025-8BA14
			–	–	■	8PQ6000-8BA27	8PQ2025-8BA14
3VA15	1000 A	800 mm	■	–	–	8PQ6001-4BA22	8PQ2045-8BA22
3VA20	100 A	600 mm	■	■	–	8PQ6000-8BA08	8PQ2020-6BA38
			–	–	■	8PQ6000-8BA08	8PQ2020-6BA38
		800 mm	■	■	–	8PQ6000-8BA10	8PQ2020-8BA21
			–	–	■	8PQ6000-8BA10	8PQ2020-8BA21
3VA21	160 A	600 mm	■	■	–	8PQ6000-8BA08	8PQ2020-6BA38
			–	–	■	8PQ6000-8BA08	8PQ2020-6BA38
		800 mm	■	■	–	8PQ6000-8BA10	8PQ2020-8BA21
			–	–	■	8PQ6000-8BA10	8PQ2020-8BA21
3VA22	250 A	600 mm	■	■	–	8PQ6000-8BA08	8PQ2020-6BA38
			–	–	■	8PQ6000-8BA08	8PQ2020-6BA38
		800 mm	■	■	–	8PQ6000-8BA10	8PQ2020-8BA21
			–	–	■	8PQ6000-8BA10	8PQ2020-8BA21
3VA23	400 A	600 mm	■	■	–	8PQ6000-8BA25	8PQ2025-6BA23
			–	–	■	8PQ6000-8BA25	8PQ2025-6BA23
		800 mm	■	■	–	8PQ6000-8BA27	8PQ2025-8BA14
			–	–	■	8PQ6000-8BA27	8PQ2025-8BA14
3VA24	630 A	600 mm	■	■	–	8PQ6000-8BA25	8PQ2025-6BA23
			–	–	■	8PQ6000-8BA25	8PQ2025-6BA23
		800 mm	■	■	–	8PQ6000-8BA27	8PQ2025-8BA14
			–	–	■	8PQ6000-8BA27	8PQ2025-8BA14
3VA25	1000 A	800 mm	■	–	–	8PQ6001-4BA22	8PQ2045-8BA22
3VA26	1250 A	800 mm	■	–	–	8PQ6001-4BA22	8PQ2045-8BA22
3VA27	1600 A	800 mm	■	–	–	8PQ6001-4BA23	8PQ2045-8BA23

Accessories

Insulation 130 × 2 mm

Size	Length	Article No.
3VA15 3VA25 3VA26	15 m	8PQ3000-3BA81

15

System overview, page 15/70

© Siemens 2025

❷ Fixed-mounted version with RCD		❸ Plug-in version		❹ Withdrawable version [2]	
					
Device holders	**Covers**	**Device holders**	**Covers**	**Device holders**	**Covers**
–	–	–	–	–	–
–	–	–	–	–	–
8PQ6000-8BA01	8PQ2015-6BA27	8PQ6000-8BA01	8PQ2015-6BA26	–	–
8PQ6000-8BA01	8PQ2015-6BA27	8PQ6000-8BA01	8PQ2015-6BA26	–	–
8PQ6000-8BA02	8PQ2015-8BA11	8PQ6000-8BA02	8PQ2015-8BA11	–	–
8PQ6000-8BA02	8PQ2015-8BA11	8PQ6000-8BA02	8PQ2015-8BA11	–	–
8PQ6000-8BA05 [1]	8PQ2020-6BA37	8PQ6000-8BA06	8PQ2020-6BA36	8PQ6000-8BA06	8PQ2030-6BA25
8PQ6000-8BA05 [1]	8PQ2020-6BA37	8PQ6000-8BA06	8PQ2020-6BA36	–	–
8PQ6000-8BA07	8PQ2020-8BA20	8PQ6000-8BA07	8PQ2020-8BA20	8PQ6000-8BA07	8PQ2030-8BA12
8PQ6000-8BA07	8PQ2020-8BA20	8PQ6000-8BA07	8PQ2020-8BA20	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	8PQ6001-1BA02	8PQ2025-8BA18	8PQ6001-1BA02	8PQ2030-8BA15
–	–	8PQ6001-1BA02	8PQ2025-8BA18	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	8PQ6001-1BA02	8PQ2025-8BA18	8PQ6001-1BA02	8PQ2030-8BA15
–	–	8PQ6001-1BA02	8PQ2025-8BA18	–	–
–	–	–	–	–	–
8PQ6000-8BA11	8PQ2020-6BA40	8PQ6000-8BA08	8PQ2020-6BA38	8PQ6000-8BA08	8PQ2030-6BA26
8PQ6000-8BA11	8PQ2020-6BA40	8PQ6000-8BA08	8PQ2020-6BA38	–	–
8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2030-8BA13
8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2020-8BA21	–	–
8PQ6000-8BA11	8PQ2020-6BA40	8PQ6000-8BA08	8PQ2020-6BA38	8PQ6000-8BA08	8PQ2030-6BA26
8PQ6000-8BA11	8PQ2020-6BA40	8PQ6000-8BA08	8PQ2020-6BA38	–	–
8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2030-8BA13
8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2020-8BA21	–	–
8PQ6000-8BA11	8PQ2020-6BA40	8PQ6000-8BA08	8PQ2020-6BA38	8PQ6000-8BA08	8PQ2030-6BA26
8PQ6000-8BA11	8PQ2020-6BA40	8PQ6000-8BA08	8PQ2020-6BA38	–	–
8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2030-8BA13
8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2020-8BA21	–	–
–	–	–	–	–	–
–	–	–	–	–	–
8PQ6000-8BA27	8PQ2025-8BA14	8PQ6001-1BA02	8PQ2025-8BA18	8PQ6001-1BA02	8PQ2030-8BA15
8PQ6000-8BA27	8PQ2025-8BA14	8PQ6001-1BA02	8PQ2025-8BA18	–	–
–	–	–	–	–	–
–	–	–	–	–	–
8PQ6000-8BA27	8PQ2025-8BA14	8PQ6001-1BA02	8PQ2025-8BA18	8PQ6001-1BA02	8PQ2030-8BA15
8PQ6000-8BA27	8PQ2025-8BA14	8PQ6001-1BA02	8PQ2025-8BA18	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	8PQ6001-4BA24	8PQ2045-8BA24

[1] For applications > 415 V, front mounted rotary operating mechanism or motorized operating mechanism required for compliance with creepage distances and clearances.
[2] Guide frame with direct operating mechanism only

15

System overview, page 15/70

© Siemens 2025

Section expansion

Siemens EcoTech

3VA molded case circuit breakers, 3-pole

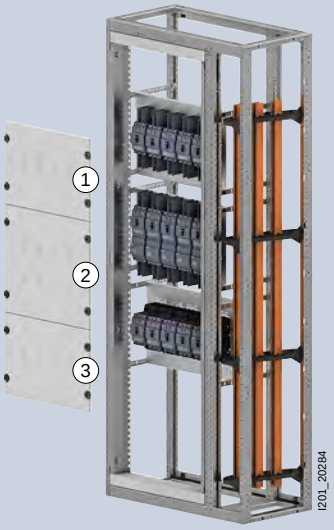

❶ Fixed-mounted version



Type	I_n	Width	Operating mechanism			Device holders	Covers
			Direct	Rotary	Motorized		
3VA10	100 A	600 mm	■	■	–	8PQ6000-8BA33	8PQ2035-6BA26
		800 mm	■	■	–	8PQ6000-8BA47	8PQ2035-8BA16
3VA11	160 A	600 mm	■	■	–	8PQ6000-8BA33	8PQ2035-6BA26
			–	–	■	8PQ6000-8BA33	8PQ2035-6BA26
		800 mm	■	■	–	8PQ6000-8BA47	8PQ2035-8BA16
			–	–	■	8PQ6000-8BA47	8PQ2035-8BA16
3VA12	250 A	600 mm	■	■	–	8PQ6000-8BA35	8PQ2040-6BA26
			–	–	■	8PQ6000-8BA35	8PQ2040-6BA26
		800 mm	■	■	–	8PQ6000-8BA43	8PQ2040-8BA23
			–	–	■	8PQ6000-8BA43	8PQ2040-8BA23
3VA13	400 A	600 mm	■	■	–	8PQ6000-8BA54	8PQ2050-6BA11
			–	–	■	8PQ6000-8BA54	8PQ2050-6BA11
		800 mm	■	■	–	8PQ6000-8BA57	8PQ2050-8BA14
			–	–	■	8PQ6000-8BA57	8PQ2050-8BA14
3VA14	630 A	600 mm	■	■	–	8PQ6000-8BA54	8PQ2050-6BA11
			–	–	■	8PQ6000-8BA54	8PQ2050-6BA11
		800 mm	■	■	–	8PQ6000-8BA57	8PQ2050-8BA14
			–	–	■	8PQ6000-8BA57	8PQ2050-8BA14
3VA20	100 A	600 mm	■	■	–	8PQ6000-8BA37	8PQ2045-6BA11
			–	–	■	8PQ6000-8BA37	8PQ2045-6BA13
		800 mm	■	■	–	8PQ6000-8BA50	8PQ2045-8BA11
			–	–	■	8PQ6000-8BA50	8PQ2045-8BA15
3VA21	160 A	600 mm	■	■	–	8PQ6000-8BA37	8PQ2045-6BA11
			–	–	■	8PQ6000-8BA37	8PQ2045-6BA13
		800 mm	■	■	–	8PQ6000-8BA50	8PQ2045-8BA11
			–	–	■	8PQ6000-8BA50	8PQ2045-8BA15
3VA22	250 A	600 mm	■	■	–	8PQ6000-8BA37	8PQ2045-6BA11
			–	–	■	8PQ6000-8BA37	8PQ2045-6BA13
		800 mm	■	■	–	8PQ6000-8BA50	8PQ2045-8BA11
			–	–	■	8PQ6000-8BA50	8PQ2045-8BA15
3VA23	400 A	600 mm	■	■	–	8PQ6000-8BA54	8PQ2045-6BA12
			–	–	■	8PQ6000-8BA54	8PQ2045-6BA12
		800 mm	■	■	–	8PQ6000-8BA57	8PQ2045-8BA13
			–	–	■	8PQ6000-8BA57	8PQ2045-8BA13
3VA24	630 A	600 mm	■	■	–	8PQ6000-8BA54	8PQ2045-6BA12
			–	–	■	8PQ6000-8BA54	8PQ2045-6BA12
		800 mm	■	■	–	8PQ6000-8BA57	8PQ2045-8BA13
			–	–	■	8PQ6000-8BA57	8PQ2045-8BA13

System overview, page 15/70

© Siemens 2025

❷ Fixed-mounted version with RCD		❸ Plug-in version	
			
Device holders	**Covers**	**Device holders**	**Covers**
–	–	–	–
–	–	–	–
8PQ6000-8BA33	8PQ2045-6BA08	8PQ6000-8BA33	8PQ2035-6BA26
8PQ6000-8BA33	8PQ2045-6BA08	8PQ6000-8BA33	8PQ2035-6BA26
8PQ6000-8BA47	8PQ2045-8BA08	8PQ6000-8BA47	8PQ2035-8BA16
8PQ6000-8BA47	8PQ2045-8BA08	8PQ6000-8BA47	8PQ2035-8BA16
8PQ6000-8BA35	8PQ2050-6BA10	8PQ6001-5BA70	8PQ2040-6BA26
8PQ6000-8BA35	8PQ2050-6BA10	8PQ6001-5BA70	8PQ2040-6BA26
8PQ6000-8BA43	8PQ2050-8BA12	8PQ6000-8BA44	8PQ2040-8BA23
8PQ6000-8BA43	8PQ2050-8BA12	8PQ6000-8BA44	8PQ2040-8BA23
–	–	8PQ6000-8BA56	8PQ2055-6BA22
–	–	8PQ6000-8BA56	8PQ2055-6BA22
–	–	8PQ6000-8BA60	8PQ2055-8BA15
–	–	8PQ6000-8BA60	8PQ2055-8BA15
–	–	8PQ6000-8BA56	8PQ2055-6BA22
–	–	8PQ6000-8BA56	8PQ2055-6BA22
–	–	8PQ6000-8BA60	8PQ2055-8BA15
–	–	8PQ6000-8BA60	8PQ2055-8BA15
8PQ6000-8BA37	8PQ2055-6BA20	8PQ6001-5BA71	8PQ2045-6BA11
8PQ6000-8BA37	8PQ2055-6BA21	8PQ6001-5BA71	8PQ2045-6BA13
8PQ6000-8BA50	8PQ2055-8BA11	8PQ6000-8BA51	8PQ2045-8BA11
8PQ6000-8BA50	8PQ2055-8BA13	8PQ6000-8BA51	8PQ2045-8BA15
8PQ6000-8BA37	8PQ2055-6BA20	8PQ6001-5BA71	8PQ2045-6BA11
8PQ6000-8BA37	8PQ2055-6BA21	8PQ6001-5BA71	8PQ2045-6BA13
8PQ6000-8BA50	8PQ2055-8BA11	8PQ6000-8BA51	8PQ2045-8BA11
8PQ6000-8BA50	8PQ2055-8BA13	8PQ6000-8BA51	8PQ2045-8BA15
8PQ6000-8BA37	8PQ2055-6BA20	8PQ6001-5BA71	8PQ2045-6BA11
8PQ6000-8BA37	8PQ2055-6BA21	8PQ6001-5BA71	8PQ2045-6BA13
8PQ6000-8BA50	8PQ2055-8BA11	8PQ6000-8BA51	8PQ2045-8BA11
8PQ6000-8BA50	8PQ2055-8BA13	8PQ6000-8BA51	8PQ2045-8BA15
8PQ6000-8BA55	8PQ2060-6BA25	8PQ6000-8BA56	8PQ2045-6BA12
8PQ6000-8BA55	8PQ2060-6BA25	8PQ6000-8BA56	8PQ2045-6BA12
8PQ6000-8BA58	8PQ2060-8BA07	8PQ6000-8BA60	8PQ2045-8BA13
8PQ6000-8BA58	8PQ2060-8BA07	8PQ6000-8BA60	8PQ2045-8BA13
8PQ6000-8BA55	8PQ2060-6BA25	8PQ6000-8BA56	8PQ2045-6BA12
8PQ6000-8BA55	8PQ2060-6BA25	8PQ6000-8BA56	8PQ2045-6BA12
8PQ6000-8BA58	8PQ2060-8BA07	8PQ6000-8BA60	8PQ2045-8BA13
8PQ6000-8BA58	8PQ2060-8BA07	8PQ6000-8BA60	8PQ2045-8BA13

System overview, page 15/70

© Siemens 2025

Section expansion

Siemens EcoTech

3VA molded case circuit breakers, 4-pole

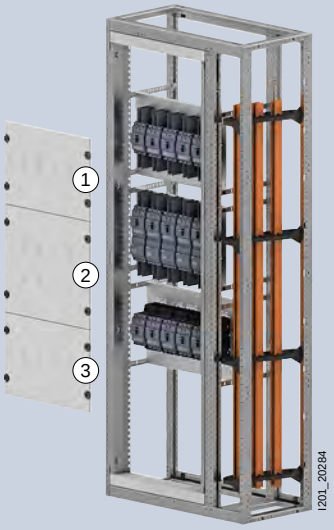

❶ Fixed-mounted version



Type	I_n	Width	Operating mechanism			Device holders	Covers
			Direct	Rotary	Motorized		
3VA10	100 A	600 mm	■	■	–	8PQ6000-8BA34	8PQ2035-6BA27
		800 mm	■	■	–	8PQ6000-8BA48	8PQ2035-8BA17
3VA11	160 A	600 mm	■	■	–	8PQ6000-8BA34	8PQ2035-6BA27
			–	–	■	8PQ6000-8BA34	8PQ2035-6BA27
		800 mm	■	■	–	8PQ6000-8BA48	8PQ2035-8BA17
			–	–	■	8PQ6000-8BA48	8PQ2035-8BA17
3VA12	250 A	600 mm	■	■	–	8PQ6000-8BA35	8PQ2040-6BA26
			–	–	■	8PQ6000-8BA35	8PQ2040-6BA26
		800 mm	■	■	–	8PQ6000-8BA45	8PQ2040-8BA24
			–	–	■	8PQ6000-8BA45	8PQ2040-8BA24
3VA13	400 A	600 mm	■	■	–	8PQ6000-8BA64	8PQ2050-6BA12
			–	–	■	8PQ6000-8BA64	8PQ2050-6BA12
		800 mm	■	■	–	8PQ6000-8BA61	8PQ2050-8BA15
			–	–	■	8PQ6000-8BA61	8PQ2050-8BA15
3VA14	630 A	600 mm	■	■	–	8PQ6000-8BA64	8PQ2050-6BA12
			–	–	■	8PQ6000-8BA64	8PQ2050-6BA12
		800 mm	■	■	–	8PQ6000-8BA61	8PQ2050-8BA15
			–	–	■	8PQ6000-8BA61	8PQ2050-8BA15
3VA20	100 A	600 mm	■	■	–	8PQ6000-8BA37	8PQ2045-6BA11
			–	–	■	8PQ6000-8BA37	8PQ2045-6BA13
		800 mm	■	■	–	8PQ6000-8BA52	8PQ2045-8BA12
			–	–	■	8PQ6000-8BA52	8PQ2045-8BA16
3VA21	160 A	600 mm	■	■	–	8PQ6000-8BA37	8PQ2045-6BA11
			–	–	■	8PQ6000-8BA37	8PQ2045-6BA13
		800 mm	■	■	–	8PQ6000-8BA52	8PQ2045-8BA12
			–	–	■	8PQ6000-8BA52	8PQ2045-8BA16
3VA22	250 A	600 mm	■	■	–	8PQ6000-8BA37	8PQ2045-6BA11
			–	–	■	8PQ6000-8BA37	8PQ2045-6BA13
		800 mm	■	■	–	8PQ6000-8BA52	8PQ2045-8BA12
			–	–	■	8PQ6000-8BA52	8PQ2045-8BA16
3VA23	400 A	600 mm	■	■	–	8PQ6000-8BA64	8PQ2045-6BA14
			–	–	■	8PQ6000-8BA64	8PQ2045-6BA14
		800 mm	■	■	–	8PQ6000-8BA61	8PQ2045-8BA14
			–	–	■	8PQ6000-8BA61	8PQ2045-8BA14
3VA24	630 A	600 mm	■	■	–	8PQ6000-8BA64	8PQ2045-6BA14
			–	–	■	8PQ6000-8BA64	8PQ2045-6BA14
		800 mm	■	■	–	8PQ6000-8BA61	8PQ2045-8BA14
			–	–	■	8PQ6000-8BA61	8PQ2045-8BA14

System overview, page 15/70

© Siemens 2025

❷ Fixed-mounted version with RCD		❸ Plug-in version	
			
Device holders	**Covers**	**Device holders**	**Covers**
–	–	–	–
–	–	–	–
8PQ6000-8BA34	8PQ2045-6BA10	8PQ6000-8BA34	8PQ2035-6BA27
8PQ6000-8BA34	8PQ2045-6BA10	8PQ6000-8BA34	8PQ2035-6BA27
8PQ6000-8BA48	8PQ2045-8BA10	8PQ6000-8BA48	8PQ2035-8BA17
8PQ6000-8BA48	8PQ2045-8BA10	8PQ6000-8BA48	8PQ2035-8BA17
8PQ6000-8BA35	8PQ2050-6BA10	8PQ6001-5BA70	8PQ2040-6BA26
8PQ6000-8BA35	8PQ2050-6BA10	8PQ6001-5BA70	8PQ2040-6BA26
8PQ6000-8BA45	8PQ2050-8BA13	8PQ6000-8BA46	8PQ2040-8BA24
8PQ6000-8BA45	8PQ2050-8BA13	8PQ6000-8BA46	8PQ2040-8BA24
–	–	8PQ6000-8BA66	8PQ2055-6BA23
–	–	8PQ6000-8BA66	8PQ2055-6BA23
–	–	8PQ6000-8BA63	8PQ2055-8BA16
–	–	8PQ6000-8BA63	8PQ2055-8BA16
–	–	8PQ6000-8BA66	8PQ2055-6BA23
–	–	8PQ6000-8BA66	8PQ2055-6BA23
–	–	8PQ6000-8BA63	8PQ2055-8BA16
–	–	8PQ6000-8BA63	8PQ2055-8BA16
8PQ6000-8BA37	8PQ2055-6BA20	8PQ6001-5BA71	8PQ2045-6BA11
8PQ6000-8BA37	8PQ2055-6BA21	8PQ6001-5BA71	8PQ2045-6BA13
8PQ6000-8BA52	8PQ2055-8BA12	8PQ6000-8BA53	8PQ2045-8BA12
8PQ6000-8BA52	8PQ2055-8BA14	8PQ6000-8BA53	8PQ2045-8BA16
8PQ6000-8BA37	8PQ2055-6BA20	8PQ6001-5BA71	8PQ2045-6BA11
8PQ6000-8BA37	8PQ2055-6BA21	8PQ6001-5BA71	8PQ2045-6BA13
8PQ6000-8BA52	8PQ2055-8BA12	8PQ6000-8BA53	8PQ2045-8BA12
8PQ6000-8BA52	8PQ2055-8BA14	8PQ6000-8BA53	8PQ2045-8BA16
8PQ6000-8BA37	8PQ2055-6BA20	8PQ6001-5BA71	8PQ2045-6BA11
8PQ6000-8BA37	8PQ2055-6BA21	8PQ6001-5BA71	8PQ2045-6BA13
8PQ6000-8BA52	8PQ2055-8BA12	8PQ6000-8BA53	8PQ2045-8BA12
8PQ6000-8BA52	8PQ2055-8BA14	8PQ6000-8BA53	8PQ2045-8BA16
8PQ6000-8BA65	8PQ2060-6BA26	8PQ6000-8BA66	8PQ2045-6BA14
8PQ6000-8BA65	8PQ2060-6BA26	8PQ6000-8BA66	8PQ2045-6BA14
8PQ6000-8BA62	8PQ2060-8BA08	8PQ6000-8BA63	8PQ2045-8BA14
8PQ6000-8BA62	8PQ2060-8BA08	8PQ6000-8BA63	8PQ2045-8BA14
8PQ6000-8BA65	8PQ2060-6BA26	8PQ6000-8BA66	8PQ2045-6BA14
8PQ6000-8BA65	8PQ2060-6BA26	8PQ6000-8BA66	8PQ2045-6BA14
8PQ6000-8BA62	8PQ2060-8BA08	8PQ6000-8BA63	8PQ2045-8BA14
8PQ6000-8BA62	8PQ2060-8BA08	8PQ6000-8BA63	8PQ2045-8BA14

System overview, page 15/70

© Siemens 2025

Section expansion

Siemens EcoTech

3VA molded case circuit breakers, compartment door

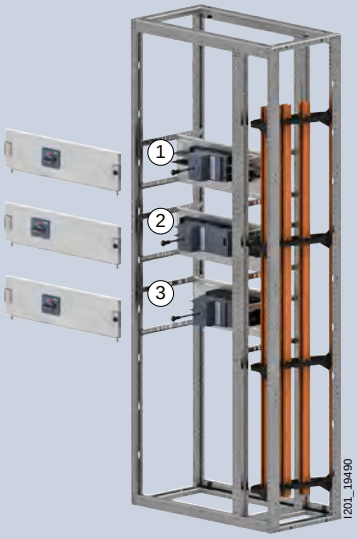

3-pole





Type	I_n	Width	❶ Fixed-mounted		❷ Fixed-mounted version with RCD	
			Device holders	Compartment door	Device holders	Compartment door
3VA10	100 A	600 mm	8PQ6000-8BA01	8PQ2015-6BA31	–	–
		800 mm	8PQ6000-8BA02	8PQ2015-8BA12	–	–
3VA11	160 A	600 mm	8PQ6000-8BA01	8PQ2015-6BA31	8PQ6000-8BA01	8PQ2015-6BA33
		800 mm	8PQ6000-8BA02	8PQ2015-8BA12	8PQ6000-8BA02	8PQ2015-8BA12
3VA12	250 A	600 mm	8PQ6000-8BA03	8PQ2015-6BA34	8PQ6000-8BA03	8PQ2015-6BA35
		800 mm	8PQ6000-8BA07	8PQ2020-8BA22	8PQ6000-8BA07	8PQ2020-8BA22
3VA13	400 A	600 mm	8PQ6000-8BA23	8PQ2020-6BA46	–	–
		800 mm	8PQ6000-8BA27	8PQ2025-8BA15	–	–
3VA14	630 A	600 mm	8PQ6000-8BA23	8PQ2020-6BA46	–	–
		800 mm	8PQ6000-8BA27	8PQ2025-8BA15	–	–
3VA15	1000 A	800 mm	8PQ6001-4BA22	8PQ2045-8BA20	–	–
3VA20	100 A	600 mm	8PQ6000-8BA08	8PQ2020-6BA44	8PQ6000-8BA11	8PQ2020-6BA45
		800 mm	8PQ6000-8BA10	8PQ2020-8BA23	8PQ6000-8BA10	8PQ2020-8BA23
3VA21	160 A	600 mm	8PQ6000-8BA08	8PQ2020-6BA44	8PQ6000-8BA11	8PQ2020-6BA45
		800 mm	8PQ6000-8BA10	8PQ2020-8BA23	8PQ6000-8BA10	8PQ2020-8BA23
3VA22	250 A	600 mm	8PQ6000-8BA08	8PQ2020-6BA44	8PQ6000-8BA11	8PQ2020-6BA45
		800 mm	8PQ6000-8BA10	8PQ2020-8BA23	8PQ6000-8BA10	8PQ2020-8BA23
3VA23	400 A	600 mm	8PQ6000-8BA23	8PQ2020-6BA46	–	–
		800 mm	8PQ6000-8BA27	8PQ2025-8BA15	8PQ6000-8BA27	8PQ2025-8BA15
3VA24	630 A	600 mm	8PQ6000-8BA23	8PQ2020-6BA46	–	–
		800 mm	8PQ6000-8BA27	8PQ2025-8BA15	8PQ6000-8BA27	8PQ2025-8BA15
3VA25	1000 A	800 mm	8PQ6001-4BA22	8PQ2045-8BA20	–	–
3VA26	1250 A	800 mm	8PQ6001-4BA22	8PQ2045-8BA20	–	–
3VA27	1600 A	800 mm	8PQ6001-4BA23	8PQ2045-8BA21	–	–

4-pole





Type	I_n	Width	❶ Fixed-mounted		❷ Fixed-mounted version with RCD	
			Device holders	Compartment door	Device holders	Compartment door
3VA10	100 A	600 mm	8PQ6000-8BA01	8PQ2015-6BA31	–	–
		800 mm	8PQ6000-8BA02	8PQ2015-8BA12	–	–
3VA11	160 A	600 mm	8PQ6000-8BA01	8PQ2015-6BA31	8PQ6000-8BA01	8PQ2015-6BA33
		800 mm	8PQ6000-8BA02	8PQ2015-8BA12	8PQ6000-8BA02	8PQ2015-8BA12
3VA12	250 A	600 mm	8PQ6000-8BA05	8PQ2020-6BA42	8PQ6000-8BA05	8PQ2020-6BA43
		800 mm	8PQ6000-8BA07	8PQ2020-8BA22	8PQ6000-8BA07	8PQ2020-8BA22
3VA13	400 A	600 mm	8PQ6000-8BA25	8PQ2025-6BA24	–	–
		800 mm	8PQ6000-8BA27	8PQ2025-8BA15	–	–
3VA14	630 A	600 mm	8PQ6000-8BA25	8PQ2025-6BA24	–	–
		800 mm	8PQ6000-8BA27	8PQ2025-8BA15	–	–
3VA15	1000 A	800 mm	8PQ6001-4BA22	8PQ2045-8BA20	–	–
3VA20	100 A	600 mm	8PQ6000-8BA08	8PQ2020-6BA44	8PQ6000-8BA11	8PQ2020-6BA45
		800 mm	8PQ6000-8BA10	8PQ2020-8BA23	8PQ6000-8BA10	8PQ2020-8BA23
3VA21	160 A	600 mm	8PQ6000-8BA08	8PQ2020-6BA44	8PQ6000-8BA11	8PQ2020-6BA45
		800 mm	8PQ6000-8BA10	8PQ2020-8BA23	8PQ6000-8BA10	8PQ2020-8BA23
3VA22	250 A	600 mm	8PQ6000-8BA08	8PQ2020-6BA44	8PQ6000-8BA11	8PQ2020-6BA45
		800 mm	8PQ6000-8BA10	8PQ2020-8BA23	8PQ6000-8BA10	8PQ2020-8BA23
3VA23	400 A	600 mm	8PQ6000-8BA25	8PQ2025-6BA24	–	–
		800 mm	8PQ6000-8BA27	8PQ2025-8BA15	8PQ6000-8BA27	8PQ2025-8BA15
3VA24	630 A	600 mm	8PQ6000-8BA25	8PQ2025-6BA24	–	–
		800 mm	8PQ6000-8BA27	8PQ2025-8BA15	8PQ6000-8BA27	8PQ2025-8BA15
3VA25	1000 A	800 mm	8PQ6001-4BA22	8PQ2045-8BA20	–	–
3VA26	1250 A	800 mm	8PQ6001-4BA22	8PQ2045-8BA20	–	–
3VA27	1600 A	800 mm	8PQ6001-4BA23	8PQ2045-8BA21	–	–

15

System overview, page 15/70

© Siemens 2025

❸ Plug-in version

Device holders	Compartment door
–	–
–	–
8PQ6000-8BA01	8PQ2015-6BA31
8PQ6000-8BA02	8PQ2015-8BA12
8PQ6000-8BA04	8PQ2015-6BA34
8PQ6000-8BA07	8PQ2020-8BA22
–	–
8PQ6001-1BA02	8PQ2025-8BA23
–	–
8PQ6001-1BA02	8PQ2025-8BA23
–	–
8PQ6000-8BA08	8PQ2020-6BA44
8PQ6000-8BA10	8PQ2020-8BA23
8PQ6000-8BA08	8PQ2020-6BA44
8PQ6000-8BA10	8PQ2020-8BA23
8PQ6000-8BA08	8PQ2020-6BA44
8PQ6000-8BA10	8PQ2020-8BA23
–	–
8PQ6001-1BA02	8PQ2025-8BA23
–	–
8PQ6001-1BA02	8PQ2025-8BA23
–	–
–	–
–	–

❸ Plug-in version



Device holders	Compartment door
–	–
–	–
8PQ6000-8BA01	8PQ2015-6BA31
8PQ6000-8BA02	8PQ2015-8BA12
8PQ6000-8BA06	8PQ2020-6BA42
8PQ6000-8BA07	8PQ2020-8BA22
–	–
8PQ6001-1BA02	8PQ2025-8BA23
–	–
8PQ6001-1BA02	8PQ2025-8BA23
–	–
8PQ6000-8BA08	8PQ2020-6BA44
8PQ6000-8BA10	8PQ2020-8BA23
8PQ6000-8BA08	8PQ2020-6BA44
8PQ6000-8BA10	8PQ2020-8BA23
8PQ6000-8BA08	8PQ2020-6BA44
8PQ6000-8BA10	8PQ2020-8BA23
–	–
8PQ6001-1BA02	8PQ2025-8BA23
–	–
8PQ6001-1BA02	8PQ2025-8BA23
–	–
–	–
–	–

15

System overview, page 15/70

© Siemens 2025

Section expansion

Siemens EcoTech

3VA molded case circuit breakers, 8US multiple feeders

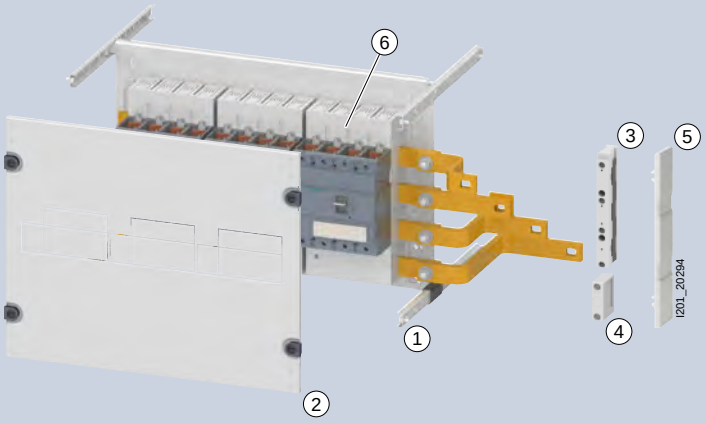

3-pole



Type	I_n	Width	No. of switches/ breakers	Operating Direct	Rotary	Motorized	❶ Device holders	❷ Covers
3VA10	100 A	600 mm	5	■	■	–	8PQ6000-8BA33	8PQ2035-6BA26
		800 mm	7	■	■	–	8PQ6000-8BA40	8PQ2035-8BA20
3VA11	160 A	600 mm	5	■	■	■	8PQ6000-8BA33	8PQ2035-6BA26
		800 mm	7	■	■	■	8PQ6000-8BA40	8PQ2035-8BA20
3VA12	250 A	600 mm	3	■	■	■	8PQ6001-5BA68	8PQ2040-6BA26
		800 mm	5	■	■	■	8PQ6001-5BA72	8PQ2040-8BA23
3VA20	100 A	600 mm	3	■	■	–	8PQ6001-5BA71	8PQ2045-6BA11
				–	–	■	8PQ6001-5BA71	8PQ2045-6BA13
		800 mm	5	■	■	–	8PQ6001-5BA73	8PQ2045-8BA11
				–	–	■	8PQ6001-5BA73	8PQ2045-8BA15
3VA21	160 A	600 mm	3	■	■	–	8PQ6001-5BA71	8PQ2045-6BA11
				–	–	■	8PQ6001-5BA71	8PQ2045-6BA13
		800 mm	5	■	■	–	8PQ6001-5BA73	8PQ2045-8BA11
				–	–	■	8PQ6001-5BA73	8PQ2045-8BA15
3VA22	250 A	600 mm	3	■	■	–	8PQ6001-5BA71	8PQ2045-6BA11
				–	–	■	8PQ6001-5BA71	8PQ2045-6BA13
		800 mm	5	■	■	–	8PQ6001-5BA73	8PQ2045-8BA11
				–	–	■	8PQ6001-5BA73	8PQ2045-8BA15

4-pole

Type	I_n	Width	No. of switches/ breakers	Operating Direct	Rotary	Motorized	❶ Device holders	❷ Covers
3VA12	250 A	600 mm	3	■	■	■	8PQ6001-5BA68	8PQ2040-6BA26
		800 mm	4	■	■	■	8PQ6001-5BA72	8PQ2040-8BA24
3VA20	100 A	600 mm	3	■	■	–	8PQ6001-5BA71	8PQ2045-6BA11
				–	–	■	8PQ6001-5BA71	8PQ2045-6BA13
		800 mm	4	■	■	–	8PQ6001-5BA73	8PQ2045-8BA12
				–	–	■	8PQ6001-5BA73	8PQ2045-8BA16
3VA21	160 A	600 mm	3	■	■	–	8PQ6001-5BA71	8PQ2045-6BA11
				–	–	■	8PQ6001-5BA71	8PQ2045-6BA13
		800 mm	4	■	■	–	8PQ6001-5BA73	8PQ2045-8BA12
				–	–	■	8PQ6001-5BA73	8PQ2045-8BA16
3VA22	250 A	600 mm	3	■	■	–	8PQ6001-5BA71	8PQ2045-6BA11
				–	–	■	8PQ6001-5BA71	8PQ2045-6BA13
		800 mm	4	■	■	–	8PQ6001-5BA73	8PQ2045-8BA12
				–	–	■	8PQ6001-5BA73	8PQ2045-8BA16

15

System overview, page 15/70

© Siemens 2025

❸ Busbar holders	❺ End cover	❻ 8US Adapter
8US1923-3AA01	8US1922-1AC00	8US1213-4AU01
8US1923-3AA01	8US1922-1AC00	8US1213-4AU01
8US1923-3AA01	8US1922-1AC00	8US1213-4AU01
8US1923-3AA01	8US1922-1AC00	8US1213-4AU01
8US1923-3AA01	8US1922-1AC00	8US1213-4AP03
8US1923-3AA01	8US1922-1AC00	8US1213-4AP03
8US1923-3AA01	8US1922-1AC00	8US1213-4AP03
8US1923-3AA01	8US1922-1AC00	8US1213-4AP03
8US1923-3AA01	8US1922-1AC00	8US1213-4AP03
8US1923-3AA01	8US1922-1AC00	8US1213-4AP03
8US1923-3AA01	8US1922-1AC00	8US1213-4AP03
8US1923-3AA01	8US1922-1AC00	8US1213-4AP03
8US1923-3AA01	8US1922-1AC00	8US1213-4AP03
8US1923-3AA01	8US1922-1AC00	8US1213-4AP03
8US1923-3AA01	8US1922-1AC00	8US1213-4AP03
8US1923-3AA01	8US1922-1AC00	8US1213-4AP03
8US1923-3AA01	8US1922-1AC00	8US1213-4AP03

❸ Busbar holders	❹ 4th pole	❺ End cover	❻ 8US Adapter
8US1923-3AA01	5SH3540	8US1922-1AC00	8US1313-4AH03
8US1923-3AA01	5SH3540	8US1922-1AC00	8US1313-4AH03
8US1923-3AA01	5SH3540	8US1922-1AC00	8US1313-4AH03
8US1923-3AA01	5SH3540	8US1922-1AC00	8US1313-4AH03
8US1923-3AA01	5SH3540	8US1922-1AC00	8US1313-4AH03
8US1923-3AA01	5SH3540	8US1922-1AC00	8US1313-4AH03
8US1923-3AA01	5SH3540	8US1922-1AC00	8US1313-4AH03
8US1923-3AA01	5SH3540	8US1922-1AC00	8US1313-4AH03
8US1923-3AA01	5SH3540	8US1922-1AC00	8US1313-4AH03
8US1923-3AA01	5SH3540	8US1922-1AC00	8US1313-4AH03
8US1923-3AA01	5SH3540	8US1922-1AC00	8US1313-4AH03
8US1923-3AA01	5SH3540	8US1922-1AC00	8US1313-4AH03
8US1923-3AA01	5SH3540	8US1922-1AC00	8US1313-4AH03
8US1923-3AA01	5SH3540	8US1922-1AC00	8US1313-4AH03
8US1923-3AA01	5SH3540	8US1922-1AC00	8US1313-4AH03

System overview, page 15/70

© Siemens 2025

Section expansion

Siemens EcoTech

3VA molded case circuit breakers, DIN-rail mounting

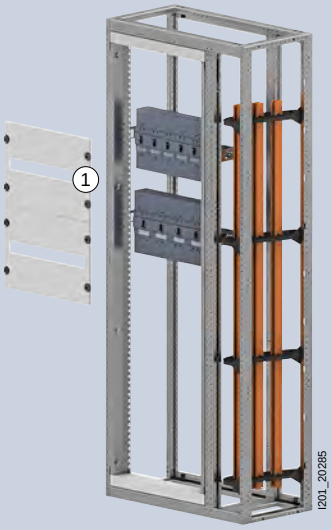

3-pole

Type	I_n	No. of switches/ breakers	Width	Height	Operating mechanism		
					Direct	Rotary	Motorized
3VA10	100 A	5	600 mm	350 mm	■	–	–
		8	800 mm	350 mm	■	–	–
3VA11	160 A	4	600 mm	350 mm	■	–	–
		5	800 mm	350 mm	■	–	–

4-pole

Type	I_n	No. of switches/ breakers	Width	Height	Operating mechanism		
					Direct	Rotary	Motorized
3VA10	100 A	4	600 mm	350 mm	■	–	–
		6	800 mm	350 mm	■	–	–
3VA11	160 A	3	600 mm	350 mm	■	–	–
		4	800 mm	350 mm	■	–	–

Accessories

Cable duct fastening		
	Version	Article No.
	Mounting brackets	8PQ6000-0BA16
Blanking strips		
	Types	Article No.
	Length 1 m	8GK9910-0KK01

15

System overview, page 15/70

© Siemens 2025

❶ DIN-rail mounting	
Device holders	**Covers**
8PQ6000-3BA36	8PQ2035-6BA28
8PQ6000-3BA37	8PQ2035-8BA18
8PQ6000-3BA36	8PQ2035-6BA28
8PQ6000-3BA37	8PQ2035-8BA18

❶ DIN-rail mounting	
Device holders	**Covers**
8PQ6000-3BA36	8PQ2035-6BA28
8PQ6000-3BA37	8PQ2035-8BA18
8PQ6000-3BA36	8PQ2035-6BA28
8PQ6000-3BA37	8PQ2035-8BA18

System overview, page 15/70

© Siemens 2025

Section expansion

3VA molded case circuit breakers, internal partitions – front connection

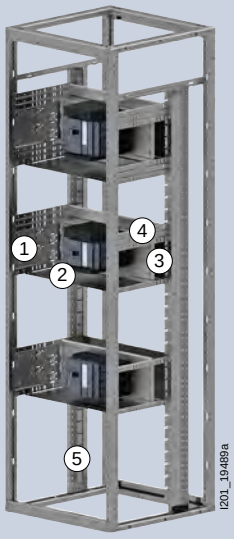

3-pole, width 600 mm

❶ Cable connection



Type	I_n	Height		Operating mechanism			
				Direct	Rotary	Motorized	
3VA10	100 A	150 mm	Fixed-mounted	■	■	–	8PQ5000-2BA28 + 8PQ5000-0BA05
3VA11	160 A	150 mm	Fixed-mounted	■	■	■	8PQ5000-2BA28 + 8PQ5000-0BA05
			Plug-in	■	■	■	8PQ5000-2BA28 + 8PQ5000-0BA05
3VA12	250 A	150 mm	Fixed-mounted	■	■	–	8PQ6000-8BA12
				–	–	■	8PQ6000-8BA13
			Plug-in	■	■	–	8PQ6000-8BA13
				–	–	■	8PQ6000-8BA12
		250 mm	Withdrawable	■	–	■	8PQ6000-8BA12
3VA13	400 A	200 mm	Fixed-mounted	■	■	■	8PQ6000-8BA20
3VA14	630 A	200 mm	Fixed-mounted	■	■	■	8PQ6000-8BA20
3VA20	100 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30 + 8PQ5000-0BA05
			Plug-in	■	■	■	8PQ5000-2BA30 + 8PQ5000-0BA05
		250 mm	Withdrawable	■	–	■	8PQ5000-2BA30
3VA21	100 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30 + 8PQ5000-0BA05
			Plug-in	■	■	■	8PQ5000-2BA30 + 8PQ5000-0BA05
		250 mm	Withdrawable	■	–	■	8PQ5000-2BA30 + 8PQ5000-0BA05
3VA22	250 A	200 mm	Fixed-mounted	■	■	–	8PQ6000-8BA16
				–	–	■	8PQ6000-8BA17
			Plug-in	■	■	–	8PQ6000-8BA17
				–	–	■	8PQ6000-8BA16
		250 mm	Withdrawable	■	–	■	8PQ6000-8BA16
3VA23	400 A	200 mm	Fixed-mounted	■	■	–	8PQ6000-8BA20
				–	–	■	8PQ6000-8BA18
3VA24	630 A	200 mm	Fixed-mounted	■	■	■	8PQ6000-8BA20
				–	–	–	8PQ6000-8BA18

15

System overview, page 15/70

© Siemens 2025

	❷ Horizontal	❸ Rear	❹ Increase in module height	Horizontal with increase in module height	❺ Plug-in rails	
					1600 mm	1800 mm
Protective bellows					**Busbar system**	
Form 4b					**Top**	**Rear or without**
8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA40	–	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA40	–	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA40	–	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA40	–	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA40	–	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA40	–	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA40	–	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA40	2 × 8PQ5000-4BA60	2 × 8PQ5000-4BA68	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	–	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	–	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	–	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	–	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	8PQ5000-4BA62	8PQ5000-4BA70	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	–	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	–	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	8PQ5000-4BA62	8PQ5000-4BA70	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	–	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	–	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	–	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	–	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	8PQ5000-4BA62	8PQ5000-4BA70	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	–	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	–	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	–	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	–	–	8PQ3000-0BA82	8PQ3000-0BA83

System overview, page 15/70

© Siemens 2025

Section expansion

3VA molded case circuit breakers, internal partitions – front connection

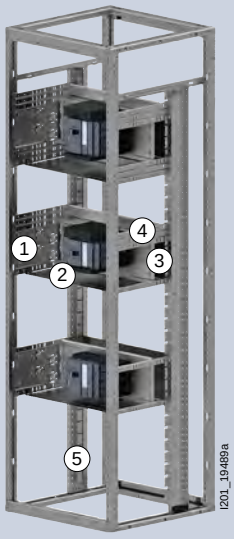

3-pole, width 800 mm

❶ Cable connection



Type	I_n	Height		Operating mechanism				
				Direct	Rotary	Motorized		
3VA10	100 A	150 mm	Fixed-mounted	■	■	–	8PQ5000-2BA28 +	8PQ5000-0BA05
3VA11	160 A	150 mm	Fixed-mounted	■	■	■	8PQ5000-2BA28 +	8PQ5000-0BA05
			Plug-in	■	■	■	8PQ5000-2BA28 +	8PQ5000-0BA05
3VA12	250 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30 +	8PQ5000-0BA05
			Plug-in	■	■	■	8PQ5000-2BA30 +	8PQ5000-0BA05
		250 mm	Withdrawable	■	–	■	8PQ6000-8BA14	
3VA13	400 A	250 mm	Fixed-mounted	■	■	–	8PQ6000-8BA22	
				–	–	■	8PQ6000-8BA21	
			Plug-in	■	■	■	8PQ6000-8BA21	
		300 mm	Withdrawable	■	–	–	8PQ6000-8BA22	
3VA14	630 A	250 mm	Fixed-mounted	■	■	–	8PQ6000-8BA22	
				–	–	■	8PQ6000-8BA21	
			Plug-in	■	■	■	8PQ6000-8BA21	
		300 mm	Withdrawable	■	–	–	8PQ6000-8BA22	
3VA20	250 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30 +	8PQ5000-0BA05
			Plug-in	■	■	■	8PQ5000-2BA30 +	8PQ5000-0BA05
		250 mm	Withdrawable	■	–	■	8PQ5000-2BA30 +	8PQ5000-0BA05
3VA21	250 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30 +	8PQ5000-0BA05
			Plug-in	■	■	■	8PQ5000-2BA30 +	8PQ5000-0BA05
		250 mm	Withdrawable	■	–	■	8PQ5000-2BA30 +	8PQ5000-0BA05
3VA22	250 A	200 mm	Fixed-mounted	■	■	–	8PQ6000-8BA16	
				–	–	■	8PQ6000-8BA17	
			Plug-in	■	■	■	8PQ6000-8BA17	
		250 mm	Withdrawable	■	–	■	8PQ6000-8BA16	
3VA23	400 A	250 mm	Fixed-mounted	■	■	–	8PQ6000-8BA22	
				–	–	■	8PQ6000-8BA21	
			Plug-in	■	■	■	8PQ6000-8BA21	
		300 mm	Withdrawable	■	–	–	8PQ6000-8BA22	
3VA24	630 A	250 mm	Fixed-mounted	■	■	–	8PQ6000-8BA22	
				–	–	■	8PQ6000-8BA21	
			Plug-in	■	■	■	8PQ6000-8BA21	
		300 mm	Withdrawable	■	–	–	8PQ6000-8BA22	

15

System overview, page 15/70

© Siemens 2025

	❷ Horizontal	❸ Rear	❹ Increase in module height	❺ Plug-in rails	
				1600 mm	1800 mm
Protective bellows				Busbar system	
Form 4b				Top	Rear or without
8PQ9400-0BA71	8PQ5000-2BA62	–	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA62	–	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA62	–	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA48	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA48	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA48	8PQ5000-4BA61 + 8PQ5000-4BA71	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA50	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA50	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA50	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA50	8PQ5000-4BA63 + 8PQ5000-4BA72	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA50	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA50	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA50	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA50	8PQ5000-4BA63 + 8PQ5000-4BA72	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA48	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA48	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA48	8PQ5000-4BA63 + 8PQ5000-4BA72	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA48	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA48	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA48	8PQ5000-4BA63 + 8PQ5000-4BA72	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA48	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA48	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA48	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA48	8PQ5000-4BA63 + 8PQ5000-4BA72	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA50	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA50	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA50	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA50	8PQ5000-4BA63 + 8PQ5000-4BA72	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA50	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA50	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA50	–	8PQ3000-0BA82	8PQ3000-0BA83
8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA50	8PQ5000-4BA63 + 8PQ5000-4BA72	8PQ3000-0BA82	8PQ3000-0BA83

System overview, page 15/70

© Siemens 2025

Section expansion

3VA molded case circuit breakers, internal partitions – front connection

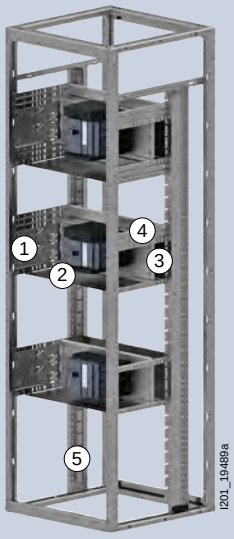

4-pole, width 600 mm

❶ Cable connection



Type	I_n	Height		Operating mechanism			Terminals		
				Direct	Rotary	Motorized			
3VA10	100 A	150 mm	Fixed-mounted	■	■	–	8PQ5000-2BA28	+	8PQ5000-0BA05
3VA11	160 A	150 mm	Fixed-mounted	■	■	■	8PQ5000-2BA28	+	8PQ5000-0BA05
			Plug-in	■	■	■	8PQ5000-2BA28	+	8PQ5000-0BA05
3VA12	250 A	200 mm	Fixed-mounted	■	■	–	8PQ6000-8BA14		
				–	–	■	8PQ6000-8BA15		
			Plug-in	■	■	–	8PQ6000-8BA15		
				–	–	■	8PQ6000-8BA14		
		300 mm	Withdrawable	■	–	■	8PQ6000-8BA14		
3VA13	400 A	250 mm	Fixed-mounted	■	■	–	8PQ6000-8BA22		
				–	–	■	8PQ6000-8BA21		
3VA14	630 A	250 mm	Fixed-mounted	■	■	–	8PQ6000-8BA22		
				–	–	■	8PQ6000-8BA21		
3VA20	250 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	+	8PQ5000-0BA05
			Plug-in	■	■	–	8PQ5000-2BA30	+	8PQ5000-0BA05
				–	–	■	8PQ5000-2BA30	+	8PQ5000-0BA05
		300 mm	Withdrawable	■	–	■	8PQ5000-2BA30	+	8PQ5000-0BA05
3VA21	250 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	+	8PQ5000-0BA05
			Plug-in	■	■	–	8PQ5000-2BA30	+	8PQ5000-0BA05
				–	–	■	8PQ5000-2BA30	+	8PQ5000-0BA05
		300 mm	Withdrawable	■	–	■	8PQ5000-2BA30	+	8PQ5000-0BA05
3VA22	250 A	200 mm	Fixed-mounted	■	■	–	8PQ6000-8BA16		
				–	–	■	8PQ6000-8BA17		
			Plug-in	■	■	–	8PQ6000-8BA17		
				–	–	■	8PQ6000-8BA17		
		300 mm	Withdrawable	■	–	■	8PQ6000-8BA17		
3VA23	400 A	250 mm	Fixed-mounted	■	■	–	8PQ6000-8BA22		
				–	–	■	8PQ6000-8BA21		
			Plug-in	■	■	■	8PQ6000-8BA21		
3VA24	630 A	250 mm	Fixed-mounted	■	■	–	8PQ6000-8BA22		
				–	–	■	8PQ6000-8BA21		

15

System overview, page 15/70

© Siemens 2025

		❷ Horizontal	❸ Rear	❹ Increase in module height	❺ Plug-in rails	
					1600 mm	1800 mm
4th pole	Protective bellows Form 4b				Busbar system Top	Rear or without
	8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA40	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA40	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA40	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	2 × 8PQ5000-4BA60 + 2 × 8PQ5000-4BA68	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA42	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA42	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA42	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA42	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	2 × 8PQ5000-4BA62 + 2 × 8PQ5000-4BA70	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	2 × 8PQ5000-4BA62 + 2 × 8PQ5000-4BA70	8PQ3000-0BA82	8PQ3000-0BA83
+ 8PQ5000-4BA58	8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	–	8PQ3000-0BA82	8PQ3000-0BA83
+ 8PQ5000-4BA58	8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	–	8PQ3000-0BA82	8PQ3000-0BA83
+ 8PQ5000-4BA58	8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	–	8PQ3000-0BA82	8PQ3000-0BA83
+ 8PQ5000-4BA58	8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	–	8PQ3000-0BA82	8PQ3000-0BA83
+ 8PQ5000-4BA58	8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA41	2 × 8PQ5000-4BA62 + 2 × 8PQ5000-4BA70	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA42	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA42	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA42	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA42	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA61	8PQ5000-4BA42	–	8PQ3000-0BA82	8PQ3000-0BA83

System overview, page 15/70

© Siemens 2025

Section expansion

3VA molded case circuit breakers, internal partitions – front connection

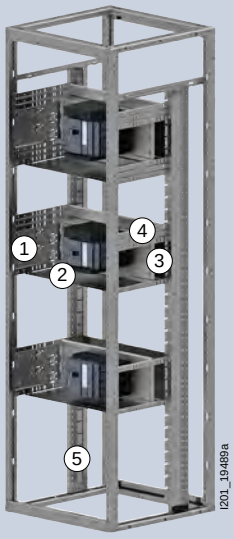

4-pole, width 800 mm

❶ Cable connection



Type	I_n	Height		Operating mechanism			Terminals		
				Direct	Rotary	Motorized			
3VA10	100 A	150 mm	Fixed-mounted	■	■	–	8PQ5000-2BA28	+	8PQ5000-0BA05
3VA11	160 A	150 mm	Fixed-mounted	■	■	■	8PQ5000-2BA28	+	8PQ5000-0BA05
			Plug-in	■	■	■	8PQ5000-2BA28	+	8PQ5000-0BA05
3VA12	250 A	200 mm	Fixed-mounted	■	■	–	8PQ6000-8BA14		
				–	–	■	8PQ6000-8BA15		
			Plug-in	■	■	–	8PQ6000-8BA15		
				–	–	■	8PQ6000-8BA14		
		300 mm	Withdrawable	■	–	■	8PQ6000-8BA14		
3VA13	400 A	250 mm	Fixed-mounted	■	■	–	8PQ6000-8BA22		
				–	–	■	8PQ6000-8BA21		
			Plug-in	■	■	■	8PQ6000-8BA21		
		300 mm	Withdrawable	■	–	–	8PQ6000-8BA22		
3VA14	630 A	250 mm	Fixed-mounted	■	■	–	8PQ6000-8BA22		
				–	–	■	8PQ6000-8BA21		
			Plug-in	■	■	■	8PQ6000-8BA21		
			Withdrawable	■	–	–	8PQ6000-8BA22		
3VA20	250 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	+	8PQ5000-0BA05
			Plug-in	■	■	■	8PQ5000-2BA30	+	8PQ5000-0BA05
		300 mm	Withdrawable	■	–	■	8PQ5000-2BA30	+	8PQ5000-0BA05
3VA21	250 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	+	8PQ5000-0BA05
			Plug-in	■	■	■	8PQ5000-2BA30	+	8PQ5000-0BA05
		300 mm	Withdrawable	■	–	■	8PQ5000-2BA30	+	8PQ5000-0BA05
3VA22	250 A	200 mm	Fixed-mounted	■	■	–	8PQ6000-8BA16		
				–	–	■	8PQ6000-8BA17		
			Plug-in	■	■	–	8PQ6000-8BA17		
				–	–	■	8PQ6000-8BA16		
		300 mm	Withdrawable	■	–	■	8PQ6000-8BA16		
3VA23	400 A	250 mm	Fixed-mounted	■	■	–	8PQ6000-8BA22		
				–	–	■	8PQ6000-8BA21		
			Plug-in	■	■	■	8PQ6000-8BA21		
3VA24	630 A	250 mm	Fixed-mounted	■	■	–	8PQ6000-8BA22		
				–	–	■	8PQ6000-8BA21		

15

System overview, page 15/70

© Siemens 2025

		❷ Horizontal	❸ Rear	❹ Increase in module height	❺ Plug-in rails	
					1600 mm	1800 mm
4th pole	Protective bellows Form 4b				Busbar system Top	Rear or without
	8PQ9400-0BA71	8PQ5000-2BA62	–	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA62	–	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA62	–	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA48	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA48	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA48	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA48	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA48	2 × 8PQ5000-4BA61 + 2 × 8PQ5000-4BA71	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA50	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA50	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA50	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA50	8PQ5000-4BA63 + 8PQ5000-4BA72	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA50	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA50	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA50	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA50	8PQ5000-4BA63 + 8PQ5000-4BA72	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA48	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA48	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA48	2 × 8PQ5000-4BA63 + 2 × 8PQ5000-4BA72	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA48	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA48	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA48	2 × 8PQ5000-4BA63 + 2 × 8PQ5000-4BA72	8PQ3000-0BA82	8PQ3000-0BA83
+ 8PQ5000-4BA58	8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA48	–	8PQ3000-0BA82	8PQ3000-0BA83
+ 8PQ5000-4BA58	8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA48	–	8PQ3000-0BA82	8PQ3000-0BA83
+ 8PQ5000-4BA58	8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA48	–	8PQ3000-0BA82	8PQ3000-0BA83
+ 8PQ5000-4BA58	8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA48	–	8PQ3000-0BA82	8PQ3000-0BA83
+ 8PQ5000-4BA58	8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA48	2 × 8PQ5000-4BA63 + 2 × 8PQ5000-4BA72	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA50	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA50	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA50	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA50	–	8PQ3000-0BA82	8PQ3000-0BA83
	8PQ9400-0BA71	8PQ5000-2BA62	8PQ5000-4BA50	–	8PQ3000-0BA82	8PQ3000-0BA83

System overview, page 15/70

© Siemens 2025

Section expansion

3VA molded case circuit breakers, internal partitions – rear connection

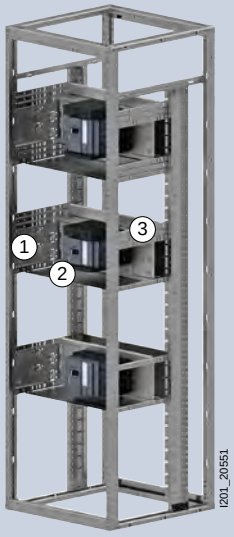

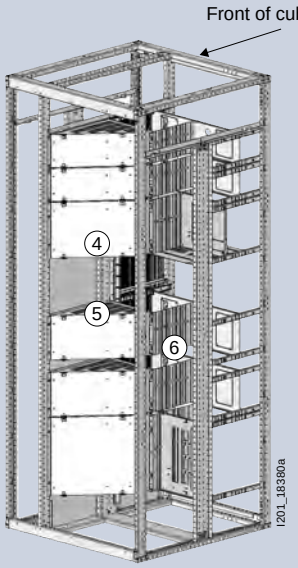

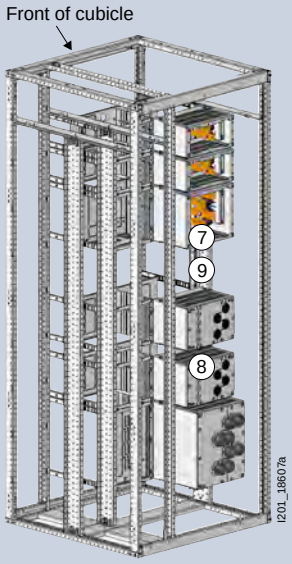

3-pole, width 600 mm

❶ Lateral	❷ Horizontal	❸ Increase in module height

Type	I_n	Height		Operating mechanism			❶ Lateral	❷ Horizontal	❸ Increase in module height
				Direct	Rotary	Motorized			
3VA10	100 A	150 mm	Fixed-mounted	■	■	–	8PQ5000-2BA28	8PQ5000-2BA61	–
3VA11	160 A	150 mm	Fixed-mounted	■	■	–	8PQ5000-2BA28	8PQ5000-2BA61	–
			Plug-in	■	–	–	8PQ5000-2BA28	8PQ5000-2BA61	–
3VA12	250 A	150 mm	Fixed-mounted	■	■	■	8PQ5000-2BA28	8PQ5000-2BA61	–
			Plug-in	■	■	■	8PQ5000-2BA28	8PQ5000-2BA61	–
		250 mm	Withdrawable	■	–	■	8PQ5000-2BA28	8PQ5000-2BA61	2 × 8PQ5000-4BA60 + 2 × 8PQ5000-4BA68
3VA13	400 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA31	8PQ5000-2BA61	–
3VA14	630 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA31	8PQ5000-2BA61	–
3VA20	100 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	8PQ5000-2BA61	–
			Plug-in	■	■	■	8PQ5000-2BA30	8PQ5000-2BA61	–
		250 mm	Withdrawable	■	–	■	8PQ5000-2BA30	8PQ5000-2BA61	8PQ5000-4BA62 + 8PQ5000-4BA70
3VA21	160 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	8PQ5000-2BA61	–
			Plug-in	■	■	■	8PQ5000-2BA30	8PQ5000-2BA61	–
		250 mm	Withdrawable	■	–	■	8PQ5000-2BA30	8PQ5000-2BA61	8PQ5000-4BA62 + 8PQ5000-4BA70
3VA22	250 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	8PQ5000-2BA61	–
			Plug-in	■	■	■	8PQ5000-2BA30	8PQ5000-2BA61	–
		250 mm	Withdrawable	■	–	■	8PQ5000-2BA30	8PQ5000-2BA61	8PQ5000-4BA62 + 8PQ5000-4BA70
3VA23	400 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA31	8PQ5000-2BA61	–
3VA24	630 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA31	8PQ5000-2BA61	–

System overview, page 15/70

© Siemens 2025

❹ Vertical busbar connection	❺ Segment covers	❻ Support plates	❼ Connection compartments	❽ Cable entries	❺ Plug-in rails	
					1600 mm	1800 mm
					Busbar system	
					Top	Rear or without
8PQ5000-3BA52	8PQ5000-3BA63	8PQ5000-4BA73	8PQ6000-5BA13	8PQ5000-4BA80	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA52	8PQ5000-3BA63	8PQ5000-4BA73	8PQ6000-5BA13	8PQ5000-4BA80	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA52	8PQ5000-3BA63	8PQ5000-4BA73	8PQ6000-5BA13	8PQ5000-4BA80	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA52	8PQ5000-3BA63	8PQ5000-4BA73	8PQ6000-5BA15	8PQ5000-3BA71	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA52	8PQ5000-3BA63	8PQ5000-4BA73	8PQ6000-5BA15	8PQ5000-3BA71	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA54	8PQ5000-3BA63	8PQ5000-4BA73	8PQ6000-5BA15	8PQ5000-3BA71	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA18	8PQ5000-3BA73	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA18	8PQ5000-3BA73	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA14	8PQ5000-3BA72	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA14	8PQ5000-3BA72	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA54	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA14	8PQ5000-3BA72	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA14	8PQ5000-3BA72	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA14	8PQ5000-3BA72	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA54	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA14	8PQ5000-3BA72	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-8BA30	8PQ5000-3BA72	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-8BA30	8PQ5000-3BA72	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA54	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-8BA30	8PQ5000-3BA72	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA18	8PQ5000-3BA73	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA18	8PQ5000-3BA73	8PQ3000-0BA82	8PQ3000-0BA83

System overview, page 15/70

© Siemens 2025

Section expansion

Siemens EcoTech

3VA molded case circuit breakers, internal partitions – rear connection

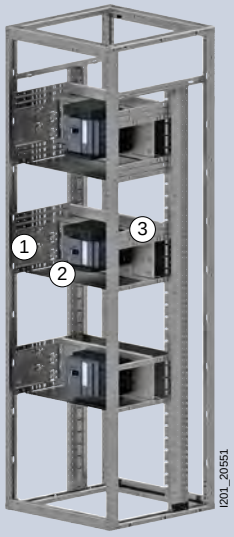

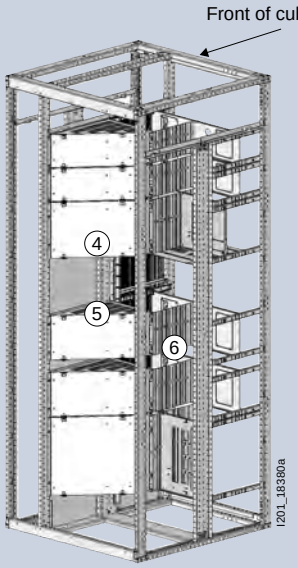

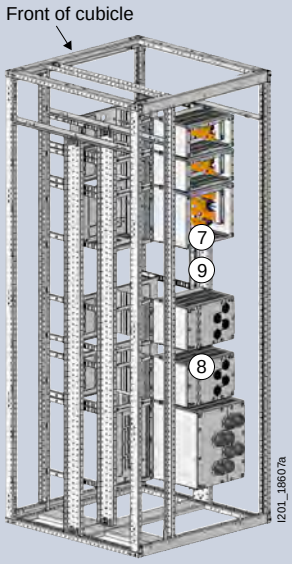

4-pole, width 600 mm

Type	I_n	Height		Operating mechanism			❶ Lateral	❷ Horizontal	❸ Increase in module height
				Direct	Rotary	Motorized			
3VA10	100 A	150 mm	Fixed-mounted	■	■	–	8PQ5000-2BA28	8PQ5000-2BA61	–
3VA11	160 A	150 mm	Fixed-mounted	■	■	■	8PQ5000-2BA28	8PQ5000-2BA61	–
			Plug-in	■	■	–	8PQ5000-2BA28	8PQ5000-2BA61	–
3VA12	250 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	8PQ5000-2BA61	–
			Plug-in	■	■	■	8PQ5000-2BA30	8PQ5000-2BA61	–
		300 mm	Withdrawable	■	–	■	8PQ5000-2BA30	8PQ5000-2BA61	2 × 8PQ5000-4BA60 + 2 × 8PQ5000-4BA68
3VA13	400 A	250 mm	Fixed-mounted	■	■	■	8PQ5000-2BA33	8PQ5000-2BA61	–
3VA14	630 A	250 mm	Fixed-mounted	■	■	■	8PQ5000-2BA33	8PQ5000-2BA61	–
3VA20	100 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	8PQ5000-2BA61	–
			Plug-in	■	■	■	8PQ5000-2BA30	8PQ5000-2BA61	–
		300 mm	Withdrawable	■	–	■	8PQ5000-2BA30	8PQ5000-2BA61	2 × 8PQ5000-4BA62 + 2 × 8PQ5000-4BA70
3VA21	160 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	8PQ5000-2BA61	–
			Plug-in	■	■	■	8PQ5000-2BA30	8PQ5000-2BA61	–
		300 mm	Withdrawable	■	–	■	8PQ5000-2BA30	8PQ5000-2BA61	2 × 8PQ5000-4BA62 + 2 × 8PQ5000-4BA70
3VA22	250 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	8PQ5000-2BA61	–
			Plug-in	■	■	■	8PQ5000-2BA30	8PQ5000-2BA61	–
		300 mm	Withdrawable	■	–	■	8PQ5000-2BA30	8PQ5000-2BA61	2 × 8PQ5000-4BA62 + 2 × 8PQ5000-4BA70
3VA23	400 A	250 mm	Fixed-mounted	■	■	■	8PQ5000-2BA33	8PQ5000-2BA61	–
3VA24	630 A	250 mm	Fixed-mounted	■	■	■	8PQ5000-2BA33	8PQ5000-2BA61	–

System overview, page 15/70

© Siemens 2025

❹ Vertical busbar connection	❺ Segment covers	❻ Support plates	❼ Connection compartments	❽ Cable entries	❺ Plug-in rails	
					1600 mm	1800 mm
					Busbar system	
					Top	Rear or without
8PQ5000-3BA52	8PQ5000-3BA63	8PQ5000-4BA73	8PQ6000-5BA13	8PQ5000-4BA80	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA52	8PQ5000-3BA63	8PQ5000-4BA73	8PQ6000-5BA13	8PQ5000-4BA80	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA52	8PQ5000-3BA63	8PQ5000-4BA73	8PQ6000-5BA13	8PQ5000-4BA80	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA17	8PQ5000-3BA72	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA17	8PQ5000-3BA72	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA55	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA17	8PQ5000-3BA72	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA54	8PQ5000-3BA63	8PQ5000-4BA75	8PQ6000-5BA20	8PQ5000-3BA74	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA54	8PQ5000-3BA63	8PQ5000-4BA75	8PQ6000-5BA20	8PQ5000-3BA74	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA14	8PQ5000-3BA72	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA14	8PQ5000-3BA72	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA55	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA14	8PQ5000-3BA72	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA14	8PQ5000-3BA72	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA14	8PQ5000-3BA72	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA55	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA14	8PQ5000-3BA72	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA17	8PQ5000-3BA72	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA17	8PQ5000-3BA72	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA55	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA17	8PQ5000-3BA72	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA54	8PQ5000-3BA63	8PQ5000-4BA75	8PQ6000-5BA20	8PQ5000-3BA74	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA54	8PQ5000-3BA63	8PQ5000-4BA75	8PQ6000-5BA20	8PQ5000-3BA74	8PQ3000-0BA82	8PQ3000-0BA83

System overview, page 15/70

© Siemens 2025

Section expansion

3VA molded case circuit breakers, internal partitions – rear connection

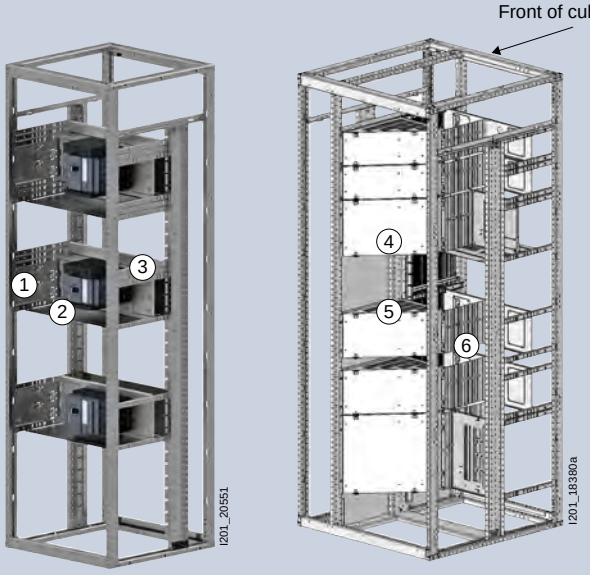

3-pole, width 800 mm

❶ Lateral	❷ Horizontal
	

Type	I_n	Height		Operating mechanism					
				Direct	Rotary	Motorized			
3VA10	100 A	150 mm	Fixed-mounted	■	–	–	8PQ5000-2BA28	8PQ5000-2BA62	
3VA11	160 A	150 mm	Fixed-mounted	■	–	–	8PQ5000-2BA28	8PQ5000-2BA62	
			Plug-in	■	–	–	8PQ5000-2BA28	8PQ5000-2BA62	
3VA12	250 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	8PQ5000-2BA62	
			Plug-in	■	■	■	8PQ5000-2BA30	8PQ5000-2BA62	
		250 mm	Withdrawable	■	–	–	8PQ5000-2BA30	8PQ5000-2BA62	
3VA13	400 A	250 mm	Fixed-mounted	■	■	■	8PQ5000-2BA33	8PQ5000-2BA62	
			Plug-in	■	–	–	8PQ5000-2BA33	8PQ5000-2BA62	
		300 mm	Withdrawable	■	–	–	8PQ5000-2BA33	8PQ5000-2BA62	
3VA14	630 A	250 mm	Fixed-mounted	■	■	■	8PQ5000-2BA33	8PQ5000-2BA62	
			Plug-in	■	–	–	8PQ5000-2BA33	8PQ5000-2BA62	
		300 mm	Withdrawable	■	–	–	8PQ5000-2BA33	8PQ5000-2BA62	
3VA15	1000 A	300 mm	Fixed-mounted	■	–	–	–	8PQ5000-2BA62	+ 8PQ5000-2BA63
3VA20	100 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	8PQ5000-2BA62	
			Plug-in	■	■	■	8PQ5000-2BA30	8PQ5000-2BA62	
		250 mm	Withdrawable	■	–	–	8PQ5000-2BA30	8PQ5000-2BA62	
3VA21	160 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	8PQ5000-2BA62	
			Plug-in	■	■	■	8PQ5000-2BA30	8PQ5000-2BA62	
		250 mm	Withdrawable	■	–	–	8PQ5000-2BA30	8PQ5000-2BA62	
3VA22	250 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	8PQ5000-2BA62	
			Plug-in	■	■	■	8PQ5000-2BA30	8PQ5000-2BA62	
		250 mm	Withdrawable	■	–	–	8PQ5000-2BA30	8PQ5000-2BA62	
3VA23	400 A	250 mm	Fixed-mounted	■	■	■	8PQ5000-2BA33	8PQ5000-2BA62	
			Plug-in	■	■	■	8PQ5000-2BA33	8PQ5000-2BA62	
		300 mm	Withdrawable	■	–	–	8PQ5000-2BA33	8PQ5000-2BA62	
3VA24	630 A	250 mm	Fixed-mounted	■	■	■	8PQ5000-2BA33	8PQ5000-2BA62	
			Plug-in	■	■	■	8PQ5000-2BA33	8PQ5000-2BA62	
		300 mm	Withdrawable	■	–	–	8PQ5000-2BA33	8PQ5000-2BA62	
3VA25	1000 A	300 mm	Fixed-mounted	■	–	–	–	8PQ5000-2BA62	+ 8PQ5000-2BA63
3VA26	1250 A	300 mm	Fixed-mounted	■	–	–	–	8PQ5000-2BA62	+ 8PQ5000-2BA63
3VA27	1600 A	300 mm	Fixed-mounted	■	–	–	–	8PQ5000-2BA62	+ 8PQ5000-2BA63
			Withdrawable	■	–	–	–	8PQ5000-2BA62	+ 8PQ5000-2BA63

15

System overview, page 15/70

© Siemens 2025

❸ Increase in module height			❹ Vertical busbar connection	Distribution busbar		❺ Segment covers	❻ Support plates
							
–			8PQ5000-3BA57			8PQ5000-3BA64	8PQ5000-4BA76
–			8PQ5000-3BA57			8PQ5000-3BA64	8PQ5000-4BA76
–			8PQ5000-3BA57			8PQ5000-3BA64	8PQ5000-4BA76
–			8PQ5000-3BA58			8PQ5000-3BA64	8PQ5000-4BA77
–			8PQ5000-3BA58			8PQ5000-3BA64	8PQ5000-4BA77
8PQ5000-4BA61	+	8PQ5000-4BA71	8PQ5000-3BA58			8PQ5000-3BA64	8PQ5000-4BA77
–			8PQ5000-3BA60			8PQ5000-3BA64	8PQ5000-4BA78
–			8PQ5000-3BA60			8PQ5000-3BA64	8PQ5000-4BA78
8PQ5000-4BA63	+	8PQ5000-4BA72	8PQ5000-3BA60			8PQ5000-3BA64	8PQ5000-4BA78
–			8PQ5000-3BA60			8PQ5000-3BA64	8PQ5000-4BA78
–			8PQ5000-3BA60			8PQ5000-3BA64	8PQ5000-4BA78
8PQ5000-4BA63	+	8PQ5000-4BA72	8PQ5000-3BA60			8PQ5000-3BA64	8PQ5000-4BA78
–			8PQ5000-5BA77	+	8PQ6001-4BA64	8PQ5000-5BA78	8PQ5000-5BA75
–			8PQ5000-3BA58			8PQ5000-3BA64	8PQ5000-4BA77
–			8PQ5000-3BA58			8PQ5000-3BA64	8PQ5000-4BA77
8PQ5000-4BA63	+	8PQ5000-4BA72	8PQ5000-3BA58			8PQ5000-3BA64	8PQ5000-4BA77
–			8PQ5000-3BA58			8PQ5000-3BA64	8PQ5000-4BA77
–			8PQ5000-3BA58			8PQ5000-3BA64	8PQ5000-4BA77
8PQ5000-4BA63	+	8PQ5000-4BA72	8PQ5000-3BA58			8PQ5000-3BA64	8PQ5000-4BA77
–			8PQ5000-3BA58			8PQ5000-3BA64	8PQ5000-4BA77
–			8PQ5000-3BA58			8PQ5000-3BA64	8PQ5000-4BA77
8PQ5000-4BA63	+	8PQ5000-4BA72	8PQ5000-3BA58			8PQ5000-3BA64	8PQ5000-4BA77
–			8PQ5000-3BA60			8PQ5000-3BA64	8PQ5000-4BA78
–			8PQ5000-3BA60			8PQ5000-3BA64	8PQ5000-4BA78
8PQ5000-4BA63	+	8PQ5000-4BA72	8PQ5000-3BA60			8PQ5000-3BA64	8PQ5000-4BA78
–			8PQ5000-3BA60			8PQ5000-3BA64	8PQ5000-4BA78
–			8PQ5000-3BA60			8PQ5000-3BA64	8PQ5000-4BA78
8PQ5000-4BA63	+	8PQ5000-4BA72	8PQ5000-3BA60			8PQ5000-3BA64	8PQ5000-4BA78
–			8PQ5000-5BA77	+	8PQ6001-4BA64	8PQ5000-5BA78	8PQ5000-5BA75
–			8PQ5000-5BA77	+	8PQ6001-4BA64	8PQ5000-5BA78	8PQ5000-5BA75
–			8PQ5000-5BA77	+	8PQ6001-4BA65	8PQ5000-5BA78	8PQ5000-5BA75
–			8PQ5000-5BA77	+	8PQ6001-4BA66	8PQ5000-5BA78	8PQ5000-5BA76

System overview, page 15/70

© Siemens 2025

Section expansion

Siemens EcoTech

3VA molded case circuit breakers, internal partitions – rear connection

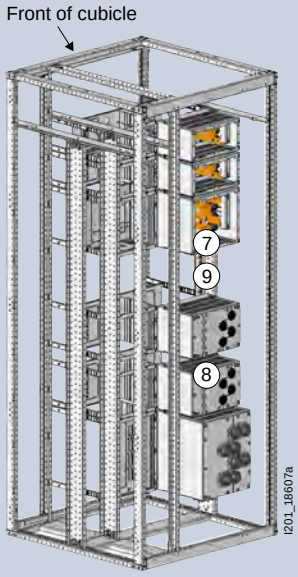

3-pole, width 800 mm

❼ Connection compartments

Type	I_n	Height		Operating mechanism						
				Direct	Rotary	Motorized				
3VA10	100 A	150 mm	Fixed-mounted	■	–	–	8PQ6000-5BA13			
3VA11	160 A	150 mm	Fixed-mounted	■	–	–	8PQ6000-5BA13			
			Plug-in	■	–	–	8PQ6000-5BA13			
3VA12	250 A	200 mm	Fixed-mounted	■	■	■	8PQ6000-5BA17			
			Plug-in	■	■	■	8PQ6000-5BA17			
		250 mm	Withdrawable	■	–	–	8PQ6000-5BA17			
3VA13	400 A	250 mm	Fixed-mounted	■	■	■	8PQ6000-5BA20			
			Plug-in	■	–	–	8PQ6000-5BA20			
		300 mm	Withdrawable	■	–	–	8PQ6000-5BA20			
3VA14	630 A	250 mm	Fixed-mounted	■	■	■	8PQ6000-5BA20			
			Plug-in	■	–	–	8PQ6000-5BA20			
		300 mm	Withdrawable	■	–	–	8PQ6000-5BA20			
3VA15	1000 A	300 mm	Fixed-mounted	■	–	–	–	8PQ5000-5BA80	+	8PQ6001-4BA33
3VA20	100 A	200 mm	Fixed-mounted	■	■	■	8PQ6000-5BA14			
			Plug-in	■	■	■	8PQ6000-5BA14			
		250 mm	Withdrawable	■	–	–	8PQ6000-5BA14			
3VA21	160 A	200 mm	Fixed-mounted	■	■	■	8PQ6000-5BA14			
			Plug-in	■	■	■	8PQ6000-5BA14			
		250 mm	Withdrawable	■	–	–	8PQ6000-5BA14			
3VA22	250 A	200 mm	Fixed-mounted	■	■	■	8PQ6000-8BA30			
			Plug-in	■	■	■	8PQ6000-8BA30			
		250 mm	Withdrawable	■	–	–	8PQ6000-8BA30			
3VA23	400 A	250 mm	Fixed-mounted	■	■	■	8PQ6000-5BA20			
			Plug-in	■	■	■	8PQ6000-5BA20			
		300 mm	Withdrawable	■	–	–	8PQ6000-5BA20			
3VA24	630 A	250 mm	Fixed-mounted	■	■	■	8PQ6000-5BA20			
			Plug-in	■	■	■	8PQ6000-5BA20			
		300 mm	Withdrawable	■	–	–	8PQ6000-5BA20			
3VA25	1000 A	300 mm	Fixed-mounted	■	–	–	–	8PQ5000-5BA80	+	8PQ6001-4BA33
3VA26	1250 A	300 mm	Fixed-mounted	■	–	–	–	8PQ5000-5BA80	+	8PQ6001-4BA33
3VA27	1600 A	300 mm	Fixed-mounted	■	–	–	–	8PQ5000-5BA81	+	8PQ6001-4BA34
			Withdrawable	■	–	–	–	8PQ5000-5BA81	+	8PQ6001-4BA35

15

System overview, page 15/70

© Siemens 2025

❽ Cable entries				❺ Plug-in rails	
				1600 mm	1800 mm
					
				Busbar system	
				Top	Rear or without
8PQ5000-4BA80				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-4BA80				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-4BA80				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA72				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA72				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA72				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA74				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA74				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA74				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA74				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA74				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA74				8PQ3000-0BA82	8PQ3000-0BA83
–	8PQ5000-5BA82	+	8PQ9400-0BA71	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA72				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA72				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA72				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA72				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA72				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA72				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA72				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA72				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA72				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA72				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA74				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA74				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA74				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA74				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA74				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA74				8PQ3000-0BA82	8PQ3000-0BA83
–	8PQ5000-5BA82	+	8PQ9400-0BA71	8PQ3000-0BA82	8PQ3000-0BA83
–	8PQ5000-5BA82	+	8PQ9400-0BA71	8PQ3000-0BA82	8PQ3000-0BA83
–	8PQ5000-5BA83	+	8PQ9400-0BA71	8PQ3000-0BA82	8PQ3000-0BA83
–	8PQ5000-5BA83	+	8PQ9400-0BA71	8PQ3000-0BA82	8PQ3000-0BA83

System overview, page 15/70

© Siemens 2025

Section expansion

Siemens EcoTech

3VA molded case circuit breakers, internal partitions – rear connection

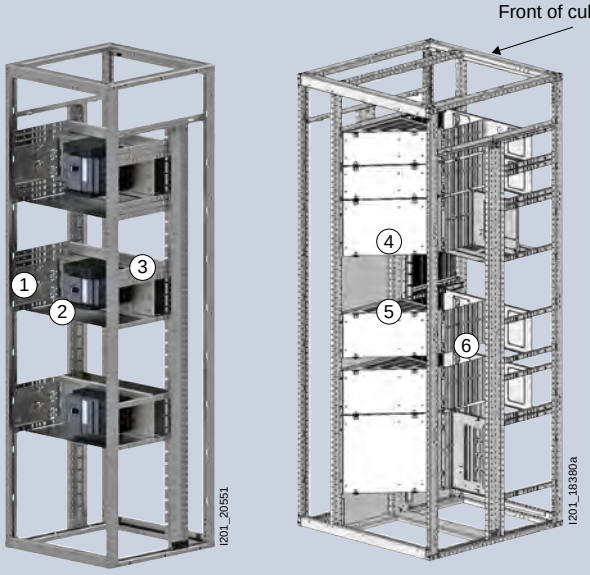

4-pole, width 800 mm

❶ Lateral	❷ Horizontal

Type	I_n	Height		Operating mechanism					
				Direct	Rotary	Motorized			
3VA10	100 A	150 mm	Fixed-mounted	■	■	–	8PQ5000-2BA28	8PQ5000-2BA62	
3VA11	160 A	150 mm	Fixed-mounted	■	■	■	8PQ5000-2BA28	8PQ5000-2BA62	
			Plug-in	■	■	■	8PQ5000-2BA28	8PQ5000-2BA62	
3VA12	250 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	8PQ5000-2BA62	
			Plug-in	■	■	■	8PQ5000-2BA30	8PQ5000-2BA62	
		300 mm	Withdrawable	■	–	–	8PQ5000-2BA30	8PQ5000-2BA62	
3VA13	400 A	250 mm	Fixed-mounted	■	■	■	8PQ5000-2BA33	8PQ5000-2BA62	
			Plug-in	■	–	–	8PQ5000-2BA33	8PQ5000-2BA62	
		300 mm	Withdrawable	■	–	–	8PQ5000-2BA33	8PQ5000-2BA62	
3VA14	630 A	250 mm	Fixed-mounted	■	■	■	8PQ5000-2BA33	8PQ5000-2BA62	
			Plug-in	■	–	–	8PQ5000-2BA33	8PQ5000-2BA62	
		300 mm	Withdrawable	■	–	–	8PQ5000-2BA33	8PQ5000-2BA62	
3VA15	1000 A	300 mm	Fixed-mounted	■	–	–	–	8PQ5000-2BA62	+ 8PQ5000-2BA63
3VA20	100 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	8PQ5000-2BA62	
			Plug-in	■	■	■	8PQ5000-2BA30	8PQ5000-2BA62	
		300 mm	Withdrawable	■	–	–	8PQ5000-2BA30	8PQ5000-2BA62	
3VA21	160 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	8PQ5000-2BA62	
			Plug-in	■	■	■	8PQ5000-2BA30	8PQ5000-2BA62	
		300 mm	Withdrawable	■	–	–	8PQ5000-2BA30	8PQ5000-2BA62	
3VA22	250 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	8PQ5000-2BA62	
			Plug-in	■	■	■	8PQ5000-2BA30	8PQ5000-2BA62	
		300 mm	Withdrawable	■	–	–	8PQ5000-2BA30	8PQ5000-2BA62	
3VA23	400 A	250 mm	Fixed-mounted	■	■	■	8PQ5000-2BA33	8PQ5000-2BA62	
			Plug-in	■	■	■	8PQ5000-2BA33	8PQ5000-2BA62	
		350 mm	Withdrawable	■	–	–	8PQ5000-2BA33	8PQ5000-2BA62	
3VA24	630 A	250 mm	Fixed-mounted	■	■	■	8PQ5000-2BA33	8PQ5000-2BA62	
			Plug-in	■	■	■	8PQ5000-2BA33	8PQ5000-2BA62	
		350 mm	Withdrawable	■	–	–	8PQ5000-2BA33	8PQ5000-2BA62	
3VA25	1000 A	300 mm	Fixed-mounted	■	–	–	–	8PQ5000-2BA62	+ 8PQ5000-2BA63
3VA26	1250 A	300 mm	Fixed-mounted	■	–	–	–	8PQ5000-2BA62	+ 8PQ5000-2BA63
3VA27	1600 A	300 mm	Fixed-mounted	■	–	–	–	8PQ5000-2BA62	+ 8PQ5000-2BA63
			Withdrawable	■	–	–	–	8PQ5000-2BA62	+ 8PQ5000-2BA63

15

System overview, page 15/70

© Siemens 2025

❸ Increase in module height	❹ Vertical busbar connection	Distribution busbar	❺ Segment covers	❻ Support plates
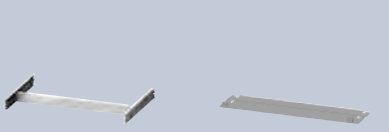				
–	8PQ5000-3BA57		8PQ5000-3BA64	8PQ5000-4BA76
–	8PQ5000-3BA57		8PQ5000-3BA64	8PQ5000-4BA76
–	8PQ5000-3BA57		8PQ5000-3BA64	8PQ5000-4BA76
–	8PQ5000-3BA58		8PQ5000-3BA64	8PQ5000-4BA77
–	8PQ5000-3BA58		8PQ5000-3BA64	8PQ5000-4BA77
2 × 8PQ5000-4BA61 + 2 × 8PQ5000-4BA71	8PQ5000-3BA58		8PQ5000-3BA64	8PQ5000-4BA77
–	8PQ5000-3BA60		8PQ5000-3BA64	8PQ5000-4BA78
–	8PQ5000-3BA60		8PQ5000-3BA64	8PQ5000-4BA78
8PQ5000-4BA63 + 8PQ5000-4BA72	8PQ5000-3BA60		8PQ5000-3BA64	8PQ5000-4BA78
–	8PQ5000-3BA60		8PQ5000-3BA64	8PQ5000-4BA78
–	8PQ5000-3BA60		8PQ5000-3BA64	8PQ5000-4BA78
8PQ5000-4BA63 + 8PQ5000-4BA72	8PQ5000-3BA60		8PQ5000-3BA64	8PQ5000-4BA78
–	8PQ5000-5BA77	+ 8PQ6001-4BA64	8PQ5000-5BA78	8PQ5000-5BA75
–	8PQ5000-3BA58		8PQ5000-3BA64	8PQ5000-4BA77
–	8PQ5000-3BA58		8PQ5000-3BA64	8PQ5000-4BA77
2 × 8PQ5000-4BA63 + 2 × 8PQ5000-4BA72	8PQ5000-3BA58		8PQ5000-3BA64	8PQ5000-4BA77
–	8PQ5000-3BA58		8PQ5000-3BA64	8PQ5000-4BA77
–	8PQ5000-3BA58		8PQ5000-3BA64	8PQ5000-4BA77
2 × 8PQ5000-4BA63 + 2 × 8PQ5000-4BA72	8PQ5000-3BA58		8PQ5000-3BA64	8PQ5000-4BA77
–	8PQ5000-3BA58		8PQ5000-3BA64	8PQ5000-4BA77
–	8PQ5000-3BA58		8PQ5000-3BA64	8PQ5000-4BA77
2 × 8PQ5000-4BA63 + 2 × 8PQ5000-4BA72	8PQ5000-3BA58		8PQ5000-3BA64	8PQ5000-4BA77
–	8PQ5000-3BA60		8PQ5000-3BA64	8PQ5000-4BA78
–	8PQ5000-3BA60		8PQ5000-3BA64	8PQ5000-4BA78
2 × 8PQ5000-4BA63 + 2 × 8PQ5000-4BA72	8PQ5000-3BA60		8PQ5000-3BA64	8PQ5000-4BA78
–	8PQ5000-3BA60		8PQ5000-3BA64	8PQ5000-4BA78
–	8PQ5000-3BA60		8PQ5000-3BA64	8PQ5000-4BA78
2 × 8PQ5000-4BA63 + 2 × 8PQ5000-4BA72	8PQ5000-3BA60		8PQ5000-3BA64	8PQ5000-4BA78
–	8PQ5000-5BA77	+ 8PQ6001-4BA64	8PQ5000-5BA78	8PQ5000-5BA75
–	8PQ5000-5BA77	+ 8PQ6001-4BA64	8PQ5000-5BA78	8PQ5000-5BA75
–	8PQ5000-5BA77	+ 8PQ6001-4BA65	8PQ5000-5BA78	8PQ5000-5BA75
–	8PQ5000-5BA77	+ 8PQ6001-4BA66	8PQ5000-5BA78	8PQ5000-5BA76

System overview, page 15/70

© Siemens 2025

Section expansion

Siemens EcoTech

3VA molded case circuit breakers, internal partitions – rear connection

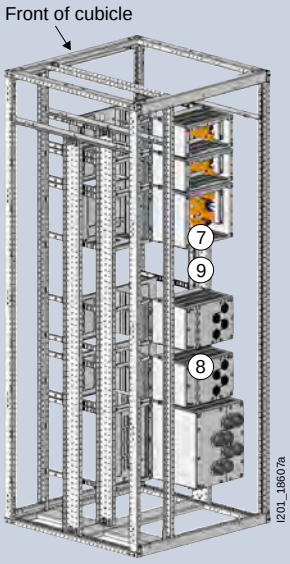

4-pole, width 800 mm

❼ Connection compartments

Type	I_n	Height		Operating mechanism				
				Direct	Rotary	Motorized		
3VA10	100 A	150 mm	Fixed-mounted	■	■	–	8PQ6000-5BA13	
3VA11	160 A	150 mm	Fixed-mounted	■	■	■	8PQ6000-5BA13	
			Plug-in	■	■	■	8PQ6000-5BA13	
3VA12	250 A	200 mm	Fixed-mounted	■	■	■	8PQ6000-5BA17	
			Plug-in	■	■	■	8PQ6000-5BA17	
		300 mm	Withdrawable	■	–	–	8PQ6000-5BA17	
3VA13	400 A	250 mm	Fixed-mounted	■	■	■	8PQ6000-5BA20	
			Plug-in	■	–	–	8PQ6000-5BA20	
		300 mm	Withdrawable	■	–	–	8PQ6000-5BA20	
3VA14	630 A	250 mm	Fixed-mounted	■	■	■	8PQ6000-5BA20	
			Plug-in	■	–	–	8PQ6000-5BA20	
		300 mm	Withdrawable	■	–	–	8PQ6000-5BA20	
3VA15	1000 A	300 mm	Fixed-mounted	■	–	–	–	8PQ5000-5BA80 + 8PQ6001-4BA33
3VA20	100 A	200 mm	Fixed-mounted	■	■	■	8PQ6000-5BA14	
			Plug-in	■	■	■	8PQ6000-5BA14	
		300 mm	Withdrawable	■	–	–	8PQ6000-5BA14	
3VA21	160 A	200 mm	Fixed-mounted	■	■	■	8PQ6000-5BA14	
			Plug-in	■	■	■	8PQ6000-5BA14	
		300 mm	Withdrawable	■	–	–	8PQ6000-5BA14	
3VA22	250 A	200 mm	Fixed-mounted	■	■	■	8PQ6000-5BA17	
			Plug-in	■	■	■	8PQ6000-5BA17	
		300 mm	Withdrawable	■	–	–	8PQ6000-5BA17	
3VA23	400 A	250 mm	Fixed-mounted	■	■	■	8PQ6000-5BA20	
			Plug-in	■	■	■	8PQ6000-5BA20	
		350 mm	Withdrawable	■	–	–	8PQ6000-5BA20	
3VA24	630 A	250 mm	Fixed-mounted	■	■	■	8PQ6000-5BA20	
			Plug-in	■	■	■	8PQ6000-5BA20	
		350 mm	Withdrawable	■	–	–	8PQ6000-5BA20	
3VA25	1000 A	300 mm	Fixed-mounted	■	–	–	–	8PQ5000-5BA80 + 8PQ6001-4BA33
3VA26	1250 A	300 mm	Fixed-mounted	■	–	–	–	8PQ5000-5BA80 + 8PQ6001-4BA33
3VA27	1600 A	300 mm	Fixed-mounted	■	–	–	–	8PQ5000-5BA81 + 8PQ6001-4BA34
			Withdrawable	■	–	–	–	8PQ5000-5BA81 + 8PQ6001-4BA35

System overview, page 15/70

© Siemens 2025

❽ Cable entries				❺ Plug-in rails	
				1600 mm	1800 mm
					
				Busbar system	
				Top	Rear or without
8PQ5000-4BA80				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-4BA80				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-4BA80				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA72				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA72				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA72				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA74				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA74				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA74				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA74				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA74				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA74				8PQ3000-0BA82	8PQ3000-0BA83
–	8PQ5000-BA82	+	8PQ9400-0BA71	8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA72				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA72				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA72				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA72				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA72				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA72				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA72				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA72				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA72				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA72				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA74				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA74				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA74				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA74				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA74				8PQ3000-0BA82	8PQ3000-0BA83
8PQ5000-3BA74				8PQ3000-0BA82	8PQ3000-0BA83
–	8PQ5000-BA82	+	8PQ9400-0BA71	8PQ3000-0BA82	8PQ3000-0BA83
–	8PQ5000-BA82	+	8PQ9400-0BA71	8PQ3000-0BA82	8PQ3000-0BA83
–	8PQ5000-BA83	+	8PQ9400-0BA71	8PQ3000-0BA82	8PQ3000-0BA83
–	8PQ5000-BA83	+	8PQ9400-0BA71	8PQ3000-0BA82	8PQ3000-0BA83

System overview, page 15/70

© Siemens 2025

Section expansion

Siemens EcoTech

3NP1 fuse switch disconnectors

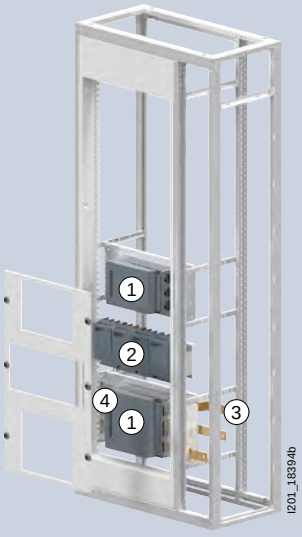

3-pole

	❶ Horizontal		❸ Section busbars	❹ Cable connection
				

Switching device	Fuse	I_n	Width	Device holders	Covers		Form 3
3NP1143	NH1	250 A	600 mm	8PQ6000-3BA75	8PQ2025-6BA16	8PQ6000-5BA68	8PQ6000-5BA72
3NP1153	NH2	400 A	600 mm	8PQ6000-3BA75	8PQ2025-6BA17	8PQ6000-5BA70	8PQ6000-5BA73
3NP1163	NH3	630 A	600 mm	8PQ6000-3BA77	8PQ2030-6BA22	8PQ6000-5BA71	8PQ6000-5BA74

See 3NP1 fuse switch disconnectors from page 8/82
See LV HRC fuse links from page 7/38

System overview, page 15/70

© Siemens 2025

❷ Vertical

Switching device	Fuse	I_n	Width	No. of switches/ breakers	Device holders	Covers
3NP1123	NH000	160 A	600 mm	4	8PQ6000-3BA78	8PQ2025-6BA18
			800 mm	6	8PQ6000-3BA82	8PQ2025-8BA10
3NP1133	NH00	160 A	600 mm	4	8PQ6000-3BA78	8PQ2030-6BA23
			800 mm	5	8PQ6000-3BA82	8PQ2030-8BA11

System overview, page 15/70

© Siemens 2025

Section expansion

Siemens EcoTech

3NJ4 fuse switch disconnectors, up to 800 V

3-pole

Fuse	I_n	Width	No. of switches/breakers	Device holders	Busbar supports	Covers
NH00 – NH3	630 A	600 mm	4 × 100 mm	8PQ6000-2BA48	2 × 3NJ5974-0AB	8PQ2000-6BA06
		800 mm	6 × 100 mm	8PQ6000-2BA48	2 × 3NJ5974-0AB	8PQ2000-8BA06

Accessories

Blanking covers

Size	Width	Article No.
NH00	50 mm	3NJ4912-2AA00
NH1 – NH3	100 mm	3NJ4912-2BA00

See 3NJ4 fuse switch disconnectors from page 8/96
See LV HRC fuse links from page 7/38

© Siemens 2025

Compartment doors	Partition			
				
	Form 3b	Horizontal		
8PQ2080-6BA10	8PQ5000-1BA70	8PQ5000-2BA61	+ 8PQ5000-2BA63	
8PQ2080-8BA05	8PQ5000-1BA71	8PQ5000-2BA62	+ 8PQ5000-2BA63	

Accessories

NH00 installation

	Version	Article No.
	Adapter 185 mm	3NJ4918-0DA02
	Covers	3NJ4912-1DA02

System overview, page 15/70

© Siemens 2025

Section expansion

Siemens EcoTech

3NJ63 switch disconnectors with fuses

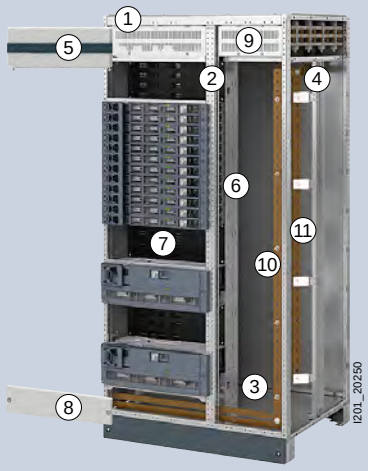

3 and 4-pole

		Device compartment						
		❶ Frames	❷ Exterior intermediate uprights	❸ Floor plate partition cross-bars	❹ Uprights	❺ Head compartment covers	❻ 3NJ6 device holder	❼ Cover Distribution busbar
Width	**Depth**							
Device compartment 600 mm + cabling compartment 400 mm								
1000 mm	400 mm	8PQ1201-4BA02	8PQ3000-1BA43	1 × 8PQ3000-1BA38	8PQ3000-0BA65	8PQ2022-6BA01	8PQ3000-1BA48 +	6 × 3NJ6916-4EA00
	600 mm	8PQ1201-6BA02	8PQ3000-1BA43	1 × 8PQ3000-1BA40	8PQ3000-0BA01	8PQ2022-6BA01	8PQ3000-1BA48 +	6 × 3NJ6916-4EA00
	800 mm	8PQ1201-8BA03	8PQ3000-1BA43	2 × 8PQ3000-1BA38	8PQ3000-0BA02	8PQ2022-6BA01	8PQ3000-1BA48 +	6 × 3NJ6916-4EA00
	800 mm duplex	8PQ1201-8BA03	8PQ3000-1BA43	2 × 8PQ3000-1BA38	8PQ3000-0BA02	8PQ2022-6BA01	8PQ3000-1BA48 +	6 × 3NJ6916-4EA00
Device compartment 600 mm + cabling compartment 600 mm								
1200 mm	400 mm	8PQ1202-4BA02	8PQ3000-1BA43	1 × 8PQ3000-1BA38	8PQ3000-0BA65	8PQ2022-6BA01	8PQ3000-1BA48 +	6 × 3NJ6916-4EA00
	600 mm	8PQ1202-6BA02	8PQ3000-1BA43	1 × 8PQ3000-1BA40	8PQ3000-0BA01	8PQ2022-6BA01	8PQ3000-1BA48 +	6 × 3NJ6916-4EA00
	800 mm	8PQ1202-8BA02	8PQ3000-1BA43	2 × 8PQ3000-1BA38	8PQ3000-0BA02	8PQ2022-6BA01	8PQ3000-1BA48 +	6 × 3NJ6916-4EA00
	800 mm duplex	8PQ1202-8BA02	8PQ3000-1BA43	2 × 8PQ3000-1BA38	8PQ3000-0BA02	8PQ2022-6BA01	8PQ3000-1BA48 +	6 × 3NJ6916-4EA00

Accessories

Device compartments

Height	Article No.
200 mm	8PQ3000-1BA50
400 mm	8PQ3000-1BA51

Blanking covers

Height	Article No.
50 mm	3NJ6900-4CB00

15

System overview, page 15/70

© Siemens 2025

Device compartment		Cabling compartment						
❽ Base compartment covers	❾ Partition main busbar	❾ Partition main busbar	❿ PE elevation	⓫ N/PEN connection	⓬ Section doors with double-bit lock		for profile semicylinder	
								
					Left	Right	Left	Right
8PQ2000-6BA07	8PQ3000-1BA44	8PQ3000-0BA67	8PQ4000-2BA23	8PQ4000-2BA22	8PQ2197-4BA08	8PQ2197-4BA11	8PQ2197-4BA06	8PQ2197-4BA07
8PQ2000-6BA07	8PQ3000-1BA45	8PQ3000-0BA52	8PQ4000-2BA23	8PQ4000-2BA22	8PQ2197-4BA08	8PQ2197-4BA11	8PQ2197-4BA06	8PQ2197-4BA07
8PQ2000-6BA07	8PQ3000-1BA46	8PQ3000-0BA55	8PQ4000-2BA23	8PQ4000-2BA22	8PQ2197-4BA08	8PQ2197-4BA11	8PQ2197-4BA06	8PQ2197-4BA07
8PQ2000-6BA07	8PQ3000-1BA47	8PQ3000-0BA58	8PQ4000-2BA23	8PQ4000-2BA22	8PQ2197-4BA08	8PQ2197-4BA11	8PQ2197-4BA06	8PQ2197-4BA07
8PQ2000-6BA07	8PQ3000-1BA44	8PQ3000-0BA68	8PQ4000-2BA23	8PQ4000-2BA22	8PQ2197-6BA06	8PQ2197-6BA13	8PQ2197-6BA04	8PQ2197-6BA05
8PQ2000-6BA07	8PQ3000-1BA45	8PQ3000-0BA53	8PQ4000-2BA23	8PQ4000-2BA22	8PQ2197-6BA06	8PQ2197-6BA13	8PQ2197-6BA04	8PQ2197-6BA05
8PQ2000-6BA07	8PQ3000-1BA46	8PQ3000-0BA56	8PQ4000-2BA23	8PQ4000-2BA22	8PQ2197-6BA06	8PQ2197-6BA13	8PQ2197-6BA04	8PQ2197-6BA05
8PQ2000-6BA07	8PQ3000-6BA07	8PQ3000-0BA60	8PQ4000-2BA23	8PQ4000-2BA22	8PQ2197-6BA06	8PQ2197-6BA13	8PQ2197-6BA04	8PQ2197-6BA05

15

Terminal covers, form 4b

Size	Article No.
NH00	3NJ6923-1DA00
NH1	3NJ6933-1DA01
NH2 – NH3	3NJ6943-1DA00
4th pole for all sizes	3NJ6904-1DA00

See 3NJ63 switch disconnectors with fuses from page 8/130
See LV HRC fuse links from page 7/38

System overview, page 15/70

© Siemens 2025

Section expansion

Modular installation devices

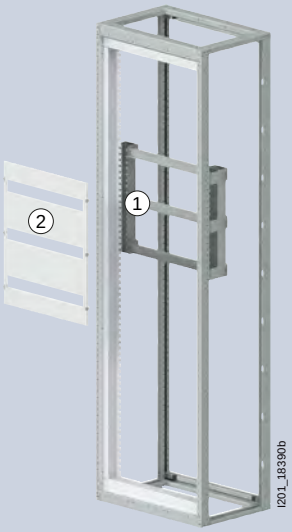

Internal covers

Width	MW	Tier spacing	Height	❶ Device holders	❷ Covers
600 mm	1 × 24	150 mm	150 mm	1 × 8PQ6000-3BA36	8PQ2015-6BA07
		200 mm	200 mm	1 × 8PQ6000-3BA36	8PQ2020-6BA12
800 mm	1 × 35	150 mm	150 mm	1 × 8PQ6000-3BA37	8PQ2015-8BA03
		200 mm	200 mm	1 × 8PQ6000-3BA37	8PQ2020-8BA05

Width	MW	Tier spacing	Height	❶ Device holders	❷ Covers
600 mm	2 × 24	150 mm	300 mm	2 × 8PQ6000-3BA36	8PQ2030-6BA07
		200 mm	400 mm	2 × 8PQ6000-3BA36	8PQ2040-6BA10
800 mm	2 × 35	150 mm	300 mm	2 × 8PQ6000-3BA37	8PQ2030-8BA03
		200 mm	400 mm	2 × 8PQ6000-3BA37	8PQ2040-8BA10

Width	MW	Tier spacing	Height	❶ Device holders	❷ Covers
600 mm	3 × 24	150 mm	450 mm	3 × 8PQ6000-3BA36	8PQ2045-6BA04
		200 mm	600 mm	3 × 8PQ6000-3BA36	8PQ2060-6BA04
800 mm	3 × 35	150 mm	450 mm	3 × 8PQ6000-3BA37	8PQ2045-8BA02
		200 mm	600 mm	3 × 8PQ6000-3BA37	8PQ2060-8BA02

Compartment doors

Width	MW	Tier spacing	Height	❶ Device holders	❷ Covers
600 mm	1 × 24	200 mm	200 mm	1 × 8PQ6000-6BA52	8PQ2020-6BA28
800 mm	1 × 35	200 mm	200 mm	1 × 8PQ6000-6BA53	8PQ2020-8BA14

Accessories

Cable duct fastening	
Version	Article No.
Mounting brackets	8PQ6000-0BA16

Blanking strips	
Types	Article No.
Length 1 m	8GK9910-0KK01

15

System overview, page 15/70

© Siemens 2025

Cable section

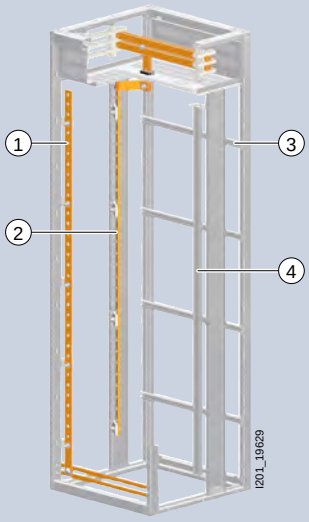

❶ PE bars

Version	Scope of supply	Article No.
Busbar supports	5 units	8PQ4000-2BA23

Version	Scope of supply	Article No.
Frame connection	6 units	8PQ4000-0BA82

Version	Scope of supply	Article No.
PE connection, cable	6 units	8PQ4000-2BA58

Version	Scope of supply	Article No.
Spacer	2 units	8PQ4000-3BA01

❷ N/PEN connection

Version	Article No.
Busbar supports and connection terminals	8PQ4000-2BA22

❸ Cable clamping rail

Version	Scope of supply	Article No.
Holders	10 units	8PQ3000-0BA73

Version	Width	Depth	Scope of supply	Article No.
C 30 × 15 mm	400 mm	–	5 units	8PQ3000-0BA41
	600 mm	–	5 units	8PQ3000-0BA42
	800 mm	–	5 units	8PQ3000-0BA43
	–	400 mm	5 units	8PQ3000-0BA38

❹ DIN rail outgoing terminals

Version	Scope of supply	Article No.
Universal brackets	10 units	8PQ9400-0BA01



Version	Length	Article No.
DIN rail	1600 mm	8PQ9600-0BA01

System overview, page 15/70

© Siemens 2025

Section expansion

Siemens EcoTech

Corner sections

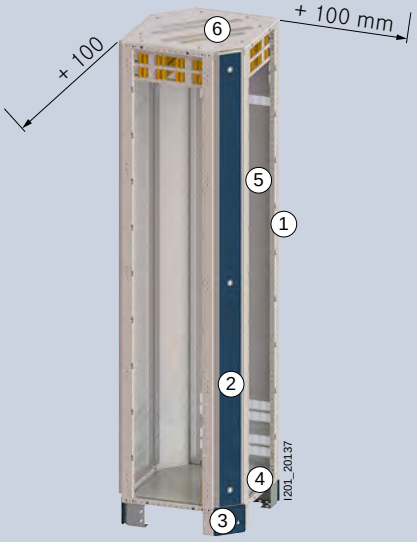

Position of main busbar	At top	At bottom	At top
	❶ Frames	❷ Conversion kits	❸ Base corner pieces

	❹ Floor plates		Reinforcement busbar	

Depth			Height 100 mm	200 mm	IP55	IP20		
400 mm	8PQ1204-4BA01 +	8PQ1200-0BA03	8PQ1010-0BA04	8PQ1024-4BA01	8PQ2304-4BA12	8PQ2300-4BA25	–	–
600 mm	8PQ1206-6BA01 +	8PQ1200-0BA03	8PQ1010-0BA05	8PQ1026-6BA01	8PQ2306-6BA12	8PQ2300-6BA27	–	–
800 mm	8PQ1208-8BA01 +	8PQ1200-0BA03	8PQ1018-8BA01	8PQ1028-8BA01	8PQ2308-8BA08	8PQ2300-8BA14	8PQ4000-6BA08	2 × 8PQ4000-0BA37

15

System overview, page 15/70

© Siemens 2025

At bottom

Reinforcement busbar		❺ Rear panels		❻ Roof plates		
		IP40	IP55	IP40	IP55	IPX1
–	–	2 × 8PQ2420-4BA02	2 × 8PQ2420-4BA01	8PQ2304-4BA10	8PQ2304-4BA08	8PQ2304-4BA11
–	–	2 × 8PQ2420-6BA02	2 × 8PQ2420-6BA01	8PQ2306-6BA10	8PQ2306-6BA08	8PQ2306-6BA11
8PQ4000-6BA10	2 × 8PQ4000-0BA37	2 × 8PQ2420-8BA02	2 × 8PQ2420-8BA01	8PQ2308-8BA06	8PQ2308-8BA05	8PQ2308-8BA07

System overview, page 15/70

© Siemens 2025

Section expansion

Mounting plates

Position of main busbar	At rear	Without
	❶ Doors	❷ Inner doors

Degree of protection	Width	Door with double-bit lock	Door for profile semicylinders	Inner door struts	Inner doors	Inner door struts
IP40	400 mm	8PQ2197-4BA08	8PQ2197-4BA06	8PQ2197-0BA10	–	–
	600 mm	8PQ2197-6BA06	8PQ2197-6BA04	8PQ2197-0BA10	8PQ2000-6BA05	2 × 8PQ2080-0BA07
	800 mm	8PQ2197-8BA06	8PQ2197-8BA04	8PQ2197-0BA10	8PQ2000-8BA05	2 × 8PQ2080-0BA07
	1000 mm	8PQ2197-1BA06	8PQ2197-1BA07	8PQ2197-0BA10	8PQ2000-1BA01	2 × 8PQ2080-0BA07
	1000 mm – Double doors	8PQ2197-1BA14	8PQ2197-1BA16	8PQ2197-0BA10	–	–
	1200 mm – Double doors	8PQ2197-2BA11	8PQ2197-2BA13	8PQ2197-0BA10	–	–
IP55	400 mm	8PQ2197-4BA05	8PQ2197-4BA03	8PQ2197-0BA10	–	–
	600 mm	8PQ2197-6BA03	8PQ2197-6BA01	8PQ2197-0BA10	8PQ2000-6BA05	2 × 8PQ2080-0BA07
	800 mm	8PQ2197-8BA03	8PQ2197-8BA01	8PQ2197-0BA10	8PQ2000-8BA05	2 × 8PQ2080-0BA07
	1000 mm	8PQ2197-1BA03	8PQ2197-1BA04	8PQ2197-0BA10	8PQ2000-1BA01	2 × 8PQ2080-0BA07
	1000 mm – Double doors	8PQ2197-1BA13	8PQ2197-1BA15	8PQ2197-0BA10	–	–
	1200 mm – Double doors	8PQ2197-2BA10	8PQ2197-2BA12	8PQ2197-0BA10	–	–

15

System overview, page 15/70

© Siemens 2025

			At top			
❸ Mounting plates		❺ Uprights	❸ Mounting plates		❺ Uprights	
						
Mounting plates	**Connecting panels**	**Depth 600 mm, 800 mm**	**Mounting plates**	**Connecting panels**	**Depth 600 mm**	**Depth 800 mm**
8PQ3000-0BA32	8PQ3000-1BA08	8PQ3000-0BA03	8PQ3000-0BA33	8PQ3000-1BA10	8PQ3000-0BA01	8PQ3000-0BA02
8PQ3000-0BA34	8PQ3000-1BA08	8PQ3000-0BA03	8PQ3000-0BA35	8PQ3000-1BA10	8PQ3000-0BA01	8PQ3000-0BA02
8PQ3000-0BA36	8PQ3000-1BA08	8PQ3000-0BA03	8PQ3000-0BA37	8PQ3000-1BA10	8PQ3000-0BA01	8PQ3000-0BA02
8PQ3000-1BA04	8PQ3000-1BA08	8PQ3000-0BA03	8PQ3000-1BA06	8PQ3000-1BA10	8PQ3000-0BA01	8PQ3000-0BA02
8PQ3000-1BA04	8PQ3000-1BA08	8PQ3000-0BA03	–	–	–	–
8PQ3000-1BA05	8PQ3000-1BA08	8PQ3000-0BA03	–	–	–	–
8PQ3000-0BA32	8PQ3000-1BA08	8PQ3000-0BA03	8PQ3000-0BA33	8PQ3000-1BA10	8PQ3000-0BA01	8PQ3000-0BA02
8PQ3000-0BA34	8PQ3000-1BA08	8PQ3000-0BA03	8PQ3000-0BA35	8PQ3000-1BA10	8PQ3000-0BA01	8PQ3000-0BA02
8PQ3000-0BA36	8PQ3000-1BA08	8PQ3000-0BA03	8PQ3000-0BA37	8PQ3000-1BA10	8PQ3000-0BA01	8PQ3000-0BA02
8PQ3000-1BA04	8PQ3000-1BA08	8PQ3000-0BA03	8PQ3000-1BA06	8PQ3000-1BA10	8PQ3000-0BA01	8PQ3000-0BA02
8PQ3000-1BA04	8PQ3000-1BA08	8PQ3000-0BA03	–	–	–	–
8PQ3000-1BA05	8PQ3000-1BA08	8PQ3000-0BA03	–	–	–	–

System overview, page 15/70

© Siemens 2025

Section expansion

Siemens EcoTech

Modular mounting plates

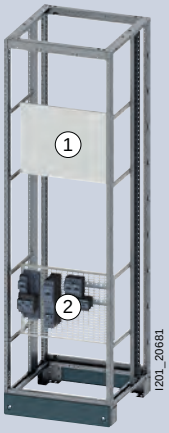

	❶ Standard			❷ With holes for clamping nuts	
					
Height	**Width**			**Width**	
	400 mm	**600 mm**	**800 mm**	**600 mm**	**800 mm**
150 mm	8PQ3000-2BA60	8PQ3000-2BA62	8PQ3000-2BA64	–	–
200 mm	8PQ3000-2BA17	8PQ3000-1BA56	8PQ3000-1BA58	8PQ3000-3BA83	8PQ3000-3BA84
250 mm	–	8PQ3000-3BA63	8PQ3000-3BA64	–	–
300 mm	8PQ3000-2BA66	8PQ3000-2BA51	8PQ3000-2BA53	–	–
400 mm	8PQ3000-2BA18	8PQ3000-1BA61	8PQ3000-1BA63	8PQ3000-3BA85	8PQ3000-3BA86
500 mm	–	8PQ3000-3BA76	8PQ3000-3BA77	–	–
550 mm	8PQ3000-3BA65	8PQ3000-3BA07	8PQ3000-3BA08	–	–
600 mm	8PQ3000-2BA21	8PQ3000-1BA65	8PQ3000-1BA67	8PQ3000-3BA87	8PQ3000-3BA88
700 mm	–	8PQ3000-3BA78	8PQ3000-3BA80	–	–
800 mm	8PQ3000-2BA23	8PQ3000-1BA26	8PQ3000-1BA28	–	–

15

Accessories

Clamping nut

- For the installation of closed-loop and open-loop control (SIRIUS, SIMATIC)

Version	Scope of supply	Article No.
M4	50 units	8PQ9400-1BA52
M5	50 units	8PQ9400-1BA53
M6	50 units	8PQ9400-1BA54

System overview, page 15/70

© Siemens 2025

System overview, page 15/70

© Siemens 2025

Section expansion

Siemens EcoTech

ALPHA DIN modular installation system

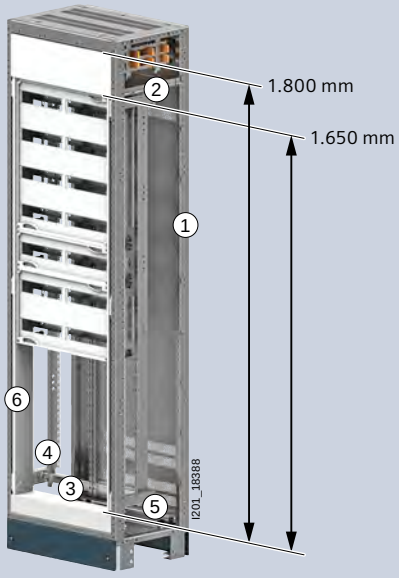

Main busbar	With					
	Without					
	❶ Frame	❷ Adapter	❸ Crossbar	❹ Longitudinal stays		
						
Width	**DIN**	**Depth**			**Height 1650 mm**	**1800 mm**
350 mm	□	400 mm	8PQ1200-4BA15	8PQ3000-1BA74	8PQ3000-1BA76	8PQ3000-2BA88	8PQ3000-1BA82
		600 mm	8PQ1200-6BA14	8PQ3000-1BA74	8PQ3000-1BA76	8PQ3000-2BA88	8PQ3000-1BA82
		800 mm	8PQ1200-8BA01	8PQ3000-1BA74	8PQ3000-1BA76	8PQ3000-2BA88	8PQ3000-1BA82
600 mm	□□	400 mm	8PQ1206-4BA01	8PQ3000-1BA74	8PQ3000-1BA78	8PQ3000-2BA88	8PQ3000-1BA82
		600 mm	8PQ1206-6BA01	8PQ3000-1BA74	8PQ3000-1BA78	8PQ3000-2BA88	8PQ3000-1BA82
		800 mm	8PQ1206-8BA01	8PQ3000-1BA74	8PQ3000-1BA78	8PQ3000-2BA88	8PQ3000-1BA82
850 mm	□□□	400 mm	8PQ1200-4BA16	8PQ3000-1BA74	8PQ3000-1BA80	8PQ3000-2BA88	8PQ3000-1BA82
		600 mm	8PQ1200-6BA15	8PQ3000-1BA74	8PQ3000-1BA80	8PQ3000-2BA88	8PQ3000-1BA82
		800 mm	8PQ1200-8BA02	8PQ3000-1BA74	8PQ3000-1BA80	8PQ3000-2BA88	8PQ3000-1BA82

See ALPHA 8GK assembly kits from page 15/238

© Siemens 2025

❺ Support	❻ Touch protection cover	
		
	Height 1650 mm	1800 mm
8PQ3000-1BA75	8PQ3000-2BA85	8PQ3000-2BA45
8PQ3000-1BA75	8PQ3000-2BA85	8PQ3000-2BA45
8PQ3000-1BA75	8PQ3000-2BA85	8PQ3000-2BA45
8PQ3000-1BA75	8PQ3000-2BA86	8PQ3000-2BA46
8PQ3000-1BA75	8PQ3000-2BA86	8PQ3000-2BA46
8PQ3000-1BA75	8PQ3000-2BA86	8PQ3000-2BA46
8PQ3000-1BA75	8PQ3000-2BA87	8PQ3000-2BA47
8PQ3000-1BA75	8PQ3000-2BA87	8PQ3000-2BA47
8PQ3000-1BA75	8PQ3000-2BA87	8PQ3000-2BA47

System overview, page 15/70

© Siemens 2025

Section expansion

ALPHA DIN modular installation system

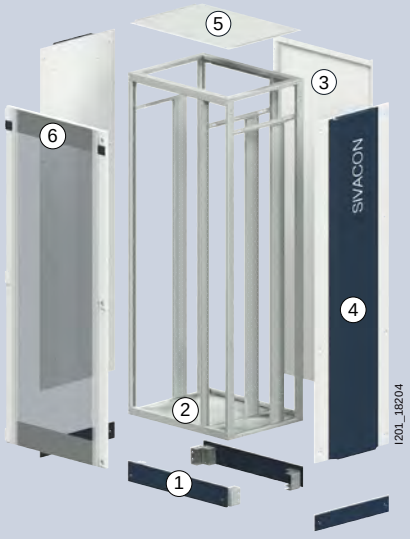

Position of main busbar | **At top**

	❶ Base			❷ Floor plate	
	Corners with front panels		Side covers		
					
Width	**Depth**	**Height 100 mm**	**200 mm**	**Height 100 mm**	**IP40 cable entry**	**IP55 closed**
350 mm	400 mm	8PQ1010-0BA01	8PQ1020-0BA01	8PQ1010-4BA01	8PQ2300-4BA18	8PQ2300-4BA16
	600 mm	8PQ1010-0BA01	8PQ1020-0BA01	8PQ1010-6BA01	8PQ2300-6BA22	8PQ2300-6BA20
	800 mm	8PQ1010-0BA01	8PQ1020-0BA01	8PQ1010-8BA01	2× 8PQ2300-4BA18	2× 8PQ2300-4BA16
600 mm	400 mm	8PQ1016-0BA01	8PQ1026-0BA01	8PQ1010-4BA01	8PQ2306-4BA06	8PQ2306-4BA05
	600 mm	8PQ1016-0BA01	8PQ1026-0BA01	8PQ1010-6BA01	8PQ2306-6BA06	8PQ2306-6BA05
	800 mm	8PQ1016-0BA01	8PQ1026-0BA01	8PQ1010-8BA01	2× 8PQ2306-4BA06	2× 8PQ2306-4BA05
850 mm	400 mm	8PQ1010-0BA02	8PQ1020-0BA02	8PQ1010-4BA01	8PQ2300-4BA20	8PQ2300-4BA17
	600 mm	8PQ1010-0BA02	8PQ1020-0BA02	8PQ1010-6BA01	8PQ2300-6BA23	8PQ2300-6BA21
	800 mm	8PQ1010-0BA02	8PQ1020-0BA02	8PQ1010-8BA01	2× 8PQ2300-4BA20	2× 8PQ2300-4BA17

15

System overview, page 15/70

© Siemens 2025

At botton

	❸ Rear walls		❹ Side walls	
				
IP20	**IP40**	**IP55**	**IP40 with design strip**	**IP55**
8PQ2300-4BA23	8PQ2420-0BA01	8PQ2420-0BA03	8PQ2520-4BA01	8PQ2520-4BA02
8PQ2300-6BA25	8PQ2420-0BA01	8PQ2420-0BA03	8PQ2520-6BA01	8PQ2520-6BA02
8PQ2300-8BA10	8PQ2420-0BA01	8PQ2420-0BA03	8PQ2520-8BA01	8PQ2520-8BA02
8PQ2306-4BA10	8PQ2420-6BA02	8PQ2420-6BA01	8PQ2520-4BA01	8PQ2520-4BA02
8PQ2306-6BA16	8PQ2420-6BA02	8PQ2420-6BA01	8PQ2520-6BA01	8PQ2520-6BA02
8PQ2306-8BA05	8PQ2420-6BA02	8PQ2420-6BA01	8PQ2520-8BA01	8PQ2520-8BA02
8PQ2300-4BA24	8PQ2420-0BA02	8PQ2420-0BA04	8PQ2520-4BA01	8PQ2520-4BA02
8PQ2300-6BA26	8PQ2420-0BA02	8PQ2420-0BA04	8PQ2520-6BA01	8PQ2520-6BA02
8PQ2300-8BA11	8PQ2420-0BA02	8PQ2420-0BA04	8PQ2520-8BA01	8PQ2520-8BA02

System overview, page 15/70

© Siemens 2025

Internal partitions

Quick selection guide

Form 1

No internal partitions

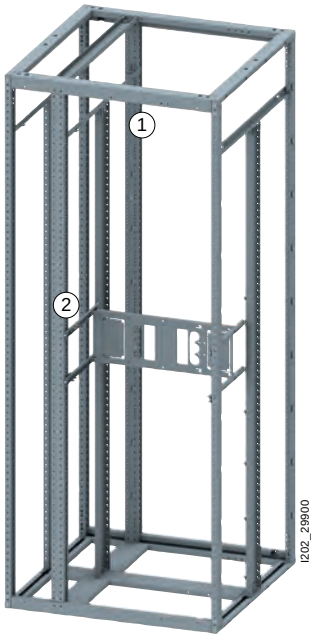

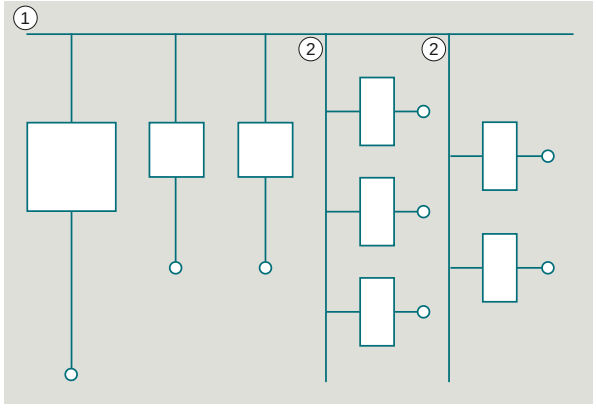

Functional unit Connection

Form 2b

Partition

+ Main busbar ①
+ Vertical busbar ②

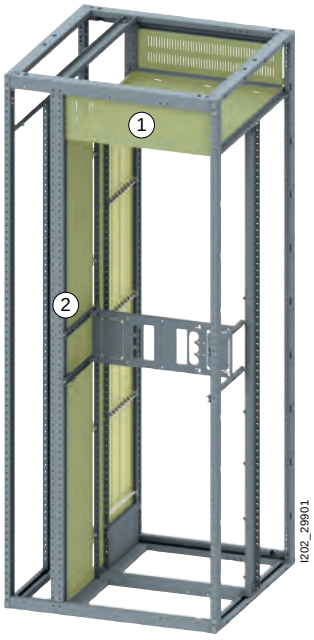

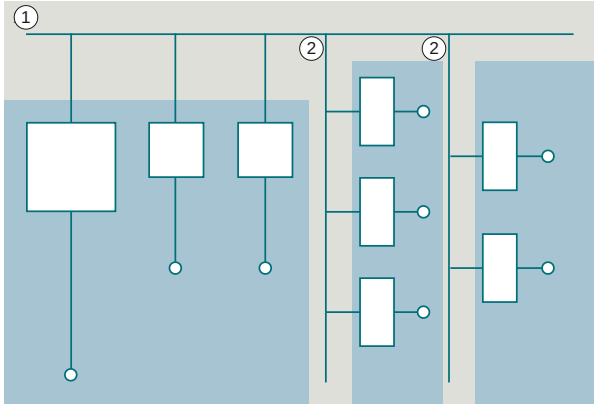

Functional unit Connection

System overview, page 15/70

© Siemens 2025

Form 3b

Partition

+ Main busbar ①
+ Vertical busbar ②
+ Device compartments (functional units) ③

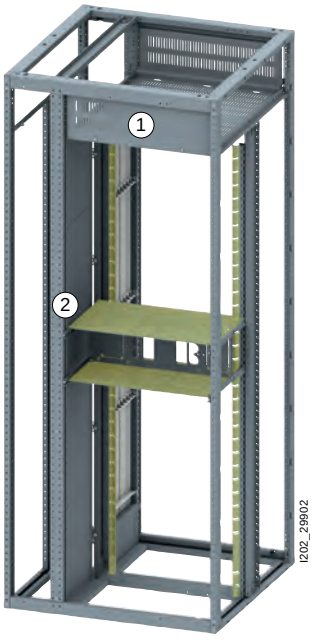

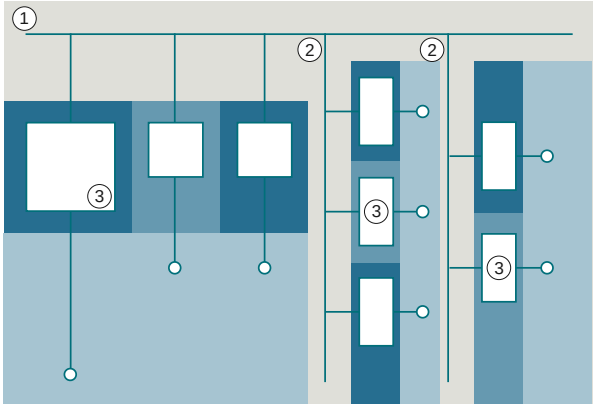

Functional unit ○ Connection

Form 4b

Partition

+ Main busbar ①
+ Vertical busbar ②
+ Device compartments (functional units) ③
+ Connections ④

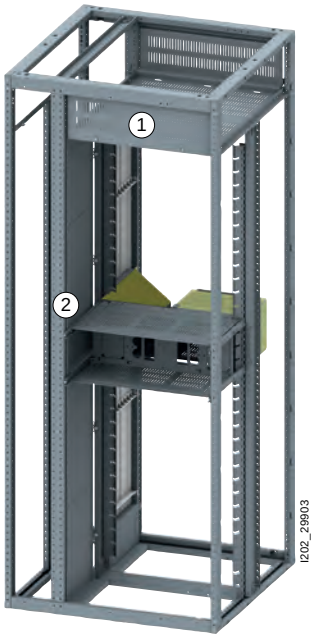

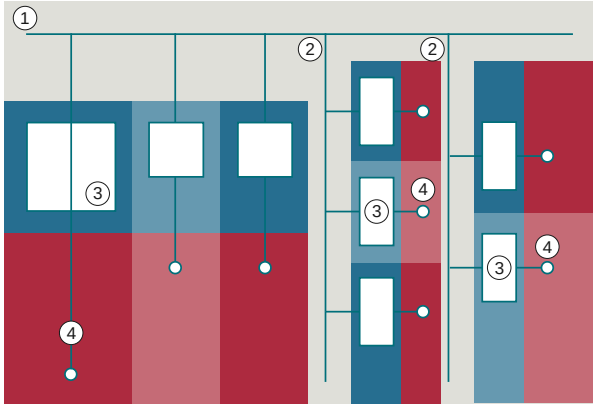

Functional unit ○ Connection

15

System overview, page 15/70

© Siemens 2025

Internal partitions

Main busbar at top/at bottom, form 2b

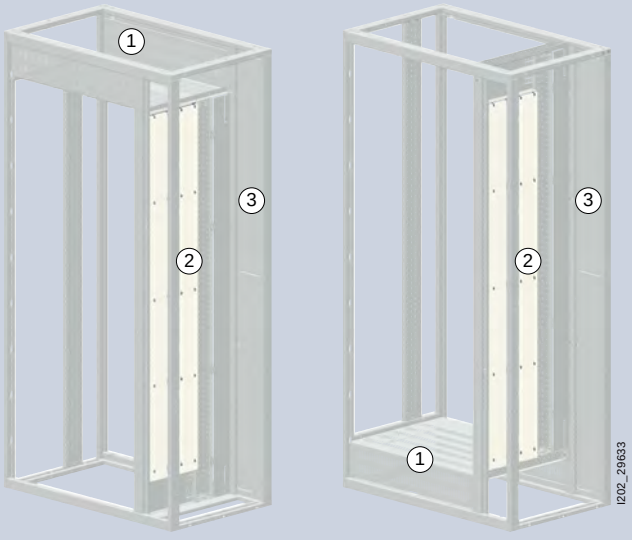

Position of main busbar | At top

Main busbars

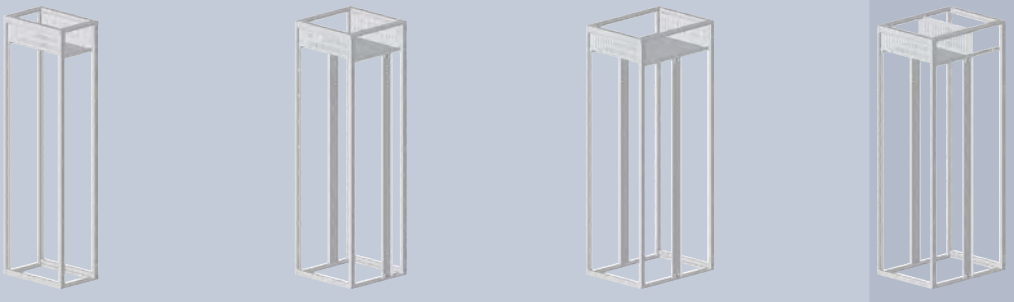

Width	Depth			
	400 mm	600 mm	800 mm	800 mm
200 mm	8PQ3000-1BA52	8PQ3000-1BA53	8PQ3000-1BA55	8PQ3000-1BA54
400 mm	8PQ3000-0BA67	8PQ3000-0BA52	8PQ3000-0BA58	8PQ3000-0BA55
600 mm	8PQ3000-0BA68	8PQ3000-0BA53	8PQ3000-0BA60	8PQ3000-0BA56
800 mm	8PQ3000-0BA70	8PQ3000-0BA54	8PQ3000-0BA61	8PQ3000-0BA57
1000 mm	8PQ3000-1BA13	8PQ3000-1BA14	8PQ3000-1BA20	8PQ3000-1BA17
1200 mm	8PQ3000-1BA15	8PQ3000-1BA16	8PQ3000-1BA21	8PQ3000-1BA18

System overview, page 15/70

© Siemens 2025

At bottom

Depth		
400 mm	**600 mm**	**800 mm**
8PQ3000-3BA12	8PQ3000-3BA21	8PQ3000-3BA30
8PQ3000-3BA14	8PQ3000-3BA23	8PQ3000-3BA32
8PQ3000-3BA15	8PQ3000-3BA24	8PQ3000-3BA33
8PQ3000-3BA16	8PQ3000-3BA25	8PQ3000-3BA34
8PQ3000-3BA18	8PQ3000-3BA27	8PQ3000-3BA36
8PQ3000-3BA20	8PQ3000-3BA28	8PQ3000-3BA37

System overview, page 15/70

© Siemens 2025

Internal partitions

Main busbar at top/at bottom, form 2b

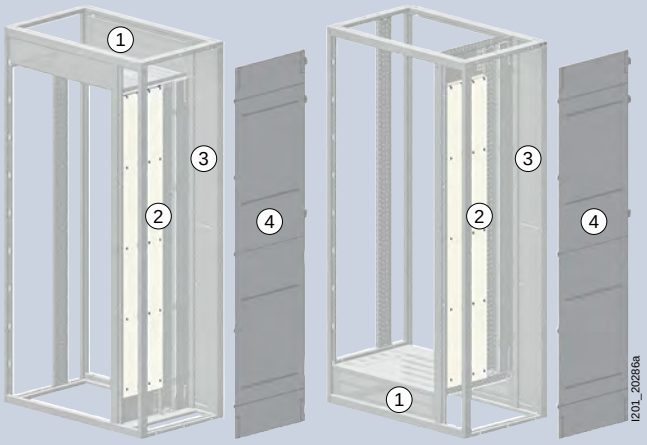

Position of main busbar	At top			Without		
	❷ Vertical busbar					
	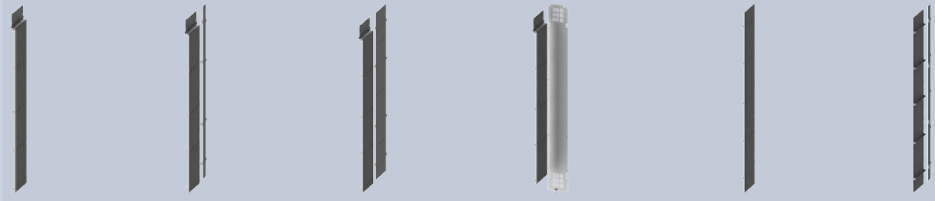					
Width	**Depth**			**Depth**	**Depth**	
	400 mm	**600 mm**	**800 mm**	**800 mm**	**400 mm**	**600 mm**
200 mm	8PQ4000-0BA05	8PQ4000-0BA07	8PQ4000-0BA64	8PQ4000-0BA02	8PQ4000-0BA06	8PQ4000-0BA03
400 mm	8PQ4000-0BA05	8PQ4000-0BA07	8PQ4000-0BA64	8PQ4000-0BA01	8PQ4000-0BA06	8PQ4000-0BA03

System overview, page 15/70

© Siemens 2025

	❸ Touch protection	❹ Vertical partition between sections		
	Rear	Depth		
800 mm		400 mm	600 mm	800 mm
8PQ4000-0BA76	8PQ3000-2BA50	8PQ3000-0BA15	8PQ3000-0BA16	2 × 8PQ3000-0BA15
8PQ4000-0BA76	8PQ3000-0BA51	8PQ3000-0BA15	8PQ3000-0BA16	2 × 8PQ3000-0BA15

System overview, page 15/70

© Siemens 2025

Internal partitions

Main busbar at rear, form 2b

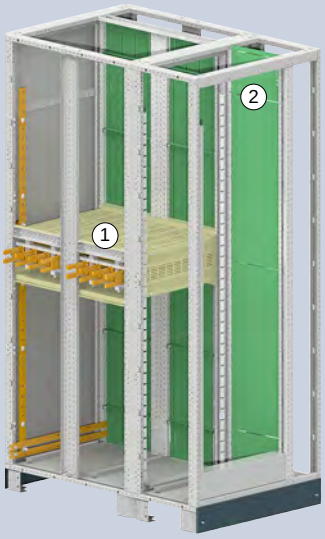

Position of main busbar

At top | Center

❶ Main busbar



Width	Depth				Depth	
	800 mm	1000 mm	1200 mm	1200 mm duplex	800 mm	1000 mm
600 mm	8PQ3000-0BA60	8PQ3000-0BA53	8PQ3000-0BA60	8PQ3000-0BA60	8PQ3000-3BA53	8PQ3000-3BA53
800 mm	8PQ3000-0BA61	8PQ3000-0BA54	8PQ3000-0BA61	8PQ3000-0BA61	8PQ3000-3BA54	8PQ3000-3BA54

Position of vertical busbar

At top | Center

❷ Vertical busbar

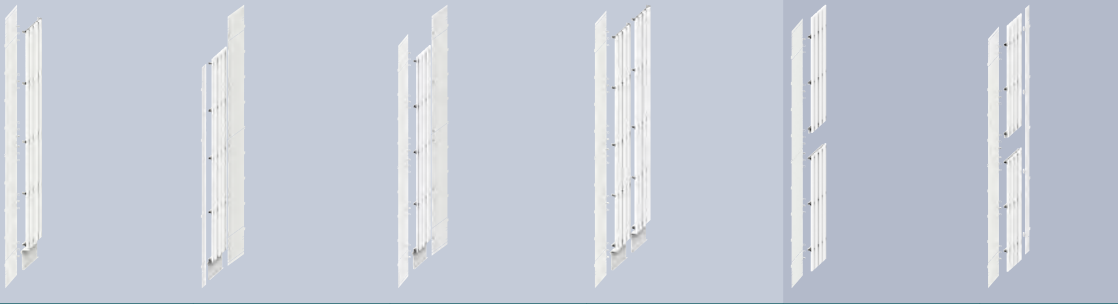

Width	Depth				Depth	
	800 mm	1000 mm	1200 mm	1200 mm duplex	800 mm	1000 mm
200 mm	8PQ4000-2BA51	8PQ4000-2BA53	8PQ4000-2BA55	8PQ4000-2BA57	8PQ4000-2BA60	8PQ4000-2BA61

15

System overview, page 15/70

© Siemens 2025

At bottom








Depth		Depth			
1200 mm	1200 mm duplex	800 mm	1000 mm	1200 mm	1200 mm duplex
8PQ3000-3BA53	8PQ3000-3BA58	8PQ3000-3BA33	8PQ3000-3BA24	8PQ3000-3BA33	8PQ3000-3BA33
8PQ3000-3BA54	8PQ3000-3BA60	8PQ3000-3BA34	8PQ3000-3BA25	8PQ3000-3BA34	8PQ3000-3BA34

At bottom

Barrier supports

1 set = 6 units

Depth		Depth				Depth
1200 mm	1200 mm duplex	800 mm	1000 mm	1200 mm	1200 mm duplex	1200 mm duplex
8PQ4000-2BA62	8PQ4000-2BA56	8PQ4000-2BA51	8PQ4000-2BA53	8PQ4000-2BA55	8PQ4000-2BA57	8PQ3000-3BA67

System overview, page 15/70

© Siemens 2025

Internal partitions

Modular kits, form 3b

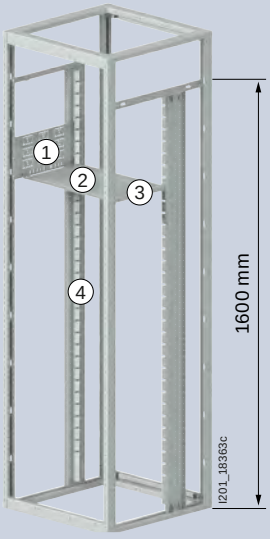

	❶ Lateral	❷ Horizontal			
					
Height	**Assembly kits**	**Width 400 mm**	**600 mm**	**800 mm**	**1000 mm**
100 mm	8PQ5000-2BA27	8PQ5000-3BA44	8PQ5000-2BA61	8PQ5000-2BA62	8PQ5000-5BA56
150 mm	8PQ5000-2BA28	8PQ5000-3BA44	8PQ5000-2BA61	8PQ5000-2BA62	8PQ5000-5BA56
200 mm	8PQ5000-2BA30	8PQ5000-3BA44	8PQ5000-2BA61	8PQ5000-2BA62	8PQ5000-5BA56
250 mm	8PQ5000-2BA32	8PQ5000-3BA44	8PQ5000-2BA61	8PQ5000-2BA62	8PQ5000-5BA56
300 mm	8PQ5000-2BA34	8PQ5000-3BA44	8PQ5000-2BA61	8PQ5000-2BA62	8PQ5000-5BA56
350 mm	8PQ5000-2BA36	8PQ5000-3BA44	8PQ5000-2BA61	8PQ5000-2BA62	8PQ5000-5BA56
400 mm	8PQ5000-2BA37	8PQ5000-3BA44	8PQ5000-2BA61	8PQ5000-2BA62	8PQ5000-5BA56
450 mm	8PQ5000-2BA38	8PQ5000-3BA44	8PQ5000-2BA61	8PQ5000-2BA62	8PQ5000-5BA56
550 mm	8PQ5000-2BA41	8PQ5000-3BA44	8PQ5000-2BA61	8PQ5000-2BA62	8PQ5000-5BA56

System overview, page 15/70

© Siemens 2025

❸ Support rails	❹ Plug-in rails		Rear	
				
	Height 1600 mm	1800 mm	Width 600 mm	800 mm
8PQ5000-2BA63	8PQ3000-0BA82	8PQ3000-0BA83	8PQ5000-2BA52	8PQ5000-2BA68
8PQ5000-2BA63	8PQ3000-0BA82	8PQ3000-0BA83	8PQ5000-4BA40	8PQ5000-5BA55
8PQ5000-2BA63	8PQ3000-0BA82	8PQ3000-0BA83	8PQ5000-4BA41	8PQ5000-4BA48
8PQ5000-2BA63	8PQ3000-0BA82	8PQ3000-0BA83	8PQ5000-4BA42	8PQ5000-4BA50
8PQ5000-2BA63	8PQ3000-0BA82	8PQ3000-0BA83	8PQ5000-4BA43	–
8PQ5000-2BA63	8PQ3000-0BA82	8PQ3000-0BA83	8PQ5000-4BA44	8PQ5000-4BA51
8PQ5000-2BA63	8PQ3000-0BA82	8PQ3000-0BA83	8PQ5000-4BA45	8PQ5000-4BA52
8PQ5000-2BA63	8PQ3000-0BA82	8PQ3000-0BA83	8PQ5000-4BA46	8PQ5000-4BA53
8PQ5000-2BA63	8PQ3000-0BA82	8PQ3000-0BA83	8PQ5000-4BA47	–

System overview, page 15/70

© Siemens 2025

Accessories

Siemens EcoTech

Connecting terminals

I_n	Busbar	Scope of supply	Article No.
–	–	4 units	8PQ5000-0BA05
250 A	2 × 25 × 5 mm	2 units	8PQ5000-0BA72
400 A	30 × 10 mm	4 units	8PQ5000-0BA73
630 A	40 × 10 mm	4 units	8PQ5000-0BA74

Protective bellows

Version	Scope of supply	Article No.
For connecting terminal	4 units	8PQ9400-0BA71

Self-tapping screws – frame



Type	Version	Scope of supply	Article No.
Cylinder-head screws DIN 7500-PE, ST, zinc-plated	M6 × 10 mm	100 units	8PQ9500-0BA34
	M6 × 16 mm	100 units	8PQ9500-0BA32
	M6 × 20 mm	100 units	8PQ9500-0BA31
Countersunk screws DIN 7500-QE, ST, zinc-plated	M6 × 12 mm	100 units	8PQ9500-1BA07

Standardized parts - electrical connections



Type	Version	Scope of supply	Article No.
Saucer-head bolts DIN 603, 8.8, zinc-plated	M10 × 35 mm	50 units	8PQ9500-0BA14
	M10 × 45 mm	50 units	8PQ9500-0BA16
	M10 × 55 mm	50 units	8PQ9500-1BA36
	M10 × 65 mm	50 units	8PQ9500-1BA25
Hexagonal nuts ISO 6042, 8, zinc-plated	M10	50 units	8PQ9500-0BA05
Spring washers DIN 6796, FSt, zinc-plated	For M10	50 units	8PQ9500-0BA60
Plain washers ISO 7089, 140 HV, zinc-plated	For M10	50 units	8PQ9500-0BA67
Lock washers SN 60727, FSt, zinc-plated	For M10	50 units	8PQ9500-0BA50

15

System overview, page 15/70

© Siemens 2025

Lifting eyebolts

Version	Application	Scope of supply	Article No.
M12, DIN 580, C15E	• Max. supported weight = 240 kg at load angle ≤ 45 ° • Max. section depth 800 mm	4 units	8PQ9400-0BA11

Lifting brackets





Width	Depth	Scope of supply	Article No.
800 mm	–	2 units	8PQ3000-1BA01
850 mm	–	2 units	8PQ3000-2BA38
1000 mm	–	2 units	8PQ3000-1BA02
1200 mm	–	2 units	8PQ3000-1BA03
–	800 mm	2 units	8PQ3000-1BA01
	1000 mm	2 units	8PQ3000-3BA70
	1200 mm	2 units	8PQ3000-3BA71

Cable entries



Version	Scope of supply	Article No.
Ø cable = 14 ... 38 mm Ø installation = 46 mm	6 units	8PQ9400-0BA33

Other

Version	Scope of supply	Article No.
Universal mounting brackets	10 units	8PQ9400-0BA01
Cubicle ID plate – SIVACON designed by Siemens	1 unit	BQ9400-0BA06

Extended delivery options

• After prior consultation with ALPHA-support.ic@siemens.com

Version	Description	Article No.
Pre-assembled solutions	Based on SIMARIS configuration • In various expansion stages • Mechanically with or without copper insert	8PQ9998-0BA20-Z
Copper for system sections	Drawings from SIMARIS	8PQ9998-0BA30-Z

System overview, page 15/70

© Siemens 2025

System overview

Distribution boards, assembly kits and accessories

ALPHA UNIVERSAL 800

ALPHA UNIVERSAL 630

Unequipped distribution boards

ALPHA 800

ALPHA 630

ALPHA 125

Assembly kits



For molded case circuit breakers

For switch disconnectors

For fuse switch disconnectors

For modular installation devices

For front cover with cutout

Note:
You will find a detailed range of accessories with the basic units and in the Accessories section.

© Siemens 2025

ALPHA UNIVERSAL 125

Busbars

Cu busbars

Busbar supports

Accessories

Bases

Crossbars

Partitions

Front covers

Locking systems

Note:
You will find a detailed range of accessories with the basic units and in the Accessories section.

© Siemens 2025

Special colors for ALPHA

Additional options

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

8GK.....-.....-.... -Z

			Order code		
	RAL 1003, signal yellow		C	2	7
	RAL 2000, yellow orange		C	2	5
	RAL 3000, flame red		C	3	1
	RAL 5005, signal blue		C	2	3
	RAL 5010, gentian blue		C	2	4
	RAL 5017, traffic blue		C	2	2
	RAL 6018, yellow green		C	2	6
	RAL 7032, pebble gray		C	1	3
	RAL 7033, cement gray		C	2	8
	RAL 7035, light gray	Smooth	C	1	1
		Surface structure	C	1	2
	RAL 7038, agate gray		C	1	4
	RAL 9001, cream		C	2	1
	RAL 9002, gray white		C	1	9
	RAL 9003, signal white		C	2	0
	RAL 9005, jet black		C	1	7
	RAL 9010, pure white	Smooth	C	1	5
		Surface structure	C	3	0
	RAL 9016, traffic white		C	1	0

© Siemens 2025

© Siemens 2025

ALPHA 800 UNIVERSAL floor-mounted distribution boards

Rated current 800 A

					Unequipped distribution boards
				Degree of protection	IP30/IP55
Height		**Depth**	**Width**		**Protection class I**
Outside	**Inside**	**Outside**	**Outside**	**Inside**	
1850 mm	1800 mm	400 mm	350 mm	300 mm	8GK2420-6KK14
			650 mm	600 mm	8GK2420-6KK24
			950 mm	900 mm	8GK2420-6KK34
2050 mm	2000 mm	400 mm	350 mm	300 mm	8GK2420-7KK14
			650 mm	600 mm	8GK2420-7KK24
			950 mm	900 mm	8GK2420-7KK34

Accessories

Sheet-steel doors

	Types	Width	Cubicle height	Cubicle width	Unequipped distribution boards Article No.
	Standard	–	1800 mm	300 mm	8GK9515-8KK11
				600 mm	8GK9515-8KK21
				900 mm	8GK9515-8KK31
			2000 mm	300 mm	8GK9515-8KK12
				600 mm	8GK9515-8KK22
				900 mm	8GK9515-8KK32
	For cabling compartment	250 mm	1800 mm	900 mm	8GK9515-8KK41
			2000 mm	900 mm	8GK9515-8KK42

Transparent doors

	Types	Cubicle height	Cubicle width	Article No.
	Standard	1800 mm	300 mm	8GK9505-8KK12
			600 mm	8GK9505-8KK21
			900 mm	8GK9505-8KK31
		2000 mm	300 mm	8GK9505-8KK10
			600 mm	8GK9505-8KK22
			900 mm	8GK9505-8KK32
	Giugiaro design	1800 mm	600 mm	8GK9507-8KK21
			900 mm	8GK9507-8KK31
		2000 mm	600 mm	8GK9507-8KK22
			900 mm	8GK9507-8KK32

Double doors

	Types	Width	Cubicle height	Cubicle width	Unequipped distribution boards Article No.
	Made of sheet steel	600 + 250 mm	1800 mm	900 mm	8GK9515-8KK21 + 8GK9515-8KK41
			2000 mm	900 mm	8GK9515-8KK22 + 8GK9515-8KK42
	Transparent door + sheet-steel door	600 + 250 mm	1800 mm	900 mm	8GK9505-8KK21 + 8GK9515-8KK41
			2000 mm	900 mm	8GK9505-8KK22 + 8GK9515-8KK42
	Transparent door in Giugiaro design + sheet-steel door	600 + 250 mm	1800 mm	900 mm	8GK9507-8KK21 + 8GK9515-8KK41
			2000 mm	900 mm	8GK9507-8KK22 + 8GK9515-8KK42

15

System overview, page 15/188

© Siemens 2025

Accessories

Vertical profile bars for cabling compartment/busbars

Cubicle height	Cubicle width	Unequipped distribution boards Article No.
1800 mm	300/600/900 mm	8GK9200-8KK00
2000 mm	300/600/900 mm	8GK9200-8KK01

Front covers for cabling compartment

Height	Width	Cubicle height	Cubicle width	Article No.
800 + 1000 mm	250/300 mm	1800 mm	300 mm	8GK9607-5KK10 + 8GK9607-7KK10
			900 mm	8GK9606-5KK10 + 8GK9606-7KK10
1000 + 1000 mm	250/300 mm	2000 mm	300 mm	8GK9607-7KK10 + 8GK9607-7KK10
			900 mm	8GK9606-7KK10 + 8GK9606-7KK10

Bases



Color	Height	Cubicle height	Cubicle width	Article No.
Blue-green	100 mm	1800/2000 mm	300 mm	8GK9906-0KK15
			600 mm	8GK9906-0KK25
			900 mm	8GK9906-0KK35

Side panels

Color	Cubicle height	Cubicle width	Article No.
RAL 7035 (pair)	1800 mm	300/600/900 mm	8GK9200-8KK04
	2000 mm	300/600/900 mm	8GK9200-8KK05
Blue-green	1800 mm	300/600/900 mm	8GK9200-8KK07
	2000 mm	300/600/900 mm	8GK9200-8KK08

Supports

Types	Height	Article No.
Mounting stays (pair)	1600 mm	8GK6850-0KK02
	1800 mm	8GK6850-0KK03
	2000 mm	8GK6850-0KK04
Rear universal supports	1800 mm	8GK6850-0KK05
	2000 mm	8GK6850-0KK06

Crossbars



Types	Article No.
Upper crossbar	8GK6850-0KK00
Lateral crossbar	8GK6850-0KK01
Adapter for installation of assembly kits in the cabling compartment, width 250 mm (2 units)	8GK9920-0KK01

System overview, page 15/188

© Siemens 2025

ALPHA 630 UNIVERSAL wall-mounted distribution boards

Rated current 630 A

					Flat pack	Unequipped distribution boards	Distribution boards with built-in distribution board panels
					Degree of protection IP43	IP30/IP55	IP55
							
Height		**Depth**	**Width**		**Protection class I**	**Protection class I**	**Protection class I**
Outside	**Inside**	**Outside**	**Outside**	**Inside**			
450 mm	400 mm	250 mm	650 mm	600 mm	8GK2100-0KS23	–	–
650 mm	600 mm	250 mm	650 mm	600 mm	8GK2100-1KS23	8GK2124-1KK23	–
850 mm	800 mm	250 mm	650 mm	600 mm	8GK2100-2KS23	8GK2124-2KK23	8GK9988-0KL00
1050 mm	1000 mm	250 mm	650 mm	600 mm	8GK2100-3KS23	8GK2124-3KK23	8GK9988-0KL01
			950 mm	900 mm	8GK2100-3KL23	8GK2124-3KK33	–
1250 mm	1200 mm	250 mm	650 mm	600 mm	8GK2100-4KS23	8GK2124-4KK23	8GK9988-0KL02
			950 mm	900 mm	8GK2100-4KL23	8GK2124-4KK33	–

Accessories

				Flat Pack IP43	Unequipped distribution boards IP55
Sheet-steel doors					
	Types	**Cubicle height**	**Cubicle width**	**Article No.**	**Article No.**
	Standard	400 mm	600 mm	8GK9515-3KK20	–
		600 mm	600 mm	8GK9515-4KK20	8GK9515-4KK20
		800 mm	600 mm	8GK9515-5KK20	8GK9515-5KK23
		1000 mm	600 mm	8GK9515-6KK20	8GK9515-6KK23
			900 mm	8GK9515-6KK30	8GK9515-6KK33
		1200 mm	600 mm	8GK9515-7KK20	8GK9515-7KK23
			900 mm	8GK9515-7KK30	8GK9515-7KK33
	For cabling compartment	1000 mm	900 mm	8GK9515-6KK40	8GK9515-6KK43
		1200 mm	900 mm	8GK9515-7KK40	8GK9515-7KK33
			600 + 300 mm	–	8GK9515-7KK43
Transparent doors					
	Types	**Cubicle height**	**Cubicle width**	**Article No.**	**Article No.**
	Standard	400 mm	600 mm	8GK9505-3KK20	–
		600 mm	600 mm	8GK9505-4KK20	8GK9505-4KK20
		800 mm	600 mm	8GK9505-5KK20	8GK9505-5KK23
		1000 mm	600 mm	8GK9505-6KK20	8GK9505-6KK23
			900 mm	8GK9505-6KK30	8GK9505-6KK33
		1200 mm	600 mm	8GK9505-7KK20	8GK9505-7KK23
			900 mm	8GK9505-7KK30	8GK9505-7KK33
	Giugiaro design	400 mm	600 mm	8GK9507-2KK23	–
		600 mm	600 mm	8GK9507-4KK23	8GK9507-4KK23
		800 mm	600 mm	8GK9507-5KK23	8GK9507-5KK23
		1000 mm	600 mm	8GK9507-7KK23	8GK9507-7KK23
			900 mm	8GK9507-7KK33	8GK9507-7KK33
		1200 mm	600 mm	8GK9507-8KK23	8GK9507-8KK23
			900 mm	8GK9507-8KK33	8GK9507-8KK33

15

System overview, page 15/188

© Siemens 2025

Accessories

Double doors

Types	Width	Cubicle height	Cubicle width	Flat Pack IP43 Article No.	Unequipped distribution boards IP55 Article No.
Made of sheet steel	600 + 250 mm [1]	1000 mm	900 mm	8GK9515-6KK20 + 8GK9515-6KK40	8GK9515-6KK23 + 8GK9515-6KK43
		1200 mm	900 mm	8GK9515-7KK20 + 8GK9515-7KK40	8GK9515-7KK23 + 8GK9515-7KK43
Transparent door + sheet-steel door	600 + 250 mm	1000 mm	900 mm	8GK9505-6KK20 + 8GK9515-6KK40	8GK9505-6KK23 + 8GK9515-6KK43
		1200 mm	900 mm	8GK9505-7KK20 + 8GK9515-7KK40	8GK9505-7KK23 + 8GK9515-7KK43
Transparent door in Giugiaro design + sheet-steel door	600 + 250 mm [1]	1600 mm	900 mm	8GK9507-7KK23 + 8GK9515-6KK40	8GK9507-7KK23 + 8GK9515-6KK43
		1800 mm	900 mm	8GK9507-8KK23 + 8GK9515-7KK40	8GK9507-8KK23 + 8GK9515-7KK43

Vertical profile bars for cabling compartment

Cubicle height	Cubicle width	Article No.	Article No.
1000 mm	900 mm	8GK9125-7KK01	8GK9125-7KK01
1200 mm	900 mm	8GK9127-8KK01	8GK9127-8KK01

Front covers for cabling compartment

Height	Width	Cubicle height	Cubicle width	Article No.	Article No.
1000 mm	250/300 mm	1000 mm	900 mm	8GK9606-7KK10	8GK9606-7KK10
600 + 600 mm	250/300 mm	1200 mm	900 mm	8GK9606-4KK10 + 8GK9606-4KK10	8GK9606-4KK10 + 8GK9606-4KK10

Bases

Color	Height	Cubicle height	Cubicle width	Article No.	Article No.
 Blue-green	100 mm	600/1200 mm	600 mm	8GK9906-0KK23	8GK9906-0KK23
		1000/1200 mm	900 mm	8GK9906-0KK33	8GK9906-0KK33

Covers for cable entry and cable duct

Cubicle height	Cubicle width	Article No.	Article No.
 600/1200 mm	600 mm	8GK9920-0KK41	8GK9920-0KK41
1000/1200 mm	900 mm	8GK9920-0KK42	8GK9920-0KK42

Side panels

Color	Cubicle height	Cubicle width	Article No.	Article No.
Blue-green	600 mm	600 mm	–	8GK9122-4KK01
	800 mm	600 mm	–	8GK9122-5KK01
	1000 mm	600/900 mm	–	8GK9122-6KK01
	1200 mm	600/900 mm	–	8GK9122-7KK01

[1] For distribution boards with a width of 900 mm with double door and vertical profile bar

System overview, page 15/188

© Siemens 2025

ALPHA 630 UNIVERSAL floor-mounted distribution boards

Rated current 630 A

					Flat pack	Unequipped distribution boards	Control cabinet with built-in assembly kits for modular installation devices	With assembly kit for 3VL molded case circuit breakers
				Degree of protection	IP43	IP30/IP55	IP55	IP55
Height		Depth	Width		Protection class I	Protection class I	Protection class I	Protection class I
Outside	Inside	Outside	Outside	Inside				
1650 mm	1600 mm	250 mm	350 mm	300 mm	8GK2300-5KL13	8GK2325-5KK13	–	–
			650 mm	600 mm	8GK2300-5KL23	8GK2325-5KK23	–	–
			950 mm	900 mm	8GK2300-5KL43	8GK2325-5KK43	–	–
1850 mm	1800 mm	250 mm	350 mm	300 mm	8GK2300-6KL13	8GK2325-6KK13	–	–
			650 mm	600 mm	8GK2300-6KL23	8GK2325-6KK23	8GK2348-7KL00	8GK2348-7KL01
			950 mm	900 mm	8GK2300-6KL43	8GK2325-6KK43	–	–
2050 mm	2000 mm	250 mm	350 mm	300 mm	8GK2300-7KL13	8GK2325-7KK13	–	–
			650 mm	600 mm	8GK2300-7KL23	8GK2325-7KK23	–	–
			950 mm	900 mm	8GK2300-7KL43	8GK2325-7KK43	–	–

15

System overview, page 15/188

© Siemens 2025

System overview, page 15/188

© Siemens 2025

ALPHA 630 UNIVERSAL floor-mounted distribution boards

Rated current 630 A

Accessories

Sheet-steel doors

Types	Width	Cubicle height	Cubicle width	Flat Pack Article No.	Unequipped distribution boards Article No.
Standard	–	1600 mm	300 mm	8GK9515-8KK10	8GK9515-8KK10
			600 mm	8GK9515-8KK20	8GK9515-8KK20
			900 mm	8GK9515-8KK30	8GK9515-8KK30
		1800 mm	300 mm	8GK9515-8KK11	8GK9515-8KK11
			600 mm	8GK9515-8KK21	8GK9515-8KK21
			900 mm	8GK9515-8KK31	8GK9515-8KK31
		2000 mm	300 mm	8GK9515-8KK12	8GK9515-8KK12
			600 mm	8GK9515-8KK22	8GK9515-8KK22
			900 mm	8GK9515-8KK32	8GK9515-8KK32
For cabling compartment	250 mm	1600 mm	900 mm	8GK9515-8KK40	8GK9515-8KK40
		1800 mm	900 mm	8GK9515-8KK41	8GK9515-8KK41
		2000 mm	900 mm	8GK9515-8KK42	8GK9515-8KK42

Transparent doors

Types	Cubicle height	Cubicle width	Article No.	Article No.
Standard	1600 mm	300 mm	8GK9505-8KK11	8GK9505-8KK11
		600 mm	8GK9505-8KK20	8GK9505-8KK20
		900 mm	8GK9505-8KK30	8GK9505-8KK30
	1800 mm	300 mm	8GK9505-8KK12	8GK9505-8KK12
		600 mm	8GK9505-8KK21	8GK9505-8KK21
		900 mm	8GK9505-8KK31	8GK9505-8KK31
	2000 mm	300 mm	8GK9505-8KK10	8GK9505-8KK10
		600 mm	8GK9505-8KK22	8GK9505-8KK22
		900 mm	8GK9505-8KK32	8GK9505-8KK32
Giugiaro design	1600 mm	600 mm	8GK9507-8KK20	8GK9507-8KK20
		900 mm	8GK9507-8KK30	8GK9507-8KK30
	1800 mm	600 mm	8GK9507-8KK21	8GK9507-8KK21
		900 mm	8GK9507-8KK31	8GK9507-8KK31
	2000 mm	600 mm	8GK9507-8KK22	8GK9507-8KK22
		900 mm	8GK9507-8KK32	8GK9507-8KK32

Double doors

Types	Width	Cubicle height	Cubicle width	Article No.	Article No.
Made of sheet steel	600 + 250 mm	1600 mm	900 mm	8GK9515-8KK20 + 8GK9515-8KK40	8GK9515-8KK20 + 8GK9515-8KK40
		1800 mm	900 mm	8GK9515-8KK21 + 8GK9515-8KK41	8GK9515-8KK21 + 8GK9515-8KK41
		2000 mm	900 mm	8GK9515-8KK22 + 8GK9515-8KK42	8GK9515-8KK22 + 8GK9515-8KK42
Transparent door + sheet-steel door	600 + 250 mm	1600 mm	900 mm	8GK9505-8KK20 + 8GK9515-8KK40	8GK9505-8KK20 + 8GK9515-8KK40
		1800 mm	900 mm	8GK9505-8KK21 + 8GK9515-8KK41	8GK9505-8KK21 + 8GK9515-8KK41
		2000 mm	900 mm	8GK9505-8KK22 + 8GK9515-8KK42	8GK9505-8KK22 + 8GK9515-8KK42
Transparent door in Giugiaro design + sheet-steel door	600 + 250 mm	1600 mm	900 mm	8GK9507-8KK20 + 8GK9515-8KK40	8GK9507-8KK20 + 8GK9515-8KK40
		1800 mm	900 mm	8GK9507-8KK21 + 8GK9515-8KK41	8GK9507-8KK21 + 8GK9515-8KK41
		2000 mm	900 mm	8GK9507-8KK22 + 8GK9515-8KK42	8GK9507-8KK22 + 8GK9515-8KK42

Vertical profile bars for cabling compartment

Cubicle height	Cubicle width	Article No.	Article No.
1600 mm	900 mm	8GK9125-8KK11	8GK9125-8KK11
1800 mm	900 mm	8GK9125-8KK12	8GK9125-8KK12
2000 mm	900 mm	8GK9125-8KK13	8GK9125-8KK13

15

System overview, page 15/188

© Siemens 2025

Accessories

Front covers for cabling compartment

Height	Width	Cubicle height	Cubicle width	Flat Pack Article No.	Unequipped distribution boards Article No.
800 + 800 mm	250/300 mm	1600 mm	300 mm	8GK9607-5KK10 + 8GK9607-5KK10	8GK9607-5KK10 + 8GK9607-5KK10
			900 mm	8GK9606-5KK10 + 8GK9606-5KK10	8GK9606-5KK10 + 8GK9606-5KK10
800 + 1000 mm	250/300 mm	1800 mm	300 mm	8GK9607-5KK10 + 8GK9607-7KK10	8GK9607-5KK10 + 8GK9607-7KK10
			900 mm	8GK9606-5KK10 + 8GK9606-7KK10	8GK9606-5KK10 + 8GK9606-7KK10
1000 + 1000 mm	250/300 mm	2000 mm	300 mm	8GK9607-7KK10 + 8GK9607-7KK10	8GK9607-7KK10 + 8GK9607-7KK10
			900 mm	8GK9606-7KK10 + 8GK9606-7KK10	8GK9606-7KK10 + 8GK9606-7KK10

Bases



Color	Height	Cubicle height	Cubicle width	Article No.	Article No.
Blue-green	100 mm	1600/2000 mm	300 mm	8GK9906-0KK13	8GK9906-0KK13
		1600/2000 mm	600 mm	8GK9906-0KK23	8GK9906-0KK23
		1600/2000 mm	900 mm	8GK9906-0KK33	8GK9906-0KK33

Covers for cable entry and cable duct



	Cubicle height	Cubicle width	Article No.	Article No.
	1600/2000 mm	300 mm	8GK9920-0KK40	8GK9920-0KK40
	1600/2000 mm	600 mm	8GK9920-0KK41	8GK9920-0KK41
	1600/2000 mm	900 mm	8GK9920-0KK42	8GK9920-0KK42

Side panels

Color	Cubicle height	Cubicle width	Article No.	Article No.
RAL 7035 (pair)	1600 mm	300/600/900 mm	8GK9120-8KK00	8GK9122-8KK03
	1800 mm	300/600/900 mm	8GK9120-8KK01	8GK9122-8KK04
	2000 mm	300/600/900 mm	8GK9120-8KK02	8GK9122-8KK05

15

System overview, page 15/188

© Siemens 2025

ALPHA UNIVERSAL 125 distribution boards

Rated current 125 A

						Surface-mounting distribution boards		Flush-mounting distribution boards	
						With sheet-steel door	With transparent door	With sheet-steel door	With transparent door
					Degree of protection	IP43	IP43	IP31D	IP31D
									
Height		Depth	Width		Tiers	Protection class I	Protection class I	Protection class I	Protection class I
Outside	Inside	Outside	Outside	Inside	(MW = 18 mm)				
450 mm	400 mm	140 mm	660 mm	600 mm	48 (2 × 24)	8GK2042-0KL21	8GK2042-0KM21	–	–
650 mm	600 mm	140 mm	660 mm	600 mm	72 (3 × 24)	8GK2042-1KL21	8GK2042-1KM21	–	–
800 mm	850 mm	140 mm	660 mm	600 mm	96 (4 × 24)	8GK2042-2KL21	8GK2042-2KM21	–	–
1050 mm	1000 mm	140 mm	660 mm	600 mm	120 (5 × 24)	8GK2042-3KL21	8GK2042-3KM21	–	–
1250 mm	1200 mm	140 mm	660 mm	600 mm	144 (6 × 24)	8GK2042-4KL21	8GK2042-4KM21	–	–
508 mm	400 mm	140 mm	718 mm	600 mm	48 (2 × 24)	–	–	8GK2043-0KL21	8GK2043-0KM21
708 mm	600 mm	140 mm	718 mm	600 mm	72 (3 × 24)	–	–	8GK2043-1KL21	8GK2043-1KM21
908 mm	800 mm	140 mm	718 mm	600 mm	96 (4 × 24)	–	–	8GK2043-2KL21	8GK2043-2KM21
1108 mm	1000 mm	140 mm	718 mm	600 mm	120 (5 × 24)	–	–	8GK2043-3KL21	8GK2043-3KM21
1308 mm	1200 mm	140 mm	718 mm	600 mm	144 (6 × 24)	–	–	8GK2043-4KL21	8GK2043-4KM21

Accessories

Front covers



- With quick-lock screws and integrated grounding connection

Type	Height	Width	Article No.
Closed	50 mm	600 mm	8GK9620-1KK20
	100 mm	600 mm	8GK9621-1KK20
	150 mm	600 mm	8GK9622-1KK20
	200 mm	600 mm	8GK9623-1KK20
	400 mm	600 mm	8GK9622-2KK20
	600 mm	600 mm	8GK9622-4KK20
	800 mm	600 mm	8GK9622-5KK20
For modular installation devices	150 mm	600 mm	8GK9608-1KK22
	200 mm	600 mm	8GK9608-1KK20
	300 mm	600 mm	8GK9608-2KK22
	400 mm	600 mm	8GK9608-2KK20
	450 mm	600 mm	8GK9608-3KK22
	600 mm	600 mm	8GK9608-4KK20

DIN rails for modular installation devices

Width	Article No.
600 mm	8GK9920-0KK11

Holders for cable duct

Width	Article No.
600 mm	8GK9920-0KK20

Grounding bars, PE

Width	Article No.
600 mm (20 × 5 mm²)	8GK9920-0KK10

System overview, page 15/188

© Siemens 2025

Accessories

Hinge for front cover

Version	Article No.
For hinged covers	8GK9120-0KK11

Hinges for masking frames

Version	Scope of supply	Article No.
Hinge, incl. fixing accessories	1 set	8PQ2000-0BA08

Rotary handles

Version	Color	Article No.
Plastic	Black	8GK9560-0KK04
Lockable	Black	8GK9560-0KK13

Profile semicylinders E012

Version	Article No.
Insert and key 8GK9560	8GK9560-0KK07

Rotary handles for profile semicylinders

Version	Article No.
For 40 mm profile semicylinders	8GK9560-0KK06

Quick-lock screws for ALPHA cabinets with ¼ turn

Scope of supply	Article No.
20 units	8GK9562-0KK00

System overview, page 15/188

© Siemens 2025

Assembly kits

For 3VA molded case circuit breakers

						Horizontal	
Switches/breakers				**Distribution board**		**With RCD module**	**Without RCD module**
Type	**Rated current**	**Quantity**	**Rotary operating mechanism**	**Height outside**	**Width outside**	**Infeed side**	
3VA10.. and 3VA11..	100 A/160 A	1	–	200 mm	600 mm	8GK6735-2KK23	8GK6730-2KK23
					900 mm	8GK6735-2KK33	8GK6730-2KK33
			■	200 mm	600 mm	–	8GK6733-2KK23
					900 mm	–	8GK6733-2KK33
3VA12..	250 A	1	–	200 mm	600 mm	8GK6736-2KK23	8GK6721-2KK23
					900 mm	8GK6736-2KK33	8GK6721-2KK33
			■	200 mm	600 mm	–	8GK6734-2KK23
					900 mm	–	8GK6734-2KK33
3VA20.. and 3VA22..	100 A/250 A	1	–	200 mm	600 mm	8GK6725-2KK23	8GK6720-2KK23
					900 mm	8GK6725-2KK33	8GK6720-2KK33
			■	200 mm	600 mm	–	8GK6723-2KK23
					900 mm	–	8GK6723-2KK33
3VA23.. and 3VA24..	400 A/630 A	1	–	400 mm	600 mm	–	8GK6740-4KK23
					900 mm	8GK6745-4KK23	8GK6740-4KK33

System overview, page 15/188

© Siemens 2025

Vertical

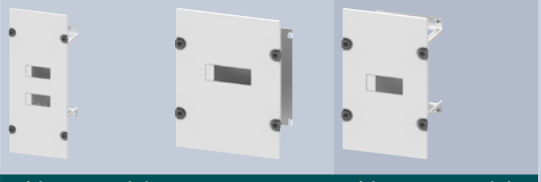

Switches/breakers				Distribution board		With RCD module		Without RCD module
Type	Rated current	Quantity	Motorized operating mechanism	Height outside	Width outside	Infeed side	At side	
3VA10.. and 3VA11..	100 A/160 A	1	–	200 mm	300 mm	–	–	8GK6731-2KK13
				400 mm	250 mm	–	–	8GK6730-4KK43
					300 mm	–	8GK6731-6KK13	8GK6730-4KK13
				600 mm	250 mm	8GK6735-4KK43	–	–
					300 mm	8GK6735-6KK13	–	–
			■	400 mm	300 mm	–	8GK6738-6KK13	8GK6734-4KK13
				600 mm	300 mm	8GK6736-6KK13	–	–
		3	–	200 mm	600 mm	–	–	8GK6731-2KK23
				400 mm	600 mm	–	8GK6731-6KK23	8GK6730-4KK23
					900 mm	–	–	8GK6731-6KK33
				600 mm	600 mm	8GK6735-6KK23	–	–
			■	200 mm	600 mm	–	–	8GK6734-4KK23
				400 mm	600 mm	–	8GK6737-6KK23	–
					900 mm	–	8GK6737-6KK33	–
				600 mm	600 mm	8GK6736-6KK23	–	–
		5	–	200 mm	900 mm	–	–	8GK6731-2KK33
				400 mm	900 mm	–	–	8GK6730-4KK33
			■	200 mm	900 mm	–	–	8GK6734-4KK33
				600 mm	900 mm	8GK6736-6KK33	–	–
3VA12..	250 A	1	–	400 mm	300 mm	–	–	8GK6721-4KK13
				600 mm	250 mm	8GK6732-6KK13	–	8GK6730-6KK13
					300 mm	–	8GK6722-6KK13	8GK6721-6KK13
		3	–	400 mm	600 mm	–	–	8GK6721-4KK23
				600 mm	600 mm	–	8GK6724-6KK23	8GK6721-6KK23
			■	400 mm	600 mm	–	–	8GK6722-6KK23
				600 mm	600 mm	–	8GK6723-6KK23	–
		5	–	400 mm	900 mm	–	–	8GK6721-4KK33
				600 mm	900 mm	–	8GK6724-6KK33	8GK6721-6KK33
			■	400 mm	900 mm	–	–	8GK6722-6KK33
				600 mm	900 mm	–	8GK6723-6KK33	–
3VA20.. and 3VA22..	100 A/250 A	1	–	400 mm	300 mm	–	–	8GK6720-4KK13
				600 mm	300 mm	8GK6725-6KK13	–	–
		3	–	400 mm	600 mm	–	–	8GK6720-4KK23
				600 mm	600 mm	8GK6725-6KK23	–	–
			■	400 mm	600 mm	–	–	8GK6724-4KK23
		5	–	400 mm	900 mm	–	–	8GK6720-4KK33
				600 mm	900 mm	8GK6725-6KK33	–	–
			■	400 mm	900 mm	–	–	8GK6724-4KK33
3VA23.. and 3VA24..	400 A/630 A	1	–	600 mm	300 mm	–	–	8GK6740-6KK13
		2	–	600 mm	600 mm	8GK6745-6KK23	–	8GK6740-6KK23
		3	–	600 mm	900 mm	8GK6745-6KK33	–	8GK6740-6KK33

System overview, page 15/188

© Siemens 2025

Assembly kits

For 3KA7 switch disconnectors

Vertical



Switches/breakers			Distribution board			
Type	Description	Quantity	Height outside	Width outside	Depth	
3KA7	3KA711 size 1 max. 125 A	1	200 mm	600 mm	–	8GK6400-2KK20
			400 mm	250 mm [1]	–	8GK6400-4KK10
				300 mm [2]	–	8GK6400-4KK11
		3	200 mm	900 mm	–	8GK6400-2KK30
	3KA712 size 2 max. 250 A	1	400 mm	250 mm [1]	–	8GK6401-4KK10
				300 mm [2]	–	8GK6401-4KK12
				600 mm	–	8GK6400-4KK20
		3	400 mm	900 mm	–	8GK6400-4KK30
	3KA713 size 3 max. 400 A	1	400 mm	600 mm	–	8GK6401-4KK20
		3	400 mm	900 mm	–	8GK6400-4KK31
3KA7/3KL7	3KA7/3KL711 size 1 max. 125 A	1	400 mm	250 mm	250 mm	8GK6430-4KK03
				300 mm	250 mm	8GK6430-4KK14
		2	200 mm	600 mm	250 mm	8GK6430-4KK24
				900 mm	250 mm	8GK6430-4KK34
	3KA7/3KL712 size 2 max. 250 A	1	400 mm	250 mm	400 mm	8GK6431-4KK04
				300 mm	400 mm	8GK6431-4KK14
		2	400 mm	600 mm	250 mm	8GK6431-4KK24
				900 mm	250 mm	8GK6431-4KK34
	3KA7/3KL713 size 3 max. 400 A	1	400 mm	600 mm	400 mm	8GK6432-4KK24
				900 mm	400 mm	8GK6432-4KK34
	3KA7/3KL714 size 4 max. 630 A	1	400 mm	600 mm	400 mm	8GK6433-4KK24
			400 mm	900 mm	400 mm	8GK6433-4KK34

[1] In order to use box width 250 mm in the ALPHA 630 UNIVERSAL as a switchgear compartment, the following bars are required:
8GF9655 (height 1000 mm),
8GF9656 (height 1200 mm),
8GF9650 (height 1600 mm),
8GF9658 (height 1800 mm),
8GF9654 (height 2000 mm).
In order to use box width 250 mm in the ALPHA 800 UNIVERSAL as a switchgear compartment, you must order side supports and, for each assembly kit, a pair of crossbars 8GK9920-0KK01.

[2] In order to use cubicle width 300 mm in the ALPHA 630 UNIVERSAL as a switchgear compartment, you require the following inner supports:
8GK9126-8KK03 (height 1600 mm),
8GK9126-8KK04 (height 1800 mm),
8GK9126-8KK05 (height 2000 mm).
In order to use cubicle width 300 mm in the ALPHA 800 UNIVERSAL as a switchgear compartment, you must order the following side supports:
8GK6850-0KK02 (height 1600 mm),
8GK6850-0KK03 (height 1800 mm),
8GK6850-0KK04 (height 2000 mm).

System overview, page 15/188

© Siemens 2025

For 3KF switch disconnectors with fuses

Vertical

Switches/breakers				Distribution board			
Type	Rated current	Operating mechanism in center	Door-coupling rotary operating mechanism	Height	Width	Depth	
2 × 3KF1	80 A	■	–	200 mm	600 mm	250 mm	8GK6431-2KK23
					900 mm	250 mm	8GK6431-2KK33
2 × 3KF2	160 A	■	–	200 mm	600 mm	250 mm	8GK6432-2KK23
					900 mm	250 mm	8GK6432-2KK33
2 × 3KF1/3KF2 or 1 × 3KF3/3KF4	400 A	–	■	400 mm	600 mm	400 mm	8GK6431-4KK33
					900 mm	400 mm	8GK6432-4KK33

For 3KD switch disconnectors

Vertical

Switches/breakers				Distribution board		
Size	Rated current	Quantity	Door-coupling rotary operating mechanism	Height outside	Width outside	
1/2/3	63 A/250 A/400 A	1/1	■	400 mm	250 mm	8GK6430-4KK13
1/2/3/4	63 A/250 A/400 A/630 A	2/1	■	400 mm	600 mm	8GK6430-4KK23
1/2/3/4	63 A/250 A/400 A/630 A	2	■	400 mm	900 mm	8GK6430-4KK33

System overview, page 15/188

© Siemens 2025

Assembly kits

For modular installation devices



Switches/breakers		Distribution board		
No. of tiers	MW	Height outside	Width outside	
1	12	200 mm	300 mm	8GK6352-2KK13
	24	150 mm	600 mm	8GK6302-1KK23
		200 mm	600 mm	8GK6352-2KK23
	36	150 mm	900 mm	8GK6302-1KK33
		200 mm	900 mm	8GK6352-2KK33

Accessories

DIN rails

Version	Width	No. of tiers	Article No.
For mounting modular devices at various depths	600 mm	1	8GF9670
	900 mm	1	8GF9671

Depth adapters 9 mm

Version	Width	No. of tiers	MW	Article No.
For linking 5SY and 5SJ on DIN rails, L 360 mm	600 mm	1	20	8GF9670-1

© Siemens 2025

For front cover with cutout



Switches/breakers		Distribution board		
No. of tiers	MW	Height outside	Width outside	
1	24	150 mm	600 mm	8GK9608-1KK22
	24	200 mm	600 mm	8GK9608-1KK20
	36	150 mm	900 mm	8GK9608-1KK32
		200 mm	900 mm	8GK9608-1KK30
2	48	300 mm	600 mm	8GK9608-2KK22
		400 mm	600 mm	8GK9608-2KK20
	72	300 mm	900 mm	8GK9608-2KK32
		400 mm	900 mm	8GK9608-2KK30
		450 mm	600 mm	8GK9608-3KK22
		600 mm	600 mm	8GK9608-4KK20
	108	600 mm	900 mm	8GK9608-4KK30

Accessories

DIN rails

Version	Width	No. of tiers	Article No.
For mounting modular devices at various depths	600 mm	1	8GF9670
	900 mm	1	8GF9671

Depth adapters 9 mm



Version	Width	No. of tiers	MW	Article No.
For linking 5SY and 5SJ on DIN rails, L 360 mm	600 mm	1	20	8GF9670-1

System overview, page 15/188

© Siemens 2025

Busbars

For ALPHA 800/630 UNIVERSAL distribution boards

Vertical installation of rear busbars (single bars only)





Version		Width 600/900 mm	For a spacing of 150 mm, width 600/900 mm	Recessed, width 600/900 mm	Width 300 mm	Recessed, width 300 mm
Busbar supports:		8GF5764/65 (width 600 mm) 8GF5766/67 (width 900 mm)	8GF5762/63	8GF5764/65 (width 600 mm) 8GF5766/67 (width 900 mm)	8GF5768/70	8GF5768/70
Supplements:	Rear universal supports	8GK6850-0KK05/06 (2 units)	8GK6850-0KK05/06 (2 units)	8GK6850-0KK05/06 (1 unit)	–	–

Horizontal busbars (single bars only)






Version		Front	Recessed	Front, with steps	Recessed, with steps
Busbar supports:		8GF5762/63	8GF5762/63	8GF5760/61	8GF5760/61
Supplements:	Holders	8GF9652 (width 600 mm) 8GF9653 (width 900 mm)	8GF9652 (width 600 mm) 8GF9653 (width 900 mm)	8GK9920-0KK35 (width 600 mm) 8GK9920-0KK36 (width 900 mm)	8GF9652 (width 600 mm) 8GF9653 (width 900 mm)
	Rear universal supports	–	–	8GK6850-0KK05/06 (2 units)	–

System overview, page 15/188

© Siemens 2025

For ALPHA 800 UNIVERSAL distribution boards

Horizontal busbars at top (double bars only)



Version		
Busbar supports	With support plate	8GK9750-0KK02
	Without support plate	8PQ4000-1BA12
Supplements		If there is no support 8GK9750-0KK02 mounted onto the side of the cabling compartment, you will need to order an upper crossbar 8GK6850-0KK00.

Vertical busbars, for sides





Version		Double busbar with steps	Single busbar with steps	Double busbar	Busbar
Busbar supports:		8GK9750-0KK01	8GF5760/61	8GK9750-0KK02	8GF5762/63
Supplements	Lateral crossbar	8GK6850-0KK01	8GK6850-0KK01	8GK6850-0KK01	8GK6850-0KK01

15

System overview, page 15/188

© Siemens 2025

Busbars

			ALPHA 630	ALPHA 800
Copper busbars				
Busbar cross-section	Length		Article No.	Article No.
15 × 5 mm	2000 mm		8GF5751	8GF5751
	1300 mm		8GF5771	8GF5771
20 × 5 mm	2000 mm		8GF5737	8GF5737
	1300 mm		8GF5772	8GF5772
30 × 5 mm	2000 mm		8GF5742	8GF5742
	1300 mm		8GF5773	8GF5773
30 × 10 mm	2000 mm		8GF5752	8GF5752
	1300 mm		8GF5774	8GF5774
Copper grounding bars				
Busbar cross-section	Length	Width	Article No.	Article No.
20 × 5 mm	1300/2000 mm	600 mm	8GK9920-0KK10	8GK9920-0KK10
		900 mm	8GK9920-0KK13	8GK9920-0KK13

Busbar supports

				ALPHA 630	ALPHA 800
Vertical, at side/horizontal, at front, graded					
Busbar cross-section	Width	Number of poles	Busbar center-to-center spacing	Article No.	Article No.
15/20/30 × 5 mm	600/900 mm	4-pole	50 mm	8GF5760	8GF5760
30 × 10 mm	600/900 mm	4-pole	50 mm	8GF5761	8GF5761
15/20/30 × 10 mm	600/900 mm	4-pole	50 mm	–	8GK9750-0KK01
20/30 × 10 mm	600/900 mm	4-pole	50 mm	–	8GK9750-0KK02

Vertical					
Busbar cross-section	Width	Number of poles		Article No.	Article No.
15/20/30 × 5 mm	300 mm	4-pole	50 mm	8GF5768	8GF5768
30 × 10 mm	300 mm	4-pole	50 mm	8GF5770	8GF5770

Vertical, at rear					
Busbar cross-section	Width	Number of poles		Article No.	Article No.
15/20/30 × 5 mm	600 mm	4-pole	50 mm	8GF5764	8GF5764
	900 mm	4-pole	50 mm	8GF5766	8GF5766
30 × 10 mm	600 mm	4-pole	50 mm	8GF5765	8GF5765
	900 mm	4-pole	50 mm	8GF5767	8GF5767



Horizontal, at front [1]					
Busbar cross-section	Width	Number of poles		Article No.	Article No.
15/20/30 × 5 mm	300/600/900 mm	4-pole	50 mm	8GF5762	8GF5762
30 × 10 mm	300/600/900 mm	4-pole	50 mm	8GF5763	8GF5763
	600/900 mm	4-pole	50 mm	–	8GK9608-1KK22

Horizontal, at top					
Busbar cross-section		Number of poles		Article No.	Article No.
20/30 × 10 mm	600/900 mm	4-pole	50 mm	–	8GK9750-0KK02
				–	8PQ4000-1BA12

[1] Can be mounted directly on device holders with a clearance of 525 mm (width 600 mm) and 825 mm (width 900 mm).

15

System overview, page 15/188

© Siemens 2025

Other accessories

Set of screws/bolts for slotted bars

Cross-section	Outer thread	Tightening torque	ALPHA 630 Article No.	ALPHA 800 Article No.
15/20/30 × 5 mm	M6	8 Nm	8GF5891	8GF5891
30 × 10 mm	M8	20 Nm	8GF5892	8GF5892

Crossbars for installation of support

Version	Width	ALPHA 630 Article No.	ALPHA 800 Article No.
Für 8GF5762, 8GF5760, 8GF5763, 8GK9608-1KK22	600 mm	8GF9652	8GF9652
	900 mm	8GF9653	8GF9653
Für 8GF5760	600 mm	8GK9920-0KK35	8GK9920-0KK35
	900 mm	8GK9920-0KK36	8GK9920-0KK36
Für 8GK9750-0KK02	400 mm	–	8GK6850-0KK00
Für 8GF5760, 8GF5768, 8GF5761, 8GF5770, 8GK9750-0KK01, 8GK9750-0KK02	400 mm	–	8GK6850-0KK01

Transparent cover



Version	Width	ALPHA 630 Article No.	ALPHA 800 Article No.
For horizontal busbars, at front	600 mm	8GK9920-0KK37	8GK9920-0KK37
	900 mm	8GK9920-0KK38	8GK9920-0KK38

Connection kit for double bars

Version	Current	ALPHA 630 Article No.	ALPHA 800 Article No.
Connection kit for upper horizontal bars – vertical busbars	800 A	–	8GK9790-0KK00
Connection kit for upper horizontal busbars	800 A	–	8GK9790-0KK01

Holder for grounding bar

ALPHA 630 Article No.	ALPHA 800 Article No.
–	8GK9750-0KK00

15

System overview, page 15/188

© Siemens 2025

Accessories

Covers and holders

Covers for mounting measuring instruments

Measuring devices	Type	Height	Width	Article No.	125	630	800
72 × 72	2 instruments + 2 selectors	200 mm	600 mm	8GK9610-1KK20	■	■	■
			900 mm	8GK9610-1KK30	■	■	■
	4 instruments + 1 selector	200 mm	600 mm	8GK9611-1KK20	■	■	■
			900 mm	8GK9611-1KK30	■	■	■
96 × 96	2 instruments + 2 selectors	200 mm	600 mm	8GK9612-1KK20	■	■	■
			900 mm	8GK9612-1KK30	■	■	■
	4 instruments + 1 selector	200 mm	600 mm	8GK9613-1KK20	■	■	■
			900 mm	8GK9613-1KK30	■	■	■

Covers for pushbuttons and indicator lights



Height	Width	Article No.	125	630	800
200 mm	600 mm	8GK9630-1KK20	■	■	■
	900 mm	8GK9631-1KK20	■	■	■

Non-transparent covers

Height	Width	Article No.	125	630	800
50 mm	600 mm	8GK9620-1KK20	■	■	■
	900 mm	8GK9620-1KK30	■	■	■
100 mm	600 mm	8GK9621-1KK20	■	■	■
	900 mm	8GK9621-1KK30	■	■	■
150 mm	600 mm	8GK9622-1KK20	■	■	■
	900 mm	8GK9622-1KK30	■	■	■
200 mm	300 mm	8GK9607-1KK10	■	■	■
	600 mm	8GK9623-1KK20	■	■	■
	900 mm	8GK9623-1KK30	■	■	■
400 mm	250 mm	8GK9606-2KK10	■	■	■
	300 mm	8GK9607-2KK10	■	■	■
	600 mm	8GK9622-2KK20	■	■	■
	900 mm	8GK9622-2KK30	■	■	■
600 mm	250 mm	8GK9606-4KK10	■	■	■
	300 mm	8GK9607-4KK10	■	■	■
	600 mm	8GK9622-4KK20	■	■	■
	900 mm	8GK9622-4KK30	■	■	■
800 mm	250 mm	8GK9606-5KK10	■	■	■
	300 mm	8GK9607-5KK10	■	■	■
	600 mm	8GK9622-5KK20	■	■	■
	900 mm	8GK9622-5KK30	■	■	■
1000 mm	250 mm	8GK9606-7KK10	■	■	■
	300 mm	8GK9607-7KK10	■	■	■

Deep-drawn covers 25 mm

Height	Width	Article No.	125	630	800
800 mm	600 mm	8GK9635-5KK20	■	■	■
	900 mm	8GK9635-5KK30	■	■	■
1000 mm	600 mm	8GK9636-7KK20	■	■	■
	900 mm	8GK9636-7KK30	■	■	■

Deep-drawn front covers 35 mm

Height	Width	Article No.	125	630	800
200 mm	600 mm	8GK9605-1KK20	■	■	■
	900 mm	8GK9605-1KK30	■	■	■
400 mm	600 mm	8GK9605-2KK20	■	■	■
	900 mm	8GK9605-2KK30	■	■	■
600 mm	600 mm	8GK9605-4KK20	■	■	■
	900 mm	8GK9605-4KK30	■	■	■

15

System overview, page 15/188

© Siemens 2025

Covers and holders



Covers with ventilation openings IP30

Height	Width	Article No.	125	630	800
200 mm	600 mm	8GK9632-1KK20	■	■	■
	900 mm	8GK9633-1KK20	■	■	■

Holders for horizontal cable ducts/horizontal busbars (pair)

Width	Article No.	125	630	800
600 mm	8GF9652	■	■	■
900 mm	8GF9653	■	■	■

Horizontal crossbars with steps (pair)

Width	Article No.	125	630	800
600 mm	8GK9920-0KK35	■	■	■
900 mm	8GK9920-0KK36	■	■	■

Support rails (pair)

- ALPHA 630 UNIVERSAL vertical/horizontal busbar support, with steps
- Vertical side terminal strip (not suitable for use in ALPHA 800 UNIVERSAL)

Height	Article No.	125	630	800
1000 mm	8GF9655	■	■	■
1200 mm	8GF9656	■	■	■
1600 mm	8GF9650	■	■	■
1800 mm	8GF9658	■	■	■
2000 mm	8GF9654	■	■	■

Inner supports

- For using cubicle B 300 as a switchgear compartment in ALPHA 630 UNIVERSAL (not suitable for use in ALPHA 800 UNIVERSAL)

Height	Article No.	125	630	800
1600 mm	8GK9126-8KK03	■	■	■
1800 mm	8GK9126-8KK04	■	■	■
2000 mm	8GK9126-8KK05	■	■	■

System overview, page 15/188

© Siemens 2025

Accessories

Mounting plates and internal partitions

Modular mounting plates

- ALPHA 800 UNIVERSAL: for mounting on side supports or on the base of the cabinet

Height	Width	Article No.	125	630	800
200 mm	600 mm	8GF7155	■	■	■
	900 mm	8GF7158	■	■	■
400 mm	600 mm	8GF7156	■	■	■
	900 mm	8GF7160	■	■	■
600 mm	600 mm	8GF7157	■	■	■
	900 mm	8GF7161	■	■	■

Recessed modular mounting plates

- ALPHA 800 UNIVERSAL: for mounting on two rear supports or on the rear panel of the cabinet with one rear support

Height	Width	Article No.			
200 mm	600 mm	8GF9676	■	■	■
	900 mm	8GF9680	■	■	■
400 mm	600 mm	8GF9677	■	■	■
	900 mm	8GF9681	■	■	■
600 mm	600 mm	8GF9678	■	■	■
	900 mm	8GF9682	■	■	■

2 mm mounting plates for electrotechnical use with height and width of the cabinet

- ALPHA 800 UNIVERSAL: Plates that are not as high as the cabinet can be mounted using side supports and holders 8GF9652/3

Height	Width	Article No.			
600 mm	600 mm	8GK9535-4KK21	■	■	■
800 mm	600 mm	8GK9535-5KK21	■	■	■
1000 mm	600 mm	8GK9536-7KK21	■	■	■
	900 mm	8GK9536-7KK31	■	■	■
1200 mm	600 mm	8GK9537-8KK21	■	■	■
	900 mm	8GK9537-8KK31	■	■	■
1600 mm	600 mm	8GK9535-8KK23	■	■	■
	900 mm	8GK9535-8KK26	■	■	■
1800 mm	600 mm	8GK9535-8KK24	■	■	■
	900 mm	8GK9535-8KK34	■	■	■
2000 mm	600 mm	8GK9535-8KK25	■	■	■
	900 mm	8GK9535-8KK35	■	■	■

Adjustable depth brackets for mounting plates

Distribution board depth	Article No.			
250 mm	8GK9930-0KK03		■	

Partitions for ALPHA 630 UNIVERSAL

Mounting	Height	Width	Article No.			
Horizontal	–	250 mm	8GK9525-0KK03		■	
		300 mm	8GK9525-0KK13		■	
		600 mm	8GK9525-0KK23		■	
		900 mm	8GK9525-0KK33		■	
Vertical	800 mm	–	8GK9525-5KK03		■	
	1000 mm	–	8GK9525-6KK03		■	
	1200 mm	–	8GK9525-7KK03		■	
	1600 mm	–	8GK9525-8KK03		■	
	1800 mm	–	8GK9525-8KK13		■	
	2000 mm	–	8GK9525-8KK23		■	

15

System overview, page 15/188

© Siemens 2025

Mounting plates and internal partitions

Partitions for ALPHA 800 UNIVERSAL in cabinets in form 2b





Mounting	Height	Width	Article No.	125	630	800
Horizontal partitions between devices	–	300 mm	8GK9526-0KK06			■
		600 mm	8GK9526-0KK07			■
		900 mm	8GK9526-0KK08			■
Horizontal partitions between upper busbar compartment and devices	–	250 mm	8GK9527-0KK05			■
		300 mm	8GK9526-0KK03			■
		600 mm	8GK9526-0KK04			■
		900 mm	8GK9526-0KK05			■
Vertical partitions between the switchgear compartment and busbar compartment	1600 mm	600 mm	8GK9526-0KK00			■
	1800 mm	600 mm	8GK9526-0KK01			■
	2000 mm	600 mm	8GK9526-0KK02			■

Transparent covers



Width	Article No.	125	630	800
250 mm	8GK9527-0KK03	■	■	■
300 mm	8GK9527-0KK00	■	■	■
600 mm	8GK9527-0KK01	■	■	■
900 mm	8GK9527-0KK02	■	■	■

15

System overview, page 15/188

© Siemens 2025

Accessories

Holders for terminal strips and locking systems

DIN rails for terminal blocks



Type	Height	Width	Article No.	125	630	800
Horizontal	–	600 mm	8GF9672	■	■	■
		900 mm	8GF9674	■	■	■
Horizontal, recessed	–	600 mm	8GF9673	■	■	■
		900 mm	8GF9675	■	■	■
Vertical with 3 mounting rails	200 mm	600 mm	8GF7175	■	■	■
	400 mm	600 mm	8GF7176	■	■	■
Vertical with 5 mounting rails	–	900 mm	8GF7178	■	■	■
	400 mm	900 mm	8GF7180	■	■	■

Holder for vertical terminal strips in side compartment L = 900 mm

- ALPHA 800 UNIVERSAL: Each holder must be mounted onto a lateral crossbar

Width	Article No.	125	630	800
600/900 mm	8GF9683	■	■	■

Mounting brackets



Version	Width	Article No.	125	630	800
For angular mounting of the terminal blocks	600/900 mm	8WA746	■	■	■

Holders for DIN rails

Version	Scope of supply	Width	Article No.	125	630	800
For mounting the terminal strip vertically in the cabling compartment	4 units	600/900 mm	8GK9920-0KK28	■	■	■

Standard locking devices for wall-mounted distribution boards

Material	Width	Article No.	125	630	800
Made of plastic, black (spare part)	600/900 mm	8GK9560-0KK04	■	■	■

Seals for standard locking devices



Degree of protection	Width	Article No.	125	630	800
IP55	600/900 mm	8GK9560-0KK05	■	■	■

Rotary handle locking mechanism

- For wall-mounted distribution boards, IP43 and IP55, semicylinder insert possible for E012

Width	Article No.	125	630	800
600/900 mm	8GK9560-0KK06	■	■	■

Profile semicylinders E012

- Insert and key

Width	Article No.	125	630	800
600/900 mm	8GK9560-0KK07	■	■	■

Locking systems for floor-mounted distribution boards

Type	Width	Article No.	125	630	800
Espagnolette lock with pushbutton (spare part)	600/900 mm	8GK9561-0KK01	■	■	■
Insert for profile semicylinder with key	600/900 mm	8GK9561-0KK02	■	■	■
Profile semicylinder, 40 mm with lock E012 (for use only with espagnolette lock)	600/900 mm	8GK9561-0KK00	■	■	■

15

System overview, page 15/188

© Siemens 2025

Further accessories

			125	630	800
Assembly kits for mounting flat pack cabinets for self-assembly, IP43					
	Height	**Article No.**			
	400 mm	8GK9126-3KK00	■	■	■
	600 mm	8GK9126-4KK00	■	■	■
	800 mm	8GK9126-5KK00	■	■	■
	1000 mm	8GK9126-6KK00	■	■	■
	1200 mm	8GK9126-7KK00	■	■	■
	1600 mm	8GK9126-8KK00	■	■	■
	1800 mm	8GK9126-8KK01	■	■	■
	2000 mm	8GK9126-8KK02	■	■	■
Z-shaped crossbar for lifting the flat pack for self-assembly					
	Height	**Article No.**			
	600 mm	8GK9127-0KK01	■	■	■
	900 mm	8GK9127-0KK02	■	■	■
	1200 mm	8GK9127-0KK03	■	■	■
	1500 mm	8GK9127-0KK04	■	■	■
	1800 mm	8GK9127-0KK05	■	■	■
Z-shaped crossbar for mounting and vertical linking of wall-mounted distribution boards					
	Height	**Article No.**			
	1200 mm	8GK9920-0KK43	■	■	■
	1400 mm	8GK9920-0KK44	■	■	■
	1600 mm	8GK9920-0KK45	■	■	■
	1800 mm	8GK9920-0KK46	■	■	■
Flange plates for flat pack delivery (optional)					
	**Height**	**Article No.**			
	300 mm	8GK9120-0KK10	■	■	■
	600 mm	8GK9120-0KK20	■	■	■
Ventilation grilles – side panels					
	Scope of supply	**Article No.**			
	4 units	8GK9120-0KK30	■	■	■
Spare part hinges for doors for wall/floor-mounted distribution boards					
	Scope of supply	**Article No.**			
	2 units	8GK9920-0KK24	■	■	■
Hinges for front covers					
	Scope of supply	**Article No.**			
	10 units	8GK9120-0KK11	■	■	■
Hinges for masking frames					
		Article No.			
		8PQ2000-0BA08	■	■	■

15

System overview, page 15/188

© Siemens 2025

Accessories

Further accessories

Quick-lock screws for ALPHA cabinets with ¼ turn

Scope of supply	Article No.	125	630	800
20 units	8GK9562-0KK00	■	■	■

Mounting kit for modular distribution boards, IP55 (incl. seal)



Article No.	125	630	800
8GK9920-0KK31	■	■	■

Self-tapping screws M6 × 10

Scope of supply	Article No.	125	630	800
10 units	8GF9662	■	■	■

Captive nuts M6

Scope of supply	Article No.	125	630	800
100 units	8GF9643	■	■	■

Transport eyebolts

Scope of supply	Article No.	125	630	800
4 units	8GF9660	■	■	■

Key for double-bit interlocking mechanism

Article No.	125	630	800
8GD9290	■	■	■

Siemens nameplate

Material	Version	Color	Article No.	125	630	800
Aluminum	Self-adhesive	Petrol	8GD9084	■	■	■
Sticker, foil	Self-adhesive	Petrol	8GF9661	■	■	■

Circuit diagram pockets

Types	Depth	Article No.	125	630	800
DIN A3, made of sheet steel	10 mm	8GK9910-0KK22	■	■	■
DIN A4, transparent sleeve, adhered all-over	10 mm	8GK9910-0KK23	■	■	■
DIN A4, made of plastic	30 mm	8GD9132	■	■	■
DIN A4, large pack, made of plastic	30 mm	8GK9910-1KK24	■	■	■

Blanking cover for modular installation devices

Version	Article No.	125	630	800
For 12 modular widths (1 MW = 18 mm)	8GK9910-0KK00	■	■	■

Cover strips

Length	Article No.	125	630	800
1 m	8GK9910-0KK01	■	■	■

Spare brackets for flat pack assembly

Scope of supply	Article No.	125	630	800
2 units	8GK9920-0KK26	■	■	■

Failsafe kit ALPHA

- Self-tapping screws, captive nuts, hinges for covers, covers etc.

Article No.	125	630	800
8GK9920-0KK32	■	■	■

Wall-mounting brackets

Article No.	125	630	800
8GK9920-0KK33	■	■	■

15

System overview, page 15/188

© Siemens 2025

System overview, page 15/188

© Siemens 2025

System overview

Distribution boards, assembly kits and accessories

ALPHA 1250

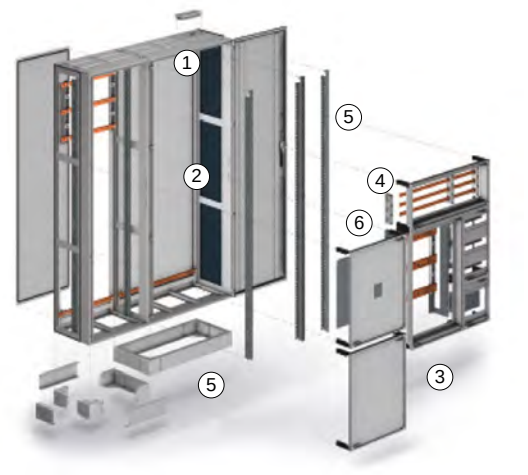

ALPHA 630

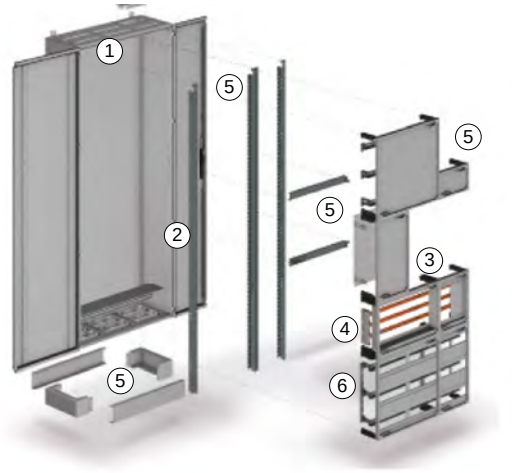

❶ Unequipped distribution boards

ALPHA 1250

ALPHA 630

ALPHA 630

ALPHA 400

ALPHA 160

ALPHA SIMBOX XL and WP

❷ Quick-assembly kits

ALPHA 1250/630/400

ALPHA 160

❸ Assembly kits

For modular installation devices

For terminal blocks

For fuse switch disconnectors

For switch disconnectors

For molded case circuit breakers

For busbar-adaptable units

Note:
You will find a detailed range of accessories with the basic units and in the Accessories section.

© Siemens 2025

ALPHA 400

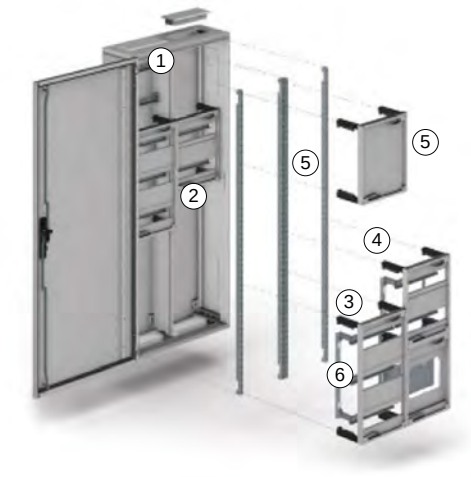

ALPHA 160

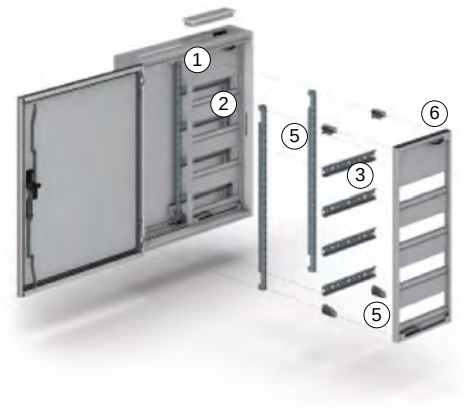

❹ Busbars

Cu busbars

Busbar supports

❺ Mechanical accessories

Bases



Stays

Crossbars



Partitions

Front covers

Locking systems

❻ Electrical accessories

N and PE terminals



Terminals

N/PE bars

Flanges

Cable entries

Cable holders

Note:
You will find a detailed range of accessories with the basic units and in the Accessories section.

© Siemens 2025

Special colors for ALPHA

Additional options

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

8GK.....-.....-.... -Z

			Order code		
	RAL 1003, signal yellow		C	2	7
	RAL 2000, yellow orange		C	2	5
	RAL 3000, flame red		C	3	1
	RAL 5005, signal blue		C	2	3
	RAL 5010, gentian blue		C	2	4
	RAL 5017, traffic blue		C	2	2
	RAL 6018, yellow green		C	2	6
	RAL 7032, pebble gray		C	1	3
	RAL 7033, cement gray		C	2	8
	RAL 7035, light gray	Smooth	C	1	1
		Surface structure	C	1	2
	RAL 7038, agate gray		C	1	4
	RAL 9001, cream		C	2	1
	RAL 9002, gray white		C	1	9
	RAL 9003, signal white		C	2	0
	RAL 9005, jet black		C	1	7
	RAL 9010, pure white	Smooth	C	1	5
		Surface structure	C	3	0
	RAL 9016, traffic white		C	1	0

© Siemens 2025

© Siemens 2025

ALPHA 1250 floor-mounted distribution boards

Rated current 1250 A

						Unequipped distribution boards	Unequipped distribution boards for isolating transformers	
						With open side panel	With open side panel	With closed side panel
					Degree of protection	IP55	IP30	IP30
Height		Depth	Tiers/MW	Width		Protection class I	Protection class I	Protection class I
Outside	Inside	Outside		Outside	Inside			
1950 mm	1800 mm	400 mm	12/144	300 mm	250 mm	8GK1423-8KK15	8GK1483-8KP15	8GK1483-8KN15
			24/288	550 mm	500 mm	8GK1423-8KK25	8GK1483-8KP25	8GK1483-8KN25
			36/432	800 mm	750 mm	8GK1423-8KK35	8GK1483-8KP35	8GK1483-8KN35
			48/576	1050 mm	1000 mm	8GK1423-8KK45	8GK1483-8KP45	8GK1483-8KN45
			60/720	1300 mm	1250 mm	8GK1423-8KK55	–	–

Accessories

Spare part doors

Height	Cubicle width	Door version	Door width	Article No.
1950 mm	300 mm	Complete	300 mm	8GK9513-8KK10
	550 mm	Complete	550 mm	8GK9513-8KK20
	800 mm	Left	525 mm	8GK9513-8KK30
		Right	275 mm	8GK9513-8KK40
	1050 mm	Left	525 mm	8GK9513-8KK30
		Right	525 mm	8GK9513-8KK50
	1300 mm	Left	775 mm	8GK9513-8KK60
		Right	525 mm	8GK9513-8KK50

Side panels, modular distribution board

Depth	Article No.
400 mm	8GK9520-0KK05

Assembly kits for masking frame for front cover

- For mounting the mounting stays at the rear of the modular distribution board

Height	Width	Article No.
1800 mm	250 mm	8GK9913-0KK10
	500 mm	8GK9913-0KK20
	750 mm	8GK9913-0KK30
	1000 mm	8GK9913-0KK40
	1250 mm	8GK9913-0KK50

See flange for cable entry, IP55 from page 15/265

© Siemens 2025

Busbar supports

- Busbar spacing 100/185 mm

Type	Article No.
With matching support plate for mounting on the rear panel	8GK9720-0KK00
Without support plate for mounting on the busbar (no fixing to the cabinet enclosure)	8GK9720-0KK01

PEN bar holders and N/PE busbar supports

Type	Article No.
PEN bar holder	8GK9721-0KK00

Pin insulator for N busbar



Version	Article No.
1P with M10 female thread and holder	8GK9110-0KK00

Crossbar N/PEN pin insulators and/or holders for PEN bars



Width	Article No.
250 mm	8GK4854-0KK10
500 mm	8GK4854-0KK20
750 mm	8GK4854-0KK30
1000 mm	8GK4854-0KK40
1250 mm	8GK4854-0KK50

Longitudinal stays

Height	Depth	Article No.
1800 mm	250/320/400 mm	8GK4853-8KK02

System overview, page 15/220

© Siemens 2025

ALPHA 1250 marshaling boxes

Rated current 630 A

	Marshaling boxes
Degree of protection	IP55

Height Outside	Depth Outside	Width Outside	Inside	Protection class I
500 mm	400 mm	300 mm	250 mm	8GK1383-1KK15
		550 mm	500 mm	8GK1383-1KK25
		800 mm	750 mm	8GK1383-1KK35
		1050 mm	1000 mm	8GK1383-1KK45
		1300 mm	1250 mm	8GK1383-1KK55
650 mm	400 mm	300 mm	250 mm	8GK1383-2KK15
		550 mm	500 mm	8GK1383-2KK25
		800 mm	750 mm	8GK1383-2KK35
		1050 mm	1000 mm	8GK1383-2KK45
		1300 mm	1250 mm	8GK1383-2KK55

System overview, page 15/220

© Siemens 2025

System overview, page 15/220

© Siemens 2025

ALPHA 630 floor-mounted distribution boards

Rated current 630 A

Unequipped distribution boards
Welded and riveted

Degree of protection IP44

Height		Depth	Tiers/MW	Width		Protection class I	Protection class II
Outside	Inside	Outside		Outside	Inside		
1950 mm	1800 mm	210 mm	12/144	300 mm	250 mm	8GK1322-8KA12	8GK1332-8KA12
			24/288	550 mm	500 mm	8GK1322-8KA22	8GK1332-8KA22
			36/432	800 mm	750 mm	8GK1322-8KA32	8GK1332-8KA32
			48/576	1050 mm	1000 mm	8GK1322-8KA42	8GK1332-8KA42
			60/720	1300 mm	1250 mm	8GK1322-8KA52	8GK1332-8KA52
		250 mm	12/144	300 mm	250 mm	–	–
			24/288	550 mm	500 mm	–	–
			36/432	800 mm	750 mm	–	–
			48/576	1050 mm	1000 mm	–	–
			60/720	1300 mm	1250 mm	–	–
		320 mm	12/144	300 mm	250 mm	–	–
			24/288	550 mm	500 mm	–	–
			36/432	800 mm	750 mm	–	–
			48/576	1050 mm	1000 mm	–	–
			60/720	1300 mm	1250 mm	–	–

Accessories

Spare part doors

Height	Cubicle width	Door version	Door width	Article No.
1950 mm	300 mm	Complete	300 mm	8GK9513-8KK10
	550 mm	Complete	550 mm	8GK9513-8KK20
	800 mm	Left	525 mm	8GK9513-8KK30
		Right	275 mm	8GK9513-8KK40
	1050 mm	Left	525 mm	8GK9513-8KK30
		Right	525 mm	8GK9513-8KK50
	1300 mm	Left	775 mm	8GK9513-8KK60
		Right	525 mm	8GK9513-8KK50

Side panels, modular distribution board

Depth	Article No.
250/320 mm	8GK9520-0KK03

Assembly kits for masking frame for front cover

Height	Width	Article No.
1800 mm	250 mm	8GK9913-0KK10
	500 mm	8GK9913-0KK20
	750 mm	8GK9913-0KK30
	1000 mm	8GK9913-0KK40
	1250 mm	8GK9913-0KK50

15

System overview, page 15/220

© Siemens 2025

With closed side panel		With open side panel	Flat pack	
IP55		IP55	IP43	
Protection class I	**Protection class II**	**Protection class I**	**Protection class I**	**Protection class II**
–	–	–	8GK1302-8KK12	8GK1312-8KK12
–	–	–	8GK1302-8KK22	8GK1312-8KK22
–	–	–	8GK1302-8KK32	8GK1312-8KK32
–	–	–	8GK1302-8KK42	8GK1312-8KK42
–	–	–	8GK1302-8KK52	8GK1312-8KK52
8GK1323-8KN13	8GK1333-8KN13	8GK1323-8KP13	–	–
8GK1323-8KN23	8GK1333-8KN23	8GK1323-8KP23	–	–
8GK1323-8KN33	8GK1333-8KN33	8GK1323-8KP33	–	–
8GK1323-8KN43	8GK1333-8KN43	8GK1323-8KP43	–	–
8GK1323-8KN53	8GK1333-8KN53	8GK1323-8KP53	–	–
8GK1323-8KN14	8GK1333-8KN14	8GK1323-8KP14	–	–
8GK1323-8KN24	8GK1333-8KN24	8GK1323-8KP24	–	–
8GK1323-8KN34	8GK1333-8KN34	8GK1323-8KP34	–	–
8GK1323-8KN44	8GK1333-8KN44	8GK1323-8KP44	–	–
8GK1323-8KN54	8GK1333-8KN54	8GK1323-8KP54	–	–

System overview, page 15/220

© Siemens 2025

ALPHA 630 marshaling boxes

Rated current 630 A

				Marshaling boxes	
			Degree of protection	IP43	IP55
Height **Outside**	**Depth** **Outside**	**Width** **Outside**	**Inside**	**Protection class I**	**Protection class I**
350 mm	210 mm [1]	300 mm	250 mm	8GK1382-0KK12	–
		550 mm	500 mm	8GK1382-0KK22	–
		800 mm	750 mm	8GK1382-0KK32	–
		1050 mm	1000 mm	8GK1382-0KK42	–
		1300 mm	1250 mm	8GK1382-0KK52	–
	250 mm	300 mm	250 mm	–	8GK1383-0KK13
		550 mm	500 mm	–	8GK1383-0KK23
		800 mm	750 mm	–	8GK1383-0KK33
		1050 mm	1000 mm	–	8GK1383-0KK43
		1300 mm	1250 mm	–	8GK1383-0KK53
	320 mm	300 mm	250 mm	–	8GK1383-0KK14
		550 mm	500 mm	–	8GK1383-0KK24
		800 mm	750 mm	–	8GK1383-0KK34
		1050 mm	1000 mm	–	8GK1383-0KK44
		1300 mm	1250 mm	–	8GK1383-0KK54
500 mm	250 mm	300 mm	250 mm	–	8GK1383-1KK13
		550 mm	500 mm	–	8GK1383-1KK23
		800 mm	750 mm	–	8GK1383-1KK33
		1050 mm	1000 mm	–	8GK1383-1KK43
		1300 mm	1250 mm	–	8GK1383-1KK53
	320 mm	300 mm	250 mm	–	8GK1383-1KK14
		550 mm	500 mm	–	8GK1383-1KK24
		800 mm	750 mm	–	8GK1383-1KK34
		1050 mm	1000 mm	–	8GK1383-1KK44
		1300 mm	1250 mm	–	8GK1383-1KK54
650 mm	250 mm	300 mm	250 mm	–	8GK1383-2KK13
		550 mm	500 mm	–	8GK1383-2KK23
		800 mm	750 mm	–	8GK1383-2KK33
		1050 mm	1000 mm	–	8GK1383-2KK43
		1300 mm	1250 mm	–	8GK1383-2KK53
	320 mm	300 mm	250 mm	–	8GK1383-2KK14
		550 mm	500 mm	–	8GK1383-2KK24
		800 mm	750 mm	–	8GK1383-2KK34
		1050 mm	1000 mm	–	8GK1383-2KK44
		1300 mm	1250 mm	–	8GK1383-2KK54

[1] For flat pack distribution boards only

System overview, page 15/220

© Siemens 2025

System overview, page 15/220

© Siemens 2025

ALPHA 400 distribution boards

Rated current 400 A

						Surface-mounting distribution boards Flat pack	
					Degree of protection	IP43	
Height		**Depth**	**Tiers/MW**	**Width**		**Protection class I**	**Protection class II**
Outside	**Inside**	**Outside**		**Outside**	**Inside**		
500 mm	450 mm	210 mm	3/36	300 mm	250 mm	–	–
			6/72	550 mm	500 mm	–	–
650 mm	600 mm	210 mm	4/48	300 mm	250 mm	8GK1102-2KK12	8GK1112-2KK12
			8/96	550 mm	500 mm	8GK1102-2KK22	8GK1112-2KK22
			12/144	800 mm	750 mm	8GK1102-2KK32	8GK1112-2KK32
			16/192	1050 mm	1000 mm	8GK1102-2KK42	8GK1112-2KK42
800 mm	750 mm	210 mm	5/60	300 mm	250 mm	8GK1102-3KK12	8GK1112-3KK12
			10/120	550 mm	500 mm	8GK1102-3KK22	8GK1112-3KK22
			15/180	800 mm	750 mm	8GK1102-3KK32	8GK1112-3KK32
			20/240	1050 mm	1000 mm	8GK1102-3KK42	8GK1112-3KK42
950 mm	900 mm	210 mm	6/72	300 mm	250 mm	8GK1102-4KK12	8GK1112-4KK12
			12/144	550 mm	500 mm	8GK1102-4KK22	8GK1112-4KK22
			18/216	800 mm	750 mm	8GK1102-4KK32	8GK1112-4KK32
			24/288	1050 mm	1000 mm	8GK1102-4KK42	8GK1112-4KK42
			30/360	1300 mm	1250 mm	8GK1102-4KK52	8GK1112-4KK52
1100 mm	1050 mm	210 mm	7/84	300 mm	250 mm	8GK1102-5KK12	8GK1112-5KK12
			14/168	550 mm	500 mm	8GK1102-5KK22	8GK1112-5KK22
			21/252	800 mm	750 mm	8GK1102-5KK32	8GK1112-5KK32
			28/336	1050 mm	1000 mm	8GK1102-5KK42	8GK1112-5KK42
			35/420	1300 mm	1250 mm	8GK1102-5KK52	8GK1112-5KK52
1250 mm	1200 mm	210 mm	8/96	300 mm	250 mm	8GK1102-6KK12	8GK1112-6KK12
			16/192	550 mm	500 mm	8GK1102-6KK22	8GK1112-6KK22
			24/288	800 mm	750 mm	8GK1102-6KK32	8GK1112-6KK32
			32/384	1050 mm	1000 mm	8GK1102-6KK42	8GK1112-6KK42
			40/480	1300 mm	1250 mm	8GK1102-6KK52	8GK1112-6KK52
1400 mm	1350 mm	210 mm	9/108	300 mm	250 mm	8GK1102-7KK12	8GK1112-7KK12
			18/216	550 mm	500 mm	8GK1102-7KK22	8GK1112-7KK22
			27/324	800 mm	750 mm	8GK1102-7KK32	8GK1112-7KK32
			36/432	1050 mm	1000 mm	8GK1102-7KK42	8GK1112-7KK42
			45/540	1300 mm	1250 mm	8GK1102-7KK52	8GK1112-7KK52

System overview, page 15/220

© Siemens 2025

Unequipped distribution boards				Flush-mounting distribution boards Unequipped distribution boards
IP44		IP55		IP31
Protection class I	**Protection class II**	**Protection class I**	**Protection class II**	**Protection class I**
8GK1122-1KA12	–	–	–	–
8GK1122-1KA22	–	–	–	–
8GK1122-2KA12	8GK1132-2KA12	–	–	–
8GK1122-2KA22	8GK1132-2KA22	–	–	–
8GK1122-2KA32	8GK1132-2KA32	–	–	–
8GK1122-2KA42	8GK1132-2KA42	–	–	–
8GK1122-3KA12	8GK1132-3KA12	–	–	–
8GK1122-3KA22	8GK1132-3KA22	–	–	8GK1121-3KK22
8GK1122-3KA32	8GK1132-3KA32	–	–	8GK1121-3KK32
8GK1122-3KA42	8GK1132-3KA42	–	–	–
8GK1122-4KA12	8GK1132-4KA12	8GK1123-4KA12	8GK1133-4KA12	–
8GK1122-4KA22	8GK1132-4KA22	8GK1123-4KA22	8GK1133-4KA22	8GK1121-4KK22
8GK1122-4KA32	8GK1132-4KA32	8GK1123-4KA32	8GK1133-4KA32	8GK1121-4KK32
8GK1122-4KA42	8GK1132-4KA42	8GK1123-4KA42	8GK1133-4KA42	–
8GK1122-4KA52	8GK1132-4KA52	8GK1123-4KA52	8GK1133-4KA52	–
8GK1122-5KA12	8GK1132-5KA12	8GK1123-5KA12	8GK1133-5KA12	–
8GK1122-5KA22	8GK1132-5KA22	8GK1123-5KA22	8GK1133-5KA22	–
8GK1122-5KA32	8GK1132-5KA32	8GK1123-5KA32	8GK1133-5KA32	–
8GK1122-5KA42	8GK1132-5KA42	8GK1123-5KA42	8GK1133-5KA42	–
8GK1122-5KA52	8GK1132-5KA52	8GK1123-5KA52	8GK1133-5KA52	–
8GK1122-6KA12	8GK1132-6KA12	8GK1123-6KA12	8GK1133-6KA12	–
8GK1122-6KA22	8GK1132-6KA22	8GK1123-6KA22	8GK1133-6KA22	8GK1121-6KK22
8GK1122-6KA32	8GK1132-6KA32	8GK1123-6KA32	8GK1133-6KA32	8GK1121-6KK32
8GK1122-6KA42	8GK1132-6KA42	8GK1123-6KA42	8GK1133-6KA42	–
8GK1122-6KA52	8GK1132-6KA52	8GK1123-6KA52	8GK1133-6KA52	–
8GK1122-7KA12	8GK1132-7KA12	8GK1123-7KA12	8GK1133-7KA12	–
8GK1122-7KA22	8GK1132-7KA22	8GK1123-7KA22	8GK1133-7KA22	8GK1121-7KK22
8GK1122-7KA32	8GK1132-7KA32	8GK1123-7KA32	8GK1133-7KA32	8GK1121-7KK32
8GK1122-7KA42	8GK1132-7KA42	8GK1123-7KA42	8GK1133-7KA42	–
8GK1122-7KA52	8GK1132-7KA52	8GK1123-7KA52	8GK1133-7KA52	–

System overview, page 15/220

© Siemens 2025

ALPHA 400 distribution boards

Rated current 400 A

Accessories

Spare part doors

Height	Cubicle width	Door version	Door width	Article No.
950 mm	300 mm	Complete	300 mm	8GK9510-6KK10
	550 mm	Complete	550 mm	8GK9510-6KK20
	800 mm	Left	525 mm	8GK9510-6KK31
		Right	275 mm	8GK9510-6KK42
	1050 mm	Left	525 mm	8GK9510-6KK31
		Right	525 mm	8GK9510-6KK52
	1300 mm	Left	775 mm	8GK9510-6KK51
		Right	525 mm	8GK9510-6KK52
1100 mm	300 mm	Complete	300 mm	8GK9510-7KK10
	550 mm	Complete	550 mm	8GK9510-7KK20
	800 mm	Left	525 mm	8GK9510-7KK31
		Right	275 mm	8GK9510-7KK32
	1050 mm	Left	525 mm	8GK9510-7KK31
		Right	525 mm	8GK9510-7KK42
	1300 mm	Left	775 mm	8GK9510-7KK41
		Right	525 mm	8GK9510-7KK42
1250 mm	300 mm	Complete	300 mm	8GK9510-8KK10
	550 mm	Complete	550 mm	8GK9510-8KK20
	800 mm	Left	525 mm	8GK9510-8KK31
		Right	275 mm	8GK9510-8KK32
	1050 mm	Left	525 mm	8GK9510-8KK31
		Right	525 mm	8GK9510-8KK52
	1300 mm	Left	775 mm	8GK9510-8KK41
		Right	525 mm	8GK9510-8KK52
1400 mm	300 mm	Complete	300 mm	8GK9510-8KK16
	550 mm	Complete	550 mm	8GK9510-8KK26
	800 mm	Left	525 mm	8GK9510-8KK37
		Right	275 mm	8GK9510-8KK38
	1050 mm	Left	525 mm	8GK9510-8KK37
		Right	525 mm	8GK9510-8KK58
	1300 mm	Left	775 mm	8GK9510-8KK47
		Right	525 mm	8GK9510-8KK58

System overview, page 15/220

© Siemens 2025

System overview, page 15/220

© Siemens 2025

ALPHA 160 distribution boards

Rated current 160 A

Surface-mounting distribution boards
Unequipped distribution boards

Degree of protection IP44

Height		Depth	Tiers/MW	Width		Protection class II
Outside	Inside	Outside	(MW = 18 mm)	Outside	Inside	
500 mm	450 mm	140 mm	3/36	300 mm	250 mm	8GK1032-1KK11
			3/72	550 mm	500 mm	8GK1032-1KK21
			3/108	800 mm	750 mm	8GK1032-1KK31
650 mm	600 mm	140 mm	4/48	300 mm	250 mm	8GK1032-2KK11
			4/96	550 mm	500 mm	8GK1032-2KK21
			4/144	800 mm	750 mm	8GK1032-2KK31
			4/192	1050 mm	1000 mm	8GK1032-2KK41
800 mm	750 mm	140 mm	5/60	300 mm	250 mm	8GK1032-3KK11
			5/120	550 mm	500 mm	8GK1032-3KK21
			5/180	800 mm	750 mm	8GK1032-3KK31
			5/240	1050 mm	1000 mm	8GK1032-3KK41
950 mm	900 mm	140 mm	6/72	300 mm	250 mm	8GK1032-4KK11
			6/144	550 mm	500 mm	8GK1032-4KK21
			6/216	800 mm	750 mm	8GK1032-4KK31
			6/288	1050 mm	1000 mm	8GK1032-4KK41
1100 mm	1050 mm	140 mm	7/84	300 mm	250 mm	8GK1032-5KK11
			7/168	550 mm	500 mm	8GK1032-5KK21
			7/252	800 mm	750 mm	8GK1032-5KK31
			7/336	1050 mm	1000 mm	8GK1032-5KK41

Flush-mounting distribution boards
Unequipped distribution boards

Degree of protection IP31

Height		Depth	Tiers/MW	Width		Protection class II
Outside	Inside	Outside	(MW = 18 mm)	Outside	Inside	
558 mm	450 mm	120 mm	3/36	358 mm	250 mm	8GK1031-1KK10
			3/72	608 mm	500 mm	8GK1031-1KK20
708 mm	600 mm	120 mm	4/48	358 mm	250 mm	8GK1031-2KK10
			4/96	608 mm	500 mm	8GK1031-2KK20
			4/144	858 mm	750 mm	8GK1031-2KK30
858 mm	750 mm	120 mm	5/60	358 mm	250 mm	8GK1031-3KK10
			5/120	608 mm	500 mm	8GK1031-3KK20
			5/180	858 mm	750 mm	8GK1031-3KK30
			5/240	1108 mm	1000 mm	8GK1031-3KK40
1008 mm	900 mm	120 mm	6/72	358 mm	250 mm	8GK1031-4KK10
			6/144	608 mm	500 mm	8GK1031-4KK20
			6/216	858 mm	750 mm	8GK1031-4KK30
			6/288	1108 mm	1000 mm	8GK1031-4KK40
1158 mm	1050 mm	120 mm	7/84	358 mm	250 mm	8GK1031-5KK10
			7/168	608 mm	500 mm	8GK1031-5KK20
			7/252	858 mm	750 mm	8GK1031-5KK30

System overview, page 15/220

© Siemens 2025

Distribution boards with built-in distribution board panels

Tier spacing 125 mm with N/PE plug-in terminal	Tier spacing 150 mm without N/PE plug-in terminal	Tier spacing 150 mm terminal blocks at top	Tier spacing 125 mm multimedia field
IP44	IP44	IP44	IP44
Protection class II	**Protection class II**	**Protection class II**	**Protection class II**
8GK1052-1KK11	8GK1062-1KK11	–	–
8GK1052-1KK21	8GK1062-1KK21	–	–
8GK1052-1KK31	8GK1062-1KK31	–	–
8GK1052-2KK11	8GK1062-2KK11	–	–
8GK1052-2KK21	8GK1062-2KK21	–	8GK1072-2KK21
8GK1052-2KK31	8GK1062-2KK31	–	–
8GK1052-2KK41	8GK1062-2KK41	–	–
8GK1052-3KK11	8GK1062-3KK11	8GK1082-3KK11	–
8GK1052-3KK21	8GK1062-3KK21	8GK1082-3KK21	–
8GK1052-3KK31	8GK1062-3KK31	8GK1082-3KK31	8GK1072-3KK31
8GK1052-3KK41	8GK1062-3KK41	8GK1082-3KK41	–
8GK1052-4KK11	8GK1062-4KK11	8GK1082-4KK11	–
8GK1052-4KK21	8GK1062-4KK21	8GK1082-4KK21	–
8GK1052-4KK31	8GK1062-4KK31	8GK1082-4KK31	–
8GK1052-4KK41	8GK1062-4KK41	8GK1082-4KK41	–
8GK1052-5KK11	8GK1062-5KK11	8GK1082-5KK11	–
8GK1052-5KK21	8GK1062-5KK21	8GK1082-5KK21	–
8GK1052-5KK31	8GK1062-5KK31	8GK1082-5KK31	–
8GK1052-5KK41	8GK1062-5KK41	8GK1082-5KK41	–

Distribution boards with built-in distribution board panels

Tier spacing 125 mm with N/PE plug-in terminal	Tier spacing 150 mm without N/PE plug-in terminal	Tier spacing 150 mm terminal blocks at top	Tier spacing 125 mm multimedia field
IP31	IP31	IP31	IP31
Protection class II	**Protection class II**	**Protection class II**	**Protection class II**
8GK1051-1KK10	8GK1061-1KK10	–	–
8GK1051-1KK20	8GK1061-1KK20	–	–
8GK1051-2KK10	8GK1061-2KK10	–	–
8GK1051-2KK20	8GK1061-2KK20	–	–
8GK1051-2KK30	8GK1061-2KK30	–	–
8GK1051-3KK10	8GK1061-3KK10	8GK1081-3KK10	–
8GK1051-3KK20	8GK1061-3KK20	8GK1081-3KK20	8GK1072-3KK20
8GK1051-3KK30	8GK1061-3KK30	8GK1081-3KK30	8GK1072-3KK30
8GK1051-3KK40	8GK1061-3KK40	8GK1081-3KK40	–
8GK1051-4KK10	8GK1061-4KK10	8GK1081-4KK10	–
8GK1051-4KK20	8GK1061-4KK20	8GK1081-4KK20	–
8GK1051-4KK30	8GK1061-4KK30	8GK1081-4KK30	8GK1072-4KK30
8GK1051-4KK40	8GK1061-4KK40	8GK1081-4KK40	–
8GK1051-5KK10	8GK1061-5KK10	8GK1081-5KK10	–
8GK1051-5KK20	8GK1061-5KK20	8GK1081-5KK20	–
8GK1051-5KK30	8GK1061-5KK30	8GK1081-5KK30	–

System overview, page 15/220

© Siemens 2025

Assembly kits

For modular installation devices

				ALPHA 1250/630/400		ALPHA 160	
			Tier spacing	125 mm	150 mm	125 mm	150 mm
							
No. of tiers	**MW**	**Height Outside**	**Width Outside**				
1	12	150 mm	250 mm	–	8GK4351-1KK12	–	8GK4351-1KK11
	24	150 mm	500 mm	–	8GK4351-1KK22	–	8GK4351-1KK21
	36	150 mm	750 mm	–	8GK4351-1KK32	–	–
2	24	300 mm	250 mm	8GK4301-2KK12	8GK4351-2KK12	8GK4301-2KK11	8GK4351-2KK11
	48	300 mm	500 mm	8GK4301-2KK22	8GK4351-2KK22	8GK4301-2KK21	8GK4351-2KK21
	72	300 mm	750 mm	–	8GK4351-2KK32	–	–
3	36	450 mm	250 mm	8GK4301-3KK12	8GK4351-3KK12	8GK4301-3KK11	8GK4351-3KK11
	72	450 mm	500 mm	8GK4301-3KK22	8GK4351-3KK22	8GK4301-3KK21	8GK4351-3KK21
	108	450 mm	750 mm	–	8GK4351-3KK32	–	–
4	48	600 mm	250 mm	8GK4301-4KK12	8GK4351-4KK12	8GK4301-4KK11	8GK4351-4KK11
	96	600 mm	500 mm	8GK4301-4KK22	8GK4351-4KK22	8GK4301-4KK21	8GK4351-4KK21
	144	600 mm	750 mm	–	8GK4351-4KK32	–	–

For terminal blocks

		ALPHA 1250/630/400		ALPHA 160
Height Outside	**Width Outside**	**Horizontal**	**Vertical**	**Horizontal**
150 mm	250 mm	8GK4401-1KK12	–	8GK4401-1KK11
	500 mm	–	–	8GK4401-1KK21
300 mm	250 mm	8GK4401-2KK12	8GK4402-2KK12	8GK4401-2KK11
	500 mm	8GK4401-2KK22	8GK4402-2KK22	8GK4401-2KK21
	750 mm	8GK4401-2KK32	8GK4402-2KK32	–
450 mm	250 mm	8GK4401-3KK12	8GK4402-3KK12	–
	500 mm	8GK4401-3KK22	8GK4402-3KK22	–
	750 mm	8GK4401-3KK32	8GK4402-3KK32	–
600 mm	250 mm	–	8GK4402-4KK12	–
	500 mm	–	8GK4402-4KK22	–
	750 mm	–	8GK4402-4KK32	–

System overview, page 15/220

© Siemens 2025

With mounting plates

Mounting plates			Assembly kits		ALPHA 1250/630/400	ALPHA 160
Height	Width	Front cover	Height outside	Width outside		
245 mm	207.5 mm	Closed	300 mm	250 mm	8GK4451-2KK12	8GK4451-2KK11
	457.5 mm	Closed	300 mm	500 mm	8GK4451-2KK22	–
	707.5 mm	Closed	300 mm	750 mm	8GK4451-2KK32	–
395 mm	207.5 mm	Closed	450 mm	250 mm	8GK4451-3KK12	8GK4451-3KK11
	457.5 mm	Closed	450 mm	500 mm	8GK4451-3KK22	–
	707.5 mm	Closed	450 mm	750 mm	8GK4451-3KK32	–
545 mm	207.5 mm	Closed	600 mm	250 mm	8GK4451-4KK12	8GK4451-4KK11
	457.5 mm	Closed	600 mm	500 mm	8GK4451-4KK22	–
	707.5 mm	Closed	600 mm	750 mm	8GK4451-4KK32	–

With mounting plates, perforated

Mounting plates			Assembly kits		ALPHA 1250/630/400
Height	Width	Front cover	Height outside	Width outside	
149 mm	245 mm	–	150 mm	250 mm	8GK4452-1KK12
299 mm	245 mm	–	300 mm	250 mm	8GK4452-2KK12
449 mm	243 mm	–	450 mm	250 mm	8GK4452-3KK12
899 mm	243 mm	–	900 mm	250 mm	8GK4452-6KK12

For unequipped panels

		ALPHA 1250/630/400			ALPHA 160
Height Outside	Width Outside	Standard	With inspection window	With deep-drawn cover 40 mm	Standard
75 mm	250 mm	8GK4501-0KK12	–	–	–
	500 mm	8GK4501-0KK22	–	–	–
150 mm	250 mm	8GK4501-1KK12	–	–	8GK4501-1KK11
	500 mm	8GK4501-1KK22	–	–	8GK4501-1KK21
	750 mm	8GK4501-1KK32	–	–	–
300 mm	250 mm	8GK4501-2KK12	8GK4500-2KK12	8GK4501-2KK13	8GK4501-2KK11
	500 mm	8GK4501-2KK22	8GK4500-2KK22	8GK4501-2KK23	8GK4501-2KK21
	750 mm	8GK4501-2KK32	–	8GK4501-2KK33	–
450 mm	250 mm	8GK4501-3KK12	8GK4500-3KK12	8GK4501-3KK13	8GK4501-3KK11
	500 mm	8GK4501-3KK22	8GK4500-3KK22	8GK4501-3KK23	8GK4501-3KK21
	750 mm	8GK4501-3KK32	–	8GK4501-3KK33	–
600 mm	250 mm	8GK4501-4KK12	8GK4500-4KK12	–	8GK4501-4KK11
	500 mm	8GK4501-4KK22	8GK4500-4KK22	–	8GK4501-4KK21
	750 mm	8GK4501-4KK32	–	–	–
750 mm	250 mm	8GK4501-5KK12	–	–	–
	500 mm	8GK4501-5KK22	–	–	–
	750 mm	8GK4501-5KK32	–	–	–

System overview, page 15/220

© Siemens 2025

Assembly kits

For 3NP1 fuse switch disconnectors

				ALPHA 1250/630/400	
LV HRC fuse Size	**Switches/breakers Quantity**	**Distribution board Height Outside**	**Width Outside**	**Mounting on support plate**	**on busbars [1)]**
00/000	2	300 mm	250 mm	8GK4550-2KK12	8GK4650-2KK12
		450 mm	250 mm	–	8GK4650-3KK12
	4	300 mm	500 mm	8GK4550-2KK22	8GK4650-2KK22
		450 mm	500 mm	–	8GK4650-3KK22
1	1	450 mm	250 mm	8GK4550-3KK12	8GK4651-3KK12
	2	450 mm	500 mm	8GK4550-3KK22	8GK4651-3KK22
2	1	450 mm	250 mm	8GK4551-3KK12	8GK4652-3KK12
3	1	450 mm	500 mm	8GK4551-3KK22	–

[1)] For busbar support 8GK9711-0KK03

Accessories

Cover 3NP1123 ... size 000

- Required for size 000 fuse switch disconnectors

Article No.
8GK9912-0KK00

Busbar supports

Busbar center-to-center spacing	Number of poles	Article No.
60 mm	1-pole	8GK9710-0KK00
	2-pole	8GK9710-0KK01
	3-pole	8GK9711-0KK03
	4-pole	8GK9670-0KK00
40 mm	5-pole	8GK9650-0KK00

System overview, page 15/220

© Siemens 2025

For 3NJ4 fuse switch disconnectors in in-line design

					ALPHA 1250/630/400	
				Busbar center-to-center spacing	100 mm	185 mm
Switches/breakers	**Number of 3NJ4 disconnectors**		**Distribution board**			**Distribution board depth min. 320 mm**
Size	**With screw fixing**	**With fixing claws**	**Height Outside**	**Width Outside**		
Assembly kits for 3NJ4 fuse switch disconnectors						
NH00	4	3	600 mm	250 mm	8GK4751-4KK13	–
	9	8	600 mm	500 mm	8GK4751-4KK23	–
	14	13	600 mm	750 mm	8GK4751-4KK33	–
NH1 – NH3	2	–	750 mm	250 mm	–	8GK4752-5KK15
	4	3	750 mm	500 mm	–	8GK4752-5KK25
	7	6	750 mm	750 mm	–	8GK4752-5KK35

Accessories

Blanking covers

Switching device size	Busbar center-to-center spacing	Height	Width	Article No.
NH00	100 mm	299 mm	50 mm	3NJ4912-2CA00
NH1 – NH3	185 mm	699 mm	50 mm	3NJ4912-2AA00
			100 mm	3NJ4912-2BA00

Ready-to-install copper bars



Switching device size	Distribution board width outside	Article No.
NH00	250 mm	8GK9735-1KK10
	500 mm	8GK9735-1KK20
	750 mm	8GK9735-1KK30
NH1 – NH3	250 mm	8GK9735-2KK10
	500 mm	8GK9735-2KK20
	750 mm	8GK9735-2KK30

Support plate for busbar supports

Switching device size	Installation	Article No.
NH00	Left or right	8GK9800-0KK06
NH1 – NH3	Left or right	8GK9800-0KK07

15

System overview, page 15/220

© Siemens 2025

Assembly kits

For SR60 busbar-adaptable units

	ALPHA 1250/630/400
Busbar center-to-center spacing	60 mm

Height Outside	Width Outside	
300 mm	250 mm	8GK4801-2KK13
	500 mm	8GK4801-2KK23
	750 mm	8GK4801-2KK33
450 mm	250 mm	8GK4801-3KK13
	500 mm	8GK4801-3KK23
	750 mm	8GK4801-3KK33

Accessories

Supports for blanking covers

	Article No.
	8US1922-2EA00

Blanking covers

	Article No.
	8US1922-2EB00

Blanking covers

Width	Article No.
56 mm	8GK9910-0KK08

System overview, page 15/220

© Siemens 2025

For bus-mounting fuse bases, for mounting on busbar systems

				ALPHA 1250/630/400	
			Busbar system	SR60, 60 mm	8US, 60 mm
					
Number of poles		**Height**	**Width**		
3P	**4P**	**Outside**	**Outside**		
■	–	300 mm	250 mm	8GK4801-2KK12	–
		450 mm	250 mm	8GK4801-3KK12	–
	■	300 mm	250 mm	–	8GK4800-2KK12
			500 mm	–	8GK4800-2KK22
			750 mm	–	8GK4800-2KK32

Accessories

Blanking covers

Width	Article No.
56 mm	8GK9910-0KK08

Holding plates



- For 4-pole busbar supports for mounting in section with height of 300 mm

Article No.
8GK9711-0KK07

15

System overview, page 15/220

© Siemens 2025

Assembly kits

For 3KF switch disconnectors with fuses

							ALPHA 1250/630/400	
						Operating mechanism	Front operating mechanism, center	Door-coupling rotary operating mechanism (mounted in the front cover)
Switches/breakers				**Distribution board**				
Size	**Rated current**	**3P**	**4P**	**Height Outside**	**Width Outside**	**Depth Outside**		
3KF1	80 A	■	■	300 mm	250 mm	≥ 210 mm	8GK4722-2KK10	–
3KF2	160 A	■	■	300 mm	500 mm	≥ 210 mm	8GK4723-2KK10	–
3KF3 ... 3KF4	400 A	■	■	300 mm	500 mm	≥ 320 mm	–	8GK4722-2KK20

For 3KD switch disconnectors

								ALPHA 1250/630/400	
							Operating mechanism	Direct operating mechanism	Door-coupling rotary operating mechanism (mounted in the front cover)
									
Switches/breakers					**Distribution board**				
Size	**Rated current**	**Quantity**	**3P**	**4P**	**Height Outside**	**Width Outside**	**Depth Outside**		
1	16 ... 63 A	2	■	–	300 mm	250 mm	210 mm	8GK4720-2KK10	–
2	80 ... 200 A	1	■	■	300 mm	250 mm	210 mm	8GK4720-2KK10	–
3	200 ... 400 A	1	■	■	300 mm	250 mm	210 mm	8GK4721-2KK10	–
3 ... 4	200 ... 800 A	1	■	■	450 mm	500 mm	≥ 250 mm	–	8GK4720-3KK20

System overview, page 15/220

© Siemens 2025

For 3KA switch disconnectors on support plate

							ALPHA 1250/630/400	
						Operating mechanism	Direct operating mechanism	Direct operating mechanism
Switches/breakers					**Distribution board**			
Size	**Rated current**	**Quantity**	**3P**	**4P**	**Height Outside**	**Width Outside**		
3KA 50/51/52/53	63 A/80 A/ 125 A/160 A	1	■	–	300 mm	250 mm	8GK4707-3KK17	–
3KA 55/57/58	250 A/400 A/ 630 A	1	■	■	300 mm	500 mm	–	8GK4707-4KK27

15

System overview, page 15/220

© Siemens 2025

Assembly kits

For 3VL molded case circuit breakers

ALPHA 1250/630/400

Switches/breakers						Distribution board		Standard
Size	Type	Rated current	Quantity	3P	4P	Height Outside	Width Outside	
3VL1	3VL160X	16 ... 160 A	1	■	■	300 mm	250 mm	8GK4701-2KK12
						450 mm	250 mm	8GK4701-3KK12
3VL2	3VL160	50 ... 160 A	1	■	■	300 mm	250 mm	8GK4701-2KK12
						450 mm	250 mm	8GK4701-3KK12
3VL3	3VL250	200 ... 250 A	1	■	■	450 mm	250 mm	8GK4701-3KK12
3VL4	3VL400	200 ... 400 A	1	■	■	600 mm	250 mm	8GK4702-4KK12
						750 mm	250 mm	–
3VL5	3VL630	315 ... 630 A	1	■	–	600 mm	250 mm	8GK4703-4KK13
			1	■	■	600 mm	500 mm	8GK4704-4KK13
			1	■	–	600 mm	500 mm	–
			1	–	■	600 mm	500 mm	–
3VL6	3VL800	800 A	1	■	–	600 mm	250 mm	8GK4704-4KK15
			1	■	■	600 mm	500 mm	8GK4704-4KK25
3VL7	3VL1250	1000 ... 1250 A	1	■	■	600 mm	500 mm	8GK4705-4KK25
3VL8	3VL1600	1600 A	1	■	■	600 mm	500 mm	8GK4705-4KK25

System overview, page 15/220

© Siemens 2025

With RCD module mounted	**For installation with front-operated rotary operating mechanism**
–	–
8GK4720-3KK10	8GK4722-3KK10
–	–
8GK4721-3KK10	8GK4722-3KK10
8GK4721-3KK10	8GK4722-3KK10
–	8GK4722-4KK10
8GK4720-5KK10	–
–	–
–	–
–	8GK4723-4KK10
–	8GK4721-4KK20
–	–
–	–
–	–
–	–

System overview, page 15/220

© Siemens 2025

Assembly kits

For 3VA molded case circuit breakers, 3-pole and 4-pole

ALPHA 1250/630/400

Switches/breakers						Distribution board		
Size	Rated current	Quantity	Direct operating mechanism	Rotary operating mechanism	Motorized operating mechanism	Height Outside	Width Outside	
3VA10.., 3VA11..	100 ... 160 A	1	■	–	■	300 mm [1]	250 mm	8GK4731-2KK12 [4]
						450 mm	250 mm	8GK4730-2KK12 [4]
			–	■	–	300 mm [1]	250 mm	8GK4733-2KK12
			–	–	■	300 mm [1]	250 mm	–
						450 mm	250 mm	–
		3	■	–	–	300 mm [1]	500 mm	8GK4731-2KK22
						450 mm	500 mm	8GK4730-2KK22
			–	■	–	300 mm [1]	500 mm	8GK4733-2KK22
			–	–	■	300 mm [1]	500 mm	–
						450 mm	500 mm	–
3VA12	250 A	1	■	–	–	300 mm	250 mm	8GK4732-2KK12
						450 mm	250 mm	8GK4733-3KK10
			–	■	–	300 mm	250 mm	8GK4735-2KK12
			–	–	■	300 mm	250 mm	–
						450 mm	250 mm	–
						600 mm	250 mm	–
		3	■	–	–	300 mm	500 mm	8GK4732-2KK22
						450 mm	500 mm	8GK4731-3KK20
			–	■	–	300 mm	500 mm	8GK4735-2KK22
			–	–	■	300 mm	500 mm	–
3VA20.., 3VA22..	100 ... 250 A	1	■	–	–	300 mm	250 mm	8GK4730-3KK10
			–	■	–	300 mm	250 mm	8GK4736-2KK12
			–	–	■	600 mm	250 mm	–
		3	■	–	–	300 mm	500 mm	8GK4730-3KK20
			–	■	–	300 mm	500 mm	8GK4736-2KK22
			–	–	■	600 mm	500 mm	–
3VA23.., 3VA24..	400 ... 630 A	1	■	–	–	450 mm	250 mm	8GK4730-4KK12
							500 mm	8GK4730-4KK22
			–	■	–	450 mm	500 mm	8GK4733-4KK22
			–	–	■	450 mm	250 mm	–
							500 mm	–
						600 mm	250 mm	–
							500 mm	–

[1] For insulated connection only
[2] Distribution board depth at least 250 mm
[3] Distribution board depth at least 320 mm
[4] With side mounted motorized operating mechanism

15

System overview, page 15/220

© Siemens 2025

	With RCD module Infeed side	At side	With RCD module Infeed side	At side
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
8GK4734-2KK12 [2]	–	–	–	–
–	8GK4731-3KK12 [4]	8GK4731-3KK10	8GK4734-3KK12 [2]	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
8GK4734-2KK22 [2]	–	–	–	–
–	8GK4731-3KK22	–	8GK4734-3KK22 [2]	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
8GK4735-3KK10 [2]	–	–	–	–
–	–	–	–	8GK4733-4KK10 [2]
–	8GK4732-4KK10	–	8GK4736-4KK12	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
8GK4732-3KK20 [2]	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	8GK4735-4KK12	–	–	–
–	–	–	–	–
–	–	–	–	–
–	8GK4735-4KK22	–	8GK4736-4KK22 [3]	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
8GK4734-4KK12 [3]	–	–	–	–
8GK4734-4KK22 [3]	–	–	–	–
–	8GK4731-4KK12	–	–	–
–	8GK4731-4KK22	–	–	–

15

System overview, page 15/220

© Siemens 2025

Assembly kits

For meter mounting without top and bottom terminal compartment

ALPHA 630

Height Outside	Width Outside	
450 mm	250 mm	8GE3713-4

For meter mounting with top and bottom terminal compartment

ALPHA ZS

Covers



Height	Width	Top/bottom terminal compartment
150 mm	250 mm	8GS4006-0
300 mm	250 mm	8GS4006-5

ALPHA ZS

Meter support plate

Height	Width	Position	1 × Counter	2 × Counter	TSG
450 mm	250 mm	–	8GS4007-4	–	–
375 mm	250 mm	Top	–	8GS4007-5	–
		Bottom	–	8GS4007-6	–
300 mm	250 mm	–	–	–	8GS4007-7

System overview, page 15/220

© Siemens 2025

Accessories

Supports for front cover

Article No.
8GS4018-8

DIN rails



Article No.
8GS4010-6

Partition for meter field, lateral (only protection class 1)

Article No.
8GK9302-3KK01

Retrofit kit for busbar supports for one panel width

	Article No.
For copper busbars with cross-sections 12 × 5 mm² und 12 × 10 mm²	8GS4018-3

Front covers for measuring devices

ALPHA 1250/630/400

Use	Height Outside	Width Outside	Cutout dimensions	
1 × measuring device 96 × 96 mm	300 mm	500 mm	92 × 92 mm	8GK4500-2KK20

15

For cable connections to the door

ALPHA 1250/630/400

Height	Width	Diameter	
150 mm	250 mm	M20	8GK4500-1KK12
	500 mm	M20	8GK4500-1KK22

System overview, page 15/220

© Siemens 2025

Quick-assembly kits

For modular installation devices and terminal blocks

					ALPHA 400	
				Tier spacing	125 mm	
Height Outside	**Width Outside**	**No. of tiers**	**Terminals**	**MW**	**With N/PE bar**	**With 2 N/PE bars**
For modular installation devices						
450 mm	250 mm	3	–	36	8GK4001-3KK11	–
600 mm	250 mm	4	–	48	8GK4001-4KK11	–
	500 mm	8	–	96	8GK4001-4KK22	–
750 mm	250 mm	5	–	60	8GK4001-5KK11	–
	500 mm	10	–	120	8GK4001-5KK22	–
900 mm	250 mm	6	–	72	8GK4001-6KK11	8GK4003-6KK11
	500 mm	12	–	144	8GK4001-6KK22	–
1050 mm	250 mm	7	–	84	8GK4001-7KK11	8GK4003-7KK11
	500 mm	14	–	168	8GK4001-7KK22	–
1200 mm	250 mm	8	–	96	8GK4001-8KK12	8GK4003-8KK12
	500 mm	16	–	192	8GK4001-8KK22	–
1350 mm	250 mm	9	–	108	8GK4002-8KK12	8GK4003-8KK13
	500 mm	18	–	216	8GK4002-8KK22	–
For modular installation devices and terminal blocks						
900 mm	250 mm	2	4	48	–	–
	500 mm	4	8	96	–	–
	750 mm	6	12	144	–	–
1050 mm	250 mm	2	5	60	–	–
	500 mm	4	10	120	–	–
	750 mm	6	15	180	–	–
1200 mm	250 mm	2	6	72	–	–
	500 mm	4	12	144	–	–
	750 mm	6	18	216	–	–
1350 mm	250 mm	3	6	72	–	–
	500 mm	6	12	144	–	–
	750 mm	9	18	216	–	–

System overview, page 15/220

© Siemens 2025

150 mm

Without N/PE bar
8GK4051-3KK11
8GK4051-4KK11
–
8GK4051-5KK11
–
8GK4051-6KK11
8GK4101-6KK22
8GK4051-7KK11
8GK4101-7KK22
8GK4101-8KK12
8GK4101-8KK22
8GK4102-8KK12
8GK4102-8KK22
8GK4100-6KK12
8GK4100-6KK22
8GK4100-6KK32
8GK4100-7KK12
8GK4100-7KK22
8GK4100-7KK32
8GK4100-8KK12
8GK4100-8KK22
8GK4100-8KK32
8GK4110-8KK12
8GK4110-8KK22
8GK4110-8KK32

System overview, page 15/220

© Siemens 2025

Busbars

For ALPHA 1250/630/400 distribution boards

Cu busbars

Cross-section	Current	Length	Article No.
12 × 5 mm	250 A	250 mm	8GK9731-0KK10
		500 mm	8GK9731-0KK20
		750 mm	8GK9731-0KK30
		1000 mm	8GK9731-0KK40
		1250 mm	8GK9731-0KK50
20 × 5 mm	320 A	250 mm	8GK9733-0KK10
		500 mm	8GK9733-0KK20
		750 mm	8GK9733-0KK30
		1000 mm	8GK9733-0KK40
		1250 mm	8GK9733-0KK50
30 × 5 mm	450 A	250 mm	8GK9735-0KK10
		500 mm	8GK9735-0KK20
		750 mm	8GK9735-0KK30
		1000 mm	8GK9735-0KK40
		1250 mm	8GK9735-0KK50
30 × 10 mm	630 A	250 mm	8GK9736-0KK10
		500 mm	8GK9736-0KK20
		750 mm	8GK9736-0KK30
		1000 mm	8GK9736-0KK40
		1250 mm	8GK9736-0KK50

Busbar supports

Version	Use	Busbar center-to-center spacing	Article No.
1-pole	For Cu busbars 12 × 5 (10) mm, 20 × 5 (10) mm, 30 × 5 (10) mm	–	8GK9710-0KK00
2-pole	For Cu busbars 12 × 5 (10) mm, 20 × 5 (10) mm, 30 × 5 (10) mm	60 mm	8GK9710-0KK01
3-pole	For Cu busbars 12 × 5 (10) mm, 20 × 5 (10) mm, 30 × 5 (10) mm, Bus-mounting fuse bases and 3NP4076 switch disconnectors in conjunction with assembly kits	60 mm	8GK9711-0KK03
4-pole	For Cu busbars 12 × 5 (10) mm, 30 × 5 (10) mm	60 mm	8GK9670-0KK00
5-pole	For Cu busbars 12 × 5 (10) mm 3NP fuse switch disconnectors	40 mm	8GK9650-0KK00

System overview, page 15/220

© Siemens 2025

Accessories

For ALPHA 1250/630/400/160 distribution boards

Wall-mounting rails

- For all wall-mounted distribution boards

Length	Article No.	1250	630	400	160
250 mm	8GK9912-0KK10			■	■
500 mm	8GK9912-0KK20			■	■
750 mm	8GK9912-0KK30			■	■
1000 mm	8GK9912-0KK40			■	■
1250 mm	8GK9912-0KK50			■	■

Cabinet mounting lugs, flat

Use	Article No.	1250	630	400	160
For mounting and fixing a distribution board directly against the wall without a clearance (1 set = 4 units)	8GK9910-0KK36		■	■	■
For connecting 2 distribution boards and for mounting and fixing a distribution board directly against the wall without a clearance (8GK9910-0KK36 additionally required for the ends) 1 set = 2 units	8GK9910-0KK37		■	■	■

Wall mounting lug, standard

- 1 set = 4 units

Article No.	1250	630	400	160
8GK9920-0KK33	■	■	■	■

Hollow wall set

Use	Article No.	1250	630	400	160
For mounting flush-mounting distribution boards in hollow walls	8GK9910-0KK28			■	■

M12 transport eyebolts

Article No.	1250	630	400	160
8GK9918-0KK00	■	■	■	■

Ventilation grilles for side panel

Article No.	1250	630	400	160
8GK9120-0KK30	■	■	■	

Bases for flat pack floor-mounted distribution boards



Height outside	Depth	Width	Article No.	1250	630	400	160
100 mm	210 mm	300 mm	8GK9901-0KK12		■		
		550 mm	8GK9901-0KK22		■		
		800 mm	8GK9901-0KK32		■		
		1050 mm	8GK9901-0KK42		■		
		1300 mm	8GK9901-0KK52		■		

15

System overview, page 15/220

© Siemens 2025

Accessories

For ALPHA 1250/630/400/160 distribution boards

Bases for pre-assembled (welded) floor-mounted distribution boards



Height outside	Depth	Width	Article No.	1250	630	400	160
100 mm	210 mm	300 mm	8GK9901-0KA12		■		
		550 mm	8GK9901-0KA22		■		
		800 mm	8GK9901-0KA32		■		
		1050 mm	8GK9901-0KA42		■		
		1300 mm	8GK9901-0KA52		■		
	250 mm	300 mm	8GK9900-0KK13		■		
		550 mm	8GK9900-0KK23		■		
		800 mm	8GK9900-0KK33		■		
		1050 mm	8GK9900-0KK43		■		
		1300 mm	8GK9900-0KK53		■		
	320 mm	300 mm	8GK9900-0KK14		■		
		550 mm	8GK9900-0KK24		■		
		800 mm	8GK9900-0KK34		■		
		1050 mm	8GK9900-0KK44		■		
		1300 mm	8GK9900-0KK54		■		
	400 mm	300 mm	8GK9902-0KK13	■			
		550 mm	8GK9902-0KK23	■			
		800 mm	8GK9902-0KK33	■			
		1050 mm	8GK9902-0KK43	■			
		1300 mm	8GK9902-0KK53	■			

Partitions, vertical

- For the visual and spatial separation of different potentials

Cubicle depth	Height	Article No.	1250	630	400	160
140 mm	450 mm	8GK9001-3KK01				■
	600 mm	8GK9001-4KK01				■
	750 mm	8GK9001-5KK01				■
	900 mm	8GK9001-6KK01				■
	1050 mm	8GK9001-7KK01				■
210 mm	300 mm	8GK9301-2KK01		■	■	
	450 mm	8GK9301-3KK01		■	■	
	600 mm	8GK9101-4KK01		■	■	
	750 mm	8GK9101-5KK01		■	■	
	900 mm	8GK9101-6KK01		■	■	
	1050 mm	8GK9101-7KK01		■	■	
	1200 mm	8GK9101-8KK01		■	■	
	1350 mm	8GK9102-8KK01		■	■	
	1800 mm	8GK9520-8KK01		■		
250/320 mm	1800 mm	8GK9520-8KK00		■		
400 mm	1800 mm	8GK9521-8KK00	■			

System overview, page 15/220

© Siemens 2025

Partitions, horizontal

- For the visual and spatial separation of different potentials

Cubicle depth	Width	Article No.	1250	630	400	160
140 mm	250 mm	8GK9002-0KK10				■
210 mm	250 mm	8GK9103-0KK10		■	■	
	500 mm	8GK9103-0KK20		■	■	
	750 mm	8GK9103-0KK30		■	■	
250/320 mm	250 mm	8GK9520-0KK10		■		
	500 mm	8GK9520-0KK20		■		
400 mm	250 mm	8GK9520-0KK30	■			

Mounting plates

Cubicle Height	Cubicle Width	Mounting plates Height	Mounting plates Width	Article No.	1250	630	400	160
600 mm	250 mm	596 mm	243 mm	8GK9531-4KK10			■	
	500 mm	596 mm	493 mm	8GK9531-4KK20			■	
750 mm	250 mm	685 mm	243 mm	8GK9531-5KK10			■	
	500 mm	685 mm	493 mm	8GK9531-5KK20			■	
900 mm	250 mm	835 mm	243 mm	8GK9531-6KK10			■	
	500 mm	835 mm	493 mm	8GK9531-6KK20			■	
1050 mm	250 mm	985 mm	243 mm	8GK9531-7KK10			■	
	500 mm	985 mm	493 mm	8GK9531-7KK20			■	
1200 mm	250 mm	1135 mm	243 mm	8GK9531-8KK10			■	
	500 mm	1135 mm	493 mm	8GK9531-8KK20			■	
1350 mm	250 mm	1285 mm	243 mm	8GK9532-8KK10			■	
	500 mm	1285 mm	493 mm	8GK9532-8KK20			■	
1800 mm	250 mm	1680 mm	242 mm	8GK9533-0KK10	■	■		
	500 mm	1680 mm	492 mm	8GK9533-0KK20	■	■		
	750 mm	1680 mm	742 mm	8GK9533-0KK30	■	■		
	1000 mm	1680 mm	992 mm	8GK9533-0KK40	■	■		
	1250 mm	1680 mm	1242 mm	8GK9533-0KK50	■	■		

Mounting plates for telecommunication units

- Made of perforated steel plate
- With insert nuts and quick-locking technology

Cubicle Height	Cubicle Width	Mounting plates Height	Mounting plates Width	Article No.	1250	630	400	160
900 mm	250 mm	835 mm	243 mm	8GS4016-1			■	
1050 mm	250 mm	985 mm	243 mm	8GS4016-2			■	
1200 mm	250 mm	1135 mm	243 mm	8GS4016-3			■	
1350 mm	250 mm	1285 mm	243 mm	8GS4016-4			■	

Longitudinal stays

- In order to mount the assembly kits in unequipped distribution boards, 2 longitudinal stays are required for each assembly kit width
- 1 set = 2 stays

Cubicle depth	Length	Article No.	1250	630	400	160
210 mm	300 mm	8GK4855-2KK02		■		
	450 mm	8GK4851-3KK00				■
	600 mm	8GK4851-4KK00			■	■
	750 mm	8GK4851-5KK00			■	■
	900 mm	8GK4851-6KK00			■	■
	1050 mm	8GK4851-7KK00			■	■
	1200 mm	8GK4851-8KK00			■	
	1350 mm	8GK4852-8KK00			■	
	1800 mm	8GK4853-8KK00		■		
250 mm, 320 mm, 400 mm	1800 mm	8GK4853-8KK02	■	■		

15

System overview, page 15/220

© Siemens 2025

Accessories

For ALPHA 1250/630/400/160 distribution boards

Stay supports

- For depth of 210 mm when mounting stays are to be shifted forward by 55 mm
- Necessary whenever DIN rails are mounted directly on the stays

Article No.	1250	630	400	160
8GK9910-0KK38			■	

Universal brackets

Article No.	1250	630	400	160
8GK9910-0KK05	■	■		

Connection kits for longitudinal stays

Depth	Article No.	1250	630	400	160
250/320 mm	8GK9910-0KK32	■	■	■	

Crossbars

Width	Article No.	1250	630	400	160
500 mm	8GK4853-0KK20	■	■	■	
750 mm	8GK4853-0KK30	■	■	■	

Front cover, closed

- Minimum order quantity = 10 units

Height	Width	Article No.	1250	630	400	160
75 mm	250 mm	8GK9601-0KK10	■	■	■	■
150 mm	250 mm	8GK9601-1KK10	■	■	■	■
	500 mm	8GK9601-1KK20	■	■	■	■
	750 mm	8GK9601-1KK30	■	■	■	■
300 mm	250 mm	8GK9601-2KK10	■	■	■	■
	500 mm	8GK9601-2KK20	■	■	■	■
	750 mm	8GK9601-2KK30	■	■	■	■
450 mm	250 mm	8GK9601-3KK10	■	■	■	■
	500 mm	8GK9601-3KK20	■	■	■	■
	750 mm	8GK9601-3KK30	■	■	■	■
600 mm	250 mm	8GK9601-4KK10	■	■	■	■
	500 mm	8GK9601-4KK20	■	■	■	■
	750 mm	8GK9601-4KK30	■	■	■	■

Front cover with cutout

- Minimum order quantity = 10 units

Tier spacing	Height	Width	Tiers	MW	Article No.	1250	630	400	160
150 mm	150 mm	250 mm	1	12	8GK9601-1KK11	■	■	■	■
		500 mm	1	24	8GK9601-1KK21	■	■	■	■
		750 mm	1	36	8GK9601-1KK31	■	■	■	■
	300 mm	250 mm	2	24	8GK9601-2KK11	■	■	■	■
		500 mm	2	48	8GK9601-2KK21	■	■	■	■
		750 mm	2	72	8GK9601-2KK31	■	■	■	■
	450 mm	250 mm	3	36	8GK9601-3KK11	■	■	■	■
		500 mm	3	72	8GK9601-3KK21	■	■	■	■
		750 mm	3	108	8GK9601-3KK31	■	■	■	■
	600 mm	250 mm	4	48	8GK9601-4KK11	■	■	■	■
		500 mm	4	96	8GK9601-4KK21	■	■	■	■
		750 mm	4	144	8GK9601-4KK31	■	■	■	■

System overview, page 15/220

© Siemens 2025

Supports for front cover



- Plastic

Version	Length	Mounting	Article No.	1250	630	400	160
Spare part	117 mm	Standard	8GK9910-0KK30	■	■	■	
	54 mm	Standard	8GK9910-0KK20				■
Large pack	117 mm	For 15 mm DIN rail directly onto the DIN-rail holder	8GK9910-0KK31	■	■	■	
	61.5 mm	For 15 mm DIN rail directly onto the stays	8GK9910-0KK24	■	■	■	

Assembly tool for supports

- For short and long version
- With ergonomic handle

Article No.	1250	630	400	160
8GK9910-0KK27	■	■	■	■

Support extensions

Length	Article No.	1250	630	400	160
7.5 mm	8GK9911-0KK03	■	■	■	■

Quick-lock screws for front cover

Material	Color	Article No.	1250	630	400	160
Plastic	RAL 7035 (light gray)	8GK9910-0KK26	■	■	■	■

Spare part door hinges

- For wall/floor-mounted distribution boards
- 1 set = 2 units

Version	Article No.	1250	630	400	160
Door hinges prior to 2019 (1 piece)	8GK9920-0KK24	■	■	■	■

Door hinges from 2019 onwards (2 pieces)	8GK9920-1KK24	■	■	■	■

Circuit diagram pockets

Version	Format	Depth	Article No.	1250	630	400	160
Sheet steel	DIN A3	10 mm	8GK9910-0KK22	■	■	■	■
Transparent sleeve, adhered all-over	DIN A4		8GK9910-0KK23	■	■	■	■
Plastic	DIN A4	30 mm	8GD9132	■	■	■	■
Plastic, large pack	DIN A4	30 mm	8GK9910-1KK24	■	■	■	■

Siemens nameplate

Material	Version	Color	Article No.	1250	630	400	160
Aluminum	Self-adhesive	Petrol	8GD9084	■	■	■	■
Sticker	Self-adhesive	Petrol	8GF9661	■	■	■	■

System overview, page 15/220

© Siemens 2025

Accessories

For ALPHA 1250/630/400/160 distribution boards

			1250	630	400	160
IP44/IP55 locking systems for wall-mounted distribution boards						
	Version	**Article No.**				
	Standard locking device with rotary handle	8GK9560-0KK04			■	■
	Retrofit kit for standard locking device with degree of protection IP44	8GK9560-0KK05			■	■
	Rotary handle locking device for profile cylinders (E012 or Senat tumbler)	8GK9560-0KK06			■	■
	Rotary handle, lockable, incl. E012 lock and two keys	8GK9560-0KK13			■	■
	Rotary handle incl. double-bit interlocking mechanism	8GK9561-0KK04			■	■
Locking systems for floor-mounted distribution boards						
	Version	**Article No.**				
	Rotary handle, recessable, with pushbutton technique	8GK9561-0KK01	■	■		
	Lock insert for installation of profile semicylinder	8GK9561-0KK02	■	■		
Profile semicylinder for locks						
	Use / **Version**	**Article No.**				
	Wall-mounted distribution boards — With E012 lock and two keys	8GK9560-0KK07			■	■
	With Senat tumbler and two keys	8GK9560-0KK08			■	■
	With 3-mm pin as double-bit lock	8GK9560-0KK10			■	■
	Floor-mounted distribution boards — With E012 lock and two keys	8GK9561-0KK00	■	■		
	With Senat tumbler and two keys	8GK9560-0KK03	■	■		

15

System overview, page 15/220

© Siemens 2025

			1250	630	400	160
Spare keys						
	Version	**Article No.**				
	For double-bit interlocking mechanism	8GD9290	■	■		
	For E012 lock	8GF9390-2	■	■	■	■
Connecting kits for distribution boards, IP44/IP55						
	• For side-by-side mounting of enclosures • Comprising: screws, washers, nuts and 5 m roll of sealing strip					
	Article No.					
		8GK9920-0KK31		■	■	
		8GK9920-0KK50	■			
Extra-deep brackets						
	• For recessed installation of DIN rails					
	Article No.					
		8GK9910-0KK34	■	■	■	
Extra-deep brackets, depth-adjustable						
	**Article No.**					
		8GK9911-0KK01	■	■	■	
Drop-down brackets, universal						
	Article No.					
		8GK9911-0KK02	■	■	■	
DIN rails, lowered						
	**Width**	**Article No.**				
	250 mm	8GK9910-0KK35	■	■	■	
	500 mm	8GK9910-0KK40	■	■	■	
	750 mm	8GK9910-0KK41	■	■	■	
15 mm DIN rails						
	**Width**	**Article No.**				
	250 mm	8GK9910-1KK10	■	■		
	500 mm	8GK9910-1KK20	■	■		
	750 mm	8GK9910-1KK30	■	■		
	1000 mm	8GK9910-1KK40	■	■		
	1250 mm	8GK9910-1KK50	■	■		
DIN-rail holders for 15 mm DIN rail						
	• Comprising a left and a right holder					
	Version	**Type**	**Article No.**			
	Long	For 1 DIN rail	8GK9910-1KK81	■	■	■
		For 2 DIN rails	8GK9910-1KK83	■	■	■
		For 3 DIN rails	8GK9910-1KK84	■	■	■
		For 4 DIN rails	8GK9910-1KK85	■	■	■

15

System overview, page 15/220

© Siemens 2025

Accessories

For ALPHA 1250/630/400/160 distribution boards

			1250	630	400	160
Iso supports						
	• For insulated DIN-rail assembly					
	Type	**Article No.**				
	4 mm	8GK9911-0KK07	■	■	■	■
	31.5 mm	8GK9911-0KK05	■	■	■	
	55.5 mm	8GK9911-0KK06	■	■	■	
Torx-slotted screws M5 × 10, self-tapping						
	• Large pack: 500 units					
		Article No.				
		8GK9911-0KK00	■	■	■	■
Crossbars for mounting vertical busbar systems						
	Width	**Article No.**				
	250 mm	8GK9911-1KK00	■	■	■	
	500 mm	8GK9911-1KK01	■	■	■	
	750 mm	8GK9911-1KK02	■	■	■	
Blanking strips						
	Type / **Color**	**Article No.**				
	For 12 MW (1 MW = 18 mm) / RAL 7035 (light gray)	8GK9910-0KK00	■	■	■	■
	Length 1 m w/o pressure-relief joint, to cut to length / RAL 7035 (light gray)	8GK9910-0KK01	■	■	■	■
Blanking plugs						
	Diameter	**Article No.**				
	16 mm	8GK9910-0KK06	■	■	■	■
	10 mm	8GK9910-0KK07	■	■	■	■
N terminals						
	• For snap-on mounting onto the DIN rail • For distributing the neutral conductor when using several RCCBs • 2 × screw terminal, conductor cross-section max. 16 mm² • 14 × plug-in terminal, conductor cross-section max. 4 mm²					
		Article No.				
		8GS4034-1	■	■	■	■
PE terminals						
	• For snap-on mounting onto the DIN rail • 2 × screw terminal, conductor cross-section max. 16 mm² • 14 × plug-in terminal, conductor cross-section max. 4 mm²					
		Article No.				
		8GS4034-2	■	■	■	■
N/PE terminals						
	• For snap-on mounting onto the DIN rail • For distributing the neutral conductor when using several RCCBs • 1 × screw terminal, conductor cross-section max. 16 mm², per PE and N potential • 7 × plug-in terminal, conductor cross-section max. 4 mm², per PE and N potential					
		Article No.				
		8GS4034-3	■	■	■	■
N/N terminals						
	• For snap-on mounting onto the DIN rail • For distributing the neutral conductor when using several RCCBs • 1 × screw terminal, conductor cross-section max. 16 mm², per PE and N potential • 7 × plug-in terminal, conductor cross-section max. 4 mm², per PE and N potential					
		Article No.				
		8GS4034-4	■	■	■	■

15

System overview, page 15/220

© Siemens 2025

				1250	630	400	160
Terminals for circular conductors							
	Busbar thickness	**Conductor cross-section**	**Article No.**				
	5 mm	1.5 ... 16 mm²	8US1921-2AA00	■	■	■	
		1.5 ... 35 mm²	8US1921-2AB00	■	■	■	
		16 ... 70 mm²	8US1921-2AC00	■	■	■	
		16 ... 120 mm²	8US1921-2AD00	■	■	■	
Terminals for circular conductors							
	Busbar thickness	**Conductor cross-section**	**Article No.**				
	10 mm	1.5 ... 16 mm²	8US1921-2BA00	■	■	■	
		1.5 ... 35 mm²	8US1921-2BB00	■	■	■	
		16 ... 70 mm²	8US1921-2BC00	■	■	■	
		16 ... 120 mm²	8US1921-2BD00	■	■	■	
Terminals with bases made of glass-fiber reinforced polyester resin							
	Incoming cables		**Outgoing cables**			**Article No.**	
	Quantity	**Cross-section**	**Quantity**	**Cross-section**			
	1	6 ... 70 mm²	1	6 ... 70 mm²	8JK401	■	■	■	
		50 ... 240 mm²	1	50 ... 240 mm²	8JK4061	■	■	■	
	2	50 ... 240 mm²	2	50 ... 185 mm²	8JK406	■	■	■	

15

System overview, page 15/220

© Siemens 2025

Accessories

For ALPHA 1250/630/400/160 distribution boards

Incoming and outgoing terminal for busbars

Busbar Dimensions	Busbar Quantity	Conductor cross-section	Description	Article No.	1250	630	400	160
20 × 8 mm	1 or 2	50 ... 240 mm²	1 conductor per clamping point	8JK3171	■	■	■	
			2 conductors per clamping point	8JK3172	■	■	■	

N/PE bars as plug-in terminals

- For mounting on longitudinal stays at a 30° inclination

Type	Connections	Article No.				
PE bar	6 screw connections 2.5 ... 16 mm² and 21 screw connections 1.5 ... 4 mm²	8GK9910-0KK11				■
PE + N bar	PE bar: 6 screw connections 2.5 ... 16 mm² and 21 screw connections 1.5 ... 4 mm² N bar: 2 screw connections 2.5 ... 16 mm² and 10 screw connections 1.5 ... 4 mm²	8GK9910-0KK12				■

Cable clamping rail

- For strain relief
- C profile 30 × 15 mm

Width	Article No.				
250 mm	8GK9911-0KK10	■	■	■	
500 mm	8GK9911-0KK20	■	■	■	
750 mm	8GK9911-0KK30	■	■	■	
1000 mm	8GK9911-0KK40	■	■	■	
1250 mm	8GK9911-0KK50	■	■	■	

Cable holders

Use	Version	Article No.				
For DIN rail	Height 45 mm, width 40 mm	8GK9910-0KK80	■	■	■	
For mounting in 5-mm hole	Clip with cable tie	8GK9910-0KK81	■	■	■	

Cable flange for cable entry (version only for flat pack)





Type	Degree of protection	Cable routing	Article No.				
1-component flange	IP44	Bottom	8GK9100-0KK00	■	■	■	
2-component flange		Top/bottom	8GK9000-0KK02				■
2-component flange	IP55	Top/bottom	8GK9100-0KK01	■	■	■	
Bushing flange		Busbar system	8GK9100-0KK10	■	■	■	

Cable flange for cable entry– only protection class I (version only for flat pack)

Version	Degree of protection	Cable diameter	Article No.				
Blank flange	IP44		8GK9100-0KK02	■	■	■	
	IP55		8GK9100-0KK03	■	■	■	
Flange, incl. 1 cable support sleeve	IP55	14 ... 65 mm	8GK9100-0KK05	■	■	■	
Flange, incl. 2 cable support sleeves	IP55	14 ... 65 mm	8GK9100-0KK06	■	■	■	

15

System overview, page 15/220

© Siemens 2025

				1250	630	400	160
Flange for cable entry, IP55							
	**Type**	**Cable diameter**	**Article No.**				
	2-component flange	58 × 5 ... 10 mm/2 × 16 ... 35 mm 8 × 11 ... 16 mm/2 × 15 ... 45 mm	8GK9101-0KK00	■ [1]	■	■	
	2-component flange, pack of 10	58 × 5 ... 10 mm/2 × 16 ... 35 mm 8 × 11 ... 16 mm/2 × 15 ... 45 mm	8GK9101-0KK01	■ [1]	■	■	
	Sheet steel closed, 214 mm × 136 mm		8GK9101-0KK02	■	■	■	
	Sheet steel incl. 1 cable support sleeve 8HC6900	14 ... 65 mm	8GK9101-0KK05	■	■	■	
	Sheet steel incl. 2 cable support sleeves 8HC6900	14 ... 65 mm	8GK9101-0KK06	■	■	■	
Rubber cable entries							
	• For inserting in 38 mm diameter knockouts (= Pg29) • Degree of protection IP65						
	Quantity	**Cable diameter**	**Article No.**				
	1	12 ... 29 mm	8HP1805	■	■	■	■
	2	6 ... 15 mm	8HP1806	■	■	■	■
	3	4 ... 12.5 mm	8HP1807	■	■	■	■
	4	4 ... 12 mm	8HP1808	■	■	■	■
Cable entries for cable entry plate							
	Cable diameter		**Article No.**				
	14 ... 65 mm		8HC6900	■	■	■	■
Breathers, PG 16							
	• For distribution boards in an outdoor climate to avoid condensate • Degree of protection IP54						
			Article No.				
			8HE8541	■	■	■	■

[1] Roof plate only

15

System overview, page 15/220

© Siemens 2025

System overview

Small distribution boards ALPHA

SIMBOX XL

SIMBOX WP

© Siemens 2025

ALPHA SIMBOX XL

Flush-mounting and hollow-wall distribution boards

Surface-mounting distribution boards

Multimedia distribution boards

Accessories

Terminal strips

RCCB terminals

Door locking kit

Mounting aid for flush mounting

ALPHA SIMBOX WP

Surface-mounting distribution boards

Accessories

Covers

N/PE terminal strips

Inner partitions

Safety cylinder locks

Note:
You will find a detailed range of accessories with the basic units.

© Siemens 2025

ALPHA SIMBOX XL small distribution boards

Flush-mounting and hollow-wall distribution boards, rated current up to 63 A

		Complete supply	Project supply
Degree of protection		IP30	IP30

Dimensions			Type	Protection class II	Protection class II	
Width	Depth	Height			Wall-recessed box	Expansion package
Flush-mounting distribution boards						
365 mm	98 mm	400 mm	1-tier	8GB5012-1KM	8GB5212-1KM01	8GB5212-3KM01
		525 mm	2-tier	8GB5024-1KM	8GB5224-1KM01	8GB5224-3KM01
		650 mm	3-tier	8GB5036-1KM	8GB5236-1KM01	8GB5236-3KM01
		775 mm	4-tier	8GB5048-1KM	8GB5248-1KM01	8GB5248-3KM01
		900 mm	5-tier	8GB5060-4KM	–	–
Hollow-wall distribution boards						
323 mm	88 mm	360 mm	1-tier	8GB5012-4KM	8GB5212-2KM01	8GB5212-4KM01
		485 mm	2-tier	8GB5024-4KM	8GB5224-2KM01	8GB5224-4KM01
		610 mm	3-tier	8GB5036-4KM	8GB5236-2KM01	8GB5236-4KM01
		735 mm	4-tier	8GB5048-4KM	8GB5248-2KM01	8GB5248-4KM01
		900 mm	5-tier	8GB5060-4KM	–	–

Accessories

Terminal strips with plug-in terminals

Type	Potential 1	Potential 2	Article No.
N/PE	N = 3 × 25 + 14 × 4 mm²	PE = 3 × 25 + 14 × 14 mm²	8GB5016-5KM
N/N	N1 = 3 × 25 + 14 × 4 mm²	N2 = 3 × 25 + 14 × 14 mm²	8GB5017-5KM
N	N = 6 × 25 + 28 × 4 mm²		8GB5020-5KM
PE	PE = 6 × 16 + 28 × 5 mm²		8GB5021-5KM

Terminal strips with screw terminals

Type	Potential 1	Potential 2	Article No.
N/PE	N = 3 × 16 + 14 × 10 mm²	PE = 3 × 16 + 14 × 10 mm²	8GB5008-5KM
N/N	N1 = 3 × 16 + 14 × 10 mm²	N2 = 3 × 16 + 14 × 10 mm²	8GB5015-5KM
N	N = 6 × 16 + 28 × 10 mm²		8GB5010-5KM
PE	PE = 6 × 16 + 28 × 10 mm²		8GB5011-5KM

RCCB terminals

Use	Potential	Article No.
For distributing the neutral conductor to two RCCBs	N = 3 × 16 + 2 × 10 mm²	8GB5005-5KM

Door locking kit

Use	Feature	Article No.
For snapping into door handle	With two keys	8GB5006-5KM

Blanking strips

Width	Feature	Color	Article No.
12 MW	Increased flame protection up to 850 °C	White	8GB4683

Mounting aid for flush mounting



Use	Article No.
For flush-mounting and hollow-wall distribution boards	8GB5013-5KM

System overview, page 15/266

© Siemens 2025

Surface-mounting distribution boards, rated current up to 63 A

				Distribution boards without door	Metal doors, white	Plastic doors, white
			Degree of protection	IP30	IP30	IP30
External dimensions			Type	Protection class II	Protection class II	Protection class II
Width	Depth	Height				
Surface-mounting distribution boards						
305 mm	99 mm	250 mm	1-tier	8GB5012-0KM	8GB5001-5KM	8GB5001-5KM01
		375 mm	2-tier	8GB5024-0KM	8GB5002-5KM	8GB5002-5KM01
		515 mm	3-tier	8GB5036-0KM	8GB5003-5KM	8GB5003-5KM01
		640 mm	4-tier	8GB5048-0KM	8GB5004-5KM	8GB5004-5KM01

Accessories

Terminal strips with plug-in terminals

Type	Potential 1	Potential 2	Article No.
N/PE	N = 3 × 25 + 14 × 4 mm²	PE = 3 × 25 + 14 × 14 mm²	8GB5016-5KM
N/N	N1 = 3 × 25 + 14 × 4 mm²	N2 = 3 × 25 + 14 × 14 mm²	8GB5017-5KM
N	N = 6 × 25 + 28 × 4 mm²		8GB5020-5KM
PE	PE = 6 × 16 + 28 × 5 mm²		8GB5021-5KM

Terminal strips with screw terminals

Type	Potential 1	Potential 2	Article No.
N/PE	N = 3 × 16 + 14 × 10 mm²	PE = 3 × 16 + 14 × 10 mm²	8GB5008-5KM
N/N	N1 = 3 × 16 + 14 × 10 mm²	N2 = 3 × 16 + 14 × 10 mm²	8GB5015-5KM
N	N = 6 × 16 + 28 × 10 mm²		8GB5010-5KM
PE	PE = 6 × 16 + 28 × 10 mm²		8GB5011-5KM

RCCB terminals

Use	Potential	Article No.
For distributing the neutral conductor to two RCCBs	N = 3 × 16 + 2 × 10 mm²	8GB5005-5KM

Door locking kit

Use	Feature	Article No.
For snapping into door handle	With two keys	8GB5006-5KM

Blanking strips

Width	Feature	Color	Article No.
12 MW	Increased flame protection up to 850 °C	White	8GB4683

System overview, page 15/266

© Siemens 2025

ALPHA SIMBOX XL small distribution boards

Multimedia distribution boards, rated current up to 63 A

	Multimedia distribution boards
Degree of protection	IP30

Recess dimensions			Type	Protection class II
Width	**Depth**	**Height**		
Flush-mounting and hollow-wall distribution boards				
364 mm	98 mm	650 mm	3-tier	8GB5036-3KM01
		775 mm	4-tier	8GB5048-3KM01
		900 mm	5-tier	8GB5060-3KM01
Surface-mounting distribution boards				
323 mm	88 mm	605 mm	3-tier	8GB5036-3KM00
		730 mm	4-tier	8GB5048-3KM00

Accessories

Connecting lugs		
	Use	**Article No.**
	For installing several distribution boards in a row, vertically or horizontally	8GB5025-5KM
Distribution board connector set for hollow-wall mounting		
	Typ	**Article No.**
	3-tier	8GB5054-0
	4-tier	8GB5054-1
	5-tier	8GB5054-2
Door handle SIMBOX XL		
		Article No.
		8GB5054-3
Door hinges SIMBOX XL		
		Article No.
		8GB5054-4
Hollow-wall mounting set		
		Article No.
		8GB5054-5

System overview, page 15/266

© Siemens 2025

ALPHA SIMBOX WP small distribution boards

Surface-mounting distribution boards, rated current up to 63 A

	Unequipped surface-mounting distribution boards
Degree of protection	IP65

Type	External dimensions			Protection class II
	Height	Width	Depth	
Surface-mounting distribution boards (order N/PE terminal strip separately)				
1-tier	210 mm	143 mm	100 mm	8GB1371-0
		215 mm	100 mm	8GB1371-1
	260 mm	298 mm	140 mm	8GB1371-2
	285 mm	410 mm	140 mm	8GB1371-3
2-tier	420 mm	298 mm	140 mm	8GB1372-2
	463 mm	410 mm	140 mm	8GB1372-3
3-tier	655 mm	410 mm	140 mm	8GB1373-3
4-tier	878 mm	410 mm	160 mm	8GB1374-3

Accessories

Covers



- For connection of conduit and cable duct entries
- Snap-on mounting

MW	Article No.
12	8GB2051-0
18	8GB2051-1

N/PE terminal strips

- For snapping onto device holder

MW	Potential 1	Potential 2	Article No.
8	N = 1 × 25 + 7 × 10 mm²	PE = 1 × 25 + 7 × 10 mm²	8GB2052-0
12	N = 3 × 25 + 10 × 10 mm²	PE = 3 × 25 + 10 × 10 mm²	8GB2052-1
18	N = 5 × 25 + 14 × 10 mm²	PE = 5 × 25 + 14 × 10 mm²	8GB2052-2

Inner partitions, horizontal

MW	Article No.
12	8GB2053-0
18	8GB2053-1

Front covers

MW	Article No.
12	8GB2054-0
18	8GB2054-1

Safety cylinder locks

Material	Scope of supply	Article No.
Metal	With key	8GB2055-0

Blanking strips

Type	Color	Article No.
For 12 MW (1 MW = 18 mm)	RAL 7035 (light gray)	8GK9910-0KK00

15

System overview, page 15/266

© Siemens 2025

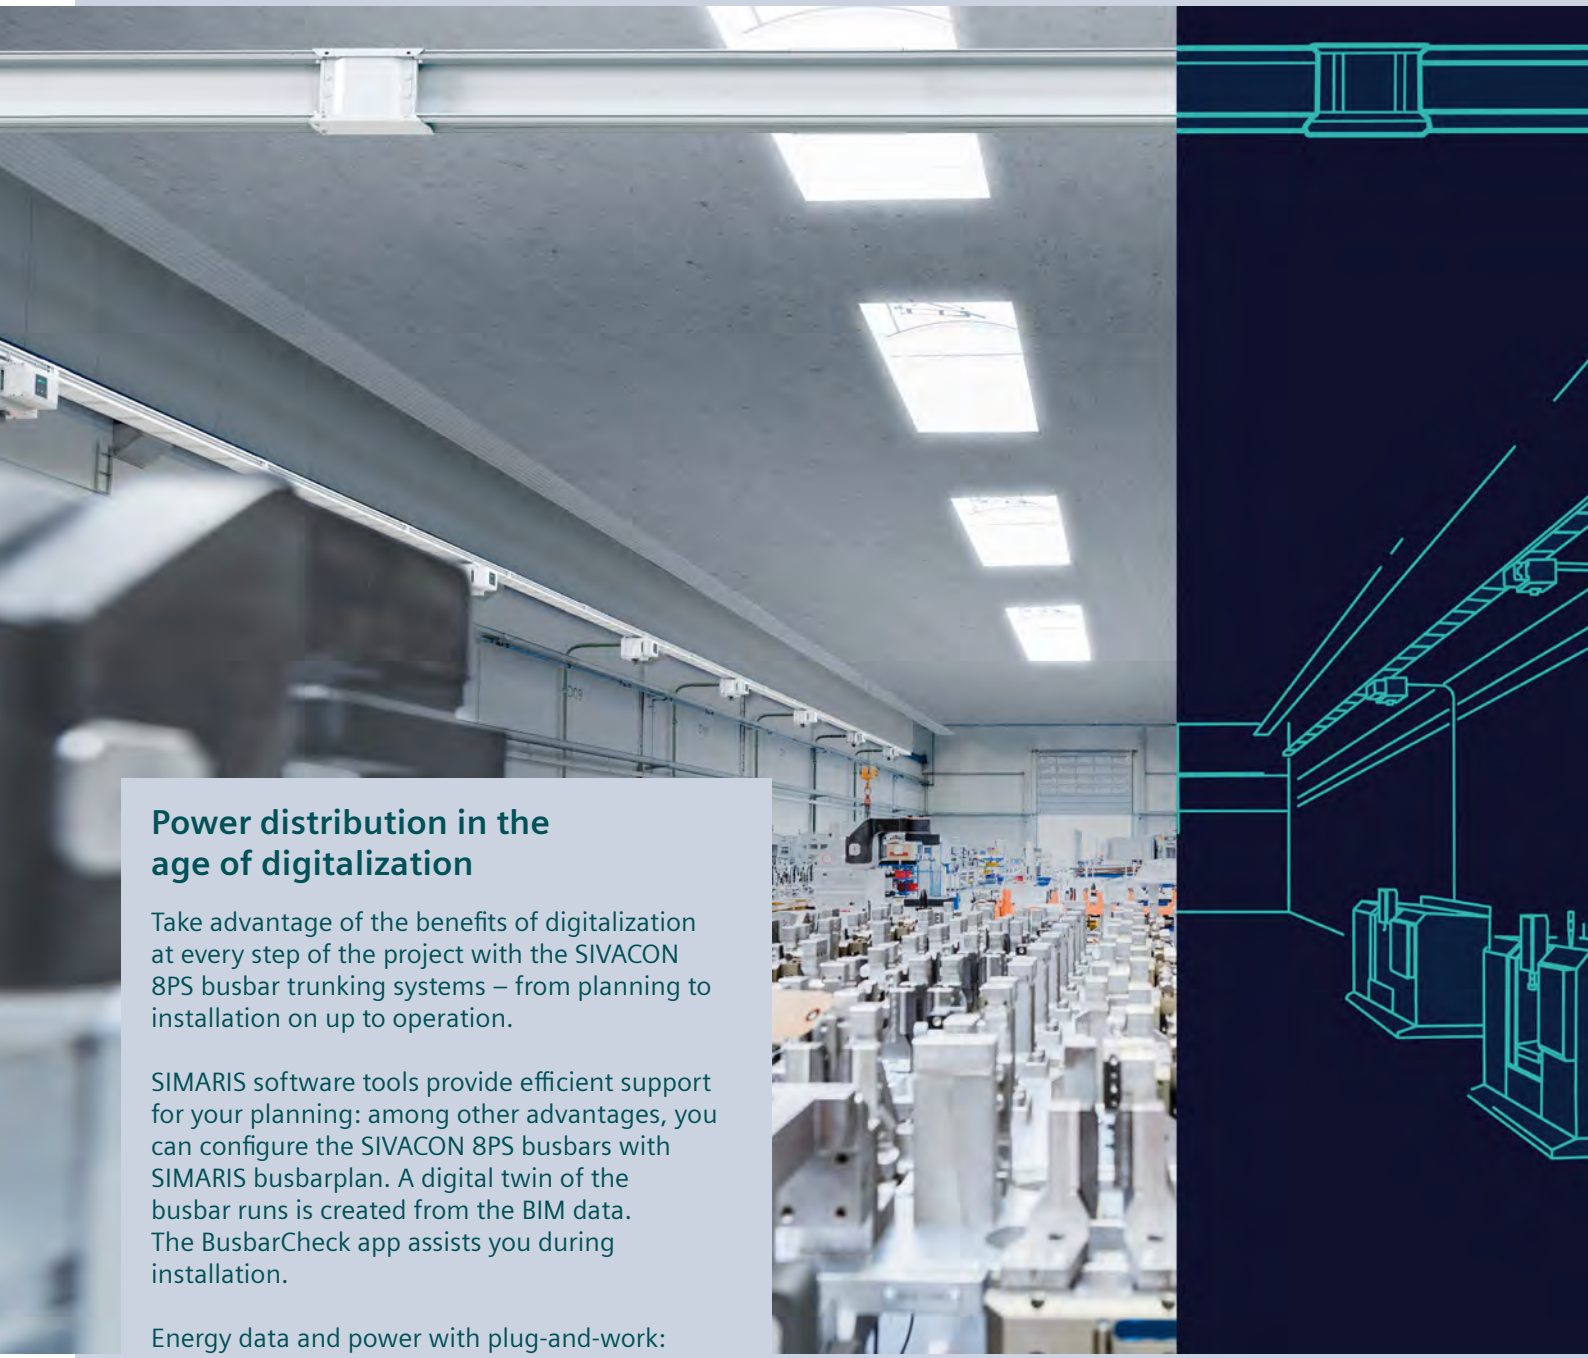

Power distribution in the age of digitalization

Take advantage of the benefits of digitalization at every step of the project with the SIVACON 8PS busbar trunking systems – from planning to installation on up to operation.

SIMARIS software tools provide efficient support for your planning: among other advantages, you can configure the SIVACON 8PS busbars with SIMARIS busbarplan. A digital twin of the busbar runs is created from the BIM data. The BusbarCheck app assists you during installation.

Energy data and power with plug-and-work: Our innovative powerline technology makes this possible for SIVACON 8PS busbar trunking systems – efficient and reliable.
Energy data is simply transferred to the automation and energy management systems, as well as to cloud-based systems (IoT). Data and electricity travel the same path via the conductor circuits and phases of the BD2, LD, LData and LI busbar trunking systems.

© Siemens 2025

Busbar Trunking Systems

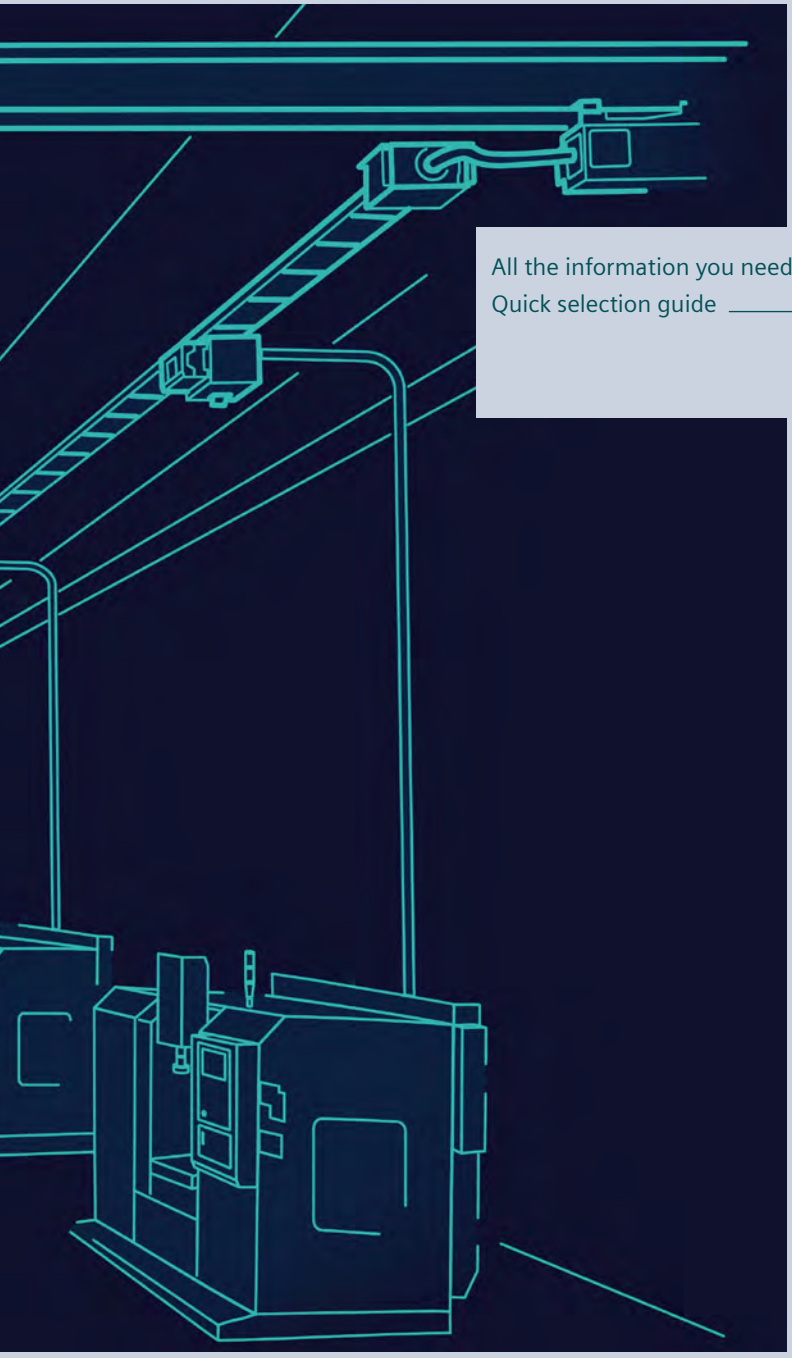

All the information you need 16/2
Quick selection guide 16/4
SIVACON 8PS busbar trunking systems 16/4
Planning and installation tools 16/6

© Siemens 2025

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about busbar trunking systems, please visit our website **www.siemens.com/sivacon-8PS**

Your product in detail

The SiePortal platform (knowledge base) provides comprehensive information **www.siemens.com/lowvoltage/product-support**

- Brochure
  - Energy and data successfully put on track **(109747761)**
- Catalog
  - LV 70 · 2023 – SIVACON 8PS busbar trunking systems – BD01, BD2 up to 1250 A **(109744546)**

The relevant tender specifications can be found at **www.siemens.com/tenderspecifications**

Use our conversion tool for quick and easy conversion to Siemens products **www.siemens.com/conversion-tool**

Siemens YouTube channel

- Power distribution – SIVACON (general) **sie.ag/6wacV9**

Everything you need for your order

Refer to SiePortal to find an overview of your products (product catalog)

- SIVACON 8PS **sie.ag/2lXpCT1**
- Planning the power distribution system **sie.ag/2m3oFbS**

Direct forwarding to the individual products in SiePortal by clicking on the article number in the catalog or entering this web address incl. article number **www.siemens.com/product_catalog_SIEP?Article No.**

Order support for SIVACON 8PS – BD01 and BD2 **www.siemens.com/LV70**

Configurators

Configure your SIVACON 8PS BD01 or BD2 busbar trunking system in **SiePortal**

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services. You can find your local contacts at **www.siemens.com/sivacon8PS-contact**

You will find further information on services at **www.siemens.com/service-offers**

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at **www.siemens.com/support-request**

© Siemens 2025

… can be found in our online services

Commissioning + operation

SIMARIS Suite

The SIMARIS planning tools (e.g. SIMARIS design, SIMARIS project, SIMARIS busbarplan, SIMARIS sketch, etc.) are provided in the SIMARIS Suite and effectively support your planning process. Project-specific IFC data (Building Information Modeling) for cross-package planning is also possible
www.siemens.com/simaris

Your product in detail

The SiePortal platform (knowledge base) provides detailed technical information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Certificates

Online Support app available for download from the **App Store** and **Play Store**

You will find further information at
www.siemens.com/support-app

Engineering data for CAD or CAE systems are available in the CAx Download Manager at
www.siemens.com/cax

Manuals

Manuals can be found in SiePortal at
www.siemens.com/lowvoltage/manuals

- Planning Manual
  - Planning with SIVACON 8PS **(109478425)**

Face-to-face or online training

Our training courses can be found at
www.power-academy.siemens.com

Technical overview – Busbar trunking systems

The fast way to get you to our online services

This page provides you with comprehensive information and links on busbar trunking systems
www.siemens.com/lowvoltage/product-support (109769090)

© Siemens 2025

SIVACON 8PS busbar trunking systems

Busbar trunking systems	BD01	BD2
Basic data		
System description	Flexible power supply in workshops and production plants for skilled trades and businesses and commercial enterprises	The universal solution for high power levels in a small space, especially in offices and in industrial transfer lines
Typical applications	• Workshops and production plants • Supermarkets • Data centers • High-rise buildings • Trade fair buildings • Automotive industry • Marine applications • eMobility	• Workshops and production plants • Production industry • Do-it-yourself centers • Data centers • High-rise buildings • Foodstuffs industry • Trade fair buildings • Hospitals • Automotive industry • Marine applications • eMobility
Technical specifications		
Rated insulation voltage U_i	400 V AC	690 V AC
Rated operational voltage U_e	400 V AC	690 V AC
Degree of protection	IP54, IP55	IP54, IP55
Design	Air-insulated	Air-insulated
Rated current I_{nA}	40 ... 160 A	160 ... 1250 A
Rated peak withstand current I_{pk}	Up to 15.3 kA	Up to 90 kA
Rated short-time withstand current I_{cw} (1 s)	Up to 2.5 kA	Up to 34 kA
Number of conductors	5 (PE = enclosure)	5
Connection technology	Connecting flange with built-in expansion compensation	With built-in expansion compensation, bolt-type terminal
Outgoing feeders and junctions		
Tap-off point	On one side every 0.5 or 1 m	On one side every 0.5 m, on two sides offset every 0.25 m
Tap-off unit	Up to 63 A	Up to 550 A
Material		
Conductors	Aluminum or copper	Aluminum or copper
Enclosures (trunking unit)	Sheet steel, zinc-plated and coated	Sheet steel, zinc-plated and coated
Communication		
powerline data transmission	–	Optional
Certificates		
	• DNV GL • Environmental Product Declaration (EPD)	• DNV GL • Environmental Product Declaration (EPD)

[1] IP66 for pure energy transfer runs without outgoing feeders.

Data transfer with powerline technology

© Siemens 2025

			
LD	**LData**	**LI**	**LR**
The proven high-current busbar for industry and special applications	Efficient and reliable power supply for today and tomorrow's data centers	An integrated solution for safe and efficient infrastructure power supply – for example in multi-story buildings and industrial applications	The reliable busbar for a high degree of protection in harsh environments, for example for networking of building sections outdoors or for power supply in tunnels
• Automotive industry • Production industry • Foodstuffs industry • Trade fair buildings • Wind power plants • Semiconductor production • Marine applications • eMobility • DC applications	• Data centers	• High-rise buildings • Data centers • Production industry • Chemicals industry • Airports • Trade fair buildings • Hospitals • Do-it-yourself centers • Shopping malls • Supermarkets • eMobility	• Chemicals industry • Oil and gas • Tunnels and subways • Outdoor applications • Marine applications
1000 V AC	600 V AC	1000 V AC	1000 V AC
1000 V AC	600 V AC	1000 V AC	1000 V AC
IP34, IP54	Trunking units: IP21 Tap-off units: IP21, IP41	IP55, IP66 [1]	IP68
Air-insulated	Air-insulated	Sandwich design	Solid-insulated
1100 ... 5000 A	1000 ... 2500 A	800 ... 6300 A	400 ... 6300 A
Up to 286 kA	Min. 84 kA	Up to 330 kA	Up to 275 kA
Up to 116 kA	Min. 40 kA	Up to 150 kA	Up to 125 kA
4 or 5	5	4 ... 6 (incl. 200% N or add. clean earth)	4 or 5
Bolt-type terminal connection with hook and bolt connection	Direct hook and bolt connection (LD technology)	Hook and bolt connection with shear nut	Bolt terminal block
On one side every 1 m	Can be plugged in anywhere along the system	Up to 3 for every 3 m (per side)	On one side every 1 m
Up to 1250 A	Up to 250 A	Up to 1250 A	On request
Aluminum or copper	Aluminum	Aluminum or copper	Aluminum or copper
Sheet steel, zinc-plated and coated	Sheet steel, zinc-plated and coated	Aluminum, coated	Epoxy resin
Optional	Optional	Optional	–
• DNV GL • Environmental Product Declaration (EPD)	–	• SEISMIC Qualification Certificate (earthquake test) • Environmental Product Declaration (EPD)	• DNV GL • SEISMIC Qualification Certificate (earthquake test) • ATEX • Product Environmental Profile (PEP)

© Siemens 2025

Planning and installation tools

For planning, visualization and installation of busbar trunking systems

From planning to commissioning

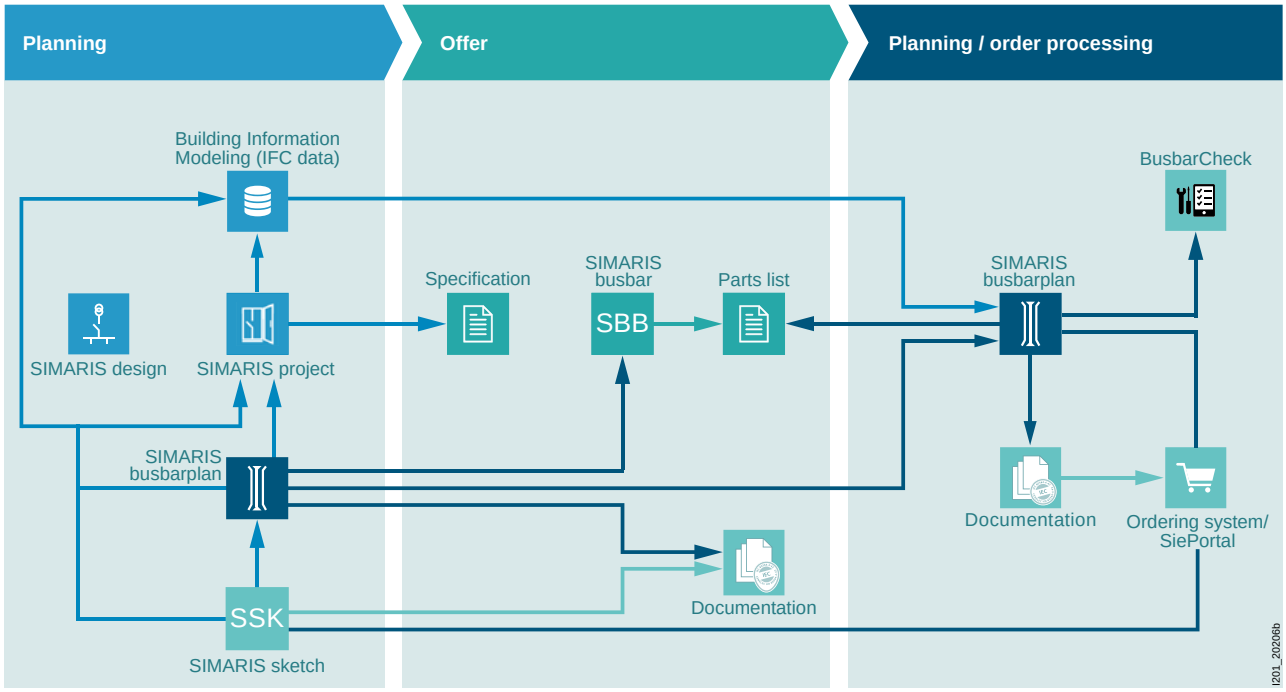

© Siemens 2025

SIMARIS design

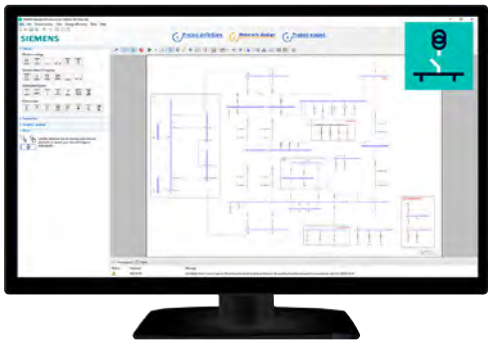

SIMARIS design is a planning tool for fast and efficient grid calculation and dimensioning of electrical power distribution for special-purpose and industrial buildings.

- Dimensioning of electrical networks on the basis of real products according to acknowledged rules of technology and the applicable standards (VDE, IEC)
- Automatic selection of the appropriate components from the stored product database

SIMARIS design forms part of SIMARIS Suite.
Free download of the SIMARIS Suite and further information at: **www.siemens.com/simarisdesign**

SIMARIS project

SIMARIS project is a planning tool used to quickly determine the necessary space requirements and the budget for electrical energy distribution for special-purpose and industrial buildings and for automatic generation of specifications.

- Import into projects created with SIMARIS design
- Export of 3D data in IFC 4.x format for BIM (Building Information Modeling)

SIMARIS project forms part of SIMARIS Suite.
Free download of the SIMARIS Suite and further information at: **www.siemens.com/simarisproject**

SIMARIS Toolbox (online)

The SIMARIS Toolbox is a platform for provision of online tools for assisting electrical installation planners. It includes, for example:

- EMC Busbar (tool for calculating magnetic field strength in the vicinity of SIVACON 8PS busbar trunking systems)

SIMARIS Toolbox forms part of SIMARIS Suite.
Free download of the SIMARIS Suite and further information at: **www.siemens.com/simaristoolbox**

SIMARIS busbarplan

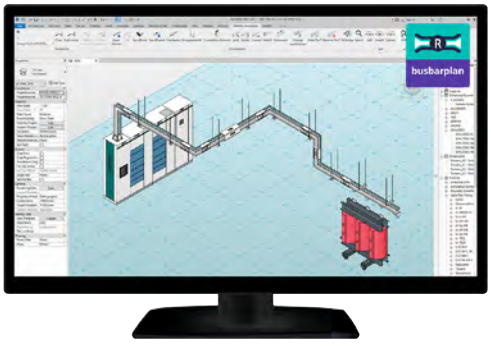

The SIMARIS busbarplan planning tool supports BIM-compliant 3D configuration of SIVACON 8PS busbar trunking systems.

- Plugin based on the BIM Autodesk REVIT software
- Version for planners and for Siemens project engineers

SIMARIS busbarplan forms part of SIMARIS Suite.
Free download of the SIMARIS Suite and further information at: **www.siemens.com/simarisbusbarplan**

© Siemens 2025

Planning and installation tools

For planning, visualization and installation of busbar trunking systems

BusbarCheck app

BusbarCheck is an installation app to use for easy and high-quality installation and documentation.

- Interface to SIMARIS busbarplan
- Detailed explanation of all steps
- Written record and proper documentation for better and easier evaluation of the installation
- Can be used by all installation companies and SIVACON 8PS busbar trunking installations in Germany and another 23 European countries

Free download from:
App Store and Play Store

SIMARIS sketch

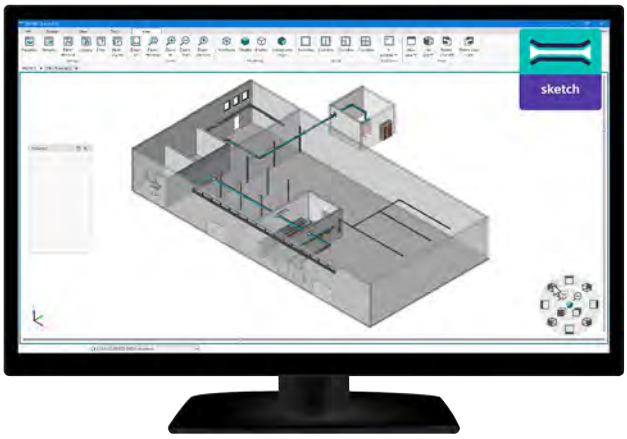

The new SIMARIS sketch is a software tool for quick and easy planning and visualization of busbar trunking systems.

- Simple creation of busbar routing and building structures in 3D
- Interface to SIMARIS busbarplan and rejection in IFC format possible
- Creation of order parts lists for the BD01 and BD2 systems

SIMARIS sketch forms part of SIMARIS Suite.
Free download of the SIMARIS Suite and further information at: www.siemens.com/simarissketch

IFC data

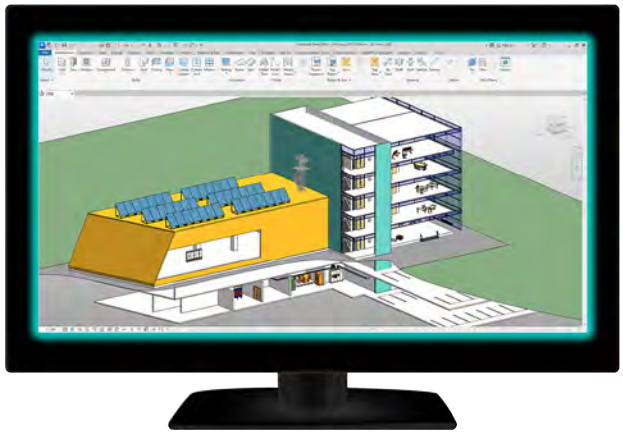

BIM simplifies the planning process. While the simple exchange of relevant building data between the planners and the facility manager ensures high quality and reduces costs, the digital twin for power distribution fits in seamlessly with the overall structure – for efficient planning, performance and maintenance.

www.siemens.com/bim-eplanning

© Siemens 2025

© Siemens 2025

Equipped for all applications

Maximum flexibility and minimum space requirement – these are the key prerequisites for high-performance switchgear and control cabinets in industrial environments. Switchgear cabinet manufacturers have to respond increasingly rapidly to their efficiency-conscious customers' requirements. Simplified configuration, planning and implementation bring you additional competitive advantages. The SIVACON 8MF1 system cubicles were rigorously designed to meet the increased demands placed on control cabinet construction.

The SIVACON 8MF1 modular system enables custom-tailored solutions to be configured for virtually all industrial sectors and applications. Whether fully assembled, adapted according to your specifications, or developed individually, the system cubicles support the individual creation of added value in control cabinet construction. With SIVACON 8MF1, you can also be sure of absolute compliance with relevant standards: The switchgear enclosures meet all currently applicable standards and regulations. Special versions, and control cabinets with various special certifications and specific approvals, as well as variants adapted to specific sectors, can be individually developed.

Note:
Products bearing our Siemens EcoTech label are identified by this clickable symbol in the catalog:

Siemens EcoTech

www.siemens.com/lowvoltage/SiemensEcoTech

© Siemens 2025

System Cubicles, System Lighting and System Air-Conditioning

All the information you need 17/2
System overview 17/4
SIVACON 8MF1 basic cubicles 17/7
- Quick selection guide 17/7
- Online configurator highlights 17/8
- Structure of the article numbers 17/9

SIVACON 8MF1 configurable enclosures 17/10
- Quick selection guide 17/10
- Frame 17/11
- Door, door halves, compartment door 17/14
- Side/rear walls and partition 17/18
- Roof 17/20
- Floor 17/22
- Mounting panels 17/23
- Mounting plates 17/26
- Mounting rails 17/27
- General accessories interior installation 17/28
- 19-inch expansion 17/32

SIVACON 8MF/8MR system lighting 17/34
- Quick selection guide 17/34
- LED lights 17/36
- Slimline lights 17/38

SIVACON 8MR system air-conditioning 17/40
- Quick selection guide 17/40
- Filter fans and outlet filters 17/41
- Roof filter fans and roof outlet filters 17/43
- Air conditioners/cooling devices, heat exchangers 17/44
- Heater units 17/45
- Fan heaters 17/46
- Thermostats 17/47
- Hygrostats and hygrotherms 17/49

© Siemens 2025

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about system cubicles, system lighting and system air-conditioning, please visit our website
www.siemens.com/sivacon-8mf

Your product in detail

The SiePortal platform (knowledge base) provides comprehensive information
www.siemens.com/lowvoltage/product-support

- Brochure
  – SIVACON 8MF1 system cubicles –
  As versatile as your requirements **(109744677)**

The relevant tender specifications can be found at
www.siemens.com/tenderspecifications

Use our conversion tool for quick and easy conversion to Siemens products **www.siemens.com/conversion-tool**

Everything you need for your order

Refer to SiePortal to find an overview of your products (product catalog)

- System cubicles **sie.ag/339cQB9**

Direct forwarding to the individual products in SiePortal by clicking on the article number in the catalog or entering this web address incl. article number
www.siemens.com/product_catalog_SIEP?Article No.

Configurators

The configurator reduces the time and effort required in the planning and ordering process, and allows for individual adaptations. Configure your SIVACON 8MF1 system cubicle at
www.siemens.com/lowvoltage/8mf1-configurator

The following are additionally available for your configured SIVACON 8MF1 system cubicle:

- Parts lists
- 2D data
- 3D data

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services.
You can find your local contacts at
www.siemens.com/lowvoltage/systems/contact

You will find further information on services at
www.siemens.com/service-offers

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at
www.siemens.com/support-request

© Siemens 2025

… can be found in our online services

Commissioning + operation

SIMARIS therm

The SIMARIS therm calculation tool helps you to easily and precisely dimension the heat dissipation of your control panels, simply by entering the ambient air temperature and selecting the relevant devices in the panel. If necessary, you can immediately select the necessary cooling devices and air conditioners. You can also define the necessary heating power for anti-condensation heating
www.siemens.com/simaristherm

Ihr Produkt im Detail

The SiePortal platform (knowledge base) provides detailed technical information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Certificates

Online Support app available for download from the **App Store** and **Play Store**
You will find further information at
www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)

- SiePortal (product catalog)
  www.siemens.com/lowvoltage/product-catalog
- Image database
  www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAx Download Manager at
www.siemens.com/cax

Technical overview – System cubicles, system lighting and system air-conditioning

The fast way to get you to our online services

This page provides you with comprehensive information and links on system cubicles, system lighting and system air-conditioning
www.siemens.com/lowvoltage/product-support (109769091)

© Siemens 2025

System overview

System cubicles, system lighting and system air-conditioning

For a complete and valid configuration of your system cubicle, please use our online configurator at www.siemens.com/lowvoltage/8mf1-configurator

SIVACON 8MF1 basic cubicles

Basic cubicles, IP40

Basic cubicles, IP55

Ventilated cubicles, IP20

Data cubicles, IP40

Earthquake-resistant cubicles, IP40

SIVACON 8MF1 configurable enclosures – Frames


Standard frames

Corner frames

Frame accessories

Bases

Separators

Trim strips

Transport eyebolts

Transport brackets

Cubicle suites

SIVACON 8MF1 configurable enclosures – Enclosures

Doors

Ventilated doors

Glass doors

Door halves

Compartment doors

Side walls/ rear walls

Rooves

Floors

Enclosure accessories

Roof trays

Covers

Grilles

Strips

Hinges

Rotary handles

Door position switches

Door stays

Note:
You will find a detailed range of accessories with the basic units and in the Accessories section.

© Siemens 2025

SIVACON 8MF1 configurable enclosures – Interior installation

Mounting panels

Mounting plates

Partitions

Shelves

Busbars

Interior installation accessories

Brackets

Groundings

Grounding screws

SIVACON 8MF1 configurable enclosures – 19-inch expansion

Swing frames

Fixed-mounted

19-inch expansion accessories

Covers

Universal supports

Device panels

SIVACON 8MF/8MR system lighting – LED lights

With motion detector

With on-off switch

Without switching function

LED lights accessories

Cables, plugs and sockets

SIVACON 8MF/8MR system lighting – Slimline lights

With motion detector and socket

With on-off switch and socket

SIVACON 8MR system air-conditioning

Filters and filter fans

Air conditioners/ cooling devices

Heat exchangers

Heater units

Fan heaters

Thermostats, hygrostats, hygrotherms

Note:
You will find a detailed range of accessories with the basic units and in the Accessories section.

© Siemens 2025

System overview

SIVACON 8MF1 system cubicles



		Standard types	Individual types
Available dimensions			
Height	mm	1800 | 2000 | 2200	Special dimensions available on request (max. 2400 mm)
Width	mm	400 | 600 | 800 | 900 | 1000 | 1200	Special dimensions available on request (max. 1600 mm)
Depth	mm	400 | 500 | 600 | 800 | 1000	Special dimensions available on request (max. 1200 mm)
Approvals			
Standards		IEC 62208	IEC 62208
Protection			
Degree of protection		IP20 | IP40 | IP55 | Shock resistance IK09 | Glass doors IK08	IP20 | IP21 | IP40 | IP41 | IP42 | IP55 | Shock resistance IK09 | Glass doors IK08
Protection class		I	I
Enclosure			
Material		Sheet steel	Sheet steel
Surface		Zinc-plated | Powder-coated	Zinc-plated | Powder-coated
Color		RAL 7035 (light gray)	All RAL colors available, other color palettes available on request
Corrosivity category acc. to EN ISO 12944-2		C3 medium, paint thickness 100 µm (±25 µm)	Up to C5-M very high (marine), paint thickness 150 µm (±25 µm)
Material thickness			
Frame		2.5 mm	2.5 mm
Enclosure (without doors)		1.5 mm	≤ 2.5 mm
Mounting panels		2.5 mm	≤ 3.0 mm
Mounting plates		2.0 mm	≤ 3.0 mm
Doors		1.5 mm	≤ 2.0 mm
EMC attenuation			
EMC attenuation		www.siemens.com/lowvoltage/product-support	www.siemens.com/lowvoltage/product-support
Installable module heights (HU = 1 3/4" = 44.45 mm)			
		19" fixed-mounted	19" swing frame	
Height 1800 mm		36 HU	34 HU	On request
Height 2000 mm		41 HU	38 HU	On request
Height 2200 mm		45 HU	43 HU	On request

© Siemens 2025

Quick selection guide

Two installation types

Stand-alone installation
- With side panels
  (lockable in the case of data cubicles)

Suite installation
- Without side panels

Four versions

Basic version
- IP40 or IP55

Ventilated cubicles
- IP20
- Door and roof with ventilation fins

Data cubicles
- IP40
- Glass door at front
- Section door at rear
- Roof with cable entry
- 19" fixed-mounted

Earthquake-resistant version
- IP40
- Increased stability

© Siemens 2025

Online configurator highlights

www.siemens.com/lowvoltage/8mf1-configurator

Graphical configuration directly on the 3D model

Customization of the control cabinet with cutouts and color

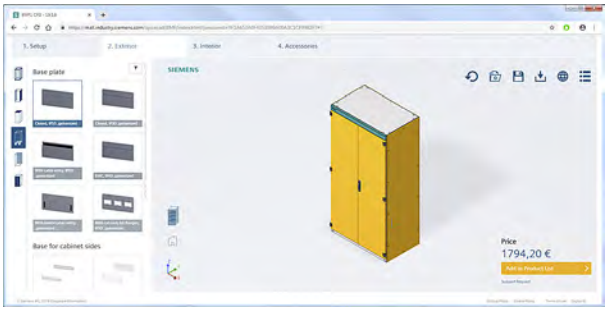

Exporting of parts lists and 3D and 2D data

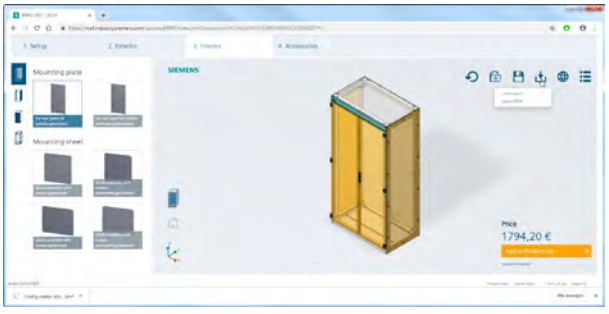

Dynamic and interactive parts lists

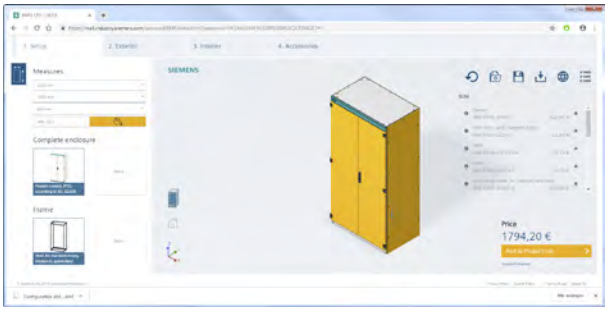

System overview, page 17/4

© Siemens 2025

Structure of the article numbers

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your system cubicle, please use our online configurator at
www.siemens.com/lowvoltage/8mf1-configurator

8MF1	5	6	7	8	9	10	11
				3			
Height							
1800 mm	8						
2000 mm	0						
2200 mm	2						
Width							
400 mm		4					
600 mm		6					
800 mm		8					
900 mm		9					
1000 mm		0					
1200 mm		2					
Depth							
400 mm			4				
500 mm			5				
600 mm			6				
800 mm			8				
1000 mm			0				
Version							
Basic					B		
Ventilated					V		
Data					D		
Earthquake-resistant					E		
Installation							
Stand-alone						S	
Side by side						R	
Degree of protection							
Basic cubicles, data cubicles							
IP40							4
IP55							5
Ventilated cubicles							
IP20							4
Earthquake-resistant cubicles							
IP40							5

17

System overview, page 17/4

© Siemens 2025

Quick selection guide

Frame

For standard enclosure

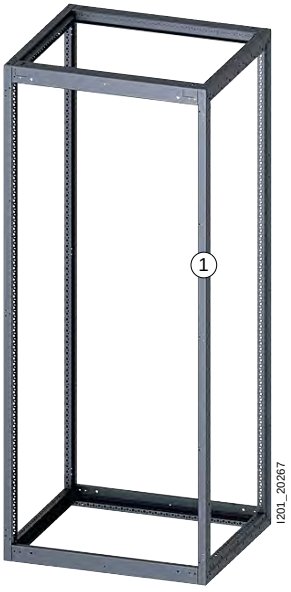

① Frame

For corner enclosure

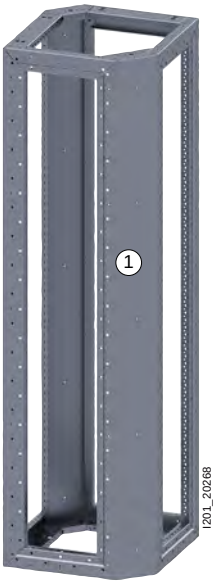

① Frame

Enclosure

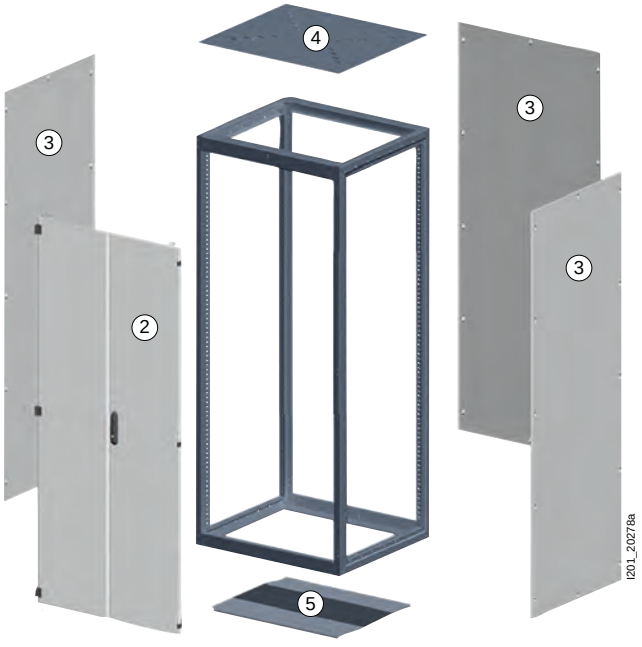

② Door, door half, compartment door
③ Side panels, rear panel
④ Roof
⑤ Floor

System overview, page 17/4

© Siemens 2025

① Frame

Siemens EcoTech



The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your system cubicle, please use our online configurator at
www.siemens.com/lowvoltage/8mf1-configurator

For standard enclosure

8MF1		5	6	7	8	9	10	11	12
					3	G	S		0
Height	1800 mm	8							
	2000 mm	0							
	2200 mm	2							
Width	400 mm		4						
	600 mm		6						
	800 mm		8						
	900 mm		9						
	1000 mm		0						
	1200 mm		2						
Depth	400 mm			4					
	500 mm			5					
	600 mm			6					
	800 mm			8					
	1000 mm			0					
Material, surface	Zinc-plated							3	
	Powder-coated, RAL 7035							4	

For corner enclosure

8MF1		5	6	7	8	9	10	11	12
					2	G	E		0
Height	1800 mm	8							
	2000 mm	0							
	2200 mm	2							
Width	400 mm		4						
	600 mm		6						
	800 mm		8						
	1000 mm		0						
Depth	400 mm			5					
	600 mm			7					
	800 mm			0					
	1000 mm			1					
Material, surface	Zinc-plated							3	

System overview, page 17/4

© Siemens 2025

① Frame

Accessories

**The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your system cubicle, please use our online configurator at
www.siemens.com/lowvoltage/8mf1-configurator**

Base

8MF1		5	6	7	8	9	10
				0	2		
Height	100 mm	0					
	200 mm	2					
Width	400 mm		4				
	600 mm		6				
	800 mm		8				
	900 mm		9				
	1000 mm		0				
	1200 mm		2				
Version	Base for cubicles with door at the front and the rear					C	R
	Base and feet for cubicles with door at the front					C	S
	Base for corner cubicle					E	S

Base cover, lateral



8MF1		5	6	7	8	9	10
			0		2	C	T
Height	100 mm	0					
	200 mm	2					
Depth	400 mm			4			
	500 mm			5			
	600 mm			6			
	800 mm			8			
	1000 mm			0			

17

System overview, page 17/4

© Siemens 2025

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your system cubicle, please use our online configurator at
www.siemens.com/lowvoltage/8mf1-configurator

Trim strip

8MF1			5	6	7	8	9	10	11	12
			0		0	2	C	D		
Width	400 mm			4						
	600 mm			6						
	800 mm			8						
	900 mm			9						
	1000 mm			0						
	1200 mm			2						
Version	Trim strip petrol	Without Siemens logo, above the door				Without cutout			0	0
		With Siemens logo, left, above the door				Without cutout			1	0
		With Siemens logo, right, above the door				With cutout, left			1	6
		With Siemens logo, left, above the door				With cutout, right			1	7
	Trim strip RAL 7035	Without Siemens logo, below the door				Without cutout			0	8

Separator

Separator for vertical division of the enclosure

Height	Article No.
1800 mm	8MF1165-2AT30
2000 mm	8MF1185-2AT30
2200 mm	8MF1205-2AT30

Mounting accessories

Accessories for cubicle suites



Version	Degree of protection	Article No.
Screw set	IP40	8MF1000-2CA
Sealing strip	IP40 to IP55	8MF1000-2CB
Side-by-side installation kit	IP40 EMC (IP55 not available)	8MF1000-2CE

Kit for stabilization of corner connections

Scope of supply	Article No.
8 units	8MF1000-2HF

Transport accessories

Transport eyebolts

Load bearing capacity	Article No.
Up to 500 kg	8MF1000-2CK

Transport brackets

Width	Article No.
400 mm	8MF1040-2CW
600 mm	8MF1060-2CW
800 mm	8MF1080-2CW
900 mm	8MF1090-2CW
1000 mm	8MF1000-2CW
1200 mm	8MF1020-2CW

System overview, page 17/4

© Siemens 2025

② Door, door halves, compartment door

Siemens EcoTech



Door, door halves

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your system cubicle, please use our online configurator at
www.siemens.com/lowvoltage/8mf1-configurator

		5	6	7	8	9	10	11	12	13		14		15	16
8MF1				0	2	U	T								
Height	1800 mm	8													
	2000 mm	0													
	2200 mm	2													
Width	300 mm		3												
	400 mm		4												
	450 mm		7												
	500 mm		5												
	600 mm		6												
	800 mm		8												
	900 mm		9												
	1000 mm		0												
	1200 mm		2												
Door type	Door/inner door							1							
	Door halves (only available with hinging on the left)							2							
Hinge position	Left								5						
	Right								4						
Door version	IP20	With ventilation openings			Foamed seal					1		B		A	2
	IP40	Closed			EMC seal					0		C		A	1
		With ventilation slits			Foamed seal					2		B		A	2
	IP55	Closed			Foamed seal					0		B		A	2
		With inspection window *Strips for door reinforcement cannot be mounted*			Foamed seal					0		B		E	2
	IPxx	With cutout 292 × 292 mm (up to IP55) for filter fan			Foamed seal					3		B		A	2
	–	Inner door, closed (up to 800 mm wide)			Without seal					4		B		A	2

System overview, page 17/4

© Siemens 2025

Compartment door

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your system cubicle, please use our online configurator at
www.siemens.com/lowvoltage/8mf1-configurator

		5	6	7	8	9	10	11	12	13	14	15	16
8MF1				0	2	U	T	3	4	0	B	A	2
Compartment height	300 mm	3											
	400 mm	4											
	500 mm	5											
	600 mm	6											
	700 mm	7											
	800 mm	8											
	900 mm	9											
	1000 mm	0											
	1100 mm	1											
	1200 mm	2											
Width	600 mm		6										
	800 mm		8										

17

System overview, page 17/4

© Siemens 2025

② Door, door halves, compartment door

Siemens EcoTech

Accessories

Door shelves

- Multi-purpose door bars required for mounting
- Shelf: RAL 7035

For door width	Mounting location			Article No.
	Door	Door halves	Compartment door	
600 mm	■	■	–	8MF1060-2VP
800 mm	■	■	–	8MF1080-2VP

Grilles

- To upgrade degree of protection from IP2x to IP4x
- Surface: zinc-plated

Width	Mounting location			Article No.
	Door	Door halves	Compartment door	
300 mm	■	■	–	8MF1030-2HM
400 mm	■	■	–	8MF1040-2HM
450 mm	■	■	–	8MF1070-2HM
500 mm	■	■	–	8MF1050-2HM
600 mm	■	■	–	8MF1060-2HM
800 mm	■	■	–	8MF1080-2HM
900 mm	■	■	–	8MF1090-2HM

Strips

- For door reinforcement
- Surface: zinc-plated
- Cannot be used for glass doors

Height	Mounting location			Article No.
	Door	Door halves	Compartment door	
1800 mm	■	■	–	8MF1008-2VM
2000 mm	■	■	–	8MF1000-2VM
2200 mm	■	■	–	8MF1002-2VM

Door position switches

Version				Article No.
1 NO + 1 NC (incl. 3SE5232-0HC05)	■	■	■	8MF1000-2VL
1 NO + 2 NC (incl. 3SE5232-0LC05)	■	■	■	8MF1000-2VR

Circuit diagram pockets

- Cannot be used for glass doors

Version	Mounting location			Article No.
	Door	Door halves	Compartment door	
Plastic	■	■	–	8MF1000-2VK
Steel, zinc-plated	■	■	–	8MF1000-2VU

Limit plates



For a number n of compartment doors, n–1 limit plates are additionally required.
Please order separately.

Width	Mounting location			Article No.
	Door	Door halves	Compartment door	
600 mm	–	–	■	8MF1060-2AK14-0
800 mm	–	–	■	8MF1080-2AK14-0

Door stays

- With variable opening angle: 90°, 120° and 150°
- Surface: zinc-plated

	Mounting location			Article No.
	Door	Door halves	Compartment door	
	■	■	–	8MF1000-2VG

Rotary handles

Version	Mounting location			Article No.
	Door	Door halves	Compartment door	
With button insert and eye for padlock (Lock not included in 8MF portfolio)	■	–	–	8MF1000-2VN

17

System overview, page 17/4

© Siemens 2025

Rotary handle inserts

- Not suitable for door halves

	Version	Mounting location			Article No.
		Door	Door halves	Compartment door	
	Double-bit key 3 mm	■	–	–	8MF1000-2VA
	Square key 8 mm	■	–	–	8MF1000-2VC
	Triangular key 8 mm	■	–	–	8MF1000-2VD
	Daimler	■	–	–	8MF1000-2VE
	Cylinder lock	■	–	–	8MF1000-2VF

Spare part door

Hinge sets

	Version	Mounting location			Article No.
		Door	Door halves	Compartment door	
	For left-hand hinge (1 set = 3 units)	■	■	■	8MF1000-2VT
	For right-hand hinge (1 set = 3 units)	■	■	■	8MF1000-2VW

Rotary handles

	Version	Mounting location			Article No.
		Door	Door halves	Compartment door	
	With button insert	■	–	–	8MF1000-2VP

Grounding cables for doors

	Cable cross-section	Mounting location			Article No.
		Door	Door halves	Compartment door	
	6 mm²	■	■	■	8MF1010-2HD3

System overview, page 17/4

© Siemens 2025

③ Side/rear walls and partition

Siemens EcoTech



The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your system cubicle, please use our online configurator at
www.siemens.com/lowvoltage/8mf1-configurator

8MF1				5	6	7	8	9	10	11	12	13	14
							2	U	W				
Height			1800 mm	8									
			2000 mm	0									
			2200 mm	2									
Width			400 mm		4								
			500 mm		5								
			600 mm		6								
			800 mm		8								
			900 mm		9								
			1000 mm/*No selection available for partitions*		0								
			1200 mm		2								
Depth			No value			0							
			400 mm			4							
			500 mm			5							
			600 mm			6							
			800 mm			8							
			1000 mm/*No selection available for side panels*			0							
Side wall/ rear wall	IP40	Closed	Without seal							6	0	1	C
			EMC seal							6	2	1	B
		Flat								6	3	1	C
	IP55	Closed	Foamed seal							6	1	1	C
Partition		Closed	Without seal							7	0	3	C

System overview, page 17/4

© Siemens 2025

System overview, page 17/4

© Siemens 2025

④ Roof



The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your system cubicle, please use our online configurator at
www.siemens.com/lowvoltage/8mf1-configurator

For standard systems

8MF1	5	6	7	8	9	10	11	12	13	14
	0			2	U	D				

Width	400 mm					4					
	600 mm					6					
	800 mm					8					
	900 mm					9					
	1000 mm					0					
	1200 mm					2					
Depth	400 mm						4				
	500 mm						5				
	600 mm						6				
	800 mm						8				
	1000 mm						0				
Version	IP20	Perforated	Without seal					2	0	0	A
	IP40	Closed	Without seal					1	0	0	A
			EMC seal					1	2	0	A
		With ventilation fins	Without seal					3	0	0	A
	IP55	Closed	Foamed seal					1	1	0	A

For corner enclosure

8MF1	5	6	7	8	9	10	11	12	13	14
	0	0		2	U	E				

Width/depth	400/400 mm						4				
	600/600 mm						6				
	800/800 mm						8				
	1000/1000 mm						0				
Version	For corner cubicle	IP20	With ventilation openings					2	0	0	A
		IP40	Closed					1	0	0	A
			With ventilation openings					3	0	0	A
		IP55	Closed					1	1	0	A

System overview, page 17/4

© Siemens 2025

Accessories

Roof trays

Roof trays for increasing the degree of protection, IPX1

Width	Depth	Article No.
400 mm	400 mm	8MF1044-2VH
	500 mm	8MF1045-2VH
	600 mm	8MF1046-2VH
	800 mm	8MF1048-2VH
	1000 mm	8MF1040-2VH
600 mm	400 mm	8MF1064-2VH
	500 mm	8MF1065-2VH
	600 mm	8MF1066-2VH
	800 mm	8MF1068-2VH
	1000 mm	8MF1060-2VH
800 mm	400 mm	8MF1084-2VH
	500 mm	8MF1085-2VH
	600 mm	8MF1086-2VH
	800 mm	8MF1088-2VH
	1000 mm	8MF1080-2VH
900 mm	400 mm	8MF1094-2VH
	500 mm	8MF1095-2VH
	600 mm	8MF1096-2VH
	800 mm	8MF1098-2VH
	1000 mm	8MF1090-2VH
1000 mm	400 mm	8MF1004-2VH
	500 mm	8MF1005-2VH
	600 mm	8MF1006-2VH
	800 mm	8MF1008-2VH
	1000 mm	8MF1000-2VH
1200 mm	400 mm	8MF1024-2VH
	500 mm	8MF1025-2VH
	600 mm	8MF1026-2VH
	800 mm	8MF1028-2VH
	1000 mm	8MF1020-2VH

Roof tray rims

Roof tray rims for cubicle side, IPX1

Each cubicle or cubicle group with a roof tray requires two roof tray rims.
(1 set = 2 units)

Depth	Article No.
400 mm	8MF1004-2VB
500 mm	8MF1005-2VB
600 mm	8MF1006-2VB
800 mm	8MF1008-2VB
1000 mm	8MF1000-2VB

System overview, page 17/4

© Siemens 2025

⑤ Floor



The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your system cubicle, please use our online configurator at
www.siemens.com/lowvoltage/8mf1-configurator

For standard enclosure

8MF1				5	6	7	8	9	10	11	12	13
				0			2	U	B			
Width		400 mm			4							
		600 mm			6							
		800 mm			8							
		900 mm			9							
		1000 mm			0							
		1200 mm			2							
Depth		400 mm				4						
		500 mm				5						
		600 mm				6						
		800 mm				8						
		1000 mm				0						
Version	IP30	Closed, divided								2	2	0
	IP40	Closed	EMC seal							4	2	0
	IP55	Closed	Seal							1	2	0
	IPxx	With cable entry, rear [1]								3	2	0
		With cable entry, lateral and rear [2]								5	1	2
		With cut-outs for flanges								5	2	0

[1] Version available from depth ≥ 600 mm, max. opening area at rear = 87 mm (without foam rubber)
[2] Version available from width ≥ 600 mm and depth ≥ 600 mm, max. opening area at rear = 87 mm and at side = 100 mm (without foam rubber)

For corner enclosure

8MF1			5	6	7	8	9	10	11	12	13
			0	0		2	U	E		1	0
Depth		400 mm			4						
		600 mm			6						
		800 mm			8						
		1000 mm			0						
Degree of protection		IP40							2		
		IP55							1		

System overview, page 17/4

© Siemens 2025

System overview, page 17/4

© Siemens 2025

Mounting panels

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your system cubicle, please use our online configurator at
www.siemens.com/lowvoltage/8mf1-configurator

For mounting plate at rear, depth adjustable [1)]

		8MF1	5	6	7	8	9	10	11	12	13
					0	2	A	L		3	0
Cubicle height	1800 mm		8								
	2000 mm		0								
	2200 mm		2								
Cubicle width	400 mm			4							
	600 mm			6							
	800 mm			8							
	900 mm			9							
	1000 mm			0							
	1200 mm			2							
Version	Non-perforated								0		
	Perforated								1		

[1)] Center mounting only possible when mounted at rear or in conjunction with mounting rail (50), if the mounting plate is installed offset in the depth direction

Accessories

Mounting panel adapters



- For connecting side-by-side mounting panels
- Surface: zinc-plated

Height	Article No.
1800 mm	8MF1800-2CH
2000 mm	8MF1000-2CH
2200 mm	8MF1200-2CH

System overview, page 17/4

© Siemens 2025



The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your system cubicle, please use our online configurator at
www.siemens.com/lowvoltage/8mf1-configurator

For side mounting plate

		5	6	7	8	9	10	11	12	13
8MF1			0		2	A	K		3	0
Cubicle height	1800 mm	8								
	2000 mm	0								
	2200 mm	2								
Depth	400 mm			4						
	500 mm			5						
	600 mm			6						
	800 mm			8						
	1000 mm			0						
Version	Non-perforated							0		
	Perforated							1		

17

System overview, page 17/4

© Siemens 2025

Mounting plates

Siemens EcoTech

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your system cubicle, please use our online configurator at
www.siemens.com/lowvoltage/8mf1-configurator

		5	6	7	8	9	10	11	12	13
8MF1				0	2	A				0
Height	100 mm	1								
	200 mm	2								
	300 mm	3								
	400 mm	4								
	600 mm	6								
	800 mm	8								
Width	400 mm		4							
	600 mm		6							
	800 mm		8							
	900 mm		9							
	1000 mm		0							
	1200 mm		2							
Installation location	Fixed with zinc die-cast parts between the bars of the frame or mounting rails (50)						M			
	Fixed directly to the frame or mounting rails (50)						A			
Version	Non-perforated							0		
	Perforated							1		
Material	2.0 mm sheet steel								2	

System overview, page 17/4

© Siemens 2025

Mounting rails

Siemens EcoTech

Mounting rails (50)



Length	Version	Article No.
250 mm	Suitable for cubicle depth 400 mm	8MF1025-2AS30
325 mm	Suitable for cubicle width 400 mm	8MF1032-2AS30
350 mm	Suitable for cubicle depth 500 mm	8MF1035-2AS30
425 mm	–	8MF1042-2AS30
450 mm	Suitable for cubicle depth 600 mm	8MF1045-2AS30
525 mm	Suitable for cubicle width 600 mm	8MF1052-2AS30
550 mm	–	8MF1055-2AS30
625 mm	–	8MF1062-2AS30
650 mm	Suitable for cubicle depth 800 mm	8MF1065-2AS30
725 mm	Suitable for cubicle width 800 mm	8MF1072-2AS30
750 mm	–	8MF1075-2AS30
825 mm	Suitable for cubicle width 900 mm	8MF1082-2AS30
850 mm	Suitable for cubicle depth 1000 mm	8MF1085-2AS30
925 mm	Suitable for cubicle width 1000 mm	8MF1092-2AS30
1050 mm	–	8MF1105-2AS30
1125 mm	Suitable for cubicle width 1200 mm	8MF1112-2AS30
1250 mm	–	8MF1125-2AS30
1350 mm	–	8MF1135-2AS30
1450 mm	–	8MF1145-2AS30
1550 mm	–	8MF1155-2AS30
1650 mm	Suitable for cubicle height 1800 mm	8MF1165-2AS30
1750 mm	–	8MF1175-2AS30
1850 mm	Suitable for cubicle height 2000 mm	8MF1185-2AS30
1950 mm	–	8MF1195-2AS30
2050 mm	Suitable for cubicle height 2200 mm	8MF1205-2AS30
2150 mm	–	8MF1215-2AS30
2250 mm	–	8MF1225-2AS30

Mounting rails (25)

Version		Length	Article No.
Suitable for cubicle width	600 mm	566 mm	8MF1056-2AS30
	1000 mm	966 mm	8MF1096-2AS30
	1200 mm	1166 mm	8MF1006-2AS30
Suitable for door width	300 mm	166 mm	8MF1016-2AS30
	400 mm	266 mm	8MF1026-2AS30
	450 mm	316 mm	8MF1031-2AS30
	500 mm	366 mm	8MF1036-2AS30
	600 mm	466 mm	8MF1046-2AS30
	800 mm	666 mm	8MF1066-2AS30
	900 mm	766 mm	8MF1076-2AS30
	1000 mm	866 mm	8MF1086-2AS30

Mounting rails, serrated





Version	Article No.
Flat	8MF1060-2HC13-0
	8MF1080-2HC13-0
	8MF1090-2HC13-0
	8MF1000-2HC13-0
	8MF1020-2HC13-0
U-shape	8MF1060-2HC03-0
	8MF1080-2HC03-0
	8MF1090-2HC03-0
	8MF1000-2HC03-0
	8MF1020-2HC03-0

Mounting rails, heavy duty

- Can be installed in the cubicle depth and width (the length corresponds to the appropriate cubicle dimension)

Length	Article No.
600 mm	8MF1060-2AH60
800 mm	8MF1080-2AH60
900 mm	8MF1090-2AH60
1000 mm	8MF1000-2AH60
1200 mm	8MF1020-2AH60

17

System overview, page 17/4

© Siemens 2025

General accessories interior installation

Siemens EcoTech

Telescopic rails

- For withdrawable shelves

For cubicle depth	Article No.
400 mm and 600 mm	8MF1003-2HF
800 mm and 1000 mm	8MF1006-2HF

Mounting brackets



- For mounting expansion elements

Article No.
8MF1000-2CP

Earthquake assembly kits

For stabilization of	Article No.
Corner connections	8MF1000-2HA
Intermediate panel	8MF1000-2HW
19" fixed-mounted	8MF1000-2HE

Grounding plates

- For fixing to the frame (although fixing points for ground connection are already provided on the frame)

Article No.
8MF1000-2HK

Grounding bars

Version	Width	Article No.
30 × 10 mm²	600 mm	8MF1060-2HD2
	800 mm	8MF1080-2HD2
	900 mm	8MF1090-2HD2
	1000 mm	8MF1000-2HD2
	1200 mm	8MF1020-2HD2
30 × 5 mm²	600 mm	8MF1060-2HD1
	800 mm	8MF1080-2HD1
	900 mm	8MF1090-2HD1
	1000 mm	8MF1000-2HD1
	1200 mm	8MF1020-2HD1

Grounding screws

Thread	Article No.
M12	8MF1000-2HB

Grounding straps

Cross-section	Length	Perforation	Article No.
16 mm²	300 mm	6.5 mm on both sides	8MF1000-2HK1
16 mm²	300 mm	6.5 mm and 8.5 mm	8MF1000-2HK2

17

System overview, page 17/4

© Siemens 2025

Universal sheets



- Incl. DIN rail; e.g. for mounting a heater unit

Article No.
8MF1000-2HG

DIN rails



- For mounting modular installation devices

Height	Article No.
7.5 mm	8MF1500-2HS
15 mm	8MF1100-2HS

Insulated supports

Thread	Dimensions	Article No.
M8	D 40 × 50 mm	8MF1000-2VY

Cable clamping rails



Height	Width	Depth	Article No.
30 mm	600 mm	–	8MF1360-2HH
	800 mm	–	8MF1380-2HH
	900 mm	–	8MF1390-2HH
	1000 mm	–	8MF1310-2HH
	1200 mm	–	8MF1320-2HH
	–	400 mm	8MF1304-2HH
		600 mm	8MF1306-2HH
		800 mm	8MF1308-2HH
		1000 mm	8MF1301-2HH
40 mm	600 mm	–	8MF1460-2HH
	800 mm	–	8MF1480-2HH
	900 mm	–	8MF1490-2HH
	1000 mm	–	8MF1410-2HH
	1200 mm	–	8MF1420-2HH
	–	400 mm	8MF1404-2HH
		600 mm	8MF1406-2HH
		800 mm	8MF1408-2HH
		1000 mm	8MF1401-2HH
50 mm	600 mm	–	8MF1560-2HH
	800 mm	–	8MF1580-2HH
	900 mm	–	8MF1590-2HH
	1000 mm	–	8MF1510-2HH
	1200 mm	–	8MF1520-2HH
	–	400 mm	8MF1504-2HH
		600 mm	8MF1506-2HH
		800 mm	8MF1508-2HH
		1000 mm	8MF1501-2HH

System overview, page 17/4

© Siemens 2025

General accessories interior installation

Siemens EcoTech

Cable ducts



Version	Color	Height	Width	Article No.
Halogen-free	RAL 7035	37.5 mm	25 mm	8MF1120-2HL7
		50 mm	25 mm	8MF1220-2HL7
			37.5 mm	8MF1240-2HL7
			50 mm	8MF1250-2HL7
			75 mm	8MF1260-2HL7
		75 mm	50 mm	8MF1350-2HL7
			75 mm	8MF1360-2HL7
			100 mm	8MF1370-2HL7
			125 mm	8MF1380-2HL7
		100 mm	75 mm	8MF1460-2HL7
Standard	RAL 7030	37.5 mm	25 mm	8MF1120-2HL6
		50 mm	25 mm	8MF1220-2HL6
			37.5 mm	8MF1240-2HL6
			50 mm	8MF1250-2HL6
			75 mm	8MF1260-2HL6
		75 mm	50 mm	8MF1350-2HL6
			75 mm	8MF1360-2HL6
			100 mm	8MF1370-2HL6
			125 mm	8MF1380-2HL6
		100 mm	75 mm	8MF1460-2HL6

Edge protection

Dimensions	Length	Article No.
9.5 × 6.5 mm	5 m	8MF1000-2CD

Mounting plates



Dimensions	Version	Article No.
122 × 91 mm	Standard	8MF1000-2HH
122 × 92 mm	With DIN rail	8MF1000-2HH1

Buses for improving EMC



Installation in	Width	Depth	Article No.
Cubicle width	400 mm	–	8MF1040-2HN
	600 mm	–	8MF1060-2HN
	800 mm	–	8MF1080-2HN
	900 mm	–	8MF1090-2HN
	1000 mm	–	8MF1000-2HN
	1200 mm	–	8MF1020-2HN
Cubicle depth	–	400 mm	8MF1004-2HN
		600 mm	8MF1006-2HN
		800 mm	8MF1008-2HN
		1000 mm	8MF1001-2HN

System overview, page 17/4

© Siemens 2025

Brackets

- For variable mounting of cable clamping rails

Article No.
8MF1000-2HH5

Toothed bars

- For installation on mounting rail

Length	Article No.
100 mm	8MF1000-2HC

Contact washers

- Size 6

Scope of supply	Article No.
100 units	8MF1000-2VJ

Screws

- M6 × 12

Scope of supply	Article No.
100 units	8MF1000-2VS

Adapters for wiring systems

Version	Article No.
For Lütze wiring system	8MF1000-2HL
For Promet wiring system	8MF1000-2HP

17

System overview, page 17/4

© Siemens 2025

19-inch expansion

Siemens EcoTech

Cubicle frames

- For the installation of 19" devices, screwed
- In combination with 2 mounting rails, heavy duty in cubicle width (order mounting rail separately, see page 17/27)
- For cubicle width ≥ 600 mm

Surface	Height	For mounting height	Article No.
Zinc-plated	400 mm	7 HU	8MF1100-2AN30
	600 mm	12 HU	8MF1200-2AN30
	800 mm	16 HU	8MF1300-2AN30
	1000 mm	21 HU	8MF1400-2AN30
	1200 mm	25 HU	8MF1500-2AN30
	1400 mm	30 HU	8MF1600-2AN30
	1800 mm	36 HU	8MF1700-2AN30
	2000 mm	41 HU	8MF1800-2AN30
	2200 mm	45 HU	8MF1900-2AN30

Swing frames

- For the installation of 19" devices, screwed
- Left-hand/right-hand hinge
- In combination with 2 mounting rails, heavy duty in cubicle width (order mounting rail separately)
- For cubicle width ≥ 800 mm

Version	Surface	Height	For mounting height	Article No.
Screwed [1]	Zinc-plated	1800 mm	34 HU	8MF1800-2AR02-4
		2000 mm	38 HU	8MF1000-2AR02-4
		2200 mm	43 HU	8MF1200-2AR02-4
	Powder-coated	1800 mm	34 HU	8MF1800-2AR02-3
		2000 mm	38 HU	8MF1000-2AR02-3
		2200 mm	43 HU	8MF1200-2AR02-3
Welded [2]	Powder-coated	1800 mm	34 HU	8MF1800-2AR02-2
		2000 mm	38 HU	8MF1000-2AR02-2
		2200 mm	43 HU	8MF1200-2AR02-2

[1] Interlocking with 3 mm double-bit key
[2] Spring interlocking at top and bottom

Accessories

Universal supports



Version	For mounting height	Article No.
For cable channel, DIN rail and C rail	1 HU	8MF1000-2HH2
	2 HU	8MF1000-2HH3
For cable channel, DIN rail, C rail and lamp		8MF1000-2HH4

© Siemens 2025

Covers

Version	Surface	For mounting height	Article No.
Closed	RAL 7035	1 HU	8MF1000-2AB01
		2 HU	8MF1000-2AB02
		3 HU	8MF1000-2AB03
		4 HU	8MF1000-2AB04
		5 HU	8MF1000-2AB05
		6 HU	8MF1000-2AB06
		7 HU	8MF1000-2AB07

With ventilation openings	RAL 7035	2 HU	8MF1000-2AB32
		3 HU	8MF1000-2AB33

For modular installation devices, for 24 modular widths	RAL 7035	3 HU	8MF1000-2AB31

Frames

Version	Surface	For mounting height	Article No.
For mounting test switches, 19"	RAL 7035	7 HU	8MF1000-2AB30

Covers for frames

Version	Surface	Article No.
For mounting 7XP 1/6 standard devices	RAL 7035	8MF1000-2AB34
For mounting 7XP 2/6 standard devices	RAL 7035	8MF1000-2AB35
For mounting 7XP 3/6 standard devices	RAL 7035	8MF1000-2AB36

Shelves



- For 19" frame

Version	Surface	For mounting height	Depth	Article No.
Non-adjustable	Zinc-plated	3 HU	230 mm	8MF1000-2AB12
			400 mm	8MF1000-2AB14
Withdrawable	RAL 7035	1 HU		8MF1000-2HF12

Slide rails



Version	Depth	Article No.
For 19" fixed-mounted (double mounting at front and rear)	400 mm	8MF1004-2HG12
	600 mm	8MF1006-2HG12
	800 mm	8MF1008-2HG12
	1000 mm	8MF1000-2HG12
For 19" fixed-mounted and for 19" swing frame		8MF1000-2HS12

Device panels

Version	Surface	Height	Width	Article No.
For 24 modular widths	Zinc-plated	1800 mm	100 mm	8MF1810-2AB00
			150 mm	8MF1850-2AB00
			200 mm	8MF1820-2AB00
		2000 mm	100 mm	8MF1010-2AB00
			150 mm	8MF1050-2AB00
			200 mm	8MF1020-2AB00
		2200 mm	100 mm	8MF1210-2AB00
			150 mm	8MF1250-2AB00
			200 mm	8MF1220-2AB00

17

System overview, page 17/4

© Siemens 2025

Quick selection guide

Standard LED lights

The LED lights offer optimum lighting conditions for installation and maintenance. The LED technology is energy-efficient and maintenance-free. The connection is established via a 2-pin plug with lock. Through-wiring is possible.

	Magnetic fixing Easy installation at any point on the steel cubicle	Screw fixing Fixed installation in the case of impact loads or high vibration levels	Clip fixing The lamp is snapped into the clip bracket and can be turned in both directions
With motion detector The lights switch on when the door is opened, enabling work in the cubicle to be started immediately			
With on-off switch Particularly suitable for operation in cubicles and enclosures with a high density of built-in electrical/electronic components			

Ecoline LED lights

The Ecoline LED lights do not differ from the standard LED lights in terms of luminosity and mounting system. The connection is made via a 2-pole clamping terminal.

	Magnetic fixing Easy installation at any point on the steel cubicle	Screw fixing Fixed installation in the case of impact loads or high vibration levels	Clip fixing The lamp is snapped into the clip bracket and can be turned in both directions
With motion detector The lights switch on when the door is opened, enabling work in the cubicle to be started immediately			
With on-off switch Particularly suitable for operation in cubicles and enclosures with a high density of built-in electrical/electronic components			
Without switching function Prepared for the use of an external switch			

17

System overview, page 17/4

© Siemens 2025

Slimline lights

The Slimline lights are an alternative with an energy-saving lamp and are available as a version with an integrated socket.

	Screw fixing	Magnetic fixing
With motion detector and socket The lights switch on when the door is opened, enabling work in the cubicle to be started immediately		
With on-off switch and socket Particularly suitable for operation in cubicles and enclosures with a high density of built-in electrical/electronic components		

System overview, page 17/4

© Siemens 2025

LED lights

Standard

Magnetic fixing

Version	Voltage	Standard	Article No.
With motion detector	100 ... 240 V AC, 50/60 Hz	VDE	8MR2200-0A
	24 ... 48 V DC	VDE	8MR2201-0A
With on-off switch	100 ... 240 V AC, 50/60 Hz	VDE, UL	8MR2200-1A
	24 ... 48 V DC	VDE, UL	8MR2201-1A

Screw fixing

Version	Voltage	Standard	Article No.
With motion detector	100 ... 240 V AC, 50/60 Hz	VDE	8MR2200-0B
	24 ... 48 V DC	VDE	8MR2201-0B
With on-off switch	100 ... 240 V AC, 50/60 Hz	VDE, UL	8MR2200-1B
	24 ... 48 V DC	VDE, UL	8MR2201-1B

Clip fixing

Version	Voltage	Standard	Article No.
With motion detector	100 ... 240 V AC, 50/60 Hz	VDE	8MR2200-0C
	24 ... 48 V DC	VDE	8MR2201-0C
With on-off switch	100 ... 240 V AC, 50/60 Hz	VDE	8MR2200-1C
	24 ... 48 V DC	VDE	8MR2201-1C

Accessories

Cables

Connecting cables with socket and open end

- For connection of an LED light (switch side)
- Length 2 m

Version	Cross-section	Standard	Article No.
AC connecting cable	2 × 1.5 mm²	VDE	8MR2210-1B
	AWG 16	VDE, UL	8MR2210-2B
DC connecting cable	2 × 1.5 mm²	VDE	8MR2210-3B
	AWG 16	VDE, UL	8MR2210-4B

Extension cables with socket and plug

- For looping through to another LED light
- Length 1 m

Version	Cross-section	Standard	Article No.
AC plastic-sheathed cable	2 × 1.5 mm²	VDE	8MR2210-1C
	AWG 16	VDE, UL	8MR2210-2C
DC plastic-sheathed cable	2 × 1.5 mm²	VDE	8MR2210-3C
	AWG 16	VDE, UL	8MR2210-4C

Individual plugs or sockets for self-assembly of cables

For connection of an LED light (switch side)

Version	Application	Standard	Color	Article No.
AC socket	For input side	VDE	White	8MR2210-1A
DC socket	For input side	VDE	Blue	8MR2210-3A

For looping through to another LED light

Version	Application	Standard	Color	Article No.
AC connector	For output side	VDE	White	8MR2210-2A
DC connector	For output side	VDE	Blue	8MR2210-4A

17

System overview, page 17/4

© Siemens 2025

Ecoline

Magnetic fixing

Version	Voltage		Article No.
With motion detector	100 ... 240 V AC, 50/60 Hz	90 ... 110 V DC	8MR2303-0A
	24 ... 48 V DC		8MR2301-0A
With on-off switch	100 ... 240 V AC, 50/60 Hz	90 ... 110 V DC	8MR2303-1A
	24 ... 48 V DC		8MR2301-1A
Without switching function	100 ... 240 V AC, 50/60 Hz	90 ... 110 V DC	8MR2303-3A
	24 ... 48 V DC		8MR2301-3A

Screw fixing

Version	Voltage		Article No.
With motion detector	100 ... 240 V AC, 50/60 Hz	90 ... 110 V DC	8MR2303-0B
	24 ... 48 V DC		8MR2301-0B
With on-off switch	100 ... 240 V AC, 50/60 Hz	90 ... 110 V DC	8MR2303-1B
	24 ... 48 V DC		8MR2301-1B
Without switching function	100 ... 240 V AC, 50/60 Hz	90 ... 110 V DC	8MR2303-3B
	24 ... 48 V DC		8MR2301-3B

Clip fixing

Version	Voltage		Article No.
With motion detector	100 ... 240 V AC, 50/60 Hz	90 ... 110 V DC	8MR2303-0C
	24 ... 48 V DC		8MR2301-0C
With on-off switch	100 ... 240 V AC, 50/60 Hz	90 ... 110 V DC	8MR2303-1C
	24 ... 48 V DC		8MR2301-1C
Without switching function	100 ... 240 V AC, 50/60 Hz	90 ... 110 V DC	8MR2303-3C
	24 ... 48 V DC		8MR2301-3C

System overview, page 17/4

© Siemens 2025

Slimline lights

Magnetic fixing (approx. 30 N)

Version	Voltage	Standard	Article No.
With motion detector and socket	230 V AC, 50/60 Hz	VDE	8MF5910-1C
With on-off switch and socket	230 V AC, 50/60 Hz	VDE	8MF5900-1C

Screw fixing

Version	Voltage	Standard	Article No.
With motion detector and socket	230 V AC, 50/60 Hz	VDE	8MF5910-1A
Slimline lights with on-off switch and socket	230 V AC, 50/60 Hz	VDE	8MF5900-1A

System overview, page 17/4

© Siemens 2025

System overview, page 17/4

© Siemens 2025

Quick selection guide

Solutions to provide protection against heat

Cooling devices

Heat exchangers

Filter fans/outlet fans

Thermostats

Solutions to provide protection against cold

Heater units

Fan heaters

Thermostats

Solutions to provide protection against corrosion and condensation

Heater units/ fan heaters

Filter fans/outlet filters

Thermostats

Hygrostats/ hygrotherms

SIMARIS therm

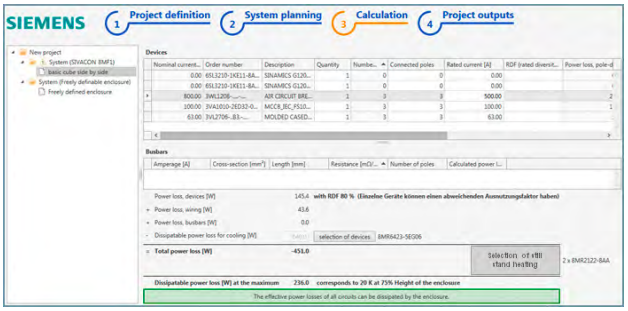

The SIMARIS therm calculation tool helps you to easily and precisely dimension the heat dissipation of your control panels, simply by selecting the relevant devices in the panel. If necessary, you can immediately select the necessary cooling devices and air conditioners. You can also define the heating power that may be required for anti-condensation heating.

For a free download and further information, visit:
www.siemens.com/simaristherm

System overview, page 17/4

© Siemens 2025

Filter fans and outlet filters

Filter fans

	Cutout	Voltage	Input rating at 50 Hz	Standard	Color	Degree of protection IP54 Air current, free-blowing at 50 Hz	Degree of protection IP54 Article No.	Degree of protection IP55 Air current, free-blowing at 50 Hz	Degree of protection IP55 Article No.
	Filter fans with EC technology								
	125 × 125 mm	115 V AC, 50/60 Hz	4.4 W	VDE	RAL 7035	62 m³/h	8MR6411-5LE25		–
		230 V AC, 50/60 Hz	4.4 W	VDE	RAL 7035	62 m³/h	8MR6423-5LE25		–
	177 × 177 mm	115 V AC, 50/60 Hz	4.4 W	VDE	RAL 7035	120 m³/h	8MR6411-5LE30		–
		230 V AC, 50/60 Hz	4.4 W	VDE	RAL 7035	120 m³/h	8MR6423-5LE30		–
	Standard filter fans								
	92 × 92 mm	115 V AC, 50/60 Hz	12 W	VDE	RAL 7035	25 m³/h	8MR6411-5LV10		–
		230 V AC, 50/60 Hz	12 W	VDE, UL	RAL 7032	25 m³/h	8MR6423-2LV10		–
				VDE, UL	RAL 7035	25 m³/h	8MR6423-5LV10		–
		24 V DC	2.2 W	VDE	RAL 7035	25 m³/h	8MR6402-5LV10		–
	125 × 125 mm	115 V AC, 50/60 Hz	20 W	VDE, UL	RAL 7035	63 m³/h	8MR6411-5LV25	58 m³/h	8MR6511-5LV25
		230 V AC, 50/60 Hz	20 W	VDE, UL	RAL 7032	63 m³/h	8MR6423-2LV25		–
				VDE, UL	RAL 7035	63 m³/h	8MR6423-5LV25	58 m³/h	8MR6523-5LV25
		24 V DC	4.1 W	VDE	RAL 7035	63 m³/h	8MR6402-5LV25		–
	177 × 177 mm	115 V AC, 50/60 Hz	20 W	VDE, UL	RAL 7035	115 m³/h	8MR6411-5LV30	105 m³/h	8MR6511-5LV30
		230 V AC, 50/60 Hz	20 W	VDE, UL	RAL 7035	115 m³/h	8MR6423-5LV30	105 m³/h	8MR6523-5LV30
		24 V DC	4.1 W	VDE	RAL 7035	115 m³/h	8MR6402-5LV30		–
	223 × 223 mm	115 V AC, 50/60 Hz	18 W	VDE, UL	RAL 7035	160 m³/h	8MR6411-5LV45	147 m³/h	8MR6511-5LV45
			43 W	VDE, UL	RAL 7035	250 m³/h	8MR6411-5LV41	230 m³/h	8MR6511-5LV41
		24 V DC	6.5 W	VDE	RAL 7035	160 m³/h	8MR6402-5LV45		–
		230 V AC, 50/60 Hz	18 W	VDE, UL	RAL 7032	160 m³/h	8MR6423-2LV45		–
				VDE, UL	RAL 7035	160 m³/h	8MR6423-5LV45	147 m³/h	8MR6523-5LV45
			45 W	VDE, UL	RAL 7032	250 m³/h	8MR6423-2LV41		–
				VDE, UL	RAL 7035	250 m³/h	8MR6423-5LV41	230 m³/h	8MR6423-5LV41
		24 V DC	16 W	VDE, UL	RAL 7032	250 m³/h	8MR6402-2LV41		–
				VDE	RAL 7035	250 m³/h	8MR6402-5LV41		–
	292 × 292 mm	115 V AC, 50/60 Hz	64 W	VDE, UL	RAL 7035	580 m³/h	8MR6411-5LV60	531 m³/h	8MR6511-5LV60
			115 W	VDE, UL	RAL 7035	930 m³/h	8MR6411-5LV80	850 m³/h	8MR6511-5LV80
		230 V AC, 50/60 Hz	64 W	VDE, UL	RAL 7032	580 m³/h	8MR6423-2LV60		–
				VDE, UL	RAL 7035	580 m³/h	8MR6423-5LV60	531 m³/h	8MR6523-5LV60
			135 W	VDE, UL	RAL 7035	930 m³/h	8MR6423-5LV80	850 m³/h	8MR6523-5LV80
	EMC filter fans								
	177 × 177 mm	115 V AC, 50/60 Hz	20 W	VDE, UL	RAL 7035	115 m³/h	8MR6411-6LV30	105 m³/h	8MR6511-6LV30
		230 V AC, 50/60 Hz	20 W	VDE, UL	RAL 7035	115 m³/h	8MR6423-6LV30	105 m³/h	8MR6523-6LV30
	223 × 223 mm	115 V AC, 50/60 Hz	18 W	VDE, UL	RAL 7035	160 m³/h	8MR6411-6LV45	147 m³/h	8MR6511-6LV45
			43 W	VDE, UL	RAL 7035	250 m³/h	8MR6411-6LV41	230 m³/h	8MR6511-6LV41
		230 V AC, 50/60 Hz	18 W	VDE, UL	RAL 7035	160 m³/h	8MR6423-6LV45	147 m³/h	8MR6523-6LV45
			45 W	VDE, UL	RAL 7035	250 m³/h	8MR6423-6LV41	230 m³/h	8MR6523-6LV41

System overview, page 17/4

© Siemens 2025

Filter fans and outlet filters

Outlet filters without fan

	Cutout	External dimensions W × H	Mounting depth	Cover grille height	Color	Standard	Degree of protection IP54 Article No.	Degree of protection IP55 Article No.
Standard outlet filters								
	68 × 68 mm	80 × 80 mm	11 mm	4 mm	RAL 7035	VDE	8MR6400-5GV08	–
	92 × 92 mm	105 × 105 mm	12 mm	4.5 mm	RAL 7032	VDE, UL	8MR6400-2GV10	–
					RAL 7035	VDE, UL	8MR6400-5GV10	–
	116 × 116 mm	130 × 130 mm	24 mm	5 mm	RAL 7035	VDE	8MR6400-5GV20	–
	125 × 125 mm	148 × 148 mm	23 mm	5.5 mm	RAL 7032	VDE, UL	8MR6400-2GV25	–
					RAL 7035	VDE, UL	8MR6400-5GV25	8MR6500-5GV25
	177 × 177 mm	204 × 204 mm	26 mm	6 mm	RAL 7035	VDE, UL	8MR6400-5GV30	8MR6500-5GV30
	223 × 223 mm	250 × 250 mm	32 mm	6 mm	RAL 7032	VDE, UL	8MR6400-2GV45	–
					RAL 7035	VDE, UL	8MR6400-5GV45	8MR6500-5GV45
	292 × 292 mm	323 × 323 mm	33 mm	6.5 mm	RAL 7032	VDE, UL	8MR6400-2GV67	–
					RAL 7035	VDE, UL	8MR6400-5GV67	8MR6500-5GV67
EMC outlet filters								
	177 × 177 mm	204 × 204 mm	26 mm	6 mm	RAL 7035	VDE, UL	8MR6400-6GV30	8MR6500-6GV30
	223 × 223 mm	250 × 250 mm	32 mm	6 mm	RAL 7035	VDE, UL	8MR6400-6GV45	8MR6500-6GV45

Filter mats for filter fans and outlet filters

	Degree of protection IP54 Dimensions W × H	Standard	Article No.	Degree of protection IP55 Dimensions W × H	Standard	Article No.
Standard filter mats						
	65 × 65 mm	VDE	8MR6000-0AM08		VDE	–
	92 × 92 mm	VDE	8MR6000-0AM10		VDE	–
	112 × 112 mm	VDE	8MR6000-0AM20		VDE	–
	125 × 125 mm	VDE	8MR6000-0AM25	116 × 116 mm	VDE	8MR6000-0CF25
	177 × 177 mm	VDE	8MR6000-0AM30	169 × 169 mm	VDE	8MR6000-0CF30
	223 × 223 mm	VDE	8MR6000-0AM45	215 × 215 mm	VDE	8MR6000-0CF45
	292 × 292 mm	VDE	8MR6000-0AM67	281 × 281 mm	VDE	8MR6000-0CF67

System overview, page 17/4

© Siemens 2025

Roof filter fans and roof outlet filters

Roof filter fans

	Air current, free-blowing at 50 Hz	External dimensions W × H × D	Voltage	Input rating	Standard	Degree of protection IP44 Article No.	Degree of protection IP54 Article No.
	For cutout 223 × 223 mm, color RAL 7035						
	71 m³/h	287 × 287 × 104 mm	230 V AC, 50/60 Hz	40 W	VDE, UL	–	8MR6423-5VL44
			115 V AC, 50/60 Hz	48 W	VDE	–	8MR6411-5VL44
			24 V DC	8.8 W	VDE, UL	–	8MR6402-5VL44
	240 m³/h	287 × 287 × 174 mm	230 V AC, 50/60 Hz	45 W	VDE, UL	–	8MR6423-5VL41
			115 V AC, 50/60 Hz	43 W	VDE	–	8MR6411-5VL41
			24 V DC	16 W	VDE, UL	–	8MR6402-5VL41
	300 m³/h	287 × 287 × 174 mm	230 V AC, 50/60 Hz	45 W	VDE, UL	–	8MR6423-5VL55
	For cutout 292 × 292 mm, color RAL 7035						
	232 m³/h	361 × 361 × 114 mm	230 V AC, 50/60 Hz	68 W	VDE, UL	–	8MR6423-5VL64
			115 V AC, 50/60 Hz	68 W	VDE	–	8MR6411-5VL64
			24 V DC	14 W	VDE, UL	–	8MR6402-5VL64
	550 m³/h	361 × 361 × 211 mm	230 V AC, 50/60 Hz	64 W	VDE, UL	–	8MR6423-5VL60
			115 V AC, 50/60 Hz	64 W	VDE	–	8MR6411-5VL60
			24 V DC	55 W	VDE, UL	–	8MR6402-5VL60
	840 m³/h	361 × 361 × 203 mm	230 V AC, 50/60 Hz	135 W	VDE, UL	–	8MR6423-5VL80
			115 V AC, 50/60 Hz	115 W	VDE	–	8MR6411-5VL80
			24 V DC	105 W	VDE, UL	–	8MR6402-5VL80
	**For cutout 345 × 265 mm, color RAL 7035, metal**						
	405 m³/h	420 × 340 × 108 mm	115 V AC, 50/60 Hz	40/45 W	VDE, UL	8MR6311-5DL40	–
			230 V AC, 50/60 Hz	40/45 W	VDE, UL	8MR6323-5DL40	–
	690 m³/h	420 × 340 × 108 mm	115 V AC, 50/60 Hz	100/130 W	VDE, UL	8MR6311-5DL42	–
			230 V AC, 50/60 Hz	100/130 W	VDE, UL	8MR6323-5DL42	–

Roof outlet filters without fan

	External dimensions W × H × D	Standard	Degree of protection IP44 Article No.	Degree of protection IP54 Article No.
	For cutout 223 × 223 mm, color RAL 7035			
	287 × 287 × 85 mm	VDE, UL	–	8MR6400-5VE45
	For cutout 292 × 292 mm, color RAL 7035			
	361 × 361 × 96 mm	VDE, UL	–	8MR6400-5VE67
	**For cutout 345 × 265 mm, color RAL 7035, metal**			
	420 × 340 × 83 mm	VDE, UL	8MR6000-5DE40	–

17

System overview, page 17/4

© Siemens 2025

Air conditioners/cooling devices

For roof mounting, degree of protection inside IP54/outside IP34, color RAL 7035

Cooling capacity	Rated power	Dimensions W × H × D	Air capacity Inside	Air capacity Outside	Design	Mounting Undrilled	Mounting Part	Standard	Article No.
230 V, 50/60 Hz									
410 W	270 W	259 × 264 × 486 mm	235 m³/h	330 m³/h	■	■	–	VDE	8MR6423-5DE04
820 W	510 W	340 × 340 × 600 mm	330 m³/h	570 m³/h	■	■	–	VDE	8MR6423-5DE08
1150 W	550 W	401 × 415 × 567 mm	570 m³/h	1010 m³/h	■	■	–	VDE	8MR6423-5DE12
1550 W	810 W	401 × 415 × 567 mm	860 m³/h	1820 m³/h	■	■	–	VDE	8MR6423-5DE15
2050 W	1190 W	401 × 415 × 567 mm	1050 m³/h	1820 m³/h	■	■	–	VDE	8MR6423-5DE20
400 V, 50/60 Hz									
2900 W	1210 W	492 × 496 × 797 mm	860 m³/h	3410 m³/h	■	■	–	VDE	8MR6440-5DE30
3850 W	1630 W	492 × 496 × 797 mm	1450 m³/h	3410 m³/h	■	■	–	VDE	8MR6440-5DE40

Heat exchangers

Air/air heat exchangers, degree of protection IP54, color RAL 7035

Thermal power	Rated power	Dimensions W × H × D	Air capacity Inside	Air capacity Outside	Design	Mounting Undrilled	Mounting Part	Standard	Article No.
230 V, 50/60 Hz									
36 W/K	140 W	316 × 771 × 103 mm	570 m³/h	570 m³/h	■	■	–	VDE	8MR6423-5ML36
80 W/K	240 W	317 × 1260 × 148 mm	1050 m³/h	1050 m³/h	■	■	–	VDE	8MR6423-5ML80

System overview, page 17/4

© Siemens 2025

Heater units

Rated value	Rated power	Shutdown temperature	Standard	Article No.
Heater units with PTC thermistor, UL-approved				
120 ... 240 V AC/DC	15 W	–	VDE, UL	8MR2130-1A
	30 W	–	VDE, UL	8MR2130-3A
	45 W	–	VDE, UL	8MR2130-4A
	60 W	–	VDE, UL	8MR2130-6A
	75 W	–	VDE, UL	8MR2130-7A
	100 W	–	VDE, UL	8MR2130-0A
	150 W	–	VDE, UL	8MR2130-5A
Semiconductor heater units without thermostat, compact design, UL-approved				
120 ... 240 V AC/DC	50 W	–	VDE	8MR2131-4A
	100 W	–	VDE	8MR2131-0A
	150 W	–	VDE	8MR2131-5A
Semiconductor heater units with thermostat, compact design				
120 ... 240 V AC/DC	50 W	15 °C	VDE	8MR2132-1A
		25 °C	VDE	8MR2132-1AB
	100 W	15 °C	VDE	8MR2132-0A
		25 °C	VDE	8MR2132-0AB
	150 W	15 °C	VDE	8MR2132-5A
		25 °C	VDE	8MR2132-5AB
Semiconductor heater units				
12 ... 30 V AC/DC	15 W	–	VDE	8MR2130-1BA
	30 W	–	VDE	8MR2130-3BA
	45 W	–	VDE	8MR2130-4BA
	60 W	–	VDE	8MR2130-6BA

System overview, page 17/4

© Siemens 2025

Fan heaters

Fan heaters

Version	Voltage	Continuous heat output	Parameter	Standard	Article No.
Standard version					
Without fan	230 V AC	100 W	–	VDE, UL	8MR2140-0A
		150 W	–	VDE, UL	8MR2140-1A
		200 W	–	VDE, UL	8MR2140-2A
		300 W	–	VDE, UL	8MR2140-3A
		400 W	–	VDE, UL	8MR2140-4A
With fan	230 V AC	100 W	–	VDE, UL	8MR2140-0B
		150 W	–	VDE, UL	8MR2140-1B
		200 W	–	VDE, UL	8MR2140-2B
		300 W	–	VDE, UL	8MR2140-3B
		400 W	–	VDE, UL	8MR2140-4B
Compact fan heater					
Without fan	230 V AC	250 W	–	VDE, UL	8MR2122-4A
		400 W	–	VDE, UL	8MR2122-8A
	120 V AC	250 W	–	VDE, UL	8MR2122-4B
		400 W	–	VDE, UL	8MR2122-8B
With fan	24 V DC	250 W	–	VDE, UL	8MR2122-4AB
	48 V DC	250 W	–	VDE, UL	8MR2122-4AC
		400 W	–	VDE, UL	8MR2122-8AA
With integrated thermostat					
For floor mounting	230 V AC	950 W	0 ... +60 °C	VDE, UL	8MR2150-0A
For wall mounting	230 V AC	950 W	0 ... +60 °C	VDE, UL	8MR2150-0C
With integrated hygrostat					
For wall mounting	230 V AC	950 W	65% R.H.	VDE, UL	8MR2150-0CA

Semiconductor fan heaters

Mounting	Voltage	Continuous heat output	Version	Standard	Article No.
Fan heaters					
Clip fixing	230 V AC	150 W	–	VDE, UL	8MR2150-2C
		250 W	–	VDE, UL	8MR2150-5A
		400 W	–	VDE, UL	8MR2150-4A
	120 V AC	250 W	–	VDE, UL	8MR2150-5AA
		400 W	–	VDE, UL	8MR2150-4AA
Screw fixing	230 V AC	150 W	–	VDE, UL	8MR2150-2D
		250 W	–	VDE, UL	8MR2150-5B
		400 W	–	VDE, UL	8MR2150-4B
	120 V AC	250 W	–	VDE, UL	8MR2150-5AB
		400 W	–	VDE, UL	8MR2150-4AB
PTC fan heaters for wall mounting					
Screw fixing	230 V AC	1200 W	With thermostat 0 ... +60 °C	VDE, UL	8MR2150-3A
		1200 W	Without thermostat	VDE, UL	8MR2150-3B
Clip fixing	120 V AC	1200 W	With thermostat +32 ... +140 °F	VDE, UL	8MR2151-3A
		1200 W	Without thermostat	VDE, UL	8MR2151-3B
PTC fan heaters for floor mounting					
Screw fixing	230 V AC	1200 W	With thermostat 0 ... +60 °C	VDE, UL	8MR2150-2A
		1200 W	Without thermostat	VDE, UL	8MR2150-2B
Clip fixing	120 V AC	1200 W	With thermostat +32 ... +140 °F	VDE, UL	8MR2151-2A
		1200 W	Without thermostat	VDE, UL	8MR2151-2B

System overview, page 17/4

© Siemens 2025

Thermostats

Adjustable thermostats

Version	Max. switching power	Temperature range	Standard	Article No.
Mini thermostat				
NC with red adjusting knob	250 V AC, 10 (2) A	0 ... +60 °C	VDE	8MR2170-1KA
		−10 ... +50 °C	VDE	8MR2170-1KB
		+20 ... +80 °C	VDE	8MR2170-1KC
		+32 ... +140 °F	VDE	8MR2170-1KD
		+14 ... +122 °F	VDE	8MR2170-1KE
NO with blue adjusting knob	250 V AC, 10 (2) A	0 ... +60 °C	VDE	8MR2170-2KA
		−10 ... +50 °C	VDE	8MR2170-2KB
		+20 ... +80 °C	VDE	8MR2170-2KC
		+32 ... +140 °F	VDE	8MR2170-2KD
		+14 ... +122 °F	VDE	8MR2170-2KE
Mechanical thermostat				
CO	250 V AC, 10 (4) A	+5 ... +60 °C	VDE, UL	8MR2170-1A
		−20 ... +30 °C	VDE, UL	8MR2170-1B
Electronic thermostat				
CO	230 V AC, 8 (1.6) A	−20 ... +60 °C	VDE	8MR2170-1GA
	120 V AC, 8 (1.6) A	−4 ... +140 °F	VDE	8MR2170-1GB
	24 V DC, 16 A	0 ... +60 °C	VDE	8MR2170-2A
CO, integrated	230 V AC, 8 (1.6) A	−20 ... +60 °C	VDE	8MR2170-1GC
Zwillings-Thermostat				
NC and NO	250 V AC, 10 (2) A	0 ... +60 °C	VDE, UL	8MR2170-1E
NO and NO	250 V AC, 10 (2) A	0 ... +60 °C	VDE, UL	8MR2170-1EA

System overview, page 17/4

© Siemens 2025

Thermostats

Tamper-proof thermostats

Version	Max. switching power	Shutdown temperature	Standard	Article No.
Tamper-proof thermostat				
NC	250 V AC, 5 (1.6) A	15 °C	VDE, UL	8MR2171-1BA
		25 °C	VDE, UL	8MR2171-2BA
NO	250 V AC, 5 (1.6) A	35 °C	VDE, UL	8MR2171-3BB
		50 °C	VDE, UL	8MR2171-1BB
		60 °C	VDE, UL	8MR2171-2BB
Twin thermostat				
NC and NO	250 V AC, 5 (1.6) A	15 °C | 50 °C (NC | NO)	VDE, UL	8MR2172-1A
	250 V AC, 5 (1.6) A or 30 W DC	25 °C | 60 °C (NC | NO)	VDE, UL	8MR2172-2A
NO and NO	250 V AC, 5 (1.6) A	50 °C | 60 °C (NO | NO)	VDE, UL	8MR2172-1AB

System overview, page 17/4

© Siemens 2025

Hygrostats and hygrotherms

Hygrostats

	Version	Relative air humidity	Voltage	Max. switching power	Standard	Article No.
	Mechanical hygrostat					
	CO	35 ... 95%	230 V AC	250 V AC, 5 (0.2) A/20 W DC	VDE, UL	8MR2170-1C
	Electronic hygrostat					
	CO	40 ... 90%	230 V AC	240 V AC, 8 (1.6) A	VDE	8MR2170-1AF
			120 V AC	240 V AC, 8 (1.6) A	VDE	8MR2170-2AF
		65%	230 V AC	240 V AC	VDE	8MR2170-1BF
			120 V AC	120 V AC	VDE	8MR2170-2BF

Hygrotherms

	Version	Relative air humidity	Temperature range	Voltage	Max. switching power	Standard	Article No.
	Electronic hygrotherm						
	NC and NO	50 ... 90%	+32 ... +140 °F	100 ... 240 V AC	NC: 120 V AC, 6 (1) A NO: 120 V AC, 8 (1.6) A	VDE, UL	8MR2170-4F
			0 ... +60 °C	100 ... 240 V AC	NC: 100 ... 240 V AC, 6 (1) A NO: 100 ... 240 V AC, 8 (1.6) A	VDE, UL	8MR2170-4E

System overview, page 17/4

© Siemens 2025

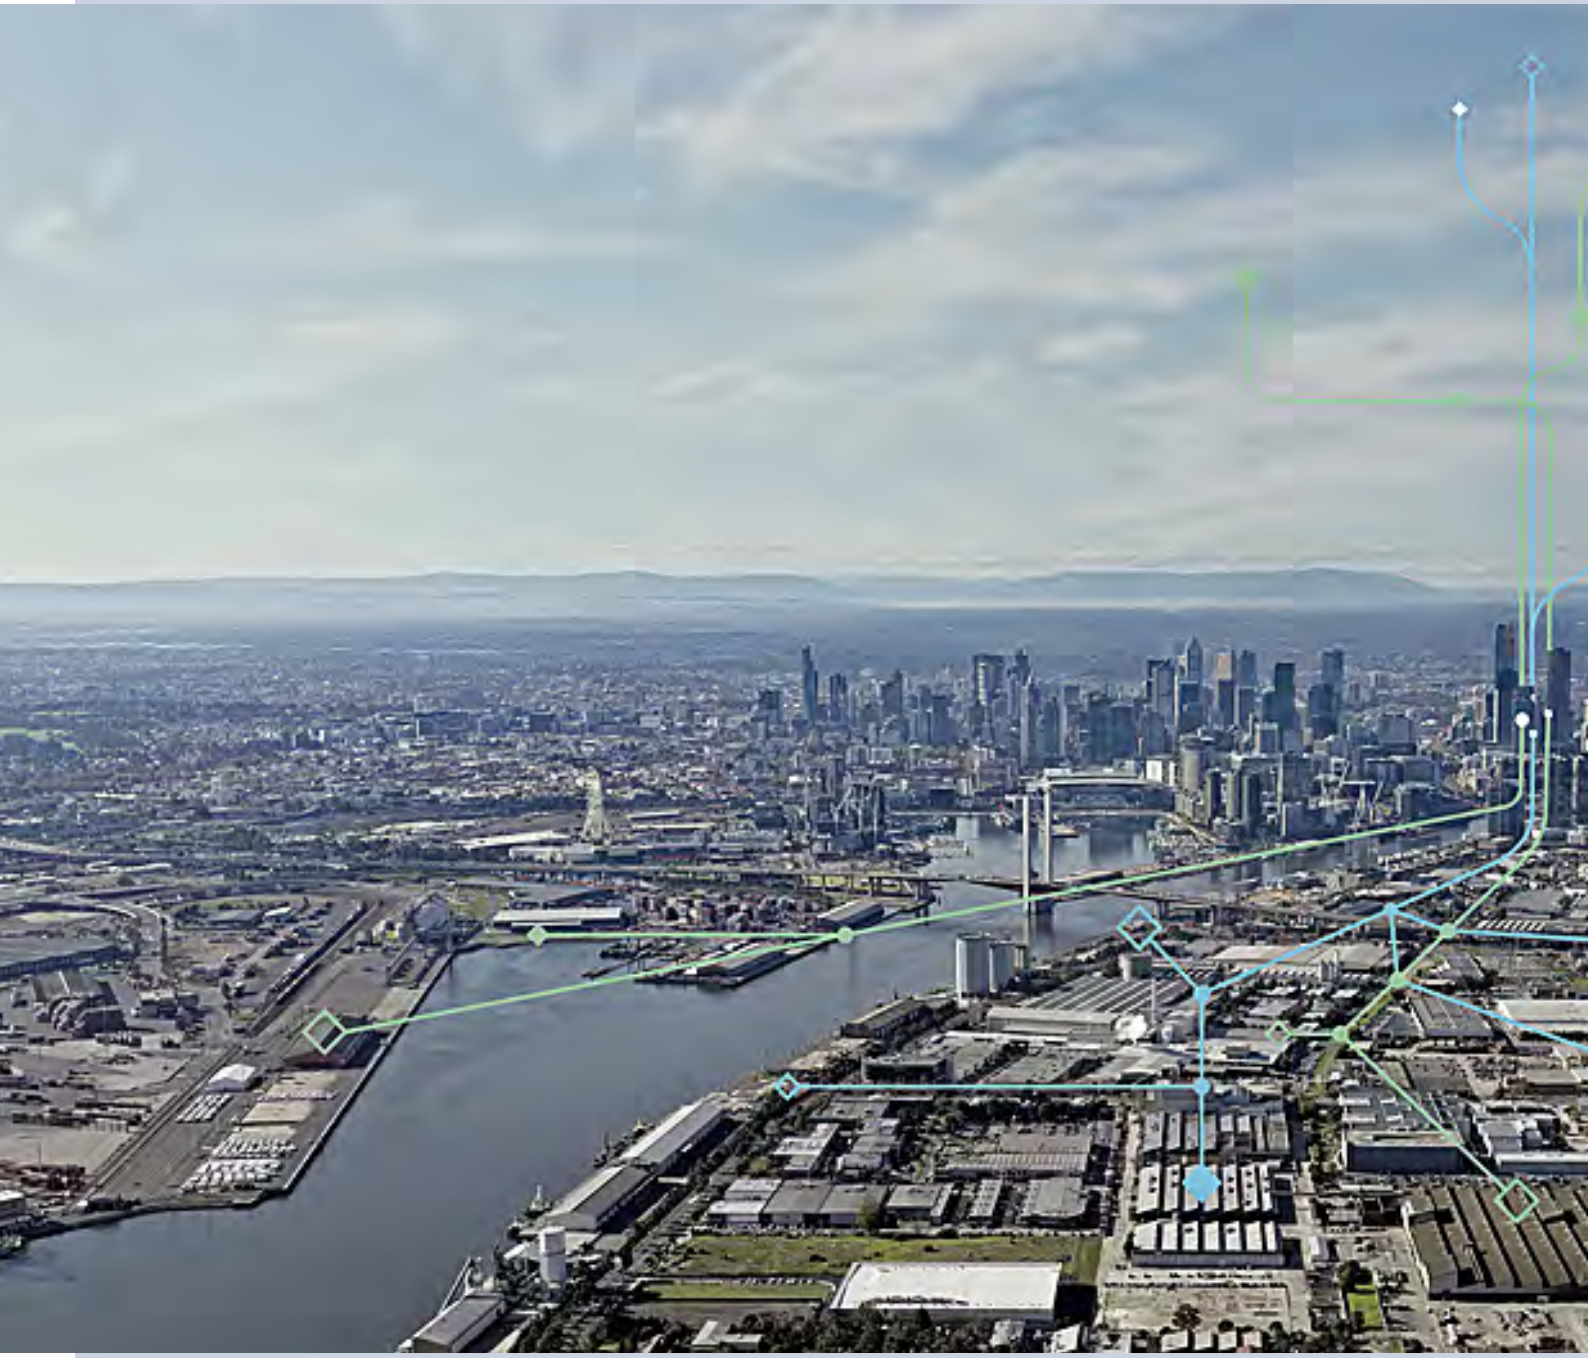

© Siemens 2025

Appendix

Link directory A/2

Conditions of sale and delivery A/8

Article number index A/10

Index A/17

Notes A/21

A

© Siemens 2025

Link directory

Catalog LV 10

General information

Information on low-voltage power distribution and electrical installation technology	www.siemens.com/lowvoltage
Tender specifications	www.siemens.com/tenderspecifications
Conversion tool	www.siemens.com/conversion-tool
Image database	www.siemens.com/lowvoltage/picturedb
CAx download manager	www.siemens.com/cax
Newsletter system	www.siemens.com/lowvoltage/newsletter
Siemens YouTube channel	www.youtube.com/Siemens
Catalog LV 10	www.siemens.com/lv10
Catalog LV 13	www.siemens.com/lv13
Catalog LV 18	www.siemens.com/lv18
Brochures/catalogs	www.siemens.com/lowvoltage/catalogs
Operating instructions/manuals	www.siemens.com/lowvoltage/manuals
SiePortal	www.siemens.com/sieportal
SiePortal (knowledge base)	www.siemens.com/lowvoltage/product-support
SiePortal (product catalog)	www.siemens.com/lowvoltage/product-catalog
Online Support App	www.siemens.com/support-app
My Documentation Manager (MDM)	www.siemens.com/lowvoltage/mdm
Configurators	www.siemens.com/lowvoltage/configurators
Direct forwarding to SiePortal	www.siemens.com/product_catalog_SIEP?Article No.
Training	www.siemens.com/sitrain-lowvoltage
Local contacts	www.siemens.com/lowvoltage/contact www.siemens.com/lowvoltage/components/contact www.siemens.com/lowvoltage/systems/contact www.siemens.com/lowvoltage/software/contact
Technical Support	www.siemens.com/support-request
Information on services	www.siemens.com/service-offers
Control panels for the North American market	www.siemens.com/northamerican-standards
Integrated Control Panels	www.siemens.com/controlpanel
Electrical Designer	www.siemens.com/controlpanel/electrical-designer
Energy savings and amortization	www.automation.siemens.com/sinasave
SIMATIC Energy Suite	www.siemens.com/energysuite
SITOP power supplies	www.siemens.com/sitop
Power distribution with Totally Integrated Power	www.siemens.com/tip
TIA Selection Tool	www.siemens.com/tst
Electrical Product Finder	www.siemens.com/electrical-product-finder
Sustainability	www.siemens.com/sustainability
Siemens EcoTech	www.siemens.com/SiemensEcoTech www.siemens.com/lowvoltage/SiemensEcoTech
SENTRON product phase-out	www.siemens.com/info-sentron

© Siemens 2025

Information + ordering

Technical overviews	
Air circuit breakers	www.siemens.com/lowvoltage/produkt-support (109781188)
Molded case circuit breakers	www.siemens.com/lowvoltage/product-support (109767421)
Miniature circuit breakers	www.siemens.com/lowvoltage/product-support (109769082)
Residual current protective devices/arc fault detection devices	www.siemens.com/lowvoltage/product-support (109769082)
Switching devices	www.siemens.com/lowvoltage/product-support (109769083)
Overvoltage protection devices	www.siemens.com/lowvoltage/product-support (109769084)
Fuse systems	www.siemens.com/lowvoltage/product-support (109769085)
Switch disconnectors	www.siemens.com/lowvoltage/product-support (109764946)
Transfer switching equipment and load transfer switches	www.siemens.com/lowvoltage/product-support (109770919)
Measuring devices, power monitoring and digitalization solutions	www.siemens.com/lowvoltage/product-support (109764480)
Monitoring devices	www.siemens.com/lowvoltage/product-support (109769086)
Transformers, power supply units and socket outlets	www.siemens.com/lowvoltage/product-support (109778781)
Busbar systems	www.siemens.com/lowvoltage/product-support (109769087)
Terminal blocks	www.siemens.com/lowvoltage/product-support (109769088)
Switchboards, distribution boards and small distribution boards	www.siemens.com/lowvoltage/product-support (109769089)
Busbar trunking systems	www.siemens.com/lowvoltage/product-support (109769090)
System cubicles, system lighting and system air-conditioning	www.siemens.com/lowvoltage/product-support (109769091)
All the important things at a glance	
Air circuit breakers	www.siemens.com/sentron-3wa
Molded case circuit breakers	www.siemens.com/sentron-3va
Miniature circuit breakers	www.siemens.com/mcb www.siemens.com/circuit-protection
Residual current protective devices/arc fault detection devices	www.siemens.com/rccb www.siemens.com/circuit-protection
Switching devices	www.siemens.com/switching-devices
Overvoltage protection devices	www.siemens.com/overvoltage-protection
Fuse systems	www.siemens.com/fuses
Switch disconnectors	www.siemens.com/switching-devices
Transfer switching equipment and load transfer switches	www.siemens.com/switching-devices sie.ag/2XBonIi
Measuring devices, power monitoring and digitalization solutions	www.siemens.com/sentron-measuring-devices
Monitoring devices	www.siemens.com/lowvoltage
Transformers, power supply units and socket outlets	www.siemens.com/switching-devices
Busbar systems	www.siemens.com/distribution-components
Terminal blocks	www.siemens.com/distribution-components
Switchboards, distribution boards and small distribution boards	www.siemens.com/sivacon-S8 www.siemens.com/distributionsystems
Busbar trunking systems	www.siemens.com/sivacon-8PS
System cubicles, system lighting and system air-conditioning	www.siemens.com/sivacon-8mf
Your product in detail	
Brochure – 3WA air circuit breakers	www.siemens.com/lowvoltage/product-support (109800077)
Brochure – Energy and data successfully put on track	www.siemens.com/lowvoltage/product-support (109747761)
Brochure – SENTRON Powermanager – update and benefit	www.siemens.com/lowvoltage/product-support (109805178)
Brochure – SIVACON 8MF1 system cubicles – As versatile as your requirements	www.siemens.com/lowvoltage/product-support (109744677)
Brochure – SIVACON S8^{plus} – The plus for your business: Intelligent. Flexible. Safe.	www.siemens.com/lowvoltage/product-support (109747937)
Catalog – LV 70 · 2023 – SIVACON 8PS busbar trunking systems – BD01, BD2 up to 1250 A	www.siemens.com/lowvoltage/product-support (109744546)
Quick Selection Guide – 3WA air circuit breakers	www.siemens.com/lowvoltage/product-support (109781967)
Quick Selection Guide – 3WL air circuit breakers	www.siemens.com/lowvoltage/product-support (109751638)
Quick Selection Guide – 3VA molded case circuit breaker	www.siemens.com/lowvoltage/product-support (109757591)

A

© Siemens 2025

Link directory

Catalog LV 10

Your product in detail	
Quick Selection Guide – SENTRON components for increased energy efficiency	www.siemens.com/lowvoltage/product-support (109744725)
Technology Primer – Miniature circuit breakers	www.siemens.com/lowvoltage/product-support (109482304)
Technology Primer – Residual current protective devices	www.siemens.com/lowvoltage/product-support (109482301)
Technology Primer – Overvoltage protection devices	www.siemens.com/lowvoltage/product-support (109756965)
Technology Primer – Fuse systems	www.siemens.com/lowvoltage/product-support (109482303)
Siemens YouTube channel	
3WA air circuit breaker – Teaserfilm	sie.ag/2Myvit
3WA air circuit breaker – Highlightfilm	sie.ag/3dy65A
3VA molded case circuit breakers (general)	sie.ag/2gSX4K
Miniature circuit breakers (general)	sie.ag/59PC9j
Residual current protective devices (general)	sie.ag/58TyMb
Siemens fuse systems	sie.ag/2J9ihb
Power monitoring (general)	sie.ag/7N6g4g
Siemens ALPHA FIX terminal blocks – 8WH2 terminal with spring-loaded-connection	sie.ag/6FTjPN
SIVACON power distribution (general)	sie.ag/6wacV9
Siemens SIVACON S4 power distribution boards up to 4000 A	sie.ag/6v6kNm
SIMARIS create	sie.ag/4JTAHi
Everything you need for your order	
Air circuit breakers	sie.ag/2lXiZjB
Molded case circuit breakers	sie.ag/2mmLcAk
Miniature circuit breakers	sie.ag/41HWeiL
Residual current protective devices	sie.ag/2m55Y7j
Arc fault detection devices	sie.ag/6Chm71
Switching devices	sie.ag/2m4eG5M
Overvoltage protection devices	sie.ag/3ZMwRuw
Fuse systems	sie.ag/2kW3pnU
Switch disconnectors	sie.ag/36HDiZp
Transfer switching equipment and load transfer switches	sie.ag/2mmMw6g
Measuring devices and power monitoring	sie.ag/2kTH9Lz
Digitalization solutions	sie.ag/2olIiNi
Configuring and visualizing for SIMATIC	sie.ag/2kpbwcs
Software and apps	sie.ag/2kTJjuF
Monitoring devices	sie.ag/2m3no4A
Transformers, power supply units and socket outlets	sie.ag/2mmMw6g
Busbar systems	sie.ag/2lXoUFl
Terminal blocks	sie.ag/2kW8ZXo
SIVACON S4 (NF)	sie.ag/2JUQwE4
Distribution boards	sie.ag/2kURLd8
Switchboards	sie.ag/3Ier6zp
SIVACON S8 Power distribution boards and motor control centers	sie.ag/3EbN0kC
Small distribution boards	sie.ag/3I4DUYm
Planning the power distribution system	sie.ag/2m3oFbS
SIVACON 8PS	sie.ag/2lXpCT1 www.siemens.com/sivacon8PS-contact
System cubicles	sie.ag/339cQB9
SIVACON S8	www.siemens.com/sivacon-partnerfinder www.siemens.com/sivaconS8-contact
Order support	
3WA air circuit breakers – Made for makers. Simply reliable.	www.siemens.com/lowvoltage/catalogs (109800074)
3VA molded case circuit breakers – One system. Global use.	www.siemens.com/lowvoltage/catalogs (109765994)
3KD switch disconnectors – End-to-end safety for user and systems	www.siemens.com/lowvoltage/catalogs (109750228)

© Siemens 2025

Order support	
3LD2 main control and EMERGENCY-STOP-switching equipment – End-to-end safety for user and systems	www.siemens.com/lowvoltage/catalogs (109755626)
3NP1 fuse switch disconnectors – End-to-end safety for user and systems	www.siemens.com/lowvoltage/catalogs (109755624)
3KF switch disconnectors with fuses – End-to-end safety for user and systems	www.siemens.com/lowvoltage/catalogs (109750229)
3NJ63 switch disconnectors with fuses – End-to-end safety for user and systems	www.siemens.com/lowvoltage/catalogs (109755619)
3KC automatic transfer switching equipment (ATSE) – End-to-end safety for user and systems	www.siemens.com/lowvoltage/catalogs (109755620)
3KC remotely operated transfer switching equipment (RTSE) – End-to-end safety for user and systems	www.siemens.com/lowvoltage/catalogs (109755627)
3KC manual transfer switching equipment (MTSE) – End-to-end safety for user and systems	www.siemens.com/lowvoltage/catalogs (109750227)
SIVACON 8PS – BD01 and BD2	www.siemens.com/LV70
Configurators	
3WA air circuit breakers	www.siemens.com/lowvoltage/3wa-configurator
3WL air circuit breakers	www.siemens.com/lowvoltage/3wl-configurator
3WL10 air circuit breakers	www.siemens.com/lowvoltage/3wl10-configurator
3VA molded case circuit breakers	www.siemens.com/lowvoltage/3va-configurator
3VA27 molded case circuit breakers	www.siemens.com/lowvoltage/3va27-configurator
Fuse systems	www.siemens.com/lowvoltage/fusesystems-configurator
3NJ63 switch disconnectors	www.siemens.com/lowvoltage/3nj63-configurator
3LD switch disconnectors	www.siemens.com/lowvoltage/3ld-configurator
3KD switch disconnectors	www.siemens.com/lowvoltage/3kd-configurator
3KF switch disconnectors with fuses	www.siemens.com/lowvoltage/3kf-configurator
3NP1 fuse switch disconnectors	www.siemens.com/lowvoltage/3np1-configurator
7KM PAC and 7KT PAC measuring device	www.siemens.com/lowvoltage/pac-configurator
SIVACON 8PS	sie.ag/2JEhpv2
SIVACON 8MF1 system cubicle	www.siemens.com/lowvoltage/8mf1-configurator

Commissioning + operation

Tools/software	
SENTRON Powerconfig	www.siemens.com/powerconfig-download
SIMARIS planning tools	www.siemens.com/simaris
SIMARIS create	www.siemens.com/simaris-create
SIMARIS configuration	www.siemens.com/simaris-configuration
SIMARIS therm	www.siemens.com/simaristherm
Manuals	
Application Manual – SIVACON S4 power distribution boards up to 6300 A	www.siemens.com/lowvoltage/manuals (25909512)
Communication Manual – 3WL air circuit breakers via COM35 – PROFINET IO, Modbus TCP	www.siemens.com/lowvoltage/manuals (109757987)
Communication Manual – 3WL10 air circuit breakers & 3VA27 molded case circuit breakers	www.siemens.com/lowvoltage/manuals (109760220)
Communication Manual – 3VA molded case circuit breakers with IEC and UL certification	www.siemens.com/lowvoltage/manuals (98746267)
Configuration Manual – Selectivity for 3VA molded case circuit breakers	www.siemens.com/lowvoltage/manuals (109743975)
Configuration Manual – Miniature circuit breakers	www.siemens.com/lowvoltage/manuals (45302792)
Configuration Manual – Residual protective devices/ arc fault detection devices	www.siemens.com/lowvoltage/manuals (45303255)

© Siemens 2025

Link directory

Catalog LV 10

Manuals	
Configuration Manual – SENTRON Powercenter 3000	www.siemens.com/lowvoltage/manuals (45315361)
Configuration Manual – Overvoltage protection devices	www.siemens.com/lowvoltage/manuals (45315289)
Configuration Manual – Fuse systems	www.siemens.com/lowvoltage/manuals (45314810)
Configuration Manual – Switch disconnectors	www.siemens.com/lowvoltage/manuals (109769744)
Configuration Manual – Transfer Switching Equipment and Load Transfer Switches	www.siemens.com/lowvoltage/manuals (109769745)
Configuration Manual – Measuring devices and power monitoring	www.siemens.com/lowvoltage/manuals (45315973)
Configuration Manual – Monitoring devices	www.siemens.com/lowvoltage/manuals (45316099)
Configuration Manual – Transformers, power supply units and socket outlets	www.siemens.com/lowvoltage/manuals (45315886)
Configuration Manual – Low-voltage protection devices selectivity tables	www.siemens.com/lowvoltage/manuals (109748621)
Configuration Manual – 8US busbar systems	www.siemens.com/lowvoltage/manuals (109769746)
Equipment Manual – 3WA1 air circuit breakers	www.siemens.com/lowvoltage/manuals (109763061)
Equipment Manual – 3VA molded case circuit breakers with IEC certificate	www.siemens.com/lowvoltage/manuals (90318775)
Equipment Manual – 3VA27 molded case circuit breakers & 3WL10 air circuit breakers	www.siemens.com/lowvoltage/manuals (109753821)
Equipment Manual – 3KD switch disconnector	www.siemens.com/lowvoltage/manuals (109758120)
Equipment Manual – 3KC3 and 3KC6 transfer switching equipment	www.siemens.com/lowvoltage/manuals (109754954)
Equipment Manual – 3KC0 manual transfer switching equipment	www.siemens.com/lowvoltage/manuals (109763232)
Equipment Manual – 3KC4 and 3KC8 transfer switching equipment	www.siemens.com/lowvoltage/manuals (109738725)
Equipment Manual – 3KC ATC3100 transfer control device	www.siemens.com/lowvoltage/manuals (100341671)
Equipment Manual – 3KC ATC6300 transfer control device	www.siemens.com/lowvoltage/manuals (109755149)
Equipment Manual – 3KC ATC6500 transfer control device	www.siemens.com/lowvoltage/manuals (109758018)
Equipment Manual – 7KT PAC1600 energy meter	www.siemens.com/lowvoltage/manuals (109759827)
Equipment Manual – 7KT PAC1600 multimeter	www.siemens.com/lowvoltage/manuals (109760293)
Equipment Manual – 7KM PAC2200 power monitoring device	www.siemens.com/lowvoltage/manuals (109746835)
Equipment Manual – 7KM PAC3200T power monitoring device	www.siemens.com/lowvoltage/manuals (109746833)
Equipment Manual – 7KM PAC3120 and 7KM PAC3220	www.siemens.com/lowvoltage/manuals (109767307)
Equipment Manual – SENTRON Powercenter 3000	www.siemens.com/lowvoltage/manuals (109763838)
Equipment Manual – 7KM PAC2200CLP power monitoring device	www.siemens.com/lowvoltage/manuals (109783220)
Installation Manual – Circuit protection devices with communication and measuring function	www.siemens.com/lowvoltage/manuals (109791805)
Planning Manual – Planning with SIVACON 8PS	www.siemens.com/lowvoltage/manuals (109478425)
Planning Manual – SIVACON S8 – Technical planning information	www.siemens.com/lowvoltage/manuals (107113936)
Quick Installation Guide – 7KN Powercenter 3000	www.siemens.com/lowvoltage/manuals (109766001)
SEM3™ – Embedded Micro Metering Module™	www.siemens.com/lowvoltage/manuals (109748928)
System Manual – 3WA air circuit breaker communication	www.siemens.com/lowvoltage/manuals (109792368)
System Manual – 3WL/3VL circuit breakers with communication capability – Modbus	www.siemens.com/lowvoltage/manuals (39850157)
System Manual – 3WL/3VL circuit breakers with communication capability – PROFIBUS	www.siemens.com/lowvoltage/manuals (12560390)
System Manual – SENTRON 3NJ62 in-line plug-in switch disconnectors with fuses	www.siemens.com/lowvoltage/manuals (31753460)
System Manual – SENTRON 3NP1 fuse switch disconnector	www.siemens.com/lowvoltage/manuals (33515690)
System Manual – 7KT1261 PAC1200 multichannel current measuring system	www.siemens.com/lowvoltage/manuals (109963296)
System Manual – 7KT multichannel current measuring system	www.siemens.com/lowvoltage/manuals (109483442)
System Manual – SENTRON PAC4200 power monitoring device	www.siemens.com/lowvoltage/manuals (34261595)
System Manual – SENTRON PAC4220 power monitoring device	www.siemens.com/lowvoltage/manuals (109823026)
System Manual – Circuit protection devices with communication and measuring function	www.siemens.com/lowvoltage/manuals (109791806)

© Siemens 2025

Face-to-face or online training	
Video tutorial on the 3WL air circuit breaker	www.lowvoltage.siemens.com/wcms/3wl-tutorial
3WA air circuit breakers	www.siemens.com/sitrain-lowvoltage (WT-LV3WA)
3WL10 air circuit breaker, size 0	www.siemens.com/sitrain-lowvoltage (WT-LVA3WL0)
3WL air circuit breakers, sizes 1-3	www.siemens.com/sitrain-lowvoltage (WT-LVA3WL)
Protection systems in low-voltage power distribution	www.siemens.com/sitrain-lowvoltage (WT-LVAPS)
Maintenance and operation of 3WL and 3WA circuit breakers	www.siemens.com/sitrain-lowvoltage (LV-CBMAIN)
Certification: Maintenance and operation of 3WL and 3WA circuit breakers	www.siemens.com/sitrain-lowvoltage (LV-CBCERT)
3VA molded case circuit breaker	www.siemens.com/sitrain-lowvoltage (WT-LVA3VA)
SENTRON circuit protection devices with measuring and communication function	www.siemens.com/sitrain-lowvoltage (WT-LVBCOM)
Basic principles of electrical engineering	www.siemens.com/sitrain-lowvoltage (WT-LVBGET)
Protection concept	www.siemens.com/sitrain-lowvoltage (WT-LVBPC)
5SM6/5SV6 arc fault detection devices	www.siemens.com/sitrain-lowvoltage (WT-LVBAFDD)
Digitalization in power distribution boards	www.siemens.com/sitrain-lowvoltage (WT-LVDIGI)
Power Monitoring with SENTRON	www.siemens.com/sitrain-lowvoltage (WT-LVAEM)
Energy Management with SENTRON Powermanager – User training	www.siemens.com/sitrain-lowvoltage (LV-PM)
SENTRON Powermanager graphic module – User training	www.siemens.com/sitrain-lowvoltage (LV-PMG)
SIMARIS configuration	www.siemens.com/sitrain-lowvoltage (WT-LVASIMC)
SIVACON 8PS	www.power-academy.siemens.com

Further links

SIRIUS

Industrial Controls – SIRIUS	www.siemens.com/sirius
SIRIUS modular system	www.siemens.com/sirius-modular-system
SiePortal – SIRIUS	www.siemens.com/sirius-sieportal
Product Support	www.siemens.com/online-support
Catalog IC 10	www.siemens.com/ic10
Configurators – SIRIUS	www.siemens.com/sirius/configurators
Brochures/catalogs	www.siemens.com/sirius/catalogs
SIRIUS SiemensEcoTech	www.siemens.com/sirius/SiemensEcoTech
Explosion protection (ATEX)	www.siemens.com/sirius-atex
SIRIUS Media	www.siemens.com/sirius-media
SIRIUS product phase-out	www.siemens.com/info-sirius

© Siemens 2025

Conditions of sale and delivery

1. General Provisions

1.1 Scope

The purchase of hardware, software, cloud services and other services (collectively "Offerings") through this catalog from Siemens Aktiengesellschaft ("Siemens") is subject to the following General Terms and Conditions for the sale of Siemens Offerings ("Catalog T&C"). These Catalog T&C apply only for orders placed with Siemens in Germany. Customer means the entity that places an order via Siemens.

1.2 Order Process

If Customer writes something in the "free choice text" (F), it is solely for Customer's internal order processing and is not reviewed or taken into consideration by Siemens and will not be legally binding.

1.3 Formation of contract

Any information provided in this catalog or in SiePortal does not constitute a binding offer and may contain errors. In particular, illustrations contained in the Offering descriptions, or in Siemens' catalogs are not binding. Any data, statement to dimensions and weights in our Offering descriptions and catalogs are subject to change without prior notice and become only binding upon contract conclusion.

An individual contract between Siemens and Customer is established when Siemens expressly accepts an order from Customer electronically or in another form, or if such acceptance does not occur, when Siemens fulfills Customer's order through delivery or performance. When the order is placed in SiePortal Siemens will send Customer an electronic confirmation of the receipt of the order, which, however, does not constitute an acceptance of the order. Neither is the Customer obligated to place an order, nor is Siemens obligated to accept any orders placed by Customer.

1.4 Additional Terms

Subordinately to these Catalog T&C, the specific terms and conditions in the text of the product description (if available) apply. If the text of the product description says that the specific terms and conditions mentioned there apply exclusively, only those specific terms and conditions apply. If the text of the product description does not contain any specific terms and conditions or if the specific terms and conditions mentioned there do not apply exclusively, the following terms and conditions apply subordinately in the version valid at the time of contract conclusion:

1.4.1 Hardware

a. "**General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry ("Grüne Lieferbedingungen"- GL)**" [1] and

b. the Siemens' "**Terms on Export Control and Electronically Order Processing**" [1].

If the hardware contains open-source software those terms prevail over the GL, we will provide a notification with the hardware specifying the applicable terms. The same applies with respect to any third-party software components in the hardware.

1.4.2 Other Offerings than hardware

a. for software on premise including any associated maintenance and support services:
the "**General Software and Cloud Supplemental Terms (AGB Germany)**" [2] and the "**Specific Supplemental Terms for on-premises Software of Infrastructure & Industry Business**" [2];

b. for cloud services:
the "**General Software and Cloud Supplemental Terms (AGB Germany)**" [2] and the cloud services product specific terms stated in the product description;

c. for services:
the "**Services Supplemental Terms (AGB Germany)**" [2]; and

d. generally for all Offerings under a. - c.:
"**Base Terms Germany (AGB Germany)**" [1].

1.5 Customers with master or frame agreement

To the extent products offered are covered by an existing master or framework agreement, the terms and conditions of that agreement shall apply instead of T&C.

1.6 Payment agreement and data sharing

If Customer can select and selects that a payment agreement shall apply to the order, upon conclusion of the order the payment agreement will apply and prevail over these Catalog T&C.

For the assessment of financing options, Siemens shares information and data in relation to Customer's company obtained within the scope of its business relationship with its affiliates (as defined in the Base Terms Germany (AGB Germany)).

A

[1] Download under **www.siemens.com/sts-base-terms-deu**
[2] Download under **www.siemens.com/sts-st-deu**

© Siemens 2025

2. Prices, payment terms and price escalation

2.1 Prices

The prices are in € (Euro), EXW INCOTERMS®2020, exclusive packaging.

2.2 Taxes

All prices and expenses stated in the order are exclusive of any taxes, duties, tariffs and any other charges ("Tax"). Customer will pay or refund Siemens for any applicable Tax imposed by any government authority for Customer's use or receipt of the Offerings.

If Customer is exempt from value-added or sales tax, or similar taxes, it must provide a valid, timely, and executed exemption certificate, direct pay permit, or other such government-approved documentation.

If Customer is required by law to deduct or withhold Tax, Customer will increase the amount it pays to Siemens so that Siemens still receives the amount originally invoiced. Customer will promptly provide all tax receipts confirming it has paid Tax or has withheld Tax.

2.3 Price escalation

2.3.1 Price escalation for metal surcharges

To account for fluctuations commodity prices (silver, copper, aluminum, lead, gold, dysprosium and/or neodymium), surcharges will apply to Offerings containing these metals. Surcharges are calculated daily using the Offering's Metal Factor, which defines the applicable commodity and pricing methods. Details are provided in the exhibit "**Metal surcharges**" [3]. The surcharges calculated by using these pricing methods will be added to the Offering's price.

If applicable, the Metal Factor is shown with the Offering's price information or listed on SiePortal (**https://sieportal.siemens.com**).

2.4.1 General price escalation

If, between ordering and delivery, there are any new or modified taxes, duties, tariffs, or equivalent measures that are directly or indirectly applicable to Siemens' offering, including any hardware, software, or service components contained therein, or a price increase of more than 20% for relevant commodities (e.g. electronic components, semiconductors) applies, Siemens reserves the right to adjust the price accordingly.

2.4 Price Changes

Prices stated in the SiePortal or in Siemens' catalogs are subject to change without prior notice.

3. Units of measurement and weight

The dimensions and weight of all Offerings are given in meters and kilograms. If the dimensions or weight of the Offerings are specified in other units of measurement, such as inches or pounds, this indicates that these Offerings are intended for export.

A

[3] Download under
https://mall.industry.siemens.com/legal/de-en/LKB002966.pdf

© Siemens 2025

Article number index

Article No.	Page
3K	
3KC03	9/24 – 9/25
3KC04	9/24 – 9/25
3KC34	9/8, 9/16
3KC43	9/16
3KC44	9/16
3KC64	9/8, 9/17
3KC83	9/17
3KC84	9/17
3KC90	9/32, 9/34
3KC91	9/26 – 9/27, 9/29
3KC92	9/26 – 9/27
3KC93	9/26 – 9/27, 9/29
3KC94	9/26 – 9/27, 9/29
3KC95	9/26 – 9/27, 9/29
3KC96	9/16, 9/18 – 9/19, 9/21
3KC97	9/19
3KC98	9/18 – 9/23
3KD01	8/68 – 8/70
3KD02	8/68 – 8/70
3KD03	8/68 – 8/70
3KD04	8/68 – 8/70
3KD05	8/68 – 8/70
3KD06	8/68 – 8/70
3KD16	8/68, 8/70 – 8/71, 8/73
3KD22	8/68, 8/70 – 8/71, 8/73
3KD26	8/68, 8/70 – 8/71, 8/73
3KD28	8/68, 8/70 – 8/71, 8/73
3KD29	8/72 – 8/73
3KD30	8/68, 8/70 – 8/71, 8/73
3KD31	8/72 – 8/73
3KD32	8/68, 8/70 – 8/71, 8/73
3KD33	8/72 – 8/73
3KD34	8/68, 8/70 – 8/71, 8/73
3KD35	8/72 – 8/73
3KD36	8/68, 8/70 – 8/71, 8/73
3KD37	8/72 – 8/73
3KD38	8/68, 8/70 – 8/71, 8/73
3KD39	8/72 – 8/73
3KD40	8/68, 8/70 – 8/71, 8/73
3KD41	8/72 – 8/73
3KD42	8/68, 8/70 – 8/71, 8/73
3KD43	8/72 – 8/73
3KD44	8/68, 8/70 – 8/71, 8/73
3KD45	8/72 – 8/73
3KD46	8/68, 8/70 – 8/71, 8/73
3KD47	8/72 – 8/73
3KD48	8/68, 8/70 – 8/71, 8/73
3KD49	8/72 – 8/73
3KD50	8/68, 8/70 – 8/71, 8/73
3KD51	8/72 – 8/73
3KD52	8/68, 8/70 – 8/71, 8/73
3KD53	8/72 – 8/73
3KD54	8/68, 8/70 – 8/71, 8/73
3KD55	8/72 – 8/73
3KD56	8/68, 8/70 – 8/71
3KD90	8/74 – 8/78
3KD91	8/8, 8/74 – 8/75, 8/77 – 8/79, 8/127 – 8/128, 9/26, 9/29
3KD92	8/74 – 8/75, 8/78 – 8/79, 9/26
3KD93	8/74 – 8/75, 8/78 – 8/79, 8/128, 9/28 – 9/29
3KD94	8/74 – 8/75, 8/78 – 8/79, 8/128, 9/28 – 9/29
3KD95	8/74 – 8/75, 8/78 – 8/79, 8/128, 9/28 – 9/29
3KF13	8/122 – 8/124
3KF14	8/122 – 8/123
3KF23	8/122 – 8/124
3KF24	8/122 – 8/123
3KF33	8/122 – 8/124
3KF34	8/122 – 8/123
3KF43	8/122 – 8/124
3KF44	8/122 – 8/123
3KF53	8/122 – 8/124
3KF54	8/122 – 8/123
3KF90	7/100, 8/128
3KF91	8/78 – 8/79, 8/125, 8/127, 8/129, 9/29
3KF92	8/79, 8/125, 8/128 – 8/129
3KF93	8/125, 8/128 – 8/129
3KF94	8/78 – 8/79, 8/125, 8/128 – 8/129
3KF95	8/78 – 8/79, 8/125, 8/129
3L	
3LD20	8/26 – 8/29, 8/32 – 8/35, 8/38 – 8/41, 8/46 – 8/49, 8/52
3LD21	8/26 – 8/29, 8/32 – 8/35, 8/38 – 8/41, 8/46 – 8/49, 8/52, 9/30 – 9/31
3LD22	8/26 – 8/29, 8/32 – 8/35, 8/38 – 8/41, 8/43, 8/46 – 8/49, 8/51 – 8/52, 9/30 – 9/31
3LD23	8/26 – 8/29, 8/32 – 8/35, 8/38 – 8/41, 9/30 – 9/31
3LD24	8/26 – 8/29, 8/32 – 8/35, 8/38 – 8/41, 9/30 – 9/31
3LD25	8/26 – 8/29, 8/32 – 8/35, 8/38 – 8/41, 8/46 – 8/49, 8/52, 9/30 – 9/31
3LD27	8/26 – 8/29, 8/32 – 8/35, 8/38 – 8/41, 8/46 – 8/49, 8/52, 9/30 – 9/31
3LD28	8/26 – 8/29, 8/32 – 8/35, 8/38 – 8/41, 8/46 – 8/49, 8/52
3LD30	8/16 – 8/21
3LD31	8/16 – 8/21
3LD32	8/16 – 8/21
3LD33	8/16 – 8/21
3LD34	8/16 – 8/21
3LD50	8/54, 8/56 – 8/61
3LD52	8/56 – 8/61
3LD54	8/54, 8/56 – 8/61
3LD56	8/56 – 8/61
3LD58	8/56 – 8/61
3LD92	8/26 – 8/42, 8/46 – 8/50, 8/53, 8/56 – 8/58, 8/60 – 8/61, 9/30 – 9/31
3LD93	8/16 – 8/19, 8/22 – 8/23, 8/36
3N	
3NA30	7/46, 7/48
3NA31	7/46, 7/48

© Siemens 2025

Article No.	Page
3NA32	7/47, 7/49, 7/52
3NA33	7/49
3NA34	7/49
3NA36	7/49
3NA38	7/46, 7/48
3NA61	7/38, 7/40 – 7/41
3NA62	7/39, 7/41, 7/54
3NA68	7/38, 7/40
3NA71	7/42, 7/44 – 7/45
3NA72	7/43, 7/45
3NA78	7/42, 7/44
3NB10	7/80
3NB11	7/76 – 7/77, 7/79 – 7/80
3NB12	7/76 – 7/77, 7/79 – 7/80
3NB13	7/77 – 7/79, 7/81
3NB17	7/77, 7/80
3NB23	7/78 – 7/79
3NB33	7/65
3NC10	7/27, 7/84, 7/86, 7/96
3NC12	7/84
3NC14	7/27, 7/84, 7/86, 7/88, 7/95, 7/97
3NC18	7/85
3NC22	7/27, 7/84, 7/87, 7/89
3NC23	7/27, 7/82, 7/84, 7/89
3NC24	7/64 – 7/65, 7/68, 7/70
3NC26	7/85, 7/89
3NC32	7/71 – 7/72
3NC33	7/71, 7/73
3NC34	7/71, 7/73
3NC58	7/74
3NC73	7/75
3NC84	7/64 – 7/65, 7/70
3ND13	7/50
3ND18	7/50
3ND21	7/50
3ND22	7/50
3ND23	7/50
3NE10	7/60, 7/62
3NE12	7/60, 7/63 – 7/64, 7/91
3NE13	7/60, 7/63, 7/65, 7/91
3NE14	7/60, 7/63, 7/65, 7/91
3NE18	7/60
3NE32	7/64, 7/68
3NE33	7/69
3NE34	7/70
3NE35	7/75
3NE36	7/70 – 7/72
3NE41	7/63, 7/67, 7/74 – 7/75
3NE43	7/69, 7/75
3NE53	7/65, 7/69
3NE54	7/70 – 7/71
3NE56	7/70
3NE64	7/74
3NE74	7/70
3NE76	7/70 – 7/71

Article No.	Page
3NE80	7/61 – 7/62, 7/66 – 7/67
3NE82	7/67 – 7/68
3NE83	7/67
3NE87	7/61, 7/66
3NE88	7/62, 7/67
3NE93	7/69
3NE94	7/74
3NE96	7/71
3NG10	7/25, 8/93, 8/129
3NG11	7/25
3NG12	7/25, 8/93, 8/129
3NG13	7/25, 8/93, 8/129
3NG14	7/25, 8/93, 8/129
3NG15	7/25
3NG20	7/25
3NG22	7/25
3NG23	7/25
3NH10	7/10, 7/24 – 7/25
3NH12	7/10, 7/24
3NH13	7/10, 7/24
3NH14	7/10, 7/24
3NH20	7/10, 7/25
3NH22	7/10, 7/25
3NH23	7/10, 7/25
3NH35	7/10, 7/24
3NH50	7/27, 7/61, 7/66, 7/85, 7/87, 7/89
3NH53	7/27
3NH54	7/27, 7/64 – 7/65, 7/68 – 7/71, 7/77, 7/79
3NH57	7/27, 7/85
3NH60	7/10, 7/24
3NH62	7/10 – 7/11, 7/24, 7/29
3NH63	7/10 – 7/11, 7/24, 7/29
3NH64	7/10 – 7/11, 7/24, 7/29
3NH75	7/25
3NH80	7/10, 7/24
3NH82	7/10, 7/24
3NJ41	8/98, 8/100 – 8/101, 8/103, 8/105, 8/107
3NJ49	8/98, 8/100, 8/102, 8/104, 8/106, 15/54, 15/56 – 15/57, 15/160 – 15/161, 15/241
3NJ56	8/98
3NJ59	8/98, 8/100, 8/102, 15/160
3NJ63	8/137
3NJ69	8/134 – 8/137, 10/44, 15/162 – 15/163
3NP11	8/86 – 8/87, 15/158 – 15/159, 15/240
3NP19	8/88 – 8/94
3NP40	15/254
3NW10	7/92
3NW11	7/92
3NW12	7/92
3NW13	7/92
3NW20	7/92
3NW21	7/92
3NW22	7/92
3NW23	7/92
3NW30	7/92

A

© Siemens 2025

Article number index

Article No.	Page
3NW31	7/92
3NW32	7/92
3NW33	7/92
3NW60	7/58, 7/90
3NW61	7/58
3NW62	7/58
3NW63	7/58
3NW66	7/90
3NW70	7/26, 7/28, 7/90
3NW71	7/26, 7/95, 7/97
3NW72	7/26
3NW73	7/26
3NW74	7/13, 7/26, 7/30 – 7/31, 7/92, 13/23
3NW75	7/30 – 7/31, 7/96
3NW76	7/28, 7/90
3NW79	7/26
3NW80	7/59
3NW81	7/59
3NW82	7/59
3NX10	7/25, 7/100
3NX20	7/24
3NX31	7/24
3NX82	7/52 – 7/54, 7/57
3R	
3RM19	13/43
3RV10	13/28, 13/34
3RV19	13/28, 13/34
3RV27	13/28, 13/34
3RV28	13/28, 13/34
3RV29	13/28, 13/34
3S	
3SE52	17/16
3SU14	8/77, 8/128, 9/26
3V	
3VA90	2/40, 2/68, 2/70 – 2/73
3VA91	I/11, 2/36 – 2/37, 2/43, 2/45, 2/47, 2/49, 2/51, 2/53, 2/55 – 2/59, 2/63, 2/65, 2/68, 2/70, 2/72 – 2/73
3VA92	2/36 – 2/39, 2/43, 2/45, 2/47, 2/49, 2/51, 2/53, 2/55, 2/57 – 2/59, 2/63, 2/70, 2/72 – 2/73
3VA93	2/45, 2/47, 2/53, 2/55, 2/57 – 2/59, 2/63, 2/65, 2/68, 2/70 – 2/71, 2/73
3VA94	2/36 – 2/39, 2/43, 2/45, 2/47, 2/49, 2/51, 2/53, 2/55, 2/57, 2/59, 2/63, 2/71
3VA95	2/47, 2/71, 2/73
3VA96	2/36, 2/38 – 2/40, 2/45, 2/49, 2/51 – 2/53, 2/55, 2/57, 2/59 – 2/60, 2/68, 2/73
3VA99	2/34 – 2/35, 2/37 – 2/38, 2/40, 2/42, 2/59 – 2/60, 2/63, 2/66, 2/68 – 2/71, 11/15, 11/17, 11/19
3VL12	15/246
3VL16	15/246
3VW81	1/130, 2/82
3VW90	1/63, 1/111, 1/131 – 1/139, 2/69, 2/83 – 2/92, 15/32, 15/36, 15/40 – 15/42, 15/46
3VW97	1/135, 2/87 – 2/88, 2/90 – 2/91
3W	
3WA12	1/47
3WA91	1/46, 1/62 – 1/74, 1/113, 1/119, 15/32, 15/34, 15/36, 15/38, 15/40 – 15/42, 15/44, 15/46, 15/48, 15/50 – 15/51, 15/96, 15/98, 15/100, 15/102, 15/104, 15/106, 15/108, 15/110, 15/112, 15/114, 15/116
3WL12	1/48, 1/72
3WL91	1/108 – 1/117, 1/119 – 1/122, 1/138, 2/92
3WL93	1/108
3Z	
3ZW10	1/117
3ZX18	1/117
4A	
4AC24	12/10
4AC32	12/6 – 12/7
4AC37	12/8 – 12/9
4N	
4NC51	10/44 – 10/45
4NC52	10/44 – 10/45
4NC53	10/44 – 10/45
4NC54	10/44 – 10/45
4NC59	10/45
5S	
5SA26	7/35
5SA27	7/35
5SA28	7/35
5SB26	7/35
5SB27	7/35
5SB28	7/35
5SB40	7/35
5SB41	7/35
5SB42	7/35
5SB43	7/35
5SD74	6/6 – 6/21
5SD80	7/35
5SE13	7/36
5SE20	7/34
5SE22	7/34
5SE23	7/34
5SF10	7/20
5SF12	7/20 – 7/21
5SF42	7/21
5SF50	7/20
5SF52	7/20
5SF60	7/9, 7/22, 13/23
5SF62	7/9, 7/22, 13/23

© Siemens 2025

Article No.	Page
5SG13	7/8, 7/18, 7/95
5SG15	7/19
5SG16	7/19
5SG17	7/8, 7/18, 7/95
5SG18	7/19
5SG53	7/8, 7/18, 7/95
5SG55	7/19
5SG56	7/19
5SG57	7/8, 7/18, 7/95
5SG62	7/9, 7/22, 13/9, 13/22
5SG71	7/15, 8/139
5SG72	7/16, 8/111, 8/113, 8/139, 13/24
5SG76	7/14, 8/109
5SH11	7/20
5SH12	7/20
5SH20	7/22, 13/23
5SH22	7/22, 13/23
5SH34	7/21
5SH35	13/13, 13/17, 15/135
5SH37	7/21
5SH41	7/18
5SH43	7/18
5SH50	7/18
5SH51	7/19
5SH52	7/19, 7/22, 13/22
5SH53	7/95, 7/98
5SH54	7/18 – 7/19
5SH55	7/15 – 7/16, 8/139, 13/24
5SJ41	3/40
5SJ42	3/41
5SJ43	3/41
5SJ61	3/18
5SJ62	3/18
5SJ63	3/18
5SJ65	3/18
5SK91	3/49
5SL30	3/20
5SL31	3/12
5SL32	3/12
5SL33	3/12
5SL34	3/13
5SL35	3/12
5SL36	3/13
5SL41	3/16
5SL42	3/16
5SL43	3/17
5SL44	3/17
5SL45	3/16
5SL46	3/17
5SL58	3/24
5SL60	3/22, 3/42, 3/44
5SL61	3/14
5SL62	3/14
5SL63	3/15
5SL64	3/15
5SL65	3/14
5SL66	3/15
5SM21	4/34
5SM23	4/34 – 4/36, 4/38 – 4/39
5SM24	4/34, 4/36, 4/38
5SM26	4/34 – 4/36, 4/38 – 4/39
5SM27	4/34, 4/36, 4/38
5SM28	4/34 – 4/36, 4/38 – 4/39
5SM33	4/32
5SM34	4/32
5SM36	4/32
5SM60	3/17, 3/23, 3/27, 3/29, 3/37, 3/42, 3/44, 3/52, 3/65, 4/41, 4/43, 4/45, 4/49, 4/53, 4/56, 4/60
5SP32	3/47
5SP33	3/47
5SP34	3/47
5SP37	3/46 – 3/47
5SP38	3/46 – 3/47
5SP41	3/30
5SP42	3/30
5SP43	3/31
5SP44	3/31
5SP51	3/32
5SP52	3/32
5ST10	3/50, 4/47, 4/60, 4/64 – 4/65
5ST11	14/48
5ST21	3/67, 4/76, 7/94, 7/98
5ST25	3/92 – 3/95
5ST26	7/26, 7/31
5ST30	3/13, 3/15, 3/17, 3/21, 3/23, 3/25, 3/27, 3/29, 3/31, 3/33, 3/35, 3/37, 3/39, 3/41 – 3/42, 3/44, 3/48, 3/50, 3/54 – 3/58, 3/60 – 3/63, 3/66, 4/15, 4/17, 4/19, 4/21, 4/23, 4/25, 4/29, 4/31, 4/35, 4/37, 4/39, 4/41, 4/43, 4/45, 4/49, 4/51, 4/53, 4/56 – 4/58, 4/60, 4/62, 4/64 – 4/68, 4/70 – 4/73, 4/75, 5/13, 5/15, 5/17, 7/15, 8/139
5ST36	3/69 – 3/80, 3/82, 3/85 – 3/86, 3/88, 4/79 – 4/82, 4/84, 4/87, 7/98 – 7/99
5ST37	3/69 – 3/80, 3/82 – 3/86, 3/88, 3/90, 4/79 – 4/82, 4/84 – 4/87, 7/94 – 7/99
5ST38	3/15, 3/17, 3/23, 3/27, 3/29, 3/31, 3/33, 3/35, 3/37, 3/39, 3/42, 3/44, 3/48, 3/54, 3/56 – 3/58, 3/60 – 3/63, 3/66, 4/15, 4/17, 4/19, 4/21, 4/23, 4/25, 4/29, 4/31, 4/35, 4/37, 4/39, 4/41, 4/43, 4/45, 4/49, 4/53, 4/64, 4/66 – 4/68, 4/70 – 4/73, 4/75, 5/7, 5/13, 5/15
5SU11	4/41
5SU13	4/40 – 4/42, 4/44 – 4/51
5SU14	4/45
5SU16	4/40 – 4/41, 4/44 – 4/45, 4/47, 4/49 – 4/51
5SU18	4/50
5SV13	4/52 – 4/53
5SV16	4/52 – 4/53
5SV31	4/14
5SV33	4/14 – 4/16, 4/20 – 4/22, 4/26, 4/28, 4/30

A

© Siemens 2025

Article number index

Article No.	Page
5SV34	4/14 – 4/15, 4/20 – 4/21, 4/26
5SV36	4/14 – 4/16, 4/20 – 4/22, 4/26, 4/28, 4/30
5SV37	4/20, 4/26, 4/30
5SV38	4/21
5SV41	4/18
5SV43	4/18, 4/24, 4/26
5SV44	4/18, 4/24, 4/26
5SV46	4/18, 4/24, 4/26
5SV47	4/24, 4/26
5SV60	4/57 – 4/58
5SV80	11/6, 11/8, 11/10
5SV81	11/14 – 11/19
5SV82	11/6, 11/8, 11/10
5SV87	11/7, 11/9, 11/11, 11/14 – 11/15, 11/17, 11/19
5SV89	11/7, 11/15
5SW30	3/67, 4/75
5SW33	4/64 – 4/65
5SY17	3/48
5SY41	3/28
5SY42	3/28
5SY43	3/29
5SY44	3/29
5SY45	3/28
5SY46	3/29
5SY51	3/34
5SY52	3/34
5SY54	3/34
5SY61	3/26
5SY62	3/26
5SY63	3/26
5SY64	3/27
5SY65	3/26
5SY66	3/27
5SY71	3/36
5SY72	3/36
5SY73	3/37
5SY74	3/37
5SY75	3/36
5SY76	3/37
5SY81	3/38
5SY82	3/38
5SY83	3/38
5SY84	3/39
5SY85	3/38
5SY86	3/39
5SZ92	4/76
5T	
5TE25	5/16
5TE48	5/8 – 5/9
5TE58	5/10
5TE68	12/12 – 12/13
5TE81	5/6, 5/12
5TE82	5/12
5TE91	5/37, 12/12 – 12/13
5TG80	5/7, 5/9, 5/11
5TG82	3/66, 5/7, 5/13, 5/15, 5/29 – 5/30, 5/34, 11/32 – 11/33
5TL11	5/14 – 5/15
5TL12	5/14 – 5/15
5TL13	5/14 – 5/15
5TL14	5/14 – 5/15
5TL16	5/14 – 5/15
5TT31	5/49, 7/14 – 7/16, 7/19, 7/21 – 7/22, 7/100, 11/27, 11/33
5TT34	5/36, 11/22 – 11/25, 11/28 – 11/30, 11/32
5TT41	5/18 – 5/20
5TT42	5/28 – 5/29
5TT43	5/26
5TT44	5/22
5TT49	5/19, 5/21, 5/23 – 5/25
5TT50	5/30
5TT52	11/31
5TT58	5/32
5TT59	5/31, 5/34 – 5/35
5TT61	11/26
5TY13	4/54
6G	
6GK19	1/46, 1/70
6M	
6MF28	1/75, 1/118, 2/66
7K	
7KG95	10/33
7KG97	10/33
7KM10	10/32
7KM22	10/32
7KM31	10/32 – 10/33
7KM32	10/32 – 10/33
7KM42	10/33
7KM92	10/35
7KM93	2/66, 10/34 – 10/35
7KM99	10/34
7KN11	3/42 – 3/45, 3/59, 3/64, 4/54 – 4/55, 4/58 – 4/59, 4/69, 4/74, 5/27, 7/52, 7/55, 10/28, 11/12, 11/20
7KN12	3/43, 3/45, 3/59, 3/64, 4/54 – 4/55, 4/59, 4/69, 4/74, 5/27, 7/52, 7/55, 10/26, 11/12, 11/20
7KN13	10/22
7KN27	1/25, 1/63, 10/20, 10/30
7KT12	10/3, 10/37, 10/39 – 10/41, 10/45
7KT16	10/36
7KT55	10/42
7KT56	10/42
7KT58	10/42 – 10/43
7KT90	10/42
7L	
7LF45	5/38 – 5/41

© Siemens 2025

Article No.	Page
7LF49	5/40 – 5/42
7LF53	5/44 – 5/47
7LF63	5/48
7LF90	3/67, 5/42, 5/45, 5/47
7LQ23	11/34
7LQ29	11/34
8G	
8GB13	15/271
8GB20	15/271
8GB45	3/67
8GB46	15/268 – 15/269
8GB50	15/268 – 15/270
8GB52	15/268
8GD90	15/218, 15/259
8GD91	15/218, 15/259
8GD92	15/218, 15/261
8GE37	15/250
8GF57	15/208 – 15/211
8GF58	15/211
8GF71	15/214, 15/216
8GF93	14/48, 15/261
8GF96	15/204, 15/206 – 15/208, 15/211, 15/213 – 15/214, 15/216, 15/218, 15/259
8GK10	15/236 – 15/237
8GK11	15/232 – 15/233
8GK13	15/226, 15/228 – 15/230
8GK14	15/224
8GK20	15/200
8GK21	15/194
8GK23	15/196
8GK24	15/192
8GK40	15/252 – 15/253
8GK41	15/253
8GK43	15/238
8GK44	15/238 – 15/239
8GK45	15/52, 15/55 – 15/56, 15/59, 15/239 – 15/240, 15/251
8GK46	15/240
8GK47	15/241, 15/244 – 15/249
8GK48	15/31, 15/52, 15/54, 15/56, 15/58, 15/225, 15/242 – 15/243, 15/257 – 15/258
8GK63	15/206
8GK64	15/204 – 15/205
8GK67	15/202 – 15/203
8GK68	15/193, 15/204, 15/208 – 15/209, 15/211
8GK90	15/256 – 15/257, 15/264
8GK91	15/24, 15/195, 15/198 – 15/199, 15/201, 15/204, 15/213, 15/217, 15/225, 15/255 – 15/257, 15/264 – 15/265
8GK92	15/193
8GK93	15/61, 15/251, 15/256
8GK95	15/192, 15/194 – 15/195, 15/198, 15/201, 15/214 – 15/216, 15/218, 15/224, 15/228, 15/234, 15/256 – 15/257, 15/260
8GK96	15/193, 15/195, 15/199 – 15/200, 15/207, 15/210 – 15/213, 15/240, 15/254, 15/258
8GK97	15/209 – 15/211, 15/225, 15/240 – 15/241, 15/243, 15/254
8GK98	15/241
8GK99	15/58, 15/68, 15/136, 15/164, 15/193 – 15/195, 15/199 – 15/200, 15/204, 15/208, 15/210 – 15/211, 15/213 – 15/214, 15/216 – 15/218, 15/224, 15/228, 15/240, 15/242 – 15/243, 15/255 – 15/256, 15/258 – 15/259, 15/261 – 15/262, 15/264, 15/271
8GS40	15/60 – 15/61, 15/250 – 15/251, 15/257, 15/262
8H	
8HC69	15/24, 15/265
8HE85	15/265
8HP18	15/24, 15/265
8J	
8JK31	15/264
8JK40	15/263
8L	
8LK10	15/22 – 15/23, 15/64, 15/68 – 15/69
8LK12	15/22, 15/64
8LK20	15/25 – 15/27, 15/32 – 15/51, 15/63, 15/68
8LK21	15/26 – 15/27, 15/34, 15/38, 15/40 – 15/41, 15/45, 15/49 – 15/51
8LK22	15/65
8LK23	15/24 – 15/25, 15/64 – 15/65
8LK24	15/23, 15/65
8LK25	15/23
8LK30	15/23, 15/30 – 15/39, 15/42 – 15/49, 15/52 – 15/58, 15/62 – 15/64, 15/66, 15/68
8LK40	15/28, 15/52, 15/55, 15/57, 15/65
8LK50	15/31 – 15/32, 15/35 – 15/36, 15/39, 15/43, 15/45, 15/47, 15/49, 15/55 – 15/57, 15/59
8LK60	15/28 – 15/29, 15/31, 15/33, 15/35, 15/37, 15/39, 15/43, 15/45, 15/47, 15/49, 15/59, 15/68
8LK94	15/24, 15/68 – 15/69
8M	
8MF10	17/13, 17/16 – 17/17, 17/21, 17/24, 17/27 – 17/33
8MF11	17/13, 17/27, 17/29 – 17/30, 17/32
8MF12	17/13, 17/24, 17/27, 17/30, 17/32 – 17/33
8MF13	17/29 – 17/30, 17/32
8MF14	17/29 – 17/30, 17/32
8MF15	17/29, 17/32
8MF16	17/32
8MF17	17/32
8MF18	17/24, 17/32 – 17/33
8MF19	17/32
8MF59	17/38
8MR21	17/45 – 17/49
8MR22	17/36
8MR23	17/37
8MR60	17/42 – 17/43
8MR63	17/43

© Siemens 2025

Article number index

Article No.	Page
8MR64	17/41 – 17/44
8MR65	17/41 – 17/42
8P	
8PQ10	15/77 – 15/78, 15/80, 15/166, 15/174
8PQ12	15/72, 15/74, 15/76, 15/110, 15/112, 15/114, 15/116, 15/162, 15/166, 15/172
8PQ20	15/86 – 15/90, 15/96 – 15/108, 15/110 – 15/117, 15/120 – 15/134, 15/137, 15/158 – 15/164, 15/168, 15/201, 15/217
8PQ21	15/82 – 15/84, 15/163, 15/168
8PQ23	15/78 – 15/81, 15/166 – 15/167, 15/174 – 15/175
8PQ24	15/79, 15/167, 15/175
8PQ25	15/79 – 15/80, 15/175
8PQ30	15/72 – 15/77, 15/92, 15/105, 15/107, 15/110, 15/112, 15/114, 15/116, 15/118, 15/120, 15/122, 15/124, 15/126, 15/139, 15/141, 15/143, 15/145, 15/147, 15/149, 15/153, 15/157, 15/162 – 15/163, 15/165, 15/169 – 15/170, 15/172 – 15/173, 15/178 – 15/179, 15/181 – 15/183, 15/185, 15/187
8PQ40	15/92 – 15/95, 15/163, 15/165 – 15/167, 15/180 – 15/183, 15/209 – 15/210
8PQ50	15/97, 15/99, 15/101, 15/103, 15/105, 15/107, 15/109 – 15/117, 15/121, 15/123, 15/138 – 15/157, 15/161, 15/184 – 15/186
8PQ60	15/97, 15/99, 15/101, 15/103, 15/105, 15/107 – 15/109, 15/111, 15/113, 15/115, 15/117 – 15/118, 15/120 – 15/134, 15/136 – 15/138, 15/140, 15/142, 15/144, 15/147, 15/149, 15/151 – 15/152, 15/155 – 15/156, 15/158 – 15/160, 15/164
8PQ94	8/137, 15/27, 15/41, 15/51, 15/68, 15/76 – 15/77, 15/82, 15/84, 15/87, 15/90, 15/92 – 15/94, 15/139, 15/141, 15/143, 15/145, 15/153, 15/157, 15/165, 15/170, 15/186 – 15/187
8PQ95	15/22, 15/68, 15/76, 15/94, 15/186
8PQ96	15/165
8PQ99	15/187
8U	
8UC60	8/37, 8/76 – 8/77, 8/127, 9/28
8UC71	8/37
8UC72	8/37
8UD11	8/75, 8/126, 9/27
8UD17	2/38, 8/60, 8/76, 8/126, 9/27
8UD18	2/88, 8/76, 8/126, 9/27
8UD19	2/38 – 2/40, 2/88, 8/61, 8/76 – 8/77, 8/127, 9/28
8US12	13/11, 13/17, 13/27 – 13/28, 13/31, 13/33 – 13/34, 15/135
8US13	13/31, 15/135
8US16	13/10 – 13/11
8US17	13/11
8US19	13/6, 13/9 – 13/14, 13/17, 13/19, 13/21, 13/27, 13/33, 13/35 – 13/36, 13/43, 15/28, 15/92, 15/135, 15/242, 15/263
8US23	13/40
8US24	13/42 – 13/43
8US28	13/44
8US29	13/40 – 13/41, 13/43

Article No.	Page
8W	
8WA18	14/12, 14/48 – 14/50
8WA28	14/48
8WA75	14/48
8WC50	13/12
8WC51	13/6, 13/12, 13/36
8WH10	8/53, 14/32 – 14/43
8WH12	14/17, 14/19
8WH20	14/22 – 14/31
8WH60	14/6 – 14/14, 14/16 – 14/21
8WH81	14/15, 14/45 – 14/47
8WH82	3/67, 4/75, 14/45
8WH90	3/49, 14/6 – 14/13, 14/15 – 14/35, 14/37, 14/39 – 14/44, 14/48 – 14/49
8WH91	14/8, 14/16 – 14/20, 14/34 – 14/35, 14/41, 14/43 – 14/44, 14/48
US	
US	210/38 – 10/39, 10/41

A

© Siemens 2025

Index

Keyword	Page
0 – 9	
19-inch expansion	17/32
3KC ATC transfer control devices	9/32
3KC0 manual transfer switching	9/24
3KC3 and 3KC4 remote transfer switching	9/16
3KC6 and 3KC8 automatic transfer switching	9/17
3KD switch disconnectors	8/62 – 8/81
3KF switch disconnectors	8/114 – 8/129
3LD switch disconnectors	8/14 – 8/61
3NA3 COM LV HRC fuse links with measuring	7/52 – 7/53
3NA6 COM LV HRC fuse links with measuring	7/54, 7/56 – 7/57
3NJ4 fuse switch disconnectors	8/96 – 8/107
3NJ63 switch disconnectors with fuses	8/130 – 8/137
3NP1 fuse switch disconnectors	8/82 – 8/95
3VA1 molded case circuit breakers and switch disconnectors up to 1000 A	2/6 – 2/12
3VA10 – 3VA26	2/24 – 2/73
3VA2 molded case circuit breakers up to 1600 A	2/14 – 2/21
3VA27	2/75 – 2/93
3WA1 circuit breakers and non-automatic circuit breakers for AC and DC	1/4 – 1/7
3WA1 circuit breakers and non-automatic circuit breakers for AC	1/8 – 1/13
3WA1 non–automatic circuit breakers for DC	1/14 – 1/16
3WA1 quick selection guide	1/5 – 1/27
3WA11 – 3WA13	1/28 – 1/75
3WL1 circuit breakers and non-automatic circuit breakers for AC and DC	1/76 – 1/77
3WL1 circuit breakers and non-automatic circuit breakers for AC	1/78 – 1/81
3WL1 non-automatic circuit breakers for DC	1/79 – 1/84
3WL1 quick selection guide	1/76 – 1/91
3WL10	1/124 – 1/139
3WL11 – 3WL13	1/92 – 1/122
4AC2 electronic power supply unit	12/10
4AC32 bell transformer	12/6
4AC37 safety transformer	12/8
5SD74 combination surge arresters, type 1 + type 2	6/8 – 6/9
5SD74 combination surge arresters, type 1/type 2	6/14 – 6/15
5SD74 combination surge arresters, with integrated back-up fuse	6/10 – 6/11
5SD74 lightning arresters, type 1	6/6 – 6/7
5SD74 surge arresters, type 1 (UL)	6/21
5SD74 surge arresters, type 1 + type 2 + type 3 for 40 mm busbar system	6/12 – 6/13
5SD74 surge arresters, type 2	6/16 – 6/19
5SD74 surge arresters, type 3	6/20
5SG switch disconnectors with fuses System overview	8/138
5SG76 fuse switch disconnectors System overview	8/108
5SJ4..HG.. miniature circuit breakers	3/40 – 6/41
5SJ6...–.KS miniature circuit breakers	3/18
5SK9 circuit breakers for equipment	3/49
5SL3 miniature circuit breakers	3/12
5SL30 miniature circuit breakers	3/20
5SL4 miniature circuit breakers	3/16
5SL58 miniature circuit breakers	3/24
5SL6 COM miniature circuit breakers with	3/42 – 3/45
5SL6 miniature circuit breakers	3/14
5SL60 miniature circuit breakers	3/22
5SM2 RC units	4/34 – 4/39
5SM3 RCCBs	4/32
5SM6 arc fault detection units	4/56
5SP3 selective main miniature	3/46
5SP4 miniature circuit breakers	3/30
5SP5 miniature circuit breakers	3/32
5SU1 RCBOs	4/40 – 4/51
5SV RCCBs	4/14 – 4/26
5SV1 RCBOs	4/52
5SV3 RCCBs (SIQUENCE)	4/28 – 4/31
5SV6 AFDD/MCB	4/57
5SV6 COM AFDD/MCB with	4/58
5SV8 COM modular residual current device	11/16 – 11/20
5SV8 COM residual current monitors	11/8 – 11/12
5SV8 modular residual current device	11/14
5SV8 residual current monitors	11/6
5SY17 circuit breakers for equipment	3/48
5SY4 miniature circuit breakers	3/28
5SY5 miniature circuit breakers	3/34
5SY6 miniature circuit breakers	3/26
5SY7 miniature circuit breakers	3/36
5SY8 miniature circuit breakers	3/38
5TE DC isolator	5/16
5TE busbars	5/37
5TE48 pushbuttons	5/8
5TE58 light indicators	5/10
5TE6 socket outlet for modular installation	12/12
5TE8 control switches	5/6
5TE81/82 On/Off switches	5/12
5TL1 On/Off switches	5/14
5TT3 fuse monitors	11/27
5TT3 insulation monitors for industrial applications	11/30
5TT3 level relays	11/32
5TT3 line circuit relays	11/33
5TT3 phase monitors	11/28
5TT3 phase sequence monitors	11/29
5TT3 short-time voltage relay	11/24
5TT3 soft-starting devices	5/36
5TT3 timers for industrial applications	5/49
5TT3 undervoltage and overvoltage relays	11/25
5TT3 undervoltage relays	11/22 – 11/23
5TT4 COM digital input/output module new	5/26
5TT4 auxiliary switches	5/24
5TT41 remote control switches	5/18, 5/20
5TT42 switching relays	5/28
5TT44 remote control switches	5/22
5TT5 EMERGENCY STOP modules	11/31
5TT5 auxiliary switches	5/35

A

© Siemens 2025

Index

Keyword	Page
5TT50 Insta contactors	5/30
5TT58 Insta contactors	5/32, 5/34
5TT6 current relays	11/26
5TY1 COM electronic circuit protection	4/54
60 mm 8US busbar system	13/12 – 13/35
60 mm 8US compact busbar system	13/6 – 13/11
7KM PAC measuring devices	10/32, 10/34
7KT PAC measuring devices	10/36
7LF4 digital time switches	5/38, 5/40, 5/42
7LF5 mechanical time switches	5/44, 5/46
7LF6 timers for buildings	5/48
7LQ2 twilight switches	11/34
8WH screw terminals	14/32 – 14/44
8WH terminal blocks	14/4 – 14/50
8WH2 spring–loaded terminals	14/22 – 14/31
8WH6 iPo installation terminals	14/1 – 14/21
8WH6 iPo plug–in terminals	14/6 – 14/15

A

ALPHA 1250 floor–mounted	15/224
ALPHA 1250 marshaling boxes	15/226
ALPHA 160 distribution boards	15/236
ALPHA 3200 Eco power distribution boards (DIN technology)	15/21 – 15/69
ALPHA 400 distribution boards	15/232 – 15/234
ALPHA 630 UNIVERSAL floor–mounted	15/196 – 15/199
ALPHA 630 UNIVERSAL wall–mounted	15/194
ALPHA 630 floor–mounted	15/228
ALPHA 630 marshaling boxes	15/230
ALPHA 800 UNIVERSAL floor–mounted	15/192
ALPHA SIMBOX WP small distribution boards	15/271
ALPHA SIMBOX XL small distribution boards	15/268 – 15/270
ALPHA UNIVERSAL 125 distribution boards	15/200
ALPHA UNIVERSAL distribution boards (NF technology)	15/189 – 15/219
ALPHA distribution boards (DIN technology)	15/221 – 15/265
Accessories	3/50 – 3/95, 4/60 – 4/87, 7/94 – 7/101, 9/18 – 9/23, 9/26 – 9/29, 10/12, 15/68, 15/186, 15/212 – 15/218, 15/255 – 15/265
Accessories and spare parts	1/62 – 1/75, 1/108 – 1/122, 1/134 – 1/139
Accessories for 3KF LV HRC and 3KF SITOR switch disconnectors	8/125 – 8/129
Accessories for 8WH terminal blocks	14/45 – 14/50
Accessories for busbars	3/86 – 3/91
Accessories for connection and insulation	2/86
Accessories for transfer control devices	9/34
Accessory options	1/50 – 1/56, 1/96 – 1/105, 1/128, 2/80
Air Circuit Breakers	1/1 – 1/141
Air conditioners/cooling devices	17/44
All the information you need	1/3 – 2/3, 3/2 – 3/3, 4/2 – 4/3, 5/2 – 5/3, 6/2 – 6/3, 7/2 – 7/3, 8/2 – 8/3, 9/2 – 9/3, 10/2 – 10/3, 11/2 – 11/3, 12/2 – 12/3, 13/2 – 13/3, 14/2 – 14/3, 15/2 – 15/3, 16/2 – 16/3, 17/2 – 17/3
Appendix	A/1 – A/22
Applications	9/6
Arc fault detection devices (AFDDs)	4/12
Arc fault detection devices Miniature circuit breakers Circuit breakers for equipment Switching devices	4/60 – 4/63
Assembly kits	15/202 – 15/207, 15/238 – 15/251
Auxiliary releases, closing coils	2/89 – 2/90

B

Basic assemblies	13/7, 13/12 – 13/14
Basic units	3/12 – 3/49, 4/14 – 4/59, 6/6 – 6/21
Built-in components	13/22 – 13/24
Bus-mounting bases	7/22
Busbar Systems 8US2 CrossBoard	13/38 – 13/45
Busbar Systems	13/1 – 13/45
Busbar Trunking Systems	16/1
Busbar supports for 40 mm busbar center-to-center spacing	13/36
Busbar systems	15/28, 15/92 – 15/95
Busbars	7/94 – 7/99, 15/208 – 15/211, 15/254

C

Circuit breakers for equipment	3/10
Class CC fuse holders	7/31
Class CC fuse links	7/92
Class J fuse holders	7/30
Communication	1/27, 2/64 – 2/69
Compact busbars	3/81 – 3/85, 4/83 – 4/87
Connection technology	2/44 – 2/57
Connection	1/26
Control cabinets/System cubicles	I/30 – I/31
Cover frame and mounting	2/72
Current transformers	10/44 – 10/45
Cylindrical fuse holders	7/26
Cylindrical fuse links	7/58

D

DIAZED fuse bases	7/20
DIAZED fuse links	7/35
Design	15/17 – 15/19
Devices for all applications	3/4
Distribution blocks for DIN–rail mounting	3/92 – 3/94
Distribution systems	15/6
Distribution systems	I/28 – I/29, 15/4 – 15/9

E

ETU electronic trip units and accessories	1/131 – 1/132
ETU electronic trip units	1/86 – 1/89
ETU300 electronic trip unit	1/19
ETU600 electronic trip unit	1/20 – 1/25
Electrical accessories	3/54 – 3/65, 4/64 – 4/74
Electronic trip unit ETU and accessories	2/83 – 2/85
Electronic trip unit	1/18
Enclosure	15/78 – 15/90
Examples of digitalization in industry	I/15
Examples of digitalization in infrastructure	I/14

© Siemens 2025

Keyword	Page
F	
Fan heaters	17/46
Filter fans and outlet filters	17/41 – 17/42
Frame	15/72 – 15/77
Frame and enclosure	15/22 – 15/27
Fuse Systems	7/1 – 7/101
Fuse holders and bases for SITOR semiconductor fuses	7/27
Fuse holders and bases for photovoltaic fuses	7/28 – 7/29
Fuse holders and bases	7/8 – 7/31
Fuse links	7/32 – 7/93
Fuse switch disconnectors	8/80 – 8/109
Fuseless switch disconnectors	8/6 – 8/13
G	
General accessories interior installation	17/28 – 17/31
Guide frames for AC	1/58 – 1/60, 1/106
Guide frames for DC	1/61, 1/107
Guide frames	1/130, 2/82
H	
Hardware components	10/6 – 10/11
Heater units	17/45
Hygrostats and hygrotherms	17/49
I	
Index	A/17 – A/20
Infeeds and connection methods	13/8, 13/16 – 13/21
Installation switching devices	5/6 – 5/37
Internal accessories	2/34
Internal separation	15/66, 15/178 – 15/185
Introduction to the topic of digitalization and Industry 4.0	I/17
Introduction to the topic of digitalization	I/16
Introduction	4/5
L	
LED lights	17/36
LV HRC fuse bases	7/24
LV HRC fuse links	7/3 – 7/50
LV HRC signal detectors	7/100
Load transfer switches	9/30 – 9/31
Locking provisions and interlocks	2/92
Locking provisions and interlocks	2/91
Locking, blocking and interlocking	2/70
M	
MINIZED fuse switch disconnectors	7/14
MINIZED switch disconnectors with fuses	7/15
Manual operators	2/36 – 2/40
Measuring Devices, Power Monitoring and Digitalization Solutions	10/1 – 10/45
Mechanical accessories	3/66, 4/75
Miniature Circuit Breakers	3/1 – 3/95
Molded Case Circuit Breakers	2/1 – 2/91
Molded case circuit breakers and switch disconnectors for all applications	2/4 – 2/5
Monitoring Devices	11/1 – 11/35
Monitoring devices for electrical values	11/6 – 11/30
Monitoring devices for plants and equipment	11/31 – 11/35
Motor operators and manual operators	2/88
Motor operators	2/42
Mounting panels	17/24
Mounting plates	17/26
Mounting rails	17/27
N	
NEOZED bus-mounting switch	7/16
NEOZED fuse bases	7/18
NEOZED fuse links	7/34
New products	I/3 – I/7
O	
Online configurator highlights	1/30, 1/124, 2/22, 17/8
Operating mechanism, auxiliary release, auxiliary switch	1/91
Overview of fuse systems according to IEC	7/6 – 7/7
Overview of protection, switching, measuring and monitoring tasks	I/18 – I/27
Overview of the modular system	3/50 – 3/53
Overvoltage Protection Devices	6/1 – 6/21
P	
PAC/3WL/3VA SIMATIC PCS 7 library	10/30
Photovoltaic fuse links	7/90
Planning and installation tools	16/6, 16/8
Plug-in and withdrawable technology	2/58, 2/60
Power monitoring	10/4
Power supply units	12/10 – 12/11
Products and their applications in industry	I/13
Products and their applications in	I/12 – I/13
Q	
Quick selection guide; Load switching devices for all applications	8/4
Quick selection guide of fuse holders	7/12
Quick selection guide of fuse holders, bases and D0 fuse switching devices	7/8
Quick selection guide of fuse links	7/32
Quick selection guide	2/7 – 2/23, 3/6 – 3/11, 4/6 – 4/13, 7/10, 8/4 – 8/5, 9/6 – 9/11, 10/4 – 10/13, 13/5, 14/5, 15/5, 15/7, 15/9, 15/11, 15/13, 15/15, 16/5, 16/7, 16/9, 17/7, 17/10, 17/34, 17/40
Quick–assembly kits	15/252
R	
RC units	4/8
RCBOs	4/10
RCCB protective socket outlets	4/76

A

© Siemens 2025

Index

Keyword	Page
RCCBs	4/6
Residual Current Protective Devices/Arc Fault Detection Devices (AFDDs)	4/1 – 4/87
Residual current devices RCD	2/62
Roof filter fans and roof outlet filters	17/43
S	
SEM3 multichannel current measuring system	10/38
SEM3T multichannel temperature	10/40
SENTRON Powercenter	10/22 – 10/28
SENTRON Powerconfig	10/14
SENTRON Powermanager	10/16 – 10/20
SIKclip wiring system	3/95
SILIZED fuse links	7/36
SIMARIS planning tools	I/27, 15/14
SIMARIS® Planning Tools	I/27
SITOR semiconductor fuse links, LV HRC design (AC/DC)	7/60 – 7/75
SITOR semiconductor fuse links, LV HRC design (DC)	7/76 – 7/81
SITOR semiconductor fuse links, cylindrical fuse design (AC/DC)	7/82 – 7/89
SIVACON 8MF/8MR system lighting	17/35 – 17/39
SIVACON 8MF1 basic cubicles	17/7 – 17/9
SIVACON 8MF1 configurable enclosures	17/11 – 17/33
SIVACON 8MR system air–conditioning	17/41 – 17/49
SIVACON 8PS busbar trunking systems	16/4
SIVACON S4 power distribution boards (NF technology)	15/71 – 15/187
SIVACON S8 power distribution boards and motor control centers	15/16 – 15/19
Section expansion	15/30 – 15/65, 15/96 – 15/175
Slimline lights	17/38
Small distribution boards	15/266 – 15/271
Socket outlets	12/12 – 12/13
Software and digitalization solutions	10/14 – 10/31
Special colors for ALPHA	15/190, 15/222
Standard busbars; For devices with add-on 5SM6 arc fault detection units and	4/82
Standard busbars	3/68 – 3/80, 4/78 – 4/80
Structure of the article numbers	1/32 – 1/45, 1/92 – 1/95, 1/126, 2/26 – 2/33, 2/76 – 2/79, 17/9
Summary of power consumption data	1/57
Sustainability@Siemens	I/2
Switch Disconnectors	8/1 – 8/139
Switch disconnectors with fuses	8/110 – 8/139
Switchboards, Distribution Boards and Small Distribution Boards	15/1 – 15/271
Switching Devices	5/1 – 5/49
System Cubicles, System Lighting and	17/1
System overview	2/24, 2/74, 3/5, 4/4, 5/4, 6/4, 7/4 – 7/5, 9/4 – 9/5, 11/4, 12/4, 13/4, 15/10 – 15/13, 15/16, 15/20 – 15/21, 15/70 – 15/71, 15/188 – 15/188, 15/220 – 15/221, 15/266, 17/4 – 17/6

Keyword	Page
T	
Terminal Blocks	14/1
The fast route to the product	I/8 – I/11
Thermostats	17/47 – 17/48
Time and pulse counters	10/42
Timers	5/38 – 5/49
Transfer Switching Equipment and Load Transfer Switches	9/1 – 9/35
Transfer control devices	9/32 – 9/35
Transfer switching equipment and load transfer switches	9/8 – 9/11
Transfer switching equipment	9/16 – 9/29
Transformers, Power Supply Units and Socket Outlets	12/1 – 12/13
Transformers	12/6 – 12/9
Tripping characteristics	I/22 – I/24

© Siemens 2025

Notes

© Siemens 2025

Notes

© Siemens 2025

Catalogs and further information

LV 10
Low-Voltage Power Distribution and Electrical Installation Technology
SENTRON • SIVACON • ALPHA

PDF (E86060-K8280-A101-C1-7600)

ET D1
Switches and Socket Outlets
DELTA

PDF (E86060-K8240-A101-A1-7600)

LV 13
3WA Air Circuit Breakers
SENTRON

PDF (E86060-K8280-B101-A4-7600)

SiePortal
Information and Ordering Platform on the Internet:

sieportal.siemens.com

LV 18
Air Circuit Breakers and Molded Case Circuit Breakers with UL Certification
SENTRON

PDF (E86060-K8280-E347-B3-7600)

SITRAIN
Digital Industry Academy

www.siemens.com/sitrain

IC 10
Industrial Controls
SIRIUS

PDF (E86060-K1010-A101-B8-7600)

Siemens TIA Selection Tool
for the selection, configuration and ordering of TIA products and devices

www.siemens.com/tst

The catalogs listed above and additional catalogs are available in PDF format at
www.siemens.com/lowvoltage/catalogs

Further information on low-voltage power distribution and electrical installation technology is available on the Internet at **www.siemens.com/lowvoltage**

© Siemens 2025

Cybersecurity information

Siemens provides products and solutions with industrial cybersecurity functions that support the secure operation of plants, systems, machines and networks.

In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial cybersecurity concept. Siemens' products and solutions constitute one element of such a concept.

Customers are responsible for preventing unauthorized access to their plants, systems, machines and networks. Such systems, machines and components should only be connected to an enterprise network or the internet if and to the extent such a connection is necessary and only when appropriate security measures (e.g. firewalls and/or network segmentation) are in place.

For additional information on industrial cybersecurity measures that may be implemented, please visit **www.siemens.com/cybersecurity-industry.**

Siemens' products and solutions undergo continuous development to make them more secure. Siemens strongly recommends that product updates are applied as soon as they are available and that the latest product versions are used. Use of product versions that are no longer supported, and failure to apply the latest updates may increase customer's exposure to cyber threats.

To stay informed about product updates, subscribe to the Siemens Industrial Cybersecurity RSS Feed under **www.siemens.com/cert.**

Get more information

www.siemens.com/lowvoltage

Published by
Siemens AG

Smart Infrastructure
Electrical Products
Siemensstraße 10
93055 Regensburg, Germany

For the U.S. published by
Siemens Industry Inc.

3617 Parkway Lane
Peachtree Corners, GA 30092
United States

PDF (E86060-K8280-A101-C1-7600)
KG 1225 1348 En
Produced in Germany
© Siemens 2025

Subject to changes and errors. The information given in this document only contains general descriptions and/or performance features which may not always specifically reflect those described, or which may undergo modification in the course of further development of the products. The requested performance features are binding only when they are expressly agreed upon in the concluded contract.

All product designations may be trademarks or other rights of Siemens AG, its affiliated companies or other companies whose use by third parties for their own purposes could violate the rights of the respective owner.

© 2025 by Siemens AG, Berlin and Munich